



Brussels, **XXX**  
[...](2017) **XXX** draft

ANNEXES 1 to 5

## **ANNEXES**

**to the**

**Commission Regulation (EU) .../...**

**implementing Regulation (EU) No 595/2009 of the European Parliament and of the Council as regards the determination of the CO<sub>2</sub> emissions and fuel consumption of heavy-duty vehicles and amending Directive 2007/46/EC of the European Parliament and of the Council and Commission Regulation (EU) No 582/2011**

## ANNEXES

to the

**Commission Regulation (EU) .../...**

**implementing Regulation (EU) No 595/2009 of the European Parliament and of the Council as regards the determination of the CO<sub>2</sub> emissions and fuel consumption of heavy-duty vehicles and amending Directive 2007/46/EC of the European Parliament and of the Council and Commission Regulation (EU) No 582/2011**

### ANNEX I

#### CLASSIFICATION OF VEHICLES IN VEHICLE GROUPS

1. Classification of the vehicles for the purpose of this Regulation
  - 1.1 Classification of vehicles of category N

**Table 1**

**Vehicle groups for vehicles of category N**

| Description of elements relevant to the classification in vehicle groups |                       |   | Vehicle group | Allocation of mission profile and vehicle configuration |                 |                   |                         |                |                   |              | Standard body allocation |
|--|-----------------------|---|---------------|---|-----------------|-------------------|-------------------------|----------------|-------------------|--------------|--------------------------|
| Axle configuration   | Chassis configuration | Technically permissible maximum laden mass (tons) |               | Long haul   | Long haul (EMS) | Regional delivery | Regional delivery (EMS) | Urban delivery | Municipal utility | Construction |                          |
| 4x2  | Rigid                 | >3.5 – <7.5                                       | (0)           |   |                 |                   |                         |                |                   |              |                          |
|  | Rigid (or tractor)**  | 7.5 – 10  | 1             |   |                 | R                 |                         | R              |                   | B1           |                          |
|  | Rigid (or tractor)**  | >10 – 12  | 2             | R+T1  |                 | R                 |                         | R              |                   | B2           |                          |
|  | Rigid (or tractor)**  | >12 – 16  | 3             |   |                 | R                 |                         | R              |                   | B3           |                          |
|  | Rigid                 | >16   | 4             | R+T2  |                 | R                 |                         |                | R                 | B4           |                          |
|  | Tractor               | >16   | 5             | T+ST  | T+ST+T2         | T+ST              | T+ST+T2                 |                |                   |              |                          |
| 4x4  | Rigid                 | 7.5 – 16  | (6)           |   |                 |                   |                         |                |                   |              |                          |
|  | Rigid                 | >16   | (7)           |   |                 |                   |                         |                |                   |              |                          |
|  | Tractor               | >16   | (8)           |   |                 |                   |                         |                |                   |              |                          |
| 6x2  | Rigid                 | all weights                                       | 9             | R+T2  | R+D+ST          | R                 | R+D+ST                  |                | R                 | B5           |                          |
|  | Tractor               | all weights                                       | 10            | T+ST  | T+ST+T2         | T+ST              | T+ST+T2                 |                |                   |              |                          |
| 6x4  | Rigid                 | all weights                                       | 11            | R+T2  | R+D+ST          | R                 | R+D+ST                  |                | R                 | R            |                          |
|  | Tractor               | all weights                                       | 12            | T+ST  | T+ST+T2         | T+ST              | T+ST+T2                 |                |                   | R            |                          |
| 6x6  | Rigid                 | all weights                                       | (13)          |   |                 |                   |                         |                |                   |              |                          |
|  | Tractor               | all weights                                       | (14)          |   |                 |                   |                         |                |                   |              |                          |
| 8x2  | Rigid                 | all weights                                       | (15)          |   |                 |                   |                         |                |                   |              |                          |
| 8x4  | Rigid                 | all weights                                       | 16            |   |                 |                   |                         |                | R                 | (generic)    |                          |

|            |       |             |      |  |  |  |  |  |  |  |                  |
|------------|-------|-------------|------|--|--|--|--|--|--|--|------------------|
|            |       |             |      |  |  |  |  |  |  |  | weight+<br>CdxA) |
| 8x6<br>8x8 | Rigid | all weights | (17) |  |  |  |  |  |  |  |                  |

\* EMS - European Modular System

\*\* in these vehicle classes tractors are treated as rigids but with specific curb weight of tractor

R = Rigid & standard body  
T1,  
T2 = Standard trailers  
ST = Standard semitrailer  
D = Standard dolly

**ANNEX II**  
**REQUIREMENTS AND PROCEDURES RELATED TO THE OPERATION OF THE**  
**SIMULATION TOOL**

1. The processes to be set up by the vehicle manufacturer with a view to the operation of the simulation tool
  - 1.1. The manufacturer shall set up at least the following processes:
    - 1.1.1 A data management system covering sourcing, storing, handling and retrieving of the input information and input data for the simulation tool as well as handling certificates on the CO<sub>2</sub> emissions and fuel consumption related properties of a component families, separate technical unit families and system families. The data management system shall at least:
      - (a) ensure application of correct input information and input data to specific vehicle configurations
      - (b) ensure correct calculation and application of standard values;
      - (c) verify by means of comparing cryptographic hashes that the input files of component families, separate technical unit families and system families which are used for the simulation corresponds to the input data of the component families, separate technical unit families and system families for which the certification has been granted;
      - (d) include a protected database for storing the input data relating to the component families, separate technical unit families or system families and the corresponding certificates on the CO<sub>2</sub> emissions and fuel consumption related properties;
      - (e) ensure correct management of the changes of specification and updates of components, separate technical units and systems;
      - (f) enable tracing of the components, separate technical units and systems after the vehicle is produced.
    - 1.1.2 A data management system covering retrieving of the input information and input data and calculations by means of the simulation tool and storing of the output data. The data management system shall at least:
      - (a) ensure a correct application of cryptographic hashes;
      - (b) include a protected database for storing the output data;
    - 1.1.3 Process for consulting the dedicated electronic distribution platform referred to in Article 5(2) and Article 10(1) and (2), as well as downloading and installing the latest versions of the simulation tool.
    - 1.1.4 Appropriate training of staff working with the simulation tool.
  2. Assessment by the approval authority

2.1. The approval authority shall verify whether the processes set out in point 1 related to the operation of the simulation tool have been set up.

The approval authority shall also verify the following:

- (a) the functioning of the processes set out in points 1.1.1., 1.1.2 and 1.1.3 and the application of the requirement set out in point 1.1.4.;
- (b) that the processes used during the demonstration are applied in the same manner in all the production facilities manufacturing the vehicle group concerned;
- (c) the completeness of the description of the data and process flows of operations related to the determination of the CO<sub>2</sub> emissions and fuel consumption of the vehicles.

For the purpose of point (a) of the second paragraph, The verification shall include determination of the CO<sub>2</sub> emissions and fuel consumption of at least one vehicle from each of the vehicle groups for which the licence has been applied for.

## Appendix 1

### MODEL OF AN INFORMATION DOCUMENT FOR THE PURPOSES OF OPERATING THE SIMULATION TOOL WITH A VIEW TO DETERMINING THE CO<sub>2</sub> EMISSIONS AND FUEL CONSUMPTION OF NEW VEHICLES

#### SECTION I

- 1 Name and address of manufacturer:
- 2 Assembly plants for which the processes referred to in point 1 of Annex II of Commission Regulation (EU) 2017/XXX [*OP, please insert the publication number of this Regulation.*] have been set up with a view to the operation of the simulation tool:
- 3 Vehicle groups covered:
- 4 Name and address of the manufacturer's representative (if any)

#### SECTION II

1. Additional information
  - 1.1. Data and process flow handling description (e.g. flow chart)
  - 1.2 Description of quality management process
  - 1.3 Additional quality management certificates (if any)
  - 1.4 Description of simulation tool data sourcing, handling and storage
  - 1.5 Additional documents (if any)
2. Date: .....
3. Signature: .....

## Appendix 2

### MODEL OF A LICENCE TO OPERATE THE SIMULATION TOOL WITH A VIEW TO DETERMINING CO<sub>2</sub> EMISSIONS AND FUEL CONSUMPTION OF NEW VEHICLES

Maximum format: A4 (210 x 297 mm)

### LICENCE TO OPERATE THE SIMULATION TOOL WITH A VIEW TO DETERMINING CO<sub>2</sub> EMISSIONS AND FUEL CONSUMPTION OF NEW VEHICLES

Communication concerning:

|                      |
|----------------------|
| Stamp administration |
|----------------------|

- granting<sup>(1)</sup>
- extension<sup>(1)</sup>
- refusal<sup>(1)</sup>
- withdrawal<sup>(1)</sup>

of the licence to operate simulation tool with regard to Regulation (EC) No 595/2009 as implemented by Regulation No XXX/2017.

Licence number:

Reason for extension:.....

#### SECTION I

- 0.1 Name and address of manufacturer:
- 0.2 Assembly plants for which the processes referred to in point 1 of Annex II of Commission Regulation (EU) 2017/XXX [OP, please insert the publication number of this Regulation.] have been set up with a view to the operation of the simulation tool
- 0.3 Vehicle groups covered:

#### SECTION II

- 1. Additional information
  - 1.1 Assessment report performed by an approval authority
  - 1.2. Data and process flow handling description (e.g. flow chart)
  - 1.3. Description of quality management process
  - 1.4. Additional quality management certificates (if any)
  - 1.5. Description of simulation tool data sourcing, handling and storage
  - 1.6. Additional documents (if any)

2. Approval authority responsible for carrying out the assessment
3. Date of the assessment report
4. Number of assessment report report
5. Remarks (if any): see Addendum
6. Place
7. Date
8. Signature

(i) Delete where not applicable (there are cases where nothing needs to be deleted when more than one entry is applicable)



## ANNEX III

### INPUT INFORMATION RELATING TO THE CHARACTERISTIC OF THE VEHICLE

#### 1. Introduction

This Appendix describes the list of parameters to be provided by the vehicle manufacturer as input to the simulation tool. The applicable XML schema as well as example data are available at the dedicated electronic distribution platform.

#### 2. Definitions

(1) “Parameter ID”: Unique identifier as used in “Vehicle Energy Consumption calculation Tool” for a specific input parameter or set of input data

(2) “Type”: Data type of the parameter

string ..... sequence of characters in ISO8859-1 encoding

token ..... sequence of characters in ISO8859-1 encoding, no leading/trailing whitespace

date ..... date and time in UTC time in the format: YYYY-MM-DDTHH:MM:SSZ with italic letters denoting fixed characters e.g. “2002-05-30T09:30:10Z”

integer ..... value with an integral data type, no leading zeros, e.g. “1800”

double, X .... fractional number with exactly X digits after the decimal sign (“.”) and no leading zeros e.g. for “double, 2”: “2345.67”; for “double, 4”: “45.6780”

(3) “Unit” ... physical unit of the parameter

(4) “corrected actual mass of the vehicle” shall mean the mass as specified under the 'actual mass of the vehicle' in accordance with Commission Regulation (EC) No 1230/2012 with an exception for the tank(s) which shall be filled to at least 50% of its or their capacity/ies, without superstructure and corrected by the additional weight of the non-installed standard equipment as specified in point 3.3 and the mass of a standard body, standard semi-trailer or standard trailer to simulate the complete vehicle or complete vehicle-(semi-)trailer combination.

All parts that are mounted on and above the main frame are regarded as superstructure parts if they are only installed for facilitating a superstructure, independent of the necessary parts for in running order conditions.

### 3. Set of input parameters

Table 1: Input parameters “Vehicle/General”

| Parameter name                     | Parameter ID | Type      | Unit    | Description/Reference   |
|------------------------------------|--------------|-----------|---------|---|
| Manufacturer                       | P235         | token     | [-]     |   |
| ManufacturerAddress                | P252         | token     | [-]     |   |
| Model                              | P236         | token     | [-]     |   |
| VIN                                | P238         | token     | [-]     |   |
| Date                               | P239         | dateTime  | [-]     | Date and time when the component-hash is created  |
| LegislativeClass                   | P251         | string    | [-]     | Allowed values: "N3"  |
| VehicleCategory                    | P036         | string    | [-]     | Allowed values: "Rigid Truck", "Tractor"  |
| AxleConfiguration                  | P037         | string    | [-]     | Allowed values: "4x2", "6x2", "6x4", "8x4"  |
| CurbMassChassis                    | P038         | int       | [kg]    |   |
| GrossVehicleMass                   | P041         | int       | [kg]    |   |
| IdlingSpeed                        | P198         | int       | [1/min] |   |
| RetarderType                       | P052         | string    | [-]     | Allowed values: "None", "Losses included in Gearbox", "Engine Retarder", "Transmission Input Retarder", "Transmission Output Retarder"  |
| RetarderRatio                      | P053         | double, 3 | [-]     |   |
| AngledriveType                     | P180         | string    | [-]     | Allowed values: "None", "Losses included in Gearbox", "Separate Angledrive"   |
| PTOShaftsGearWheels                | P247         | string    | [-]     | Allowed values: "none", "only the drive shaft of the PTO", "drive shaft and/or up to 2 gear wheels", "drive shaft and/or more than 2 gear wheels", "only one engaged gearwheel above oil level" |
| PTOOtherElements                   | P248         | string    | [-]     | Allowed values: "none", "shift claw, synchronizer, sliding gearwheel", "multi-disc clutch", "multi-disc clutch, oil pump"   |
| CertificationNumberEngine          | P261         | token     | [-]     |   |
| CertificationNumberGearbox         | P262         | token     | [-]     |   |
| CertificationNumberTorqueconverter | P263         | token     | [-]     |   |
| CertificationNumberAxlegear        | P264         | token     | [-]     |   |
| CertificationNumberAngledrive      | P265         | token     | [-]     |   |
| CertificationNumberRetarder        | P266         | token     | [-]     |   |
| CertificationNumberTyre            | P267         | token     | [-]     |   |
| CertificationNumberAirdrag         | P268         | token     | [-]     |   |

Table 2: Input parameters “Vehicle/AxleConfiguration” per wheel axle

| Parameter name | Parameter ID | Type    | Unit | Description/Reference                               |
|----------------|--------------|---------|------|---|
| TwinTyres      | P045         | boolean | [-]  |   |
| AxleType       | P154         | string  | [-]  | Allowed values: "VehicleNonDriven", "VehicleDriven" |
| Steered        | P195         | boolean |      |   |

Table 3: Input parameters “Vehicle/Auxiliaries”

| Parameter name             | Parameter ID | Type   | Unit | Description/Reference  |
|----------------------------|--------------|--------|------|--|
| Fan/Technology             | P181         | string | [-]  | Allowed values: "Crankshaft mounted - Electronically controlled visco clutch", "Crankshaft mounted - Bimetallic controlled visco clutch", "Crankshaft mounted - Discrete step clutch", "Crankshaft mounted - On/off clutch", "Belt driven or driven via transm. - Electronically controlled visco clutch", "Belt driven or driven via transm. - Bimetallic controlled visco clutch", "Belt driven or driven via transm. - Discrete step clutch", "Belt driven or driven via transm. - On/off clutch", "Hydraulic driven - Variable displacement pump", "Hydraulic driven - Constant displacement pump", "Electrically driven - Electronically controlled"  |
| SteeringPump/Technology    | P182         | string | [-]  | Allowed values: "Fixed displacement", "Fixed displacement with elec. control", "Dual displacement", "Variable displacement mech. controlled", "Variable displacement elec. controlled", "Electric"<br><br><b>Separate entry for each steered wheel axle required</b>   |
| ElectricSystem/Technology  | P183         | string | [-]  | Allowed values: "Standard technology", "Standard technology - LED headlights, all"   |
| PneumaticSystem/Technology | P184         | string | [-]  | Allowed values: "Small", "Small + ESS", "Small + visco clutch", "Small + mech. clutch", "Small + ESS + AMS", "Small + visco clutch + AMS", "Small + mech. clutch + AMS", "Medium Supply 1-stage", "Medium Supply 1-stage + ESS", "Medium Supply 1-stage + visco clutch", "Medium Supply 1-stage + mech. clutch", "Medium Supply 1-stage + ESS + AMS", "Medium Supply 1-stage + visco clutch + AMS", "Medium Supply 1-stage + mech. clutch + AMS", "Medium Supply 2-stage", "Medium Supply 2-stage + ESS", "Medium Supply 2-stage + visco clutch", "Medium Supply 2-stage + mech. clutch", "Medium Supply 2-stage + ESS + AMS", "Medium Supply 2-stage + visco clutch + AMS", "Medium Supply 2-stage + mech. clutch + AMS", "Large Supply", "Large Supply + ESS", "Large Supply + visco clutch", "Large Supply + mech. clutch", "Large Supply + ESS + AMS", "Large Supply + visco clutch + AMS", "Large Supply + mech. clutch + AMS"; "Vacuum pump" |
| HVAC/Technology            | P185         | string | [-]  | Allowed values: "Default"  |

Table 4: Input parameters “Vehicle/EngineTorqueLimits” per gear (optional)

| Parameter name | Parameter ID | Type    | Unit | Description/Reference   |
|----------------|--------------|---------|------|---|
| Gear           | P196         | integer | [-]  | only gear numbers need to be specified where vehicle related engine torque limits according to point 6 are applicable |
| MaxTorque      | P197         | integer | [Nm] |   |

#### 4. Vehicle mass

4.1 The vehicle mass used as input for the simulation tool shall be the corrected actual mass of the vehicle.

This corrected actual mass shall be based on vehicles equipped in such a way that they are compliant to all regulatory acts of Annex IV and Annex XI to Directive 2007/46/EC applicable to the particular vehicle class.

4.2 If not all the standard equipment is installed, the manufacturer shall add the weight of the following construction elements to the corrected actual mass of the vehicle:

- a) Front under-run protection in accordance with Regulation (EC) No 661/2009 of the European Parliament and of the Council<sup>1</sup>
- b) Rear under-run protection in accordance with Regulation (EC) No 661/2009 of the European Parliament and of the Council
- c) Lateral protection in accordance with Regulation (EC) No 661/2009 of the European Parliament and of the Council
- d) Fifth wheel in accordance with Regulation (EC) No 661/2009 of the European Parliament and of the Council

4.3 The weight of the construction elements referred to in point 3.3 shall be the following:

For vehicles of groups 1, 2 and 3

- a) Front under-ride protection 45 kg
- b) Rear under-ride protection 40 kg
- c) Lateral protection 8,5 kg/m \* wheel base [m] – 2,5 kg
- d) Fifth wheel 210 kg

For vehicles of groups 4, 5, 9 to 12 and 16

- a) Front under-ride protection 50 kg
- b) Rear under-ride protection 45 kg

<sup>1</sup> Regulation (EC) No 661/2009 of the European Parliament and of the Council of 13 July 2009 concerning type-approval requirements for the general safety of motor vehicles, their trailers and systems, components and separate technical units intended therefor (OJ L 200 31.7.2009, p. 1)

- c) Lateral protection 14 kg/m \* wheel base [m] – 17 kg
- d) Fifth wheel 210 kg

5. Hydraulically and mechanically driven axles

Axle configuration means:.....

In case of vehicles equipped with:

- a) a hydraulically driven axles, the axle shall be treated as a non-drivable one and the manufacturer shall not take it into consideration for establishing an axle configuration of a vehicle;
- b) a mechanically driven axles, the axle shall be treated as a drivable one and the manufacturer shall take it into consideration for establishing an axle configuration of a vehicle;

6. Gear dependent engine torque limits set by vehicle control

For the highest 50% of the gears (e.g. for gears 7 to 12 of a 12 gear transmission) the vehicle manufacturer may declare a gear dependent maximum engine torque limit which is not higher than 95% of the maximum engine torque.

7. Vehicle specific engine idling speed

- 7.1. The engine idling speed has to be declared in VECTO for each individual vehicle. This declared vehicle engine idling shall be equal or higher than specified in the engine input data approval.

## ANNEX IV

### MODEL OF THE MANUFACTURER'S RECORDS FILE AND OF THE CUSTOMER INFORMATION FILE

#### PART I

Vehicle CO<sub>2</sub> emissions and fuel consumption – Manufacturer's records file

The manufacturer's records file will be produced by the simulation tool and shall at least contain the following information:

1. Vehicle, component, separate technical unit and systems data
  - 1.1. Vehicle data
    - 1.1.1. Name and address of manufacturer
    - 1.1.2. Vehicle model
    - 1.1.3. Vehicle identification number (VIN).....
    - 1.1.4. Vehicle category (N1 N2, N3, M1, M2, M3).....
    - 1.1.5. Axle configuration.....
    - 1.1.6. Max. gross vehicle weight (t).....
    - 1.1.7. Vehicle group in accordance with Table 1 .....
    - 1.1.8. Corrected actual curb mass (kg).....
  - 1.2. Main engine specifications
    - 1.2.1. Engine model
    - 1.2.2. Engine certification number.....
    - 1.2.3. Engine rated power (kW).....
    - 1.2.4. Engine idling speed (1/min).....
    - 1.2.5. Engine rated speed (1/min).....
    - 1.2.6. Engine capacity (ltr).....
    - 1.2.7. Engine reference fuel type (diesel/LPG/CNG...).....
    - 1.2.8. Hash of the fuel map file/document.....
  - 1.3. Main transmission specifications
    - 1.3.1. Transmission model
    - 1.3.2. Transmission certification number.....
    - 1.3.3. Main option used for generation of loss maps (Option1/Option2/Option3/Standard values).....:
    - 1.3.4. Transmission type (SMT, AMT, APT-S,APT-P).....

- 1.3.5. Nr. of gears.....
- 1.3.6. Transmission ratio final gear.....
- 1.3.7. Retarder type.....
- 1.3.8. Power take off (yes/no).....
- 1.3.9. Hash of the efficiency map file/document.....
- 1.4. Retarder specifications
  - 1.4.1. Retarder model
  - 1.4.2. Retarder certification number.....
  - 1.4.3. Certification option used for generation of a loss map (standard values/measurement).....
  - 1.4.4. Hash of the efficiency map file/document.....
- 1.5. Torque converter specification
  - 1.5.1. Torque converter model
  - 1.5.2. Torque converter certification number.....
  - 1.5.3. Certification option used for generation of a loss map (standard values/measurement).....
  - 1.5.4. Hash of the efficiency map file/document.....
- 1.6. Angle drive specifications
  - 1.6.1. Angle drive model
  - 1.6.2. Axle certification number.....
  - 1.6.3. Certification option used for generation of a loss map (standard values/measurement).....
  - 1.6.4. Angle drive ratio.....
  - 1.6.5. Hash of the efficiency map file/document.....
- 1.7. Axle specifications
  - 1.7.1. Axle model....
  - 1.7.2. Axle certification number....
  - 1.7.3. Certification option used for generation of a loss map (standard values/measurement).....
  - 1.7.4. Axle type (e.g. standard single driven axle).....
  - 1.7.5. Axle ratio.....
  - 1.7.6. Hash of the efficiency map file/document.....
- 1.8. Aerodynamics

- 1.8.1. Model
- 1.8.2. Certification option used for generation of CdxA (standard values /measurement)...
- 1.8.3. CdxA Certification number (if applicable).....
- 1.8.4. CdxA value.....
- 1.8.5. Hash of the efficiency map file/document.....
- 1.9. Main tyre specifications
  - 1.9.1. Tyre dimension axle 1.....
  - 1.9.2. Tyre certification number.....
  - 1.9.3. Specific RRC of all tyres on axle 1.....
  - 1.9.4. Tyre dimension axle 2.....
  - 1.9.5. Twin axle (yes/no) axle 2.....
  - 1.9.6. Tyre certification number.....
  - 1.9.7. Specific RRC of all tyres on axle 2.....
  - 1.9.8. Tyre dimension axle 3.....
  - 1.9.9. Twin axle (yes/no) axle 3.....
  - 1.9.10. Tyre certification number.....
  - 1.9.11. Specific RRC of all tyres on axle 3.....
  - 1.9.12. Tyre dimension axle 4.....
  - 1.9.13. Twin axle (yes/no) axle 4.....
  - 1.9.14. Tyre certification number.....
  - 1.9.15. Specific RRC of all tyres on axle 4 .....
- 1.10. Main auxiliary specifications
  - 1.10.1. Engine cooling fan technology.....
  - 1.10.2. Steering pump technology.....
  - 1.10.3. Electric system technology.....
  - 1.10.4. Pneumatic system technology.....
- 1.11. Engine torque limitations
  - 1.11.1. Engine torque limit at gear 1 (% of max engine torque).....
  - 1.11.2. Engine torque limit at gear 2 (% of max engine torque).....
  - 1.11.3. Engine torque limit at gear 3 (% of max engine torque).....
  - 1.11.4. Engine torque limit at gear ... (% of max engine torque)



|         |  |       |
|---------|--|-------|
| 2.      | Mission profile and loading dependent values                             |       |
| 2.1.    | Simulation parameters (for each profile/load/fuel combination)           |       |
| 2.1.1.  | Mission profile<br>haul/regional/urban/municipal/construction).....      | (long |
| 2.1.2.  | Load (as defined in the simulation tool) (kg).....                       |       |
| 2.1.3.  | Fuel (diesel/petrol/LPG/CNG/.....)                                       |       |
| 2.1.4.  | Total vehicle mass in simulation (kg).....                               |       |
| 2.2.    | Vehicle driving performance and information for simulation quality check |       |
| 2.2.1.  | Average speed (km/h).....  |       |
| 2.2.2.  | Minimum instantaneous speed (km/h).....                                  |       |
| 2.2.3.  | Maximum instantaneous speed (km/h).....                                  |       |
| 2.2.4.  | Maximum deceleration (m/s <sup>2</sup> ).....                            |       |
| 2.2.5.  | Maximum acceleration (m/s <sup>2</sup> ).....                            |       |
| 2.2.6.  | Full load percentage on driving time.....                                |       |
| 2.2.7.  | Total number of gear shifts.....   |       |
| 2.2.8.  | Total driven distance (km).....  |       |
| 2.3.    | Fuel and CO2 results   |       |
| 2.3.1.  | Fuel consumption (g/km).....   |       |
| 2.3.2.  | Fuel consumption (g/t-km).....   |       |
| 2.3.3.  | Fuel consumption (g/p-km).....   |       |
| 2.3.4.  | Fuel consumption (g/m <sup>3</sup> -km).....                             |       |
| 2.3.5.  | Fuel consumption (l/100km).....  |       |
| 2.3.6.  | Fuel consumption (l/t-km).....   |       |
| 2.3.7.  | Fuel consumption (l/p-km).....   |       |
| 2.3.8.  | Fuel consumption (l/m <sup>3</sup> -km).....                             |       |
| 2.3.9.  | Fuel consumption (MJ/km).....  |       |
| 2.3.10. | Fuel consumption (MJ/t-km).....  |       |
| 2.3.11. | Fuel consumption (MJ/p-km).....  |       |
| 2.3.12. | Fuel consumption (MJ/m <sup>3</sup> -km).....                            |       |
| 2.3.13. | CO2 (g/km).....  |       |
| 2.3.14. | CO2 (g/t-km).....  |       |
| 2.3.15. | CO2 (g/p-km).....  |       |

- 2.3.16. CO2 (g/m<sup>3</sup>-km).....
- 3. Software and user information
  - 3.1. Software and user information
    - 3.1.1. Simulation tool version (X.X.X).....
    - 3.1.2. Date and time of the simulation
    - 3.1.3. Hash of simulation tool input information and input data.....
    - 3.1.4. Hash of simulation tool result.....

## PART II

### Vehicle CO<sub>2</sub> emissions and fuel consumption - Customer information file

1. Vehicle, component, separate technical unit and systems data

1.1. Vehicle data

1.1.1. Vehicle identification number (VIN).....

1.1.2. Vehicle category (N<sub>1</sub> N<sub>2</sub>, N<sub>3</sub>, M<sub>1</sub>, M<sub>2</sub>, M<sub>3</sub>).....

1.1.3. Axle configuration.....

1.1.4. Max. gross vehicle weight (t).....

1.1.5. Vehicle's group.....

1.1.6. Name and address of manufacturer.....

1.1.7. Make (trade name of manufacturer).....

1.1.8. Corrected actual curb mass (kg).....

1.2. Component, separate technical unit and systems data

1.2.1. Engine rated power (kW).....

1.2.2. Engine capacity (ltr).....

1.2.3. Engine reference fuel type (diesel/LPG/CNG...).....

1.2.4. Transmission values (measured/standard).....

1.2.5. Transmission type (SMT, AMT, AT-S, AT-S).....

1.2.6. Nr. of gears.....

1.2.7. Retarder (yes/no).....

1.2.8. Axle ratio.....

1.2.9. Average rolling resistance coefficient (RRC) of all tyres:

3. CO<sub>2</sub> emissions and fuel consumption of the vehicle (for each payload/fuel combination)

Payload low [kg]:

|                         | Average vehicle speed | CO <sub>2</sub> emissions |             |                           | Fuel consumption |             |                           |
|-------------------------|-----------------------|---------------------------|-------------|---------------------------|------------------|-------------|---------------------------|
|                         | .....km/h             | .....g/km                 | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km     | .....l/t-km | .....l/m <sup>3</sup> -km |
| Long haul               | .....km/h             | .....g/km                 | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km     | .....l/t-km | .....l/m <sup>3</sup> -km |
| Long haul (EMS)         | .....km/h             | .....g/km                 | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km     | .....l/t-km | .....l/m <sup>3</sup> -km |
| Regional delivery       | .....km/h             | .....g/km                 | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km     | .....l/t-km | .....l/m <sup>3</sup> -km |
| Regional delivery (EMS) | .....km/h             | .....g/km                 | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km     | .....l/t-km | .....l/m <sup>3</sup> -km |

|                   |           |           |             |                           |              |             |                           |
|-------------------|-----------|-----------|-------------|---------------------------|--------------|-------------|---------------------------|
| Urban delivery    | .....km/h | .....g/km | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km | .....l/t-km | .....l/m <sup>3</sup> -km |
| Municipal utility | .....km/h | .....g/km | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km | .....l/t-km | .....l/m <sup>3</sup> -km |
| Construction      | .....km/h | .....g/km | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km | .....l/t-km | .....l/m <sup>3</sup> -km |

Payload representative [kg]:

|                         | Average vehicle speed | CO <sub>2</sub> emissions |             |                           | Fuel consumption |             |                           |
|-------------------------|-----------------------|---------------------------|-------------|---------------------------|------------------|-------------|---------------------------|
| Long haul               | .....km/h             | .....g/km                 | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km     | .....l/t-km | .....l/m <sup>3</sup> -km |
| Long haul (EMS)         | .....km/h             | .....g/km                 | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km     | .....l/t-km | .....l/m <sup>3</sup> -km |
| Regional delivery       | .....km/h             | .....g/km                 | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km     | .....l/t-km | .....l/m <sup>3</sup> -km |
| Regional delivery (EMS) | .....km/h             | .....g/km                 | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km     | .....l/t-km | .....l/m <sup>3</sup> -km |
| Urban delivery          | .....km/h             | .....g/km                 | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km     | .....l/t-km | .....l/m <sup>3</sup> -km |
| Municipal utility       | .....km/h             | .....g/km                 | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km     | .....l/t-km | .....l/m <sup>3</sup> -km |
| Construction            | .....km/h             | .....g/km                 | .....g/t-km | .....g/m <sup>3</sup> -km | .....l/100km     | .....l/t-km | .....l/m <sup>3</sup> -km |

|                               |                                 |         |
|-------------------------------|---------------------------------|---------|
| Software and user information | Simulation tool version         | [X.X.X] |
|                               | Date and time of the simulation | [-]     |

Cryptographic hash of the output file:

## ANNEX V

### VERIFYING ENGINE DATA

#### 1. Introduction

The engine test procedure described in this Annex shall produce the simulation tool input data relating to engines for the simulation tool.

#### 2. Definitions

For the purposes of this Annex the definitions according to UN/ECE Regulation 49 Rev.06 and, in addition to these, the following definitions shall apply:

- (1) “engine CO<sub>2</sub>-family” means a manufacturer’s grouping of engines which through their design, as defined in paragraph 1 of Appendix 3;
- (2) “CO<sub>2</sub>-parent engine” means an engine selected from an engine CO<sub>2</sub>-family as specified in Appendix 3;
- (3) “NCV” means net calorific value of a fuel as specified in paragraph 3.2;
- (4) “specific mass emissions” means the total mass emissions divided by the total engine work over a defined period expressed in g/kWh;
- (5) “specific fuel consumption” means the total fuel consumption divided by the total engine work over a defined period expressed in g/kWh;
- (6) “FCMC” means fuel consumption mapping cycle;
- (7) “Full load” means the delivered engine torque/power at a certain engine speed when the engine is operated at maximum operator demand.

The definitions in paragraphs 3.1.5 and 3.1.6. of Annex 4 to UN/ECE Regulation 49 Rev.06 shall not apply.

#### 3. General requirements

The calibration laboratory facilities shall comply with the requirements of either ISO/TS 16949, ISO 9000 series or ISO/IEC 17025. All laboratory reference measurement equipment, used for calibration and/or verification, shall be traceable to national or international standards.

Engines shall be grouped into engine CO<sub>2</sub>-families defined in accordance with Appendix 3. Paragraph 4.1 explains which testruns shall be performed for the purpose of certification of one specific engine CO<sub>2</sub>-family.

##### 3.1 Test conditions

All testruns performed for the purpose of certification of one specific engine CO<sub>2</sub>-family defined in accordance with Appendix 3 to this Annex shall be conducted on the same physical engine and without any changes to the setup of the engine dynamometer and the engine system, apart from the exceptions defined in paragraph 4.2 and Appendix 3.

##### 3.1.1 Laboratory test conditions

The tests shall be conducted under ambient conditions meeting the following conditions over the whole testrun:

- (1) The parameter  $f_a$  describing the laboratory test conditions, determined in accordance with paragraph 6.1 of Annex 4 to UN/ECE Regulation 49 Rev.06, shall be within the following limits:  $0.96 \leq f_a \leq 1.04$ .
- (2) The absolute temperature ( $T_a$ ) of the engine intake air expressed in Kelvin, determined in accordance with paragraph 6.1 of Annex 4 to UN/ECE Regulation 49 Rev.06 shall be within the following limits:  $283 \text{ K} \leq T_a \leq 303 \text{ K}$ .
- (3) The atmospheric pressure expressed in kPa, determined in accordance with paragraph 6.1 of Annex 4 to UN/ECE Regulation 49 Rev.06 shall be within the following limits:  $90 \text{ kPa} \leq p_s \leq 102 \text{ kPa}$ .

If tests are performed in test cells that are able to simulate barometric conditions other than those existing in the atmosphere at the specific test site, the applicable  $f_a$  value shall be determined with the simulated values of atmospheric pressure by the conditioning system. The same reference value for the simulated atmospheric pressure shall be used for the intake air and exhaust path and all other relevant engine systems. The actual value of the simulated atmospheric pressure for the intake air and exhaust path and all other relevant engine systems shall be within the limits specified in subpoint (3).

In cases where the ambient pressure in the atmosphere at the specific test site exceeds the upper limit of 102 kPa, tests in accordance with this Annex may still be performed. In this case tests shall be performed with the specific ambient air pressure in the atmosphere.

In cases where the test cell has the ability to control temperature, pressure and/or humidity of engine intake air independent of the atmospheric conditions the same settings for those parameters shall be used for all testruns performed for the purpose of certification of one specific engine CO<sub>2</sub>-family defined in accordance with Appendix 3 to this Annex.

### 3.1.2 Engine installation

The test engine shall be installed in accordance with paragraphs 6.3 to 6.6 of Annex 4 to UN/ECE Regulation 49 Rev.06.

If auxiliaries/equipment necessary for operating the engine system are not installed as required in accordance with paragraph 6.3 of Annex 4 to UN/ECE Regulation 49 Rev.06, all measured engine torque values shall be corrected for the power required for driving these components for the purpose of this Annex in accordance with paragraph 6.3 of Annex 4 to UN/ECE Regulation 49 Rev.06.

The power consumption of the following engine components resulting in the engine torque required for driving these engine components shall be determined in accordance with Appendix 5 to this Annex:

- (1) fan
- (2) electrically powered auxiliaries/equipment necessary for operating the engine system

### 3.1.3 Crankcase emissions

In the case of a closed crankcase, the manufacturer shall ensure that the engine's ventilation system does not permit the emission of any crankcase gases into the atmosphere. If the crankcase is of an open type, the emissions shall be measured and added to the tailpipe emissions, following the provisions set out in paragraph 6.10. of Annex 4 to UN/ECE Regulation 49 Rev.06.

### 3.1.4 Engines with charge air-cooling

During all testruns the charge air cooling system used on the test bed shall be operated under conditions which are representative for in-vehicle application at reference ambient conditions. The reference ambient conditions are defined as 293 K for air temperature and 101.3 kPa for pressure.

The laboratory charge air cooling for tests according to this regulation should comply with the provisions specified in paragraph 6.2 of Annex 4 to UN/ECE Regulation 49 Rev.06.

### 3.1.5 Engine cooling system

- (1) During all testruns the engine cooling system used on the test bed shall be operated under conditions which are representative for in-vehicle application at reference ambient conditions. The reference ambient conditions are defined as 293 K for air temperature and 101.3 kPa for pressure.
- (2) The engine cooling system should be equipped with thermostats according to the manufacturer specification for vehicle installation. If either a non-operational thermostat is installed or no thermostat is used, subpoint (3) shall apply. The setting of the cooling system shall be performed in accordance with subpoint (4).
- (3) If no thermostat is used or a non-operational thermostat is installed, the test bed system shall reflect the behavior of the thermostat under all test conditions. The setting of the cooling system shall be performed in accordance with subpoint (4).
- (4) The engine coolant flow rate (or alternatively the pressure differential across the engine side of the heat exchanger) and the engine coolant temperature shall be set to a value representative for in-vehicle application at reference ambient conditions when the engine is operated at rated speed and full load with the engine thermostat in fully open position. This setting defines the coolant reference temperature. For all testruns performed for the purpose of certification of one specific engine within one engine CO<sub>2</sub>-family, the cooling system setting shall not be changed, neither on the engine side nor on the test bed side of the cooling system. The temperature of the test bed side cooling medium should be kept reasonably constant by good engineering judgement. The cooling medium on the test bed side of the heat exchanger shall not exceed the nominal thermostat opening temperature downstream of the heat exchanger.
- (5) For all testruns performed for the purpose of certification of one specific engine within one engine CO<sub>2</sub>-family the engine coolant temperature shall be maintained between the nominal value of the thermostat opening temperature declared by the manufacturer and the coolant reference temperature in accordance with subpoint

- (4) as soon as the engine coolant has reached the declared thermostat opening temperature after engine cold start.
- (6) For the WHTC coldstart test performed in accordance with paragraph 4.3.3, the specific initial conditions are specified in paragraphs 7.6.1. and 7.6.2 of Annex 4 to UN/ECE Regulation 49 Rev.06. If simulation of the thermostat behaviour in accordance with subpoint (3) is applied, there shall be no coolant flow across the heat exchanger as long as the engine coolant has not reached the declared nominal thermostat opening temperature after cold start.

### 3.2 Fuels

The respective reference fuel for the engine systems under test shall be selected from the fuel types listed in Table 1. The fuel properties of the reference fuels listed in Table 1 shall be those specified in Annex IX to Commission Regulation (EU) No 582/2011.

To ensure that the same fuel is used for all testruns performed for the purpose of certification of one specific engine CO<sub>2</sub>-family no refill of the tank or switch to another tank supplying the engine system shall occur. Exceptionally a refill or switch may be allowed if it can be ensured that the replacement fuel has exactly the same properties as the fuel used before (same production batch).

The NCV for the fuel used shall be determined by two separate measurements in accordance with the respective standards for each fuel type defined in Table 1. The two separate measurements shall be performed by two different labs independent from the manufacturer applying for certification. The lab performing the measurements shall comply with the requirements of ISO/IEC 17025. The approval authority shall ensure that the fuel sample used for determination of the NCV is taken from the batch of fuel used for all testruns.

If the two separate values for the NCV are deviating by more than 440 Joule per gram fuel, the values determined shall be void and the measurement campaign shall be repeated.

The mean value of the two separate NCV that are not deviating by more than 440 Joule per gram fuel shall be documented in MJ/kg rounded to 3 places to the right of the decimal point in accordance with ASTM E 29-06.

For gas fuels the standards for determining the NCV according to Table 1 contain the calculation of the calorific value based on the fuel composition. The gas fuel composition for determining the NCV shall be taken from the analysis of the reference gas fuel batch used for the certification tests. For the determination of the gas fuel composition used for determining the NCV only one single analysis by a lab independent from the manufacturer applying for certification shall be performed. For gas fuels the NCV shall be determined based on this single analysis instead of a mean value of two separate measurements.



Table 1: Reference fuels for testing

| <b>Fuel type / engine type</b> | <b>Reference fuel type</b> | <b>Standard used for determination of NCV</b>                    |
|--------------------------------|----------------------------|--|
| Diesel / CI                    | B7                         | at least ASTM D240 or DIN 59100-1<br>(ASTM D4809 is recommended) |
| Ethanol / CI                   | ED95                       | at least ASTM D240 or DIN 59100-1<br>(ASTM D4809 is recommended) |
| Petrol / PI                    | E10                        | at least ASTM D240 or DIN 59100-1<br>(ASTM D4809 is recommended) |
| Ethanol / PI                   | E85                        | at least ASTM D240 or DIN 59100-1<br>(ASTM D4809 is recommended) |
| LPG / PI                       | LPG Fuel B                 | ASTM 3588 or DIN 51612   |
| Natural Gas / PI               | G <sub>25</sub>            | ISO 6976 or ASTM 3588  |

### 3.3 Lubricants

The lubricating oil for all testruns performed in accordance with this Annex shall be a commercially available oil with unrestricted manufacturer approval under normal in-service conditions as defined in paragraph 4.2 of Annex 8 to UN/ECE Regulation 49 Rev.06. Lubricants for which the usage is restricted to certain special operation conditions of the engine system or having an unusually short oil change interval shall not be used for the purpose of testruns in accordance with this Annex. The commercially available oil shall not be modified by any means and no additives shall be added.

All testruns performed for the purpose of certification of the CO<sub>2</sub> emissions and fuel consumption related properties of one specific engine CO<sub>2</sub> family shall be performed with the same type of lubricating oil.

### 3.4 Fuel flow measurement system

All fuel flows consumed by the whole engine system shall be captured by the fuel flow measurement system. Additional fuel flows not directly supplied to the combustion process in the engine cylinders shall be included in the fuel flow signal for all testruns performed. Additional fuel injectors (e.g. cold start devices) not necessary for the operation of the engine system shall be disconnected from the fuel supply line during all testruns performed.

### 3.5 Measurement equipment specifications

The measurement equipment shall meet the requirements of paragraph 9 of Annex 4 to UN/ECE Regulation 49 Rev.06.

Notwithstanding the requirements defined in paragraph 9 of Annex 4 to UN/ECE Regulation 49 Rev.06, the measurement systems listed in Table 2 shall meet the limits defined in Table 2.

Table 2: Requirements of measurement systems

| Measurement system               | Linearity                                       |                |  |  | Accuracy <sup>1)</sup>  | Rise time <sup>2)</sup> |
|----------------------------------|---|----------------|--|--|---|-------------------------|
|                                  | Intercept<br>$/x_{min} \times (a_1 - 1) + a_0/$ | Slope<br>$a_1$ | Standard error<br>of estimate<br>SEE       | Coefficient of<br>determination<br>$r^2$ |   |                         |
| Engine speed                     | $\leq 0.2\%$ max calibration <sup>3)</sup>      | 0.999 - 1.001  | $\leq 0.1\%$ max calibration <sup>3)</sup> | $\geq 0.9985$                            | 0.2% of reading or 0.1% of max. calibration <sup>3)</sup> of speed whichever is larger  | $\leq 1$ s              |
| Engine torque                    | $\leq 0.5\%$ max calibration <sup>3)</sup>      | 0.995 - 1.005  | $\leq 0.5\%$ max calibration <sup>3)</sup> | $\geq 0.995$                             | 0.6% of reading or 0.3% of max. calibration <sup>3)</sup> of torque whichever is larger | $\leq 1$ s              |
| Fuel mass flow for liquid fuels  | $\leq 0.5\%$ max calibration <sup>3)</sup>      | 0.995 - 1.005  | $\leq 0.5\%$ max calibration <sup>3)</sup> | $\geq 0.995$                             | 0.6 % of reading or 0.3 % of max. calibration <sup>3)</sup> of flow whichever is larger | $\leq 2$ s              |
| Fuel mass flow for gaseous fuels | $\leq 1\%$ max calibration <sup>3)</sup>        | 0.99 - 1.01    | $\leq 1\%$ max calibration <sup>3)</sup>   | $\geq 0.995$                             | 1 % of reading or 0.5 % of max. calibration <sup>3)</sup> of flow whichever is larger   | $\leq 2$ s              |
| Electrical Power                 | $\leq 1\%$ max calibration <sup>3)</sup>        | 0.98 - 1.02    | $\leq 2\%$ max calibration <sup>3)</sup>   | $\geq 0.990$                             | n.a.  | $\leq 1$ s              |
| Current                          | $\leq 1\%$ max calibration <sup>3)</sup>        | 0.98 - 1.02    | $\leq 2\%$ max calibration <sup>3)</sup>   | $\geq 0.990$                             | n.a.  | $\leq 1$ s              |
| Voltage                          | $\leq 1\%$ max calibration <sup>3)</sup>        | 0.98 - 1.02    | $\leq 2\%$ max calibration <sup>3)</sup>   | $\geq 0.990$                             | n.a.  | $\leq 1$ s              |

- (1) “Accuracy” means the deviation of the analyzer reading from a reference value which is traceable to a national or international standard.
- (2) “Rise time” means the difference in time between the 10 percent and 90 percent response of the final analyzer reading ( $t_{90} - t_{10}$ ).
- (3) The “max calibration” values shall be 1.1 times the maximum predicted value expected during all testruns for the respective measurement system.

“ $x_{min}$ ”, used for calculation of the intercept value in Table 2, shall be 0.9 times the minimum predicted value expected during all testruns for the respective measurement system.

The signal delivery rate of the measurement systems listed in Table 2, except for the fuel mass flow measurement system, shall be at least 5 Hz ( $\geq 10$  Hz recommended). The signal delivery rate of the fuel mass flow measurement system shall be at least 2 Hz.

All measurement data shall be recorded with a sample rate of at least 5 Hz ( $\geq 10$  Hz recommended).

### 3.5.1 Measurement equipment verification

A verification of the demanded requirements defined in Table 2 shall be performed for each measurement system. At least 10 reference values between  $x_{min}$  and the “max calibration” value defined in accordance with paragraph 3.5 shall be introduced to the

measurement system and the response of the measurement system shall be recorded as measured value.

For the linearity verification the measured values shall be compared to the reference values by using a least squares linear regression in accordance with paragraph A.3.2 of Appendix 3 to Annex 4 to UN/ECE Regulation 49 Rev.06.

#### 4. Testing procedure

All measurement data shall be determined in accordance with Annex 4 to UN/ECE Regulation 49 Rev.06, unless stated otherwise in this Annex.

##### 4.1 Overview of testruns to be performed

Table 3 gives an overview of all testruns to be performed for the purpose of certification of one specific engine CO<sub>2</sub>-family defined in accordance with Appendix 3.

The fuel consumption mapping cycle in accordance with paragraph 4.3.5 and the recording of the engine motoring curve in accordance with paragraph 4.3.2 shall be omitted for all other engines except the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of **XXX** are applied, the fuel consumption mapping cycle in accordance with paragraph 4.3.5 and the recording of the engine motoring curve in accordance with paragraph 4.3.2 shall be performed additionally for that specific engine.

Table 3: Overview of testruns to be performed

| <b>Testrun</b>                 | <b>Reference to paragraph</b> | <b>Required to be run for CO<sub>2</sub>-parent engine</b> | <b>Required to be run for other engines within CO<sub>2</sub>-family</b> |
|--------------------------------|-------------------------------|--|--|
| Engine full load curve         | 4.3.1                         | yes  | yes  |
| Engine motoring curve          | 4.3.2                         | yes  | no   |
| WHTC test                      | 4.3.3                         | yes  | yes  |
| WHSC test                      | 4.3.4                         | yes  | yes  |
| Fuel consumption mapping cycle | 4.3.5                         | yes  | no   |

##### 4.2 Allowed changes to the engine system

Changing of the target value for the engine idle speed controller to a lower value in the electronic control unit of the engine shall be allowed for all testruns in which idle operation occurs, in order to prevent interference between the engine idle speed controller and the test bed speed controller.

##### 4.3 Testruns

###### 4.3.1 Engine full load curve

The engine full load curve shall be recorded in accordance with paragraphs 7.4.1. to 7.4.5. of Annex 4 to UN/ECE Regulation 49 Rev.06.

#### 4.3.2 Engine motoring curve

The recording of the engine motoring curve in accordance with this paragraph shall be omitted for all other engines except the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family defined in accordance with Appendix 3. In accordance with paragraph 6.1.3 the engine motoring curve recorded for the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family shall also be applicable to all engines within the same engine CO<sub>2</sub>-family.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of XXX are applied, the recording of the engine motoring curve shall be performed additionally for that specific engine.

The engine motoring curve shall be recorded in accordance with option (b) in paragraph 7.4.7. of Annex 4 to UN/ECE Regulation 49 Rev.06. This test shall determine the negative torque required to motor the engine between maximum and minimum mapping speed with minimum operator demand.

The test shall be continued directly after the full load curve mapping according to paragraph 4.3.1. At the request of the manufacturer, the motoring curve may be recorded separately. In this case the engine oil temperature at the end of the full load curve testrun performed in accordance with paragraph 4.3.1 shall be recorded and the manufacturer shall prove to the satisfaction of the approval authority, that the engine oil temperature at the starting point of the motoring curve meets the aforementioned temperature within  $\pm 2\text{K}$ .

At the start of the testrun for the engine motoring curve the engine shall be operated with minimum operator demand at maximum mapping speed defined in paragraph 7.4.3. of Annex 4 to UN/ECE Regulation 49 Rev.06. As soon as the motoring torque value has stabilized within  $\pm 5\%$  of its mean value for at least 10 seconds, the data recording shall start and the engine speed shall be decreased at an average rate of  $8 \pm 1 \text{ min}^{-1}/\text{s}$  from maximum to minimum mapping speed, which are defined in paragraph 7.4.3. of Annex 4 to UN/ECE Regulation 49 Rev.06..

#### 4.3.3 WHTC test

The WHTC test shall be performed in accordance with Annex 4 to UN/ECE Regulation 49 Rev.06. The weighted emission test results shall meet the applicable limits defined in Regulation (EC) No 595/2009.

The engine full load curve recorded in accordance with paragraph 4.3.1 shall be used for the denormalization of the reference cycle and all calculations of reference values performed in accordance with paragraphs 7.4.6, 7.4.7 and 7.4.8 of Annex 4 to UN/ECE Regulation 49 Rev.06.

##### 4.3.3.1 Measurement signals and data recording

In addition to the provisions defined in Annex 4 to UN/ECE Regulation 49 Rev.06 the actual fuel mass flow consumed by the engine in accordance with paragraph 3.4 shall be recorded.

#### 4.3.4 WHSC test

The WHSC test shall be performed in accordance with Annex 4 to UN/ECE Regulation 49 Rev.06. The emission test results shall meet the applicable limits defined in Regulation (EC) No 595/2009.

The engine full load curve recorded in accordance with paragraph 4.3.1 shall be used for the denormalization of the reference cycle and all calculations of reference values performed in accordance with paragraphs 7.4.6, 7.4.7 and 7.4.8 of Annex 4 to UN/ECE Regulation 49 Rev.06.

##### 4.3.4.1 Measurement signals and data recording

In addition to the provisions defined in Annex 4 to UN/ECE Regulation 49 Rev.06 the actual fuel mass flow consumed by the engine in accordance with paragraph 3.4 shall be recorded.

#### 4.3.5 Fuel consumption mapping cycle (FCMC)

The fuel consumption mapping cycle (FCMC) in accordance with this paragraph shall be omitted for all other engines except the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family. The fuel map data recorded for the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family shall also be applicable to all engines within the same engine CO<sub>2</sub>-family.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of **XXX** are applied, the fuel consumption mapping cycle shall be performed additionally for that specific engine.

The engine fuel map shall be measured in a series of steady state engine operation points, as defined according to paragraph 4.3.5.2. The metrics of this map are the fuel consumption in g/h depending on engine speed in min<sup>-1</sup> and engine torque in Nm.

##### 4.3.5.1 Handling of interruptions during the FCMC

If an after-treatment regeneration event occurs during the FCMC for engines equipped with exhaust after-treatment systems that are regenerated on a periodic basis defined in accordance with paragraph 6.6 of Annex 4 to UN/ECE Regulation 49 Rev.06, all measurements at that engine speed mode shall be void. The regeneration event shall be completed and afterwards the procedure shall be continued as described in paragraph 4.3.5.1.1.

If an unexpected interruption, malfunction or error occurs during the FCMC, all measurements at that engine speed mode shall be void and one of the following options how to continue shall be chosen by the manufacturer:

- (1) the procedure shall be continued as described in paragraph 4.3.5.1.1
- (2) the whole FCMC shall be repeated in accordance with paragraphs 4.3.5.4 and 4.3.5.5

##### 4.3.5.1.1 Provisions for continuing the FCMC

The engine shall be started and warmed up in accordance with paragraph 7.4.1. of Annex 4 to UN/ECE Regulation 49 Rev.06. After warm-up, the engine shall be

preconditioned by operating the engine for 20 minutes at mode 9, as defined in Table 1 of paragraph 7.2.2. of Annex 4 to UN/ECE Regulation 49 Rev.06.

The engine full load curve recorded in accordance with paragraph 4.3.1 shall be used for the denormalization of the reference values of mode 9 performed in accordance with paragraphs 7.4.6, 7.4.7 and 7.4.8 of Annex 4 to UN/ECE Regulation 49 Rev.06.

Directly after completion of preconditioning, the target values for engine speed and torque shall be changed linearly within 20 to 46 seconds to the highest target torque setpoint at the next higher target engine speed setpoint than the particular target engine speed setpoint where the interruption of the FCMC occurred. If the target setpoint is reached within less than 46 seconds, the remaining time up to 46 seconds shall be used for stabilization.

For stabilization the engine operation shall continue from that point in accordance with the test sequence specified in paragraph 4.3.5.5 without recording of measurement values.

When the highest target torque setpoint at the particular target engine speed setpoint where the interruption occurred is reached, the recording of measurement values shall be continued from that point on in accordance with the test sequence specified in paragraph 4.3.5.5.

#### 4.3.5.2 Grid of target setpoints

The grid of target setpoints is fixed in a normalized way and consists of 10 target engine speed setpoints and 11 target torque setpoints. Conversion of the normalized setpoint definition to the actual target values of engine speed and torque setpoints for the individual engine under test shall be based on the engine full load curve of the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.1.

##### 4.3.5.2.1 Definition of target engine speed setpoints

The 10 target engine speed setpoints are defined by 4 base target engine speed setpoints and 6 additional target engine speed setpoints.

The engine speeds  $n_{idle}$ ,  $n_{lo}$ ,  $n_{pref}$ ,  $n_{95h}$  and  $n_{hi}$  shall be determined from the engine full load curve of the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.1 by applying the definitions of characteristic engine speeds in accordance with paragraph 7.4.6. of Annex 4 to UN/ECE Regulation 49 Rev.06.

The engine speed  $n_{57}$  shall be determined by the following equation:

$$n_{57} = 0.565 \times (0.45 \times n_{lo} + 0.45 \times n_{pref} + 0.1 \times n_{hi} - n_{idle}) \times 2.0327 + n_{idle}$$

The 4 base target engine speed setpoints are defined as follows:

- (1) Base engine speed 1:  $n_{idle}$
- (2) Base engine speed 2:  $n_A = n_{57} - 0.05 \times (n_{95h} - n_{idle})$
- (3) Base engine speed 3:  $n_B = n_{57} + 0.08 \times (n_{95h} - n_{idle})$

(4) Base engine speed 4:  $n_{95h}$

The potential distances between the speed setpoints shall be determined by the following equations:

$$(1) \quad dn_{idleA\_44} = (n_A - n_{idle}) / 4$$

$$(2) \quad dn_{B95h\_44} = (n_{95h} - n_B) / 4$$

$$(3) \quad dn_{idleA\_35} = (n_A - n_{idle}) / 3$$

$$(4) \quad dn_{B95h\_35} = (n_{95h} - n_B) / 5$$

$$(5) \quad dn_{idleA\_53} = (n_A - n_{idle}) / 5$$

$$(6) \quad dn_{B95h\_53} = (n_{95h} - n_B) / 3$$

The absolute values of potential deviations between the two sections shall be determined by the following equations:

$$(1) \quad dn_{44} = ABS(dn_{idleA\_44} - dn_{B95h\_44})$$

$$(2) \quad dn_{35} = ABS(dn_{idleA\_35} - dn_{B95h\_35})$$


$$(3) \quad dn_{53} = ABS(dn_{idleA\_53} - dn_{B95h\_53})$$

The 6 additional target engine speed setpoints shall be determined based on the smallest of the three values  $dn_{44}$ ,  $dn_{35}$  and  $dn_{53}$  in accordance with the following provisions:

- (1) If  $dn_{44}$  is the smallest of the three values, the 6 additional target engine speeds shall be determined by dividing each of the two ranges, one from  $n_{idle}$  to  $n_A$  and the other from  $n_B$  to  $n_{95h}$ , into 4 equidistant sections.
- (2) If  $dn_{35}$  is the smallest of the three values, the 6 additional target engine speeds shall be determined by dividing the range from  $n_{idle}$  to  $n_A$  into 3 equidistant sections and the range from  $n_B$  to  $n_{95h}$ , into 5 equidistant sections.
- (3) If  $dn_{53}$  is the smallest of the three values, the 6 additional target engine speeds shall be determined by dividing the range from  $n_{idle}$  to  $n_A$  into 5 equidistant sections and the range from  $n_B$  to  $n_{95h}$ , into 3 equidistant sections.

Figure 1 exemplarily illustrates the definition of the target engine speed setpoints according to subpoint (1) above.

Figure 1: Definition of speed setpoints

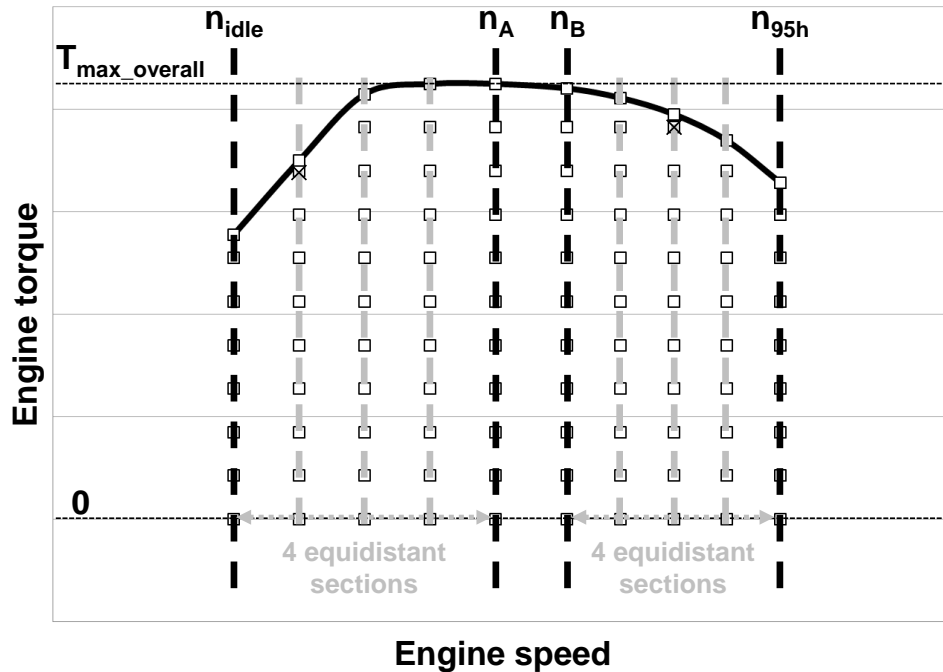


#### 4.3.5.2.2 Definition of target torque setpoints

The 11 target torque setpoints are defined by 2 base target torque setpoints and 9 additional target torque setpoints. The 2 base target torque setpoints are defined by zero engine torque and the maximum engine full load of the CO<sub>2</sub>-parent engine determined in accordance with paragraph 4.3.1. (overall maximum torque  $T_{\max\_overall}$ ). The 9 additional target torque setpoints are determined by dividing the range from zero torque to overall maximum torque,  $T_{\max\_overall}$ , into 10 equidistant sections.

All target torque setpoints at a particular target engine speed setpoint that exceed the limit value defined by the full load torque value at this particular target engine speed setpoint minus 5 percent of  $T_{\max\_overall}$ , shall be replaced with the full load torque value at this particular target engine speed setpoint. Figure 2 exemplarily illustrates the definition of the target torque setpoints.

Figure 2: Definition of torque setpoints



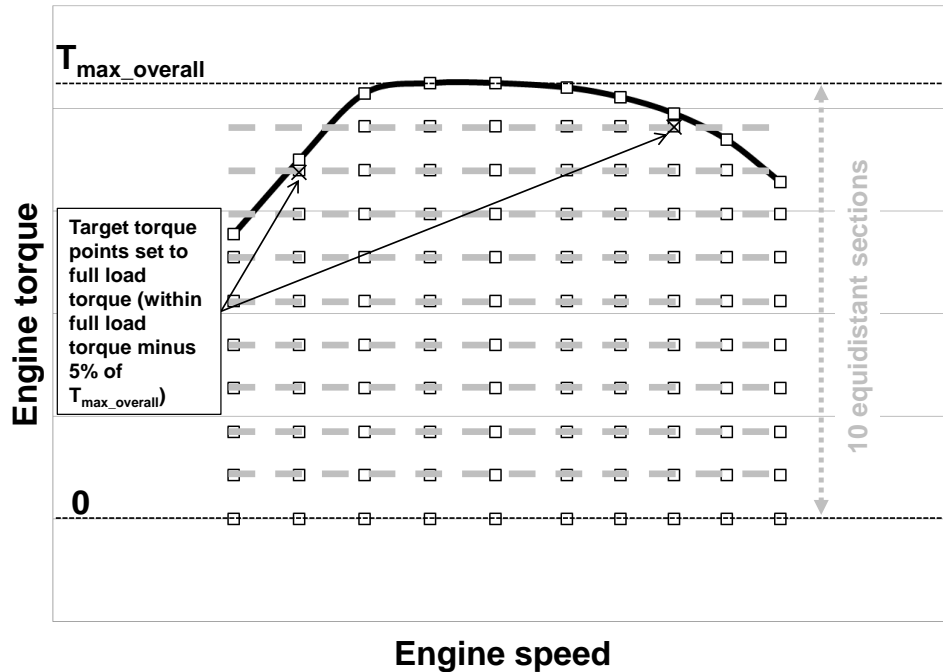

#### 4.3.5.3 Measurement signals and data recording

The following measurement data shall be recorded:

- (1) engine speed
- (2) engine torque corrected in accordance with paragraph 3.1.2
- (3) fuel mass flow consumed by the whole engine system in accordance with paragraph 3.4
- (4) Gaseous pollutants according to the definitions in UN/ECE Regulation 49 Rev.06. Particulate pollutants and ammonia emissions are not required to be monitored during the FCMC testrun.

The measurement of gaseous pollutants shall be carried out in accordance with paragraphs 7.5.1, 7.5.2, 7.5.3, 7.5.5, 7.7.4, 7.8.1, 7.8.2, 7.8.4 and 7.8.5 of Annex 4 to UN/ECE Regulation 49 Rev.06.

For the purpose of paragraph 7.8.4 of Annex 4 to UN/ECE Regulation 49 Rev.06, the term “test cycle” in the paragraph referred to shall be the complete sequence from preconditioning in accordance with paragraph 4.3.5.4 to ending of the test sequence in accordance with paragraph 4.3.5.5.

#### 4.3.5.4 Preconditioning of the engine system

The dilution system, if applicable, and the engine shall be started and warmed up in accordance with paragraph 7.4.1. of Annex 4 to UN/ECE Regulation 49 Rev.06.

After warm-up is completed, the engine and sampling system shall be preconditioned by operating the engine for 20 minutes at mode 9, as defined in Table 1 of paragraph 7.2.2.

of Annex 4 to UN/ECE Regulation 49 Rev.06, while simultaneously operating the dilution system.

The engine full load curve of the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family and recorded in accordance with paragraph 4.3.1 shall be used for the denormalization of the reference values of mode 9 performed in accordance with paragraphs 7.4.6, 7.4.7 and 7.4.8 of Annex 4 to UN/ECE Regulation 49 Rev.06.

Directly after completion of preconditioning, the target values for engine speed and torque shall be changed linearly within 20 to 46 seconds to match the first target setpoint of the test sequence according to paragraph 4.3.5.5. If the first target setpoint is reached within less than 46 seconds, the remaining time up to 46 seconds shall be used for stabilization.

#### 4.3.5.5 Test sequence

The test sequence consists of steady state target setpoints with defined engine speed and torque at each target setpoint in accordance with paragraph 4.3.5.2 and defined ramps to move from one target setpoint to the next.

The highest target torque setpoint at each target engine speed shall be operated with maximum operator demand.

The first target setpoint is defined at the highest target engine speed setpoint and highest target torque setpoint.

The following steps shall be performed to cover all target setpoints:

- (1) The engine shall be operated for 95±3 seconds at each target setpoint. The first 55±1 seconds at each target setpoint are considered as a stabilization period,. During the following period of 30±1 seconds the engine speed mean value shall be controlled as follows:
  - (a) The engine speed mean value shall be held at the target engine speed setpoint within ±1 percent of the highest target engine speed.
  - (b) Except for the points at full load, the engine torque mean value shall be held at the target torque setpoint within a tolerance of ±20 Nm or ±2 percent of the overall maximum torque,  $T_{\text{max\_overall}}$ , whichever is greater.

The recorded values in accordance with paragraph 4.3.5.3 shall be stored as averaged value over the period of 30±1 seconds. The remaining period of 10±1 seconds may be used for data post-processing and storage if necessary. During this period the engine target setpoint shall be kept

- (2) After the measurement at one target setpoint is completed, the target value for engine speed shall be kept constant within ±20 min<sup>-1</sup> of the target engine speed setpoint and the target value for torque shall be decreased linearly within 20±1 seconds to match the next lower target torque setpoint. Then the measurement shall be performed according to subpoint (1).
- (3) After the zero torque setpoint has been measured in subpoint (1), the target engine speed shall be decreased linearly to the next lower target engine speed setpoint

while at the same time the target torque shall be increased linearly to the highest target torque setpoint at the next lower target engine speed setpoint within 20 to 46 seconds. If the next target setpoint is reached within less than 46 seconds, the remaining time up to 46 seconds shall be used for stabilization. Then the measurement shall be performed by starting the the stabilization procedure according to subpoint (1) and afterwards the target torque setpoints at constant target engine speed shall be adjusted according to subpoint (2).

Figure 3 illustrates the three different steps to be performed at each measurement setpoint for the test according to subpoint (1) above.

Figure 3: Steps to be performed at each measurement setpoint


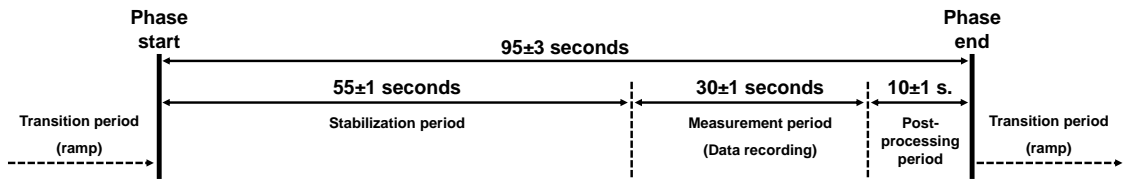


Figure 4 exemplarily illustrates the sequence of steady state measurement setpoints to be followed for the test.

Figure 4: Sequence of steady state measurement setpoints

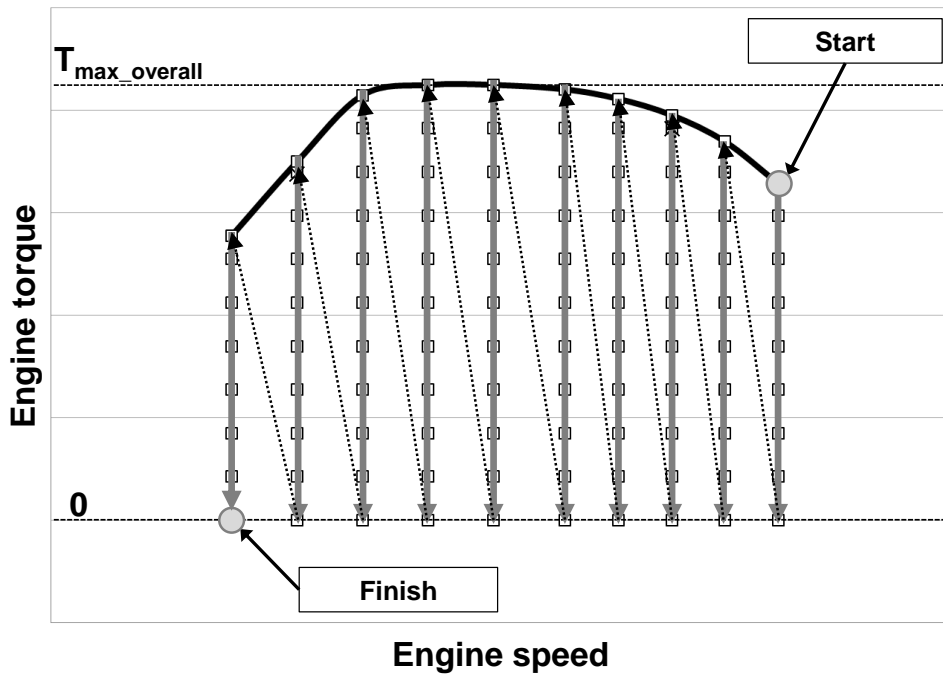

#### 4.3.5.6 Data evaluation for emission monitoring

Gaseous pollutants in accordance with paragraph 4.3.5.3 shall be monitored during the FCMC. The definitions of characteristic engine speeds in accordance with paragraph 7.4.6. of Annex 4 to UN/ECE R.49.06 shall apply.

#### 4.3.5.6.1 Definition of control area

The control area for emission monitoring during the FCMC shall be determined in accordance with paragraphs 4.3.5.6.1.1 and 4.3.5.6.1.2.

##### 4.3.5.6.1.1 Engine speed range for the control area


- (1) The engine speed range for the control area shall be defined based on the engine full load curve of the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.1.
- (2) The control area shall include all engine speeds greater than or equal to the 30<sup>th</sup> percentile cumulative speed distribution, determined from all engine speeds including idle speed sorted in ascending order, over the hotstart WHTC test cycle performed in accordance with paragraph 4.3.3 (n<sub>30</sub>) for the engine full load curve referred to the subpoint (1).
- (3) The control area shall include all engine speeds lower than or equal to n<sub>hi</sub> determined from the engine full load curve referred to in the subpoint (1)

##### 4.3.5.6.1.2 Engine torque and power range for the control area

- (1) The lower boundary of the engine torque range for the control area shall be defined based on the engine full load curve of the engine with the lowest rating of all engines within the engine CO<sub>2</sub>-family and recorded in accordance with paragraph 4.3.1.
- (2) The control area shall include all engine load points with a torque value greater than or equal to 30 percent of the maximum torque value determined from the engine full load curve referred to in subpoint (1).
- (3) Notwithstanding the provisions of subpoint (2), speed and torque points below 30 percent of the maximum power value, determined from the engine full load curve referred to in subpoint (1), shall be excluded from the control area.
- (4) Notwithstanding the provisions of subpoints (2) and (3), the upper boundary of the control area shall be based on the engine full load curve of the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.1. The torque value for each engine speed determined from the engine full load curve of the CO<sub>2</sub>-parent engine shall be increased by 5 percent of the overall maximum torque, T<sub>max\_overall</sub>, defined in accordance with paragraph 4.3.5.2.2. The modified increased engine full load curve of the CO<sub>2</sub>-parent engine shall be used as upper boundary of the control area.

Figure 5 exemplarily illustrates the definition of the engine speed, torque and power range for the control area.

Figure 5: Definition of the engine speed, torque and power range for the control area exemplarily

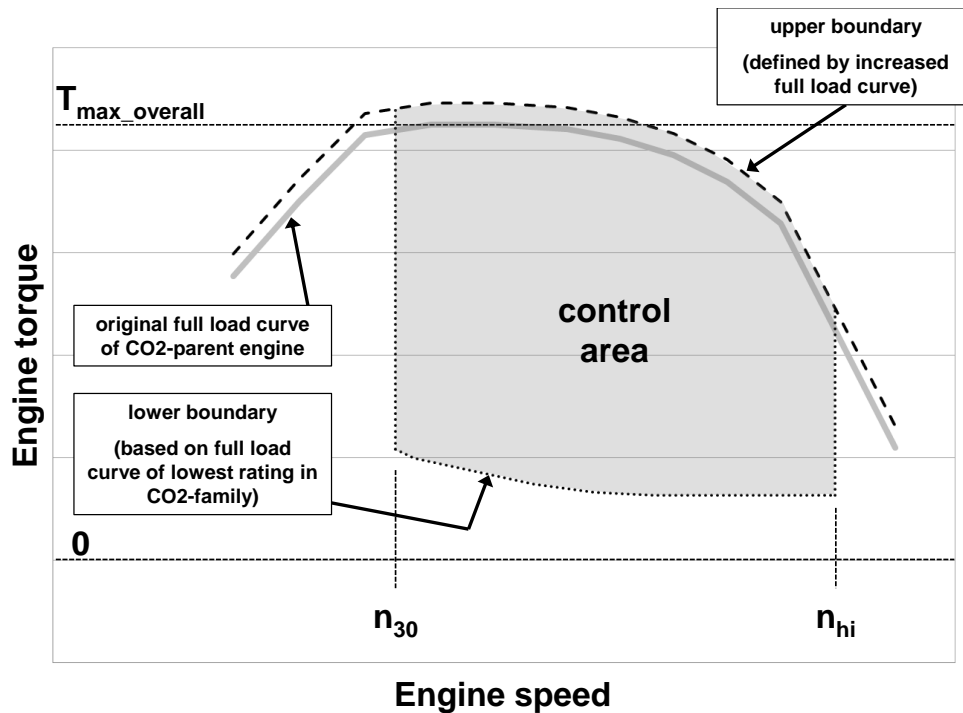

#### 4.3.5.6.2 Definition of the grid cells

The control area defined in accordance with paragraph 4.3.5.6.1 shall be divided into a number of grid cells for emission monitoring during the FCMC.


The grid shall comprise of 9 cells for engines with a rated speed less than  $3,000 \text{ min}^{-1}$  and 12 cells for engines with a rated speed greater than or equal to  $3,000 \text{ min}^{-1}$ . The grids shall be defined in accordance with the following provisions:

- (1) The outer boundaries of the grids are aligned to the control area defined according to paragraph 4.3.5.6.1.
- (2) 2 vertical lines spaced at equal distance between engine speeds  $n_{30}$  and 1.1 times  $n_{95h}$  for 9 cell grids, or 3 vertical lines spaced at equal distance between engine speeds  $n_{30}$  and 1.1 times  $n_{95h}$  for 12 cell grids.
- (3) 2 lines spaced at equal distance of engine torque (i.e.  $1/3$ ) at each vertical line of engine speed defined by subpoints (1) and (2)

All engine speed values in  $\text{min}^{-1}$  and all torque values in Newtonmeters defining the boundaries of the grid cells shall be rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

Figure 6 exemplarily illustrates the definition of the grid cells for the control area in the case of 9 cell grid.

Figure 6: Definition of the grid cells for the control area exemplarily for 9 cell grid

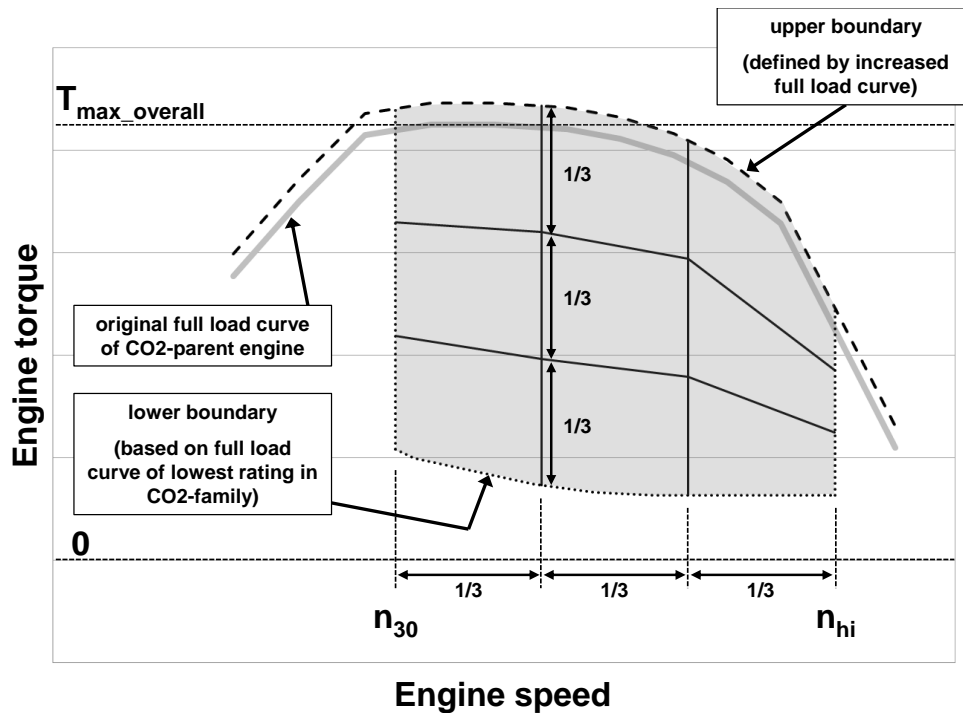

#### 4.3.5.6.3 Calculation of specific mass emissions

The specific mass emissions of the gaseous pollutants shall be determined as average value for each grid cell defined in accordance with paragraph 4.3.5.6.2. The average value for each grid cell shall be determined as arithmetical mean value of the specific mass emissions over all engine speed and torque points measured during the FCMC located within the same grid cell.

The specific mass emissions of the single engine speed and torque measured during the FCMC shall be determined as averaged value over the  $30 \pm 1$  seconds measurement period defined in accordance with subpoint (1) of paragraph 4.3.5.5.

If an engine speed and torque point is located directly on a line that separates different grid cells from each other, this engine speed and load point shall be taken into account for the average values of all adjacent grid cells.

The calculation of the total mass emissions of each gaseous pollutant for each engine speed and torque point measured during the FCMC,  $m_{\text{FCMC},i}$  in grams, over the  $30 \pm 1$  seconds measurement period in accordance with subpoint (1) of paragraph 4.3.5.5 shall be carried out in accordance with paragraph 8 of Annex 4 to UN/ECE Regulation 49 Rev.06.

The actual engine work for each engine speed and torque point measured during the FCMC,  $W_{\text{FCMC},i}$  in kWh, over the  $30 \pm 1$  seconds measurement period in accordance with subpoint (1) of paragraph 4.3.5.5 shall be determined from the engine speed and torque values recorded in accordance with paragraph 4.3.5.3.

The specific mass emissions of gaseous pollutants  $e_{\text{FCMC},i}$  in g/kWh for each engine speed and torque point measured during the FCMC shall be determined by the following equation:

$$e_{\text{FCMC},i} = m_{\text{FCMC},i} / W_{\text{FCMC},i}$$

#### 4.3.5.7 Validity of data

##### 4.3.5.7.1 Requirements for validation statistics of the FCMC

A linear regression analysis of the actual values of engine speed ( $n_{\text{act}}$ ), engine torque ( $M_{\text{act}}$ ) and engine power ( $P_{\text{act}}$ ) on the respective reference values ( $n_{\text{ref}}$ ,  $M_{\text{ref}}$ ,  $P_{\text{ref}}$ ) shall be performed for the FCMC. The actual values for  $n_{\text{act}}$ ,  $M_{\text{act}}$  and  $P_{\text{act}}$  shall be determined from the values recorded in accordance with paragraph 4.3.5.3.

The ramps to move from one target setpoint to the next shall be excluded from this regression analysis.

To minimize the biasing effect of the time lag between the actual and reference cycle values, the entire engine speed and torque actual signal sequence may be advanced or delayed in time with respect to the reference speed and torque sequence. If the actual signals are shifted, both speed and torque shall be shifted by the same amount in the same direction.

The method of least squares shall be used for the regression analysis in accordance with paragraphs A.3.1 and A.3.2 of Appendix 3 to Annex 4 to UN/ECE Regulation 49 Rev.06, with the best-fit equation having the form as defined in paragraph 7.8.8 of Annex 4 to UN/ECE Regulation 49 Rev.06. It is recommended that this analysis be performed at 1 Hz.

For the purposes of this regression analysis only, omissions of points are permitted where noted in Table 4 (Permitted point omissions from regression analysis) of Annex 4 to UN/ECE Regulation 49 Rev.06 before doing the regression calculation. Additionally, all engine torque and power values at points with maximum operator demand shall be omitted for the purposes of this regression analysis only. However, points omitted for the purposes of regression analysis shall not be omitted for any other calculations in accordance with this Annex. Point omission may be applied to the whole or to any part of the cycle.

For the data to be considered valid, the criteria of Table 3 (Regression line tolerances for the WHSC) of Annex 4 to UN/ECE Regulation 49 Rev.06 shall be met.

##### 4.3.5.7.2 Requirements for emission monitoring

The data obtained from the FCMC tests is valid if the specific mass emissions of the regulated gaseous pollutants determined for each grid cell in accordance with paragraph 4.3.5.6.3 meet the applicable limits for gaseous pollutants defined in paragraph 5.2.2 of Annex 10 to UN/ECE Regulation 49 Rev.06. In the case that the number of engine speed and torque points within the same grid cell is less than 3, this paragraph shall not apply for that specific grid cell.

#### 5. Post-processing of measurement data

All calculations defined in this paragraph shall be performed specifically for each engine within one engine CO<sub>2</sub>-family.

### 5.1 Calculation of engine work

Total engine work over a cycle or a defined period shall be determined from the recorded values of engine power determined in accordance with paragraph 3.1.2 and paragraphs 6.3.5. and 7.4.8. of Annex 4 to UN/ECE Regulation 49 Rev.06.

The engine work over a complete testcycle or over each WHTC-sub-cycle shall be determined by integrating of recorded values of engine power in accordance with the following formula:

$$W_{act,i} = \left( \frac{1}{2} P_0 + P_1 + P_2 + \dots + P_{n-2} + P_{n-1} + \frac{1}{2} P_n \right) h$$

where:

- $W_{act,i}$  = total engine work over the time period from  $t_0$  to  $t_1$
- $t_0$  = time at the start of the time period
- $t_1$  = time at the end of the time period
- $n$  = number of recorded values over the time period from  $t_0$  to  $t_1$
- $P_{k [0 \dots n]}$  = recorded engine power values over the time period from  $t_0$  to  $t_1$  in chronological order, where  $k$  runs from 0 at  $t_0$  to  $n$  at  $t_1$
- $h$  = interval width between two adjacent recorded values defined by  

$$h = \frac{t_1 - t_0}{n}$$

### 5.2 Calculation of integrated fuel consumption

Any recorded negative values for the fuel consumption shall be used directly and shall not be set equal to zero for the calculations of the integrated value.

The total fuel mass consumed by the engine over a complete testcycle or over each WHTC-sub-cycle shall be determined by integrating recorded values of fuel massflow in accordance with the following formula:

$$\Sigma FC_{meas,i} = \left( \frac{1}{2} mf_{fuel,0} + mf_{fuel,1} + mf_{fuel,2} + \dots + mf_{fuel,n-2} + mf_{fuel,n-1} + \frac{1}{2} mf_{fuel,n} \right) h$$

where:

- $\Sigma FC_{meas,i}$  = total fuel mass consumed by the engine over the time period from  $t_0$  to  $t_1$
- $t_0$  = time at the start of the time period
- $t_1$  = time at the end of the time period
- $n$  = number of recorded values over the time period from  $t_0$  to  $t_1$



- $mf_{fuel,k} [0 \dots n]$  = recorded fuel massflow values over the time period from  $t_0$  to  $t_1$  in chronological order, where  $k$  runs from 0 at  $t_0$  to  $n$  at  $t_1$
- $h$  = interval width between two adjacent recorded values defined by  

$$h = \frac{t_1 - t_0}{n}$$

### 5.3 Calculation of specific fuel consumption figures

The correction and balancing factors, which have to be provided as input for the simulation tool, are calculated by the engine pre-processing tool based on the measured specific fuel consumption figures of the engine determined in accordance with paragraphs 5.3.1 and 5.3.2.

#### 5.3.1 Specific fuel consumption figures for WHTC correction factor

The specific fuel consumption figures needed for the WHTC correction factor shall be calculated from the actual measured values for the hotstart WHTC recorded in accordance with paragraph 4.3.3 as follows:

$$SFC_{meas, Urban} = \Sigma FC_{meas, WHTC-Urban} / W_{act, WHTC-Urban}$$

$$SFC_{meas, Rural} = \Sigma FC_{meas, WHTC-Rural} / W_{act, WHTC-Rural}$$

$$SFC_{meas, MW} = \Sigma FC_{meas, WHTC-MW} / W_{act, WHTC-M}$$

where:

- $SFC_{meas, i}$  = Specific fuel consumption  
over the WHTC-sub-cycle  $i$  [g/kWh]
- $\Sigma FC_{meas, i}$  = Total fuel mass consumed by the engine over the  
WHTC-sub-cycle  $i$  [g] determined in accordance with  
paragraph 5.2
- $W_{act, i}$  = Total engine work over the WHTC sub-cycle  $i$  [kWh]  
determined in accordance with paragraph 5.1

The 3 different sub-cycles of the WHTC – urban, rural and motorway – shall be defined as follows:

- (1) urban: from cycle start to  $\leq 900$  seconds from cycle start
- (2) rural: from  $> 900$  seconds to  $\leq 1380$  seconds from cycle start
- (3) motorway (MW): from  $> 1380$  seconds from cycle start to cycle end

#### 5.3.2 Specific fuel consumption figures for cold-hot emission balancing factor

The specific fuel consumption figures needed for the cold-hot emission balancing factor shall be calculated from the actual measured values for both, the hotstart and coldstart WHTC test recorded in accordance with paragraph 4.3.3. The calculations shall be performed for both, the hotstart and coldstart WHTC separately as follows:

$$SFC_{meas, hot} = \Sigma FC_{meas, hot} / W_{act, hot}$$

$$SFC_{meas, cold} = \Sigma FC_{meas, cold} / W_{act, cold}$$

where:

- $SFC_{meas, j}$  = Specific fuel consumption [g/kWh]  
 $\Sigma FC_{meas, j}$  = Total fuel consumption over the WHTC [g]  
determined in accordance with paragraph 5.2 of this Annex  
 $W_{act, j}$  = Total engine work over the WHTC [kWh]  
determined in accordance with paragraph 5.1 of this Annex

### 5.3.3 Specific fuel consumption figures over WHSC

The specific fuel consumption over the WHSC shall be calculated from the actual measured values for the WHSC recorded in accordance with paragraph 4.3.4 as follows:

$$SFC_{WHSC} = (\Sigma FC_{WHSC}) / (W_{WHSC})$$

where:

- $SFC_{WHSC}$  = Specific fuel consumption over WHSC [g/kWh]  
 $\Sigma FC_{WHSC}$  = Total fuel consumption over the WHSC [g]  
determined in accordance with paragraph 5.2 of this Annex  
 $W_{WHSC}$  = Total engine work over the WHSC [kWh]  
determined in accordance with paragraph 5.1 of this Annex

#### 5.3.3.1 Corrected specific fuel consumption figures over WHSC

The calculated specific fuel consumption over the WHSC,  $SFC_{WHSC}$ , determined in accordance with paragraph 5.3.3 shall be adjusted to a corrected value,  $SFC_{WHSC,corr}$ , in order to account for the difference between the NCV of the fuel used during testing and the standard NCV for the respective engine fuel technology in accordance with the following equation:

$$SFC_{WHSC,corr} = SFC_{WHSC} \frac{NCV_{meas}}{NCV_{std}}$$

where:

- $SFC_{WHSC,corr}$  = Corrected specific fuel consumption over WHSC [g/kWh]  
 $SFC_{WHSC}$  = Specific fuel consumption over WHSC [g/kWh]  
 $NCV_{meas}$  = NCV of the fuel used during testing determined in

accordance with paragraph 3.2 [MJ/kg]

$NCV_{std}$  = Standard NCV in accordance with Table 4 [MJ/kg]

Table 4: Standard net calorific values of fuel types

| Fuel type / engine type | Reference fuel type | Standard NCV [MJ/kg] |
|-------------------------|---------------------|----------------------|
| Diesel / CI             | B7                  | 42.7                 |
| Ethanol / CI            | ED95                | 25.7                 |
| Petrol / PI             | E10                 | 41.5                 |
| Ethanol / PI            | E85                 | 29.1                 |
| LPG / PI                | LPG Fuel B          | 46.0                 |
| Natural Gas / PI        | G <sub>25</sub>     | 45.1                 |

#### 5.3.3.2 Special provisions for B7 reference fuel

In the case that reference fuel of the type B7 (Diesel /CI) in accordance with paragraph 3.2 was used during testing, the standardization correction in accordance with paragraph 5.3.3.1 shall not be performed and the corrected value,  $SFC_{WHSC,corr}$ , shall be set to the uncorrected value  $SFC_{WHSC}$ .

#### 5.4 Correction factor for engines equipped with exhaust after-treatment systems that are regenerated on a periodic basis

For engines equipped with exhaust after-treatment systems that are regenerated on a periodic basis defined in accordance with paragraph 6.6 of Annex 4 to UN/ECE Regulation 49 Rev.06, fuel consumption shall be adjusted to account for regeneration events by a correction factor.

This correction factor,  $CF_{RegPer}$ , shall be determined in accordance with paragraph 6.6.2 of Annex 4 to UN/ECE Regulation 49 Rev.06.

For engines equipped with exhaust after-treatment systems with continuous regeneration, defined in accordance with paragraph 6.6 of Annex 4 to UN/ECE Regulation 49 Rev.06, no correction factor shall be determined and the value of the factor  $CF_{RegPer}$  shall be set to 1.

The engine full load curve recorded in accordance with paragraph 4.3.1 shall be used for the denormalization of the WHTC reference cycle and all calculations of reference values performed in accordance with paragraphs 7.4.6, 7.4.7 and 7.4.8 of Annex 4 to UN/ECE Regulation 49 Rev.06.

In addition to the provisions defined in Annex 4 to UN/ECE Regulation 49 Rev.06 the actual fuel mass flow consumed by the engine in accordance with paragraph 3.4 shall be recorded for each WHTC hot start test performed in accordance with paragraph 6.6.2 of Annex 4 to UN/ECE Regulation 49 Rev.06.

The specific fuel consumption for each WHTC hot start test performed shall be calculated by the following equation:

$$SFC_{meas, m} = (\Sigma FC_{meas, m}) / (W_{act, m})$$

where:

$SFC_{meas, m}$  = Specific fuel consumption [g/kWh]

$\Sigma FC_{meas, m}$  = Total fuel consumption over the WHTC [g]  
determined in accordance with paragraph 5.2 of this Annex

$W_{act, m}$  = Total engine work over the WHTC [kWh]  
determined in accordance with paragraph 5.1 of this Annex

$m$  = Index defining each individual WHTC hot start test

The specific fuel consumption values for the individual WHTC tests shall be weighted by the following equation:

$$SFC_w = \frac{n \times SFC_{avg} + n_r \times SFC_{avg,r}}{n + n_r}$$

where:

$n$  = the number of WHTC hot start tests without regeneration

$n_r$  = the number of WHTC hot start tests with regeneration  
(minimum number is one test)

$SFC_{avg}$  = the average specific fuel consumption from all WHTC hot start tests without regeneration [g/kWh]

$SFC_{avg,r}$  = the average specific fuel consumption from all WHTC hot start tests with regeneration [g/kWh]

The correction factor,  $CF_{RegPer}$ , shall be calculated by the following equation:

$$CF_{RegPer} = \frac{SFC_w}{SFC_{avg}}$$

## 6. Application of engine pre-processing tool

The engine pre-processing tool shall be executed for each engine within one engine CO<sub>2</sub>-family using the input defined in paragraph 6.1.

The output data of the engine pre-processing tool shall be the final result of the engine test procedure and shall be documented.

### 6.1 Input data for the engine pre-processing tool

The following input data shall be generated by the test procedures specified in this Annex and shall be the input to the engine pre-processing tool.

#### 6.1.1 Full load curve of the CO<sub>2</sub>-parent engine

The input data shall be the engine full load curve of the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.1.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of this Regulation are applied, the engine full load curve of that specific engine recorded in accordance with paragraph 4.3.1 shall be used as input data.

The input data shall be provided in the file format of “comma separated values” with the separator character being the Unicode Character ‘COMMA’ (U+002C) (“,”). The first line of the file shall be used as a header and not contain any recorded data. The recorded data shall start from the second line of the file.

The first column of the file shall be the engine speed in min<sup>-1</sup> rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06. The second column shall be the torque in Nm rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

#### 6.1.2 Full load curve

The input data shall be the engine full load curve of the engine recorded in accordance with paragraph 4.3.1.

The input data shall be provided in the file format of “comma separated values” with the separator character being the Unicode Character ‘COMMA’ (U+002C) (“,”). The first line of the file shall be used as a header and not contain any recorded data. The recorded data shall start from the second line of the file.

The first column of the file shall be the engine speed in min<sup>-1</sup> rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06. The second column shall be the torque in Nm rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

#### 6.1.3 Motoring curve of the CO<sub>2</sub>-parent engine

The input data shall be the engine motoring curve of the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.2.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of this Regulation are applied, the engine motoring curve of that specific engine recorded in accordance with paragraph 4.3.2 shall be used as input data.

The input data shall be provided in the file format of “comma separated values” with the separator character being the Unicode Character ‘COMMA’ (U+002C) (“,”). The first line of the file shall be used as a header and not contain any recorded data. The recorded data shall start from the second line of the file.

The first column of the file shall be the engine speed in min<sup>-1</sup> rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06. The second column shall be the torque in Nm min<sup>-1</sup> rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

#### 6.1.4 Fuel consumption map of the CO<sub>2</sub>-parent engine

The input data shall be the values of engine speed, engine torque and fuel massflow determined for the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family defined in accordance with Appendix 3 to this Annex and recorded in accordance with paragraph 4.3.5.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of this Regulation are applied, the values of engine speed, engine torque and fuel massflow determined for that specific engine recorded in accordance with paragraph 4.3.5 shall be used as input data.

The input data shall only consist of the average measurement values of engine speed, engine torque and fuel massflow over the 30±1 seconds measurement period determined in accordance with subpoint (1) of paragraph 4.3.5.5.

The input data shall be provided in the file format of “comma separated values” with the separator character being the Unicode Character ‘COMMA’ (U+002C) (“,”). The first line of the file shall be used as a header and not contain any recorded data. The recorded data shall start from the second line of the file.

The first column of the file shall be the engine speed in min<sup>-1</sup> rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06. The second column shall be the torque in Nm rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06. The third column shall be the fuel massflow in g/h rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

#### 6.1.5 Specific fuel consumption figures for WHTC correction factor

The input data shall be the three values for specific fuel consumption over the different sub-cycles of the WHTC – urban, rural and motorway – in g/kWh determined in accordance with paragraph 5.3.1.

The values shall be rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

#### 6.1.6 Specific fuel consumption figures for cold-hot emission balancing factor

The input data shall be the two values for specific fuel consumption over the hotstart and coldstart WHTC in g/kWh determined in accordance with paragraph 5.3.2.

The values shall be rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

#### 6.1.7 Correction factor for engines equipped with exhaust after-treatment systems that are regenerated on a periodic basis

The input data shall be the correction factor  $CF_{RegPer}$  determined in accordance with paragraph 5.4.

For engines equipped with exhaust after-treatment systems with continuous regeneration, defined in accordance with paragraph 6.6 of Annex 4 to UN/ECERegulation 49 Rev.06, this factor shall be set to 1 in accordance with paragraph 5.4.

The value shall be rounded to 2 places to the right of the decimal point in accordance with ASTM E 29-06.

6.1.8 NCV of test fuel

The input data shall be the NCV of the test fuel in MJ/kg determined in accordance with paragraph 3.2.

The value shall be rounded to 3 places to the right of the decimal point in accordance with ASTM E 29-06.

6.1.9 Type of test fuel

The input data shall be the type of the test fuel selected in accordance with paragraph 3.2.

6.1.10 Engine idle speed of the CO<sub>2</sub>-parent engine

The input data shall be the engine idle speed,  $n_{idle}$ , in  $\text{min}^{-1}$  of the CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family defined in accordance with Appendix 3 to this Annex as declared by the manufacturer in the application for certification in the information document drawn up in accordance with the model set out in Appendix 2.

In the case that upon request of the manufacturer the provisions defined in Article 15(5) of this Regulation are applied, the engine idle speed of that specific engine shall be used as input data.

The value shall be rounded to the nearest whole number in accordance with ASTM E 29-06.

6.1.11 Engine idle speed

The input data shall be the engine idle speed,  $n_{idle}$ , in  $\text{min}^{-1}$  of the engine as declared by the manufacturer in the application for certification in the information document drawn up in accordance with the model set out in Appendix 2 to this Annex.

The value shall be rounded to the nearest whole number in accordance with ASTM E 29-06.

6.1.12 Engine displacement

The input data shall be the displacement in ccm of the engine as declared by the manufacturer at the application for certification in the information document drawn up in accordance with the model set out in Appendix 2 to this Annex.

The value shall be rounded to the nearest whole number in accordance with ASTM E 29-06.

6.1.13 Engine rated speed

The input data shall be the rated speed in  $\text{min}^{-1}$  of the engine as declared by the manufacturer at the application for certification in point 3.2.1.8. of the information document in accordance with Appendix 2 to this Annex.

The value shall be rounded to the nearest whole number in accordance with ASTM E 29-06.

#### 6.1.14 Engine rated power

The input data shall be the rated power in kW of the engine as declared by the manufacturer at the application for certification in point 3.2.1.8. of the information document in accordance with Appendix 2 to this Annex.

The value shall be rounded to the nearest whole number in accordance with ASTM E 29-06.

#### 6.1.15 Manufacturer

The input data shall be the name of the engine manufacturer as a sequence of characters in ISO8859-1 encoding.

#### 6.1.16 Model

The input data shall be the name of the engine model as a sequence of characters in ISO8859-1 encoding.

#### 6.1.17 Technical Report ID

The input data shall be an unique identifier of the technical report compiled for the type approval of the specific engine. This identifier shall be provided as a sequence of characters in ISO8859-1 encoding.



## Appendix 1

### MODEL OF A CERTIFICATE ON A COMPONENT, SEPARATE TECHNICAL UNIT, SYSTEM

Maximum format: A4 (210 x 297 mm)

#### CERTIFICATE ON CO<sub>2</sub> EMISSIONS AND FUEL CONSUMPTION RELATED PROPERTIES OF AN ENGINE FAMILY

Communication concerning:

- granting<sup>(1)</sup>
- extension<sup>(1)</sup>
- refusal<sup>(1)</sup>
- withdrawal<sup>(1)</sup>

|                      |
|----------------------|
| Stamp administration |
|----------------------|

of a certificate on CO<sub>2</sub> emission and fuel consumption related properties of an engine family in accordance with Commission Regulation (EU) 2017/XXX[*OP, please insert the publication number of this Regulation.*].

Commission Regulation (EU) 2017/XXX[*OP, please insert the publication number of this Regulation.*]. as last amended by .....

Certification number:

Hash:

Reason for extension:

## SECTION I

- 0.1. Make (trade name of manufacturer):
- 0.2. Type:
- 0.3. Means of identification of type
  - 0.3.1. Location of the certification marking:
  - 0.3.2. Method of affixing certification marking:
- 0.5. Name and address of manufacturer:
- 0.6. Name(s) and address(es) of assembly plant(s):
- 0.7. Name and address of the manufacturer's representative (if any)

## SECTION II

1. Additional information (where applicable): see Addendum
2. Approval authority responsible for carrying out the tests:
3. Date of test report:
4. Number of test report:
5. Remarks (if any): see Addendum
6. Place:
7. Date:
8. Signature:

*Attachments:*

Information package. Test report.

## **Appendix 2**

### **Engine Information Document**

---

Notes regarding filling in the tables

Letters A, B, C, D, E corresponding to engine CO<sub>2</sub>-family members shall be replaced by the actual engine CO<sub>2</sub>-family members' names.

In case when for a certain engine characteristic same value/description applies for all engine CO<sub>2</sub>-family members the cells corresponding to A-E shall be merged.

In case the engine CO<sub>2</sub>-family consists of more than 5 members, new columns may be added.

The "Appendix to information document" shall be copied and filled in for each engine within an CO<sub>2</sub>-family separately.

Explanatory footnotes can be found at the very end of this Appendix.

---

|        |  | <i>CO<sub>2</sub>-parent engine</i> | <i>Engine CO<sub>2</sub>-family members</i> |          |          |          |          |
|--------|--|-------------------------------------|---|----------|----------|----------|----------|
|        |  |                                     | <i>A</i>                                    | <i>B</i> | <i>C</i> | <i>D</i> | <i>E</i> |
| 0.     | General  |                                     |   |          |          |          |          |
| 0.1.   | Make (trade name of manufacturer)                              |                                     |   |          |          |          |          |
| 0.2.   | Type   |                                     |   |          |          |          |          |
| 0.2.1. | Commercial name(s) (if available)                              |                                     |   |          |          |          |          |
| 0.5.   | Name and address of manufacturer                               |                                     |   |          |          |          |          |
| 0.8.   | Name(s) and address (es) of assembly plant(s)                  |                                     |   |          |          |          |          |
| 0.9.   | Name and address of the manufacturer's representative (if any) |                                     |   |          |          |          |          |

**Part 1**

**Essential characteristics of the (parent) engine and the engine types within an engine family**

|            |   | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|------------|---|------------------------------|---------------------------|---|---|---|---|
|            |   |                              | A                         | B | C | D | E |
| 3.2.       | Internal combustion engine  |                              |                           |   |   |   |   |
| 3.2.1.     | Specific engine information   |                              |                           |   |   |   |   |
| 3.2.1.1.   | Working principle: positive ignition/compression ignition <sup>1</sup><br>Cycle four stroke / two stroke/ rotary <sup>1</sup>                               |                              |                           |   |   |   |   |
| 3.2.1.2.   | Number and arrangement of cylinders   |                              |                           |   |   |   |   |
| 3.2.1.2.1. | Bore <sup>3</sup> mm  |                              |                           |   |   |   |   |
| 3.2.1.2.2. | Stroke <sup>3</sup> mm  |                              |                           |   |   |   |   |
| 3.2.1.2.3. | Firing order  |                              |                           |   |   |   |   |
| 3.2.1.3.   | Engine capacity <sup>4</sup> cm <sup>3</sup>  |                              |                           |   |   |   |   |
| 3.2.1.4.   | Volumetric compression ratio <sup>5</sup>   |                              |                           |   |   |   |   |
| 3.2.1.5.   | Drawings of combustion chamber, piston crown and, in the case of positive ignition engines, piston rings  |                              |                           |   |   |   |   |
| 3.2.1.6.   | Normal engine idling speed <sup>5</sup> min <sup>-1</sup>   |                              |                           |   |   |   |   |
| 3.2.1.6.1. | High engine idling speed <sup>5</sup> min <sup>-1</sup>   |                              |                           |   |   |   |   |
| 3.2.1.7.   | Carbon monoxide content by volume in the exhaust gas with the engine idling <sup>5</sup> : % as stated by the manufacturer (positive ignition engines only) |                              |                           |   |   |   |   |
| 3.2.1.8.   | Maximum net power <sup>6</sup> ..... kW at.....min <sup>-1</sup>  |                              |                           |   |   |   |   |

|           |   | <i>Parent engine or engine type</i> | Engine CO2-family members |          |          |          |          |
|-----------|---|-------------------------------------|---------------------------|----------|----------|----------|----------|
|           |   |                                     | <i>A</i>                  | <i>B</i> | <i>C</i> | <i>D</i> | <i>E</i> |
|           | (manufacturer's declared value)   |                                     |                           |          |          |          |          |
| 3.2.1.9.  | Maximum permitted engine speed as prescribed by the manufacturer ( $\text{min}^{-1}$ )        |                                     |                           |          |          |          |          |
| 3.2.1.10. | Maximum net torque <sup>6</sup> (Nm) at ( $\text{min}^{-1}$ ) (manufacturer's declared value) |                                     |                           |          |          |          |          |

|              |   | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|--------------|---|------------------------------|---------------------------|---|---|---|---|
|              |   |                              | A                         | B | C | D | E |
| 3.2.1.11.    | Manufacturer references of the documentation package required by paragraphs 3.1., 3.2. and 3.3. of this Regulation enabling the Type Approval Authority to evaluate the emission control strategies and the systems on-board the engine to ensure the correct operation of NO <sub>x</sub> control measures |                              |                           |   |   |   |   |
| 3.2.2.       | Fuel  |                              |                           |   |   |   |   |
| 3.2.2.2.     | Heavy duty vehicles Diesel/Petrol/LPG/NG-H/NG-L/NG-HL/Ethanol (ED95)/ Ethanol (E85) <sup>1</sup>  |                              |                           |   |   |   |   |
| 3.2.2.2.1.   | Fuels compatible with use by the engine declared by the manufacturer in accordance with paragraph 4.6.2. of this Regulation (as applicable)   |                              |                           |   |   |   |   |
|              |   |                              |                           |   |   |   |   |
| 3.2.4.       | Fuel feed   |                              |                           |   |   |   |   |
| 3.2.4.2.     | By fuel injection (compression ignition only): Yes/No <sup>1</sup>  |                              |                           |   |   |   |   |
| 3.2.4.2.1.   | System description  |                              |                           |   |   |   |   |
| 3.2.4.2.2.   | Working principle: direct injection/pre-chamber/swirl chamber <sup>1</sup>  |                              |                           |   |   |   |   |
| 3.2.4.2.3.   | Injection pump  |                              |                           |   |   |   |   |
| 3.2.4.2.3.1. | Make(s)   |                              |                           |   |   |   |   |
| 3.2.4.2.3.2. | Type(s)   |                              |                           |   |   |   |   |
| 3.2.4.2.3.3. | Maximum fuel delivery <sup>1,5</sup> ..... mm <sup>3</sup> /stroke or cycle at an engine speed of ..... min <sup>-1</sup> or, alternatively, a  |                              |                           |   |   |   |   |

|                |   | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|----------------|---|------------------------------|---------------------------|---|---|---|---|
|                |   |                              | A                         | B | C | D | E |
|                | characteristic diagram<br>(When boost control is supplied, state the characteristic fuel delivery and boost pressure versus engine speed) |                              |                           |   |   |   |   |
| 3.2.4.2.3.4.   | Static injection timing <sup>5</sup>  |                              |                           |   |   |   |   |
| 3.2.4.2.3.5.   | Injection advance curve <sup>5</sup>  |                              |                           |   |   |   |   |
| 3.2.4.2.3.6.   | Calibration procedure: test bench/engine <sup>1</sup>   |                              |                           |   |   |   |   |
| 3.2.4.2.4.     | Governor  |                              |                           |   |   |   |   |
| 3.2.4.2.4.1.   | Type  |                              |                           |   |   |   |   |
| 3.2.4.2.4.2.   | Cut-off point   |                              |                           |   |   |   |   |
| 3.2.4.2.4.2.1. | Speed at which cut-off starts under load (min <sup>-1</sup> )   |                              |                           |   |   |   |   |
| 3.2.4.2.4.2.2. | Maximum no-load speed (min <sup>-1</sup> )  |                              |                           |   |   |   |   |
| 3.2.4.2.4.2.3. | Idling speed (min <sup>-1</sup> )   |                              |                           |   |   |   |   |
| 3.2.4.2.5.     | Injection piping  |                              |                           |   |   |   |   |
| 3.2.4.2.5.1.   | Length (mm)   |                              |                           |   |   |   |   |
| 3.2.4.2.5.2.   | Internal diameter (mm)  |                              |                           |   |   |   |   |
| 3.2.4.2.5.3.   | Common rail, make and type  |                              |                           |   |   |   |   |
| 3.2.4.2.6.     | Injector(s)   |                              |                           |   |   |   |   |
| 3.2.4.2.6.1.   | Make(s)   |                              |                           |   |   |   |   |
| 3.2.4.2.6.2.   | Type(s)   |                              |                           |   |   |   |   |
| 3.2.4.2.6.3.   | Opening pressure <sup>5</sup> : kPa or characteristic diagram <sup>5</sup>  |                              |                           |   |   |   |   |
| 3.2.4.2.7.     | Cold start system   |                              |                           |   |   |   |   |



|                |  | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|----------------|--|------------------------------|---------------------------|---|---|---|---|
|                |  |                              | A                         | B | C | D | E |
| 3.2.4.2.7.1.   | Make(s)  |                              |                           |   |   |   |   |
| 3.2.4.2.7.2.   | Type(s)  |                              |                           |   |   |   |   |
| 3.2.4.2.7.3.   | Description  |                              |                           |   |   |   |   |
| 3.2.4.2.8.     | Auxiliary starting aid   |                              |                           |   |   |   |   |
| 3.2.4.2.8.1.   | Make(s)  |                              |                           |   |   |   |   |
| 3.2.4.2.8.2.   | Type(s)  |                              |                           |   |   |   |   |
| 3.2.4.2.8.3.   | System description   |                              |                           |   |   |   |   |
| 3.2.4.2.9.     | Electronic controlled injection: Yes/No <sup>1</sup>   |                              |                           |   |   |   |   |
| 3.2.4.2.9.1.   | Make(s)  |                              |                           |   |   |   |   |
| 3.2.4.2.9.2.   | Type(s)  |                              |                           |   |   |   |   |
| 3.2.4.2.9.3.   | Description of the system (in the case of systems other than continuous injection give equivalent details) |                              |                           |   |   |   |   |
| 3.2.4.2.9.3.1. | Make and type of the control unit (ECU)  |                              |                           |   |   |   |   |
| 3.2.4.2.9.3.2. | Make and type of the fuel regulator  |                              |                           |   |   |   |   |
| 3.2.4.2.9.3.3. | Make and type of the air-flow sensor   |                              |                           |   |   |   |   |
| 3.2.4.2.9.3.4. | Make and type of fuel distributor  |                              |                           |   |   |   |   |
| 3.2.4.2.9.3.5. | Make and type of the throttle housing  |                              |                           |   |   |   |   |
| 3.2.4.2.9.3.6. | Make and type of water temperature sensor  |                              |                           |   |   |   |   |
| 3.2.4.2.9.3.7. | Make and type of air temperature sensor  |                              |                           |   |   |   |   |
| 3.2.4.2.9.3.8. | Make and type of air pressure sensor   |                              |                           |   |   |   |   |
| 3.2.4.2.9.3.9. | Software calibration number(s)   |                              |                           |   |   |   |   |

|               |   | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|---------------|---|------------------------------|---------------------------|---|---|---|---|
|               |   |                              | A                         | B | C | D | E |
| 3.2.4.3.      | By fuel injection (positive ignition only): Yes/No <sup>1</sup>                                       |                              |                           |   |   |   |   |
| 3.2.4.3.1.    | Working principle: intake manifold (single-/multi-point/direct injection <sup>1</sup> /other specify) |                              |                           |   |   |   |   |
| 3.2.4.3.2.    | Make(s)   |                              |                           |   |   |   |   |
| 3.2.4.3.3.    | Type(s)   |                              |                           |   |   |   |   |
| 3.2.4.3.4.    | System description (In the case of systems other than continuous injection give equivalent details)   |                              |                           |   |   |   |   |
| 3.2.4.3.4.1.  | Make and type of the control unit (ECU)   |                              |                           |   |   |   |   |
| 3.2.4.3.4.2.  | Make and type of fuel regulator   |                              |                           |   |   |   |   |
| 3.2.4.3.4.3.  | Make and type of air-flow sensor  |                              |                           |   |   |   |   |
| 3.2.4.3.4.4.  | Make and type of fuel distributor   |                              |                           |   |   |   |   |
| 3.2.4.3.4.5.  | Make and type of pressure regulator   |                              |                           |   |   |   |   |
| 3.2.4.3.4.6.  | Make and type of micro switch   |                              |                           |   |   |   |   |
| 3.2.4.3.4.7.  | Make and type of idling adjustment screw  |                              |                           |   |   |   |   |
| 3.2.4.3.4.8.  | Make and type of throttle housing   |                              |                           |   |   |   |   |
| 3.2.4.3.4.9.  | Make and type of water temperature sensor   |                              |                           |   |   |   |   |
| 3.2.4.3.4.10. | Make and type of air temperature sensor   |                              |                           |   |   |   |   |
| 3.2.4.3.4.11. | Make and type of air pressure sensor  |                              |                           |   |   |   |   |
| 3.2.4.3.4.12. | Software calibration number(s)  |                              |                           |   |   |   |   |
| 3.2.4.3.5.    | Injectors: opening pressure <sup>5</sup> (kPa) or characteristic diagram <sup>5</sup>                 |                              |                           |   |   |   |   |
| 3.2.4.3.5.1.  | Make  |                              |                           |   |   |   |   |

|              |  | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|--------------|--|------------------------------|---------------------------|---|---|---|---|
|              |  |                              | A                         | B | C | D | E |
| 3.2.4.3.5.2. | Type   |                              |                           |   |   |   |   |
| 3.2.4.3.6.   | Injection timing   |                              |                           |   |   |   |   |
| 3.2.4.3.7.   | Cold start system  |                              |                           |   |   |   |   |
| 3.2.4.3.7.1. | Operating principle(s)   |                              |                           |   |   |   |   |
| 3.2.4.3.7.2. | Operating limits/settings <sup>1,5</sup>                           |                              |                           |   |   |   |   |
| 3.2.4.4.     | Feed pump  |                              |                           |   |   |   |   |
| 3.2.4.4.1.   | Pressure <sup>5</sup> (kPa) or characteristic diagram <sup>5</sup> |                              |                           |   |   |   |   |
| 3.2.5.       | Electrical system  |                              |                           |   |   |   |   |
| 3.2.5.1.     | Rated voltage (V), positive/negative ground <sup>(1)</sup>         |                              |                           |   |   |   |   |
| 3.2.5.2.     | Generator  |                              |                           |   |   |   |   |
| 3.2.5.2.1.   | Type   |                              |                           |   |   |   |   |
| 3.2.5.2.2.   | Nominal output (VA)  |                              |                           |   |   |   |   |
| 3.2.6.       | Ignition system (spark ignition engines only)                      |                              |                           |   |   |   |   |
| 3.2.6.1.     | Make(s)  |                              |                           |   |   |   |   |
| 3.2.6.2.     | Type(s)  |                              |                           |   |   |   |   |
| 3.2.6.3.     | Working principle  |                              |                           |   |   |   |   |
| 3.2.6.4.     | Ignition advance curve or map <sup>5</sup>                         |                              |                           |   |   |   |   |
| 3.2.6.5.     | Static ignition timing <sup>5</sup> (degrees before TDC)           |                              |                           |   |   |   |   |
| 3.2.6.6.     | Spark plugs  |                              |                           |   |   |   |   |
| 3.2.6.6.1.   | Make   |                              |                           |   |   |   |   |
| 3.2.6.6.2.   | Type   |                              |                           |   |   |   |   |

|              |  | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|--------------|--|------------------------------|---------------------------|---|---|---|---|
|              |  |                              | A                         | B | C | D | E |
| 3.2.6.6.3.   | Gap setting (mm)                         |                              |                           |   |   |   |   |
| 3.2.6.7.     | Ignition coil(s)                         |                              |                           |   |   |   |   |
| 3.2.6.7.1.   | Make                                     |                              |                           |   |   |   |   |
| 3.2.6.7.2.   | Type                                     |                              |                           |   |   |   |   |
| 3.2.7.       | Cooling system: liquid/air <sup>1</sup>  |                              |                           |   |   |   |   |
|              |  |                              |                           |   |   |   |   |
| 3.2.7.2.     | Liquid                                   |                              |                           |   |   |   |   |
| 3.2.7.2.1.   | Nature of liquid                         |                              |                           |   |   |   |   |
| 3.2.7.2.2.   | Circulating pump(s): Yes/No <sup>1</sup> |                              |                           |   |   |   |   |
| 3.2.7.2.3.   | Characteristics                          |                              |                           |   |   |   |   |
| 3.2.7.2.3.1. | Make(s)                                  |                              |                           |   |   |   |   |
| 3.2.7.2.3.2. | Type(s)                                  |                              |                           |   |   |   |   |
| 3.2.7.2.4.   | Drive ratio(s)                           |                              |                           |   |   |   |   |
| 3.2.7.3.     | Air                                      |                              |                           |   |   |   |   |
| 3.2.7.3.1.   | Fan: Yes/No <sup>1</sup>                 |                              |                           |   |   |   |   |
| 3.2.7.3.2.   | Characteristics                          |                              |                           |   |   |   |   |
| 3.2.7.3.2.1. | Make(s)                                  |                              |                           |   |   |   |   |
| 3.2.7.3.2.2. | Type(s)                                  |                              |                           |   |   |   |   |
| 3.2.7.3.3.   | Drive ratio(s)                           |                              |                           |   |   |   |   |
| 3.2.8.       | Intake system                            |                              |                           |   |   |   |   |
| 3.2.8.1.     | Pressure charger: Yes/No <sup>1</sup>    |                              |                           |   |   |   |   |

|            |  | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|------------|--|------------------------------|---------------------------|---|---|---|---|
|            |  |                              | A                         | B | C | D | E |
| 3.2.8.1.1. | Make(s)  |                              |                           |   |   |   |   |
| 3.2.8.1.2. | Type(s)  |                              |                           |   |   |   |   |
| 3.2.8.1.3. | Description of the system (e.g. maximum charge pressure ..... kPa, wastegate, if applicable)                                 |                              |                           |   |   |   |   |
| 3.2.8.2.   | Intercooler: Yes/No <sup>1</sup>   |                              |                           |   |   |   |   |
| 3.2.8.2.1. | Type: air-air/air-water <sup>1</sup>   |                              |                           |   |   |   |   |
| 3.2.8.3.   | Intake depression at rated engine speed and at 100 % load (compression ignition engines only)                                |                              |                           |   |   |   |   |
| 3.2.8.3.1. | Minimum allowable (kPa)  |                              |                           |   |   |   |   |
| 3.2.8.3.2. | Maximum allowable (kPa)  |                              |                           |   |   |   |   |
| 3.2.8.4.   | Description and drawings of inlet pipes and their accessories (plenum chamber, heating device, additional air intakes, etc.) |                              |                           |   |   |   |   |
| 3.2.8.4.1. | Intake manifold description (include drawings and/or photos)   |                              |                           |   |   |   |   |
| 3.2.9.     | Exhaust system   |                              |                           |   |   |   |   |
| 3.2.9.1.   | Description and/or drawings of the exhaust manifold  |                              |                           |   |   |   |   |
| 3.2.9.2.   | Description and/or drawing of the exhaust system   |                              |                           |   |   |   |   |
| 3.2.9.2.1. | Description and/or drawing of the elements of the exhaust system that are part of the engine system                          |                              |                           |   |   |   |   |
| 3.2.9.3.   | Maximum allowable exhaust back pressure at rated engine speed and at 100 % load (compression                                 |                              |                           |   |   |   |   |

|               |   | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|---------------|---|------------------------------|---------------------------|---|---|---|---|
|               |   |                              | A                         | B | C | D | E |
|               | ignition engines only)(kPa) <sup>7</sup>  |                              |                           |   |   |   |   |
| 3.2.9.7.      | Exhaust system volume (dm <sup>3</sup> )  |                              |                           |   |   |   |   |
| 3.2.9.7.1.    | Acceptable Exhaust system volume: (dm <sup>3</sup> )  |                              |                           |   |   |   |   |
| 3.2.10.       | Minimum cross-sectional areas of inlet and outlet ports and port geometry   |                              |                           |   |   |   |   |
| 3.2.11.       | Valve timing or equivalent data   |                              |                           |   |   |   |   |
| 3.2.11.1.     | Maximum lift of valves, angles of opening and closing, or timing details of alternative distribution systems, in relation to dead centers. For variable timing system, minimum and maximum timing |                              |                           |   |   |   |   |
| 3.2.11.2.     | Reference and/or setting range <sup>7</sup>   |                              |                           |   |   |   |   |
| 3.2.12.       | Measures taken against air pollution  |                              |                           |   |   |   |   |
| 3.2.12.1.1.   | Device for recycling crankcase gases: Yes/No <sup>1</sup><br>If yes, description and drawings<br>If no, compliance with paragraph 6.10. of Annex 4 of this Regulation required                    |                              |                           |   |   |   |   |
| 3.2.12.2.     | Additional pollution control devices (if any, and if not covered by another heading)  |                              |                           |   |   |   |   |
| 3.2.12.2.1.   | Catalytic converter: Yes/No <sup>1</sup>  |                              |                           |   |   |   |   |
| 3.2.12.2.1.1. | Number of catalytic converters and elements (provide this information below for each separate unit)   |                              |                           |   |   |   |   |

|                 |   | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|-----------------|---|------------------------------|---------------------------|---|---|---|---|
|                 |   |                              | A                         | B | C | D | E |
| 3.2.12.2.1.2.   | Dimensions, shape and volume of the catalytic converter(s)                                |                              |                           |   |   |   |   |
| 3.2.12.2.1.3.   | Type of catalytic action  |                              |                           |   |   |   |   |
| 3.2.12.2.1.4.   | Total charge of precious metals   |                              |                           |   |   |   |   |
| 3.2.12.2.1.5.   | Relative concentration  |                              |                           |   |   |   |   |
| 3.2.12.2.1.6.   | Substrate (structure and material)  |                              |                           |   |   |   |   |
| 3.2.12.2.1.7.   | Cell density  |                              |                           |   |   |   |   |
| 3.2.12.2.1.8.   | Type of casing for the catalytic converter(s)   |                              |                           |   |   |   |   |
| 3.2.12.2.1.9.   | Location of the catalytic converter(s) (place and reference distance in the exhaust line) |                              |                           |   |   |   |   |
| 3.2.12.2.1.10.  | Heat shield: Yes/No <sup>1</sup>  |                              |                           |   |   |   |   |
| 3.2.12.2.1.11.  | Regeneration systems/method of exhaust after treatment systems, description               |                              |                           |   |   |   |   |
|                 |   |                              |                           |   |   |   |   |
| 3.2.12.2.1.11.5 | Normal operating temperature range (K)  |                              |                           |   |   |   |   |
| 3.2.12.2.1.11.6 | Consumable reagents: Yes/No <sup>1</sup>  |                              |                           |   |   |   |   |
| 3.2.12.2.1.11.7 | Type and concentration of reagent needed for catalytic action                             |                              |                           |   |   |   |   |
| 3.2.12.2.1.11.8 | Normal operational temperature range of reagent K   |                              |                           |   |   |   |   |
| 3.2.12.2.1.11.9 | International standard  |                              |                           |   |   |   |   |

|                   |  | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|-------------------|--|------------------------------|---------------------------|---|---|---|---|
|                   |  |                              | A                         | B | C | D | E |
| .                 |  |                              |                           |   |   |   |   |
| 3.2.12.2.1.11.10. | Frequency of reagent refill: continuous/maintenance <sup>1</sup> |                              |                           |   |   |   |   |
| 3.2.12.2.1.12.    | Make of catalytic converter                                      |                              |                           |   |   |   |   |
| 3.2.12.2.1.13.    | Identifying part number  |                              |                           |   |   |   |   |
| 3.2.12.2.2.       | Oxygen sensor: Yes/No <sup>1</sup>                               |                              |                           |   |   |   |   |
| 3.2.12.2.2.1.     | Make   |                              |                           |   |   |   |   |
| 3.2.12.2.2.2.     | Location   |                              |                           |   |   |   |   |
| 3.2.12.2.2.3.     | Control range  |                              |                           |   |   |   |   |
| 3.2.12.2.2.4.     | Type   |                              |                           |   |   |   |   |
| 3.2.12.2.2.5.     | Identifying part number  |                              |                           |   |   |   |   |
| 3.2.12.2.3.       | Air injection: Yes/No <sup>1</sup>                               |                              |                           |   |   |   |   |
| 3.2.12.2.3.1.     | Type (pulse air, air pump, etc.)                                 |                              |                           |   |   |   |   |
| 3.2.12.2.4.       | Exhaust gas recirculation (EGR): Yes/No <sup>1</sup>             |                              |                           |   |   |   |   |
| 3.2.12.2.4.1.     | Characteristics (make, type, flow, etc)                          |                              |                           |   |   |   |   |
| 3.2.12.2.6.       | Particulate trap (PT): Yes/No <sup>1</sup>                       |                              |                           |   |   |   |   |
| 3.2.12.2.6.1.     | Dimensions, shape and capacity of the particulate trap           |                              |                           |   |   |   |   |
| 3.2.12.2.6.2.     | Design of the particulate trap                                   |                              |                           |   |   |   |   |
| 3.2.12.2.6.3.     | Location (reference distance in the exhaust line)                |                              |                           |   |   |   |   |
| 3.2.12.2.6.4.     | Method or system of regeneration, description and/or drawing     |                              |                           |   |   |   |   |



|                       |   | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|-----------------------|---|------------------------------|---------------------------|---|---|---|---|
|                       |   |                              | A                         | B | C | D | E |
| 3.2.12.2.6.5.         | Make of particulate trap  |                              |                           |   |   |   |   |
| 3.2.12.2.6.6.         | Identifying part number   |                              |                           |   |   |   |   |
| 3.2.12.2.6.7.         | Normal operating temperature (K) and pressure (kPa) ranges                            |                              |                           |   |   |   |   |
| 3.2.12.2.6.8.         | In the case of periodic regeneration  |                              |                           |   |   |   |   |
| 3.2.12.2.6.8.1.<br>1. | Number of WHTC test cycles without regeneration (n)                                   |                              |                           |   |   |   |   |
| 3.2.12.2.6.8.2.<br>1. | Number of WHTC test cycles with regeneration (n <sub>R</sub> )                        |                              |                           |   |   |   |   |
| 3.2.12.2.6.9.         | Other systems: Yes/No <sup>1</sup>  |                              |                           |   |   |   |   |
| 3.2.12.2.6.9.1.       | Description and operation   |                              |                           |   |   |   |   |
| 3.2.12.2.7.           | On-board-diagnostic (OBD) system  |                              |                           |   |   |   |   |
| 3.2.12.2.7.0.1.       | Number of OBD engine families within the engine family                                |                              |                           |   |   |   |   |
| 3.2.12.2.7.0.2.       | List of the OBD engine families (when applicable)                                     | OBD engine family 1: .....   |                           |   |   |   |   |
|                       |   | OBD engine family 2: .....   |                           |   |   |   |   |
|                       |   | etc...                       |                           |   |   |   |   |
| 3.2.12.2.7.0.3.       | Number of the OBD engine family the parent engine / the engine member belongs to      |                              |                           |   |   |   |   |
| 3.2.12.2.7.0.4.       | Manufacturer references of the OBD-Documentation required by paragraph 3.1.4. (c) and |                              |                           |   |   |   |   |

|                   |  | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|-------------------|--|------------------------------|---------------------------|---|---|---|---|
|                   |  |                              | A                         | B | C | D | E |
|                   | paragraph 3.3.4. of this Regulation and specified in Annex 9A of this Regulation for the purpose of approving the OBD system |                              |                           |   |   |   |   |
| 3.2.12.2.7.0.5.   | When appropriate, manufacturer reference of the Documentation for installing in a vehicle an OBD equipped engine system      |                              |                           |   |   |   |   |
|                   |  |                              |                           |   |   |   |   |
| 3.2.12.2.7.2.     | List and purpose of all components monitored by the OBD system <sup>8</sup>  |                              |                           |   |   |   |   |
| 3.2.12.2.7.3.     | Written description (general working principles) for   |                              |                           |   |   |   |   |
| 3.2.12.2.7.3.1.   | Positive-ignition engines <sup>8</sup>   |                              |                           |   |   |   |   |
| 3.2.12.2.7.3.1.1. | Catalyst monitoring <sup>8</sup>   |                              |                           |   |   |   |   |
| 3.2.12.2.7.3.1.2. | Misfire detection <sup>8</sup>   |                              |                           |   |   |   |   |
| 3.2.12.2.7.3.1.3. | Oxygen sensor monitoring <sup>8</sup>  |                              |                           |   |   |   |   |
| 3.2.12.2.7.3.1.4. | Other components monitored by the OBD system   |                              |                           |   |   |   |   |
| 3.2.12.2.7.3.2.   | Compression-ignition engines <sup>8</sup>  |                              |                           |   |   |   |   |
| 3.2.12.2.7.3.2.1. | Catalyst monitoring <sup>8</sup>   |                              |                           |   |   |   |   |
| 3.2.12.2.7.3.2.2. | Particulate trap monitoring <sup>8</sup>   |                              |                           |   |   |   |   |

|                       |  | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|-----------------------|--|------------------------------|---------------------------|---|---|---|---|
|                       |  |                              | A                         | B | C | D | E |
| 3.2.12.2.7.3.2.<br>3. | Electronic fuelling system monitoring <sup>8</sup>   |                              |                           |   |   |   |   |
| 3.2.12.2.7.3.2.<br>4. | DeNO <sub>x</sub> system monitoring <sup>8</sup>   |                              |                           |   |   |   |   |
| 3.2.12.2.7.3.2.<br>5. | Other components monitored by the OBD system <sup>8</sup>  |                              |                           |   |   |   |   |
| 3.2.12.2.7.4.         | Criteria for MI activation (fixed number of driving cycles or statistical method) <sup>8</sup>   |                              |                           |   |   |   |   |
| 3.2.12.2.7.5.         | List of all OBD output codes and formats used (with explanation of each) <sup>8</sup>  |                              |                           |   |   |   |   |
|                       |  |                              |                           |   |   |   |   |
| 3.2.12.2.7.6.5.       | OBD Communication protocol standard <sup>8</sup>   |                              |                           |   |   |   |   |
| 3.2.12.2.7.7.         | Manufacturer reference of the OBD related information required by of paragraphs 3.1.4. (d) and 3.3.4. this Regulation for the purpose of complying with the provisions on access to vehicle OBD, or  |                              |                           |   |   |   |   |
| 3.2.12.2.7.7.1.       | As an alternative to a manufacturer reference provided in paragraph 3.2.12.2.7.7. reference of the attachment to this annex that contains the following table, once completed according to the given example:<br>Component - Fault code - Monitoring strategy - Fault detection criteria - MI activation criteria - Secondary parameters – Preconditioning - Demonstration test<br>SCR Catalyst - P20EE - NO <sub>x</sub> sensor 1 and 2 signals |                              |                           |   |   |   |   |

|               |   | Parent engine or engine type                                       | Engine CO2-family members |   |   |   |   |
|---------------|---|--|---------------------------|---|---|---|---|
|               |   |  | A                         | B | C | D | E |
|               | - Difference between sensor 1 and sensor 2 signals -<br>2nd cycle - Engine speed, engine load, catalyst<br>temperature, reagent activity, exhaust mass flow -<br>One OBD test cycle (WHTC, hot part) - OBD test<br>cycle (WHTC, hot part)   |  |                           |   |   |   |   |
| 3.2.12.2.8.   | Other system (description and operation)  |  |                           |   |   |   |   |
| 3.2.12.2.8.1. | Systems to ensure the correct operation of NO <sub>x</sub><br>control measures  |  |                           |   |   |   |   |
| 3.2.12.2.8.2. | Engine with permanent deactivation of the driver<br>inducement, for use by the rescue services or in<br>vehicles designed and constructed for use by the<br>armed services, civil defence, fire services and<br>forces responsible for maintaining public order:<br>Yes/No <sup>1</sup> |  |                           |   |   |   |   |
| 3.2.12.2.8.3. | Number of OBD engine families within the engine<br>family considered when ensuring the correct<br>operation of NO <sub>x</sub> control measures   |  |                           |   |   |   |   |
| 3.2.12.2.8.4. | List of the OBD engine families (when applicable)   | OBD engine family 1: .....<br>OBD engine family 2: .....<br>etc... |                           |   |   |   |   |
| 3.2.12.2.8.5. | Number of the OBD engine family the parent engine<br>/ the engine member belongs to   |  |                           |   |   |   |   |
| 3.2.12.2.8.6. | Lowest concentration of the active ingredient<br>present in the reagent that does not activate the<br>warning system (CD <sub>min</sub> ) (% vol)   |  |                           |   |   |   |   |
| 3.2.12.2.8.7. | When appropriate, manufacturer reference of the   |  |                           |   |   |   |   |

|             |  | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|-------------|--|------------------------------|---------------------------|---|---|---|---|
|             |  |                              | A                         | B | C | D | E |
|             | Documentation for installing in a vehicle the systems to ensure the correct operation of NO <sub>x</sub> control measures  |                              |                           |   |   |   |   |
| 3.2.17.     | Specific information related to gas fuelled engines for heavy-duty vehicles (in the case of systems laid out in a different manner, supply equivalent information) |                              |                           |   |   |   |   |
| 3.2.17.1.   | Fuel: LPG /NG-H/NG-L /NG-HL <sup>1</sup>   |                              |                           |   |   |   |   |
| 3.2.17.2.   | Pressure regulator(s) or vaporiser/pressure regulator(s) <sup>1</sup>  |                              |                           |   |   |   |   |
| 3.2.17.2.1. | Make(s)  |                              |                           |   |   |   |   |
| 3.2.17.2.2. | Type(s)  |                              |                           |   |   |   |   |
| 3.2.17.2.3. | Number of pressure reduction stages  |                              |                           |   |   |   |   |
| 3.2.17.2.4. | Pressure in final stage minimum (kPa) – maximum. (kPa)   |                              |                           |   |   |   |   |
| 3.2.17.2.5. | Number of main adjustment points   |                              |                           |   |   |   |   |
| 3.2.17.2.6. | Number of idle adjustment points   |                              |                           |   |   |   |   |
| 3.2.17.2.7. | Type approval number   |                              |                           |   |   |   |   |
| 3.2.17.3.   | Fuelling system: mixing unit / gas injection / liquid injection / direct injection <sup>1</sup>  |                              |                           |   |   |   |   |
| 3.2.17.3.1. | Mixture strength regulation  |                              |                           |   |   |   |   |
| 3.2.17.3.2. | System description and/or diagram and drawings   |                              |                           |   |   |   |   |

|               |   | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|---------------|---|------------------------------|---------------------------|---|---|---|---|
|               |   |                              | A                         | B | C | D | E |
| 3.2.17.3.3.   | Type approval number  |                              |                           |   |   |   |   |
| 3.2.17.4.     | Mixing unit   |                              |                           |   |   |   |   |
| 3.2.17.4.1.   | Number  |                              |                           |   |   |   |   |
| 3.2.17.4.2.   | Make(s)   |                              |                           |   |   |   |   |
| 3.2.17.4.3.   | Type(s)   |                              |                           |   |   |   |   |
| 3.2.17.4.4.   | Location  |                              |                           |   |   |   |   |
| 3.2.17.4.5.   | Adjustment possibilities  |                              |                           |   |   |   |   |
| 3.2.17.4.6.   | Type approval number  |                              |                           |   |   |   |   |
| 3.2.17.5.     | Inlet manifold injection  |                              |                           |   |   |   |   |
| 3.2.17.5.1.   | Injection: single point/multipoint <sup>1</sup>                               |                              |                           |   |   |   |   |
| 3.2.17.5.2.   | Injection: continuous/simultaneously<br>timed/sequentially timed <sup>1</sup> |                              |                           |   |   |   |   |
| 3.2.17.5.3.   | Injection equipment   |                              |                           |   |   |   |   |
| 3.2.17.5.3.1. | Make(s)   |                              |                           |   |   |   |   |
| 3.2.17.5.3.2. | Type(s)   |                              |                           |   |   |   |   |
| 3.2.17.5.3.3. | Adjustment possibilities  |                              |                           |   |   |   |   |
| 3.2.17.5.3.4. | Type approval number  |                              |                           |   |   |   |   |
| 3.2.17.5.4.   | Supply pump (if applicable)   |                              |                           |   |   |   |   |
| 3.2.17.5.4.1. | Make(s)   |                              |                           |   |   |   |   |
| 3.2.17.5.4.2. | Type(s)   |                              |                           |   |   |   |   |
| 3.2.17.5.4.3. | Type approval number  |                              |                           |   |   |   |   |

|               |   | <i>Parent engine or engine type</i> | Engine CO2-family members |          |          |          |          |
|---------------|---|-------------------------------------|---------------------------|----------|----------|----------|----------|
|               |   |                                     | <i>A</i>                  | <i>B</i> | <i>C</i> | <i>D</i> | <i>E</i> |
| 3.2.17.5.5.   | Injector(s)   |                                     |                           |          |          |          |          |
| 3.2.17.5.5.1. | Make(s)   |                                     |                           |          |          |          |          |
| 3.2.17.5.5.2. | Type(s)   |                                     |                           |          |          |          |          |
| 3.2.17.5.5.3. | Type approval number                                    |                                     |                           |          |          |          |          |
| 3.2.17.6.     | Direct injection  |                                     |                           |          |          |          |          |
| 3.2.17.6.1.   | Injection pump/pressure regulator <sup>1</sup>          |                                     |                           |          |          |          |          |
| 3.2.17.6.1.1. | Make(s)   |                                     |                           |          |          |          |          |
| 3.2.17.6.1.2. | Type(s)   |                                     |                           |          |          |          |          |
| 3.2.17.6.1.3. | Injection timing  |                                     |                           |          |          |          |          |
| 3.2.17.6.1.4. | Type approval number                                    |                                     |                           |          |          |          |          |
| 3.2.17.6.2.   | Injector(s)   |                                     |                           |          |          |          |          |
| 3.2.17.6.2.1. | Make(s)   |                                     |                           |          |          |          |          |
| 3.2.17.6.2.2. | Type(s)   |                                     |                           |          |          |          |          |
| 3.2.17.6.2.3. | Opening pressure or characteristic diagram <sup>1</sup> |                                     |                           |          |          |          |          |
| 3.2.17.6.2.4. | Type approval number                                    |                                     |                           |          |          |          |          |
| 3.2.17.7.     | Electronic control unit (ECU)                           |                                     |                           |          |          |          |          |
| 3.2.17.7.1.   | Make(s)   |                                     |                           |          |          |          |          |
| 3.2.17.7.2.   | Type(s)   |                                     |                           |          |          |          |          |
| 3.2.17.7.3.   | Adjustment possibilities                                |                                     |                           |          |          |          |          |
| 3.2.17.7.4.   | Software calibration number(s)                          |                                     |                           |          |          |          |          |
| 3.2.17.8.     | NG fuel-specific equipment                              |                                     |                           |          |          |          |          |

|                 |  | Parent engine or engine type  | Engine CO2-family members   |   |   |   |   |
|-----------------|--|---|---|---|---|---|---|
|                 |  |   | A   | B | C | D | E |
| 3.2.17.8.1.     | Variant 1 (only in the case of approvals of engines for several specific fuel compositions)  |   |   |   |   |   |   |
| 3.2.17.8.1.0.1. | Self-adaptive feature? Yes/No <sup>1</sup>   |   |   |   |   |   |   |
| 3.2.17.8.1.0.2. | Calibration for a specific gas composition NG-H/NG-L/NG-HL1<br>Transformation for a specific gas composition NG-H <sub>i</sub> /NG-L <sub>i</sub> /NG-HL <sub>i</sub> 1  |   |   |   |   |   |   |
| 3.2.17.8.1.1.   | methane (CH <sub>4</sub> ) .....basis (% mole)<br>ethane (C <sub>2</sub> H <sub>6</sub> ).....basis (% mole)<br>propane (C <sub>3</sub> H <sub>8</sub> ) .....basis (% mole)<br>butane (C <sub>4</sub> H <sub>10</sub> ) .....basis (% mole)<br>C <sub>5</sub> /C <sub>5+</sub> .....basis (% mole)<br>oxygen (O <sub>2</sub> ).....basis (% mole)<br>inert (N <sub>2</sub> , He etc).....basis (% mole) | min (%mole)<br>min (%mole)<br>min (%mole)<br>min (%mole)<br>min (%mole)<br>min (%mole)<br>min (%mole) | max (%mole)<br>max (%mole)<br>max (%mole)<br>max (%mole)<br>max (%mole)<br>max (%mole)<br>max (%mole) |   |   |   |   |
| 3.5.5.          | Specific fuel consumption and correction factors   |   |   |   |   |   |   |
| 3.5.5.1.        | Specific fuel consumption over WHSC “SFC <sub>WHSC</sub> ” in accordance with paragraph 5.3.3 g/kWh  |   |   |   |   |   |   |
| 3.5.5.2.        | Corrected specific fuel consumption over WHSC “SFC <sub>WHSC,corr</sub> ” in accordance with paragraph 5.3.3.1: ... g/kWh  |   |   |   |   |   |   |
| 3.5.5.3.        | Correction factor for WHTC urban part (from output of engine pre-processing tool)  |   |   |   |   |   |   |
| 3.5.5.4.        | Correction factor for WHTC rural part (from output of engine pre-processing tool)  |   |   |   |   |   |   |



|            |  | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|------------|--|------------------------------|---------------------------|---|---|---|---|
|            |  |                              | A                         | B | C | D | E |
| 3.5.5.5.   | Correction factor for WHTC motorway part (from output of engine pre-processing tool)   |                              |                           |   |   |   |   |
| 3.5.5.6.   | Cold-hot emission balancing factor (from output of engine pre-processing tool)   |                              |                           |   |   |   |   |
| 3.5.5.7.   | Correction factor for engines equipped with exhaust after-treatment systems that are regenerated on a periodic basis $CF_{RegPer}$ (from output of engine pre-processing tool) |                              |                           |   |   |   |   |
| 3.5.5.8.   | Correction factor to standard NCV (from output of engine pre-processing tool)  |                              |                           |   |   |   |   |
| 3.6.       | Temperatures permitted by the manufacturer   |                              |                           |   |   |   |   |
| 3.6.1.     | Cooling system   |                              |                           |   |   |   |   |
| 3.6.1.1.   | Liquid cooling Maximum temperature at outlet (K)   |                              |                           |   |   |   |   |
| 3.6.1.2.   | Air cooling  |                              |                           |   |   |   |   |
| 3.6.1.2.1. | Reference point  |                              |                           |   |   |   |   |
| 3.6.1.2.2. | Maximum temperature at reference point (K)   |                              |                           |   |   |   |   |
| 3.6.2.     | Maximum outlet temperature of the inlet intercooler (K)  |                              |                           |   |   |   |   |
| 3.6.3.     | Maximum exhaust temperature at the point in the exhaust pipe(s) adjacent to the outer flange(s) of the exhaust manifold(s) or turbocharger(s) (K)                              |                              |                           |   |   |   |   |
| 3.6.4.     | Fuel temperature Minimum (K) – maximum (K)<br>For diesel engines at injection pump inlet, for gas  |                              |                           |   |   |   |   |

|            |   | Parent engine or engine type | Engine CO2-family members |   |   |   |   |
|------------|---|------------------------------|---------------------------|---|---|---|---|
|            |   |                              | A                         | B | C | D | E |
|            | fuelled engines at pressure regulator final stage                               |                              |                           |   |   |   |   |
| 3.6.5.     | Lubricant temperature<br>Minimum (K) – maximum (K)                              |                              |                           |   |   |   |   |
|            |   |                              |                           |   |   |   |   |
| 3.8.       | Lubrication system  |                              |                           |   |   |   |   |
| 3.8.1.     | Description of the system   |                              |                           |   |   |   |   |
| 3.8.1.1.   | Position of lubricant reservoir   |                              |                           |   |   |   |   |
| 3.8.1.2.   | Feed system (by pump/injection into intake/mixing with fuel, etc.) <sup>1</sup> |                              |                           |   |   |   |   |
| 3.8.2.     | Lubricating pump  |                              |                           |   |   |   |   |
| 3.8.2.1.   | Make(s)   |                              |                           |   |   |   |   |
| 3.8.2.2.   | Type(s)   |                              |                           |   |   |   |   |
| 3.8.3.     | Mixture with fuel   |                              |                           |   |   |   |   |
| 3.8.3.1.   | Percentage  |                              |                           |   |   |   |   |
| 3.8.4.     | Oil cooler: Yes/No <sup>1</sup>   |                              |                           |   |   |   |   |
| 3.8.4.1.   | Drawing(s)  |                              |                           |   |   |   |   |
| 3.8.4.1.1. | Make(s)   |                              |                           |   |   |   |   |
| 3.8.4.1.2. | Type(s)   |                              |                           |   |   |   |   |

Notes:

- 1 Delete where not applicable (there are cases where nothing needs to be deleted when more than one entry is applicable).
- 3 This figure shall be rounded off to the nearest tenth of a millimetre.
- 4 This value shall be calculated and rounded off to the nearest  $\text{cm}^3$ .
- 5 Specify the tolerance.
- 6 Determined in accordance with the requirements of Regulation No. 85.
- 7 Please fill in here the upper and lower values for each variant.
- 8 To be documented in case of a single OBD engine family and if not already documented in the documentation package(s) referred to in line 3.2.12.2.7.0.4. of Part 1 to of Appendix .

## Appendix to information document

### Information on test conditions

1. Spark plugs
  - 1.1. Make
  - 1.2. Type
  - 1.3. Spark-gap setting
2. Ignition coil
  - 2.1. Make
  - 2.2. Type
3. Lubricant used
  - 3.1. Make
  - 3.2. Type (state percentage of oil in mixture if lubricant and fuel mixed)
  - 3.3. Specifications of lubricant
4. Test fuel used
  - 4.1. Fuel type (in accordance with paragraph 6.1.9 of Annex V to Commission Regulation (EU) 2017/XXX[*OP, please insert the publication number of this Regulation.*])
  - 4.2. Unique identification number (production batch number) of fuel used
  - 4.3. Net calorific value (NCV) (in accordance with paragraph 6.1.8 of Annex V to Commission Regulation (EU) 2017/XXX[*OP, please insert the publication number of this Regulation.*])
5. Engine-driven equipment
  - 5.1. The power absorbed by the auxiliaries/equipment needs only be determined,
    - (a) If auxiliaries/equipment required are not fitted to the engine and/or
    - (b) If auxiliaries/equipment not required are fitted to the engine.

*Note:* Requirements for engine-driven equipment differ between emissions test and power test
  - 5.2. Enumeration and identifying details
  - 5.3. Power absorbed at engine speeds specific for emissions test

Table 1

Power absorbed at engine speeds specific for emissions test

| <i>Equipment</i>   |             |                  |                   |                                    |                        |
|--|-------------|------------------|-------------------|------------------------------------|------------------------|
|  | <i>Idle</i> | <i>Low speed</i> | <i>High speed</i> | <i>Preferred speed<sup>2</sup></i> | <i>n<sub>95h</sub></i> |
| P <sub>a</sub><br>Auxiliaries/equipment<br>required according to |             |                  |                   |                                    |                        |

|  |  |  |  |  |  |
|--|--|--|--|--|--|
| Annex 4, Appendix 6  |  |  |  |  |  |
| P <sub>b</sub><br>Auxiliaries/equipment<br>not required<br>according to Annex 4,<br>Appendix 6 |  |  |  |  |  |

5.4. Fan constant determined in accordance with Appendix 5 to this Annex (if applicable)

5.4.1. C<sub>avg-fan</sub> (if applicable)

5.4.2. C<sub>ind-fan</sub> (if applicable)

Table 2

Value of fan constant C<sub>ind-fan</sub> for different engine speeds

| Value                                     | Engine<br>speed | Engine<br>speed | Engine<br>speed | Engine<br>speed | Engine<br>speed | Engine<br>speed | Engine<br>speed | Engine<br>speed | Engine<br>speed | Engine<br>speed |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|   | 1               | 2               | 3               | 4               | 5               | 6               | 7               | 8               | 9               | 10              |
| engine<br>speed<br>[min <sup>-1</sup> ]   |                 |                 |                 |                 |                 |                 |                 |                 |                 |                 |
| fan<br>constant<br>C <sub>ind-fan,i</sub> |                 |                 |                 |                 |                 |                 |                 |                 |                 |                 |

6. Engine performance (declared by manufacturer)

6.1. Engine test speeds for emissions test according to Annex 4<sup>2</sup>

Low speed (n<sub>lo</sub>) ..... min<sup>-1</sup>

High speed (n<sub>hi</sub>) ..... min<sup>-1</sup>

Idle speed ..... min<sup>-1</sup>

Preferred speed ..... min<sup>-1</sup>

n<sub>95h</sub> ..... min<sup>-1</sup>

6.2. Declared values for power test according to Regulation No. 85

6.2.1. Idle speed ..... min<sup>-1</sup>

<sup>2</sup> Specify the tolerance; to be within ±3 % of the values declared by the manufacturer.

|        |                         |       |                   |
|--------|-------------------------|-------|-------------------|
| 6.2.2. | Speed at maximum power  | ..... | min <sup>-1</sup> |
| 6.2.3. | Maximum power           | ..... | kW                |
| 6.2.4. | Speed at maximum torque | ..... | min <sup>-1</sup> |
| 6.2.5. | Maximum torque          | ..... | Nm                |

---

## **Appendix 3**

### **Engine CO<sub>2</sub>-Family**

#### 1. Parameters defining the engine CO<sub>2</sub>-family

The engine CO<sub>2</sub>-family, as determined by the manufacturer, shall comply with the membership criteria defined in accordance with paragraph 5.2.3. of Annex 4 to UN/ECE Regulation 49 Rev.06. An engine CO<sub>2</sub>-family may consist of only one engine.

In addition to those membership criteria, the engine CO<sub>2</sub>-family, as determined by the manufacturer, shall comply with the membership criteria listed in paragraph 1.1 to 1.9.

In addition to the parameters listed below, the manufacturer may introduce additional criteria allowing the definition of families of more restricted size. These parameters are not necessarily parameters that have an influence on the level of fuel consumption.

- 1.1. Combustion relevant geometric data
  - 1.1.1. Displacement per cylinder
  - 1.1.2. Number of cylinders
  - 1.1.3. Bore and stroke data
  - 1.1.4. Combustion chamber geometry and compression ratio
  - 1.1.5. Valve diameters and port geometry
  - 1.1.6. Fuel injectors (design and position)
  - 1.1.7. Cylinder head design
  - 1.1.8. Piston and piston ring design
- 1.2. Air management relevant components
  - 1.2.1. Pressure charging equipment type (waste gate, VTG, 2-stage, other) and thermodynamic characteristics
  - 1.2.2. Charge air cooling concept
  - 1.2.3. Valve timing concept (fixed, partly flexible, flexible)
  - 1.2.4. EGR concept (uncooled/cooled, high/low pressure, EGR-control)
- 1.3. Injection system
- 1.4. Auxiliary/equipment propulsion concept (mechanically, electrically, other)
- 1.5. Waste heat recovery (yes/no; concept and system)
- 1.6. Aftertreatment system
  - 1.6.1. Reagent dosing system characteristics (reagent and dosing concept)
  - 1.6.2. Catalyst and DPF (arrangement, material and coating)
  - 1.6.3. HC dosing system characteristics (design and dosing concept)

- 1.7. Full load curve
  - 1.7.1. The torque values at each engine speed of the full load curve of the CO<sub>2</sub>-parent engine determined in accordance with paragraph 4.3.1. shall be equal or higher than for all other engine within the same CO<sub>2</sub>-family at the same engine speed over the whole engine speed range recorded.
  - 1.7.2. The torque values at each engine speed of the full load curve of the engine with the lowest power rating of all engines within the engine CO<sub>2</sub>-family determined in accordance with paragraph 4.3.1. shall be equal or lower than for all other engines within the same CO<sub>2</sub>-family at the same engine speed over the whole engine speed range recorded.
- 1.8. Characteristic engine test speeds
  - 1.8.1. The engine idle speed,  $n_{idle}$ , of the CO<sub>2</sub>-parent engine as declared by the manufacturer at the application for certification in the information document in accordance with Appendix 2 to this Annex shall be equal or lower than for all other engines within the same CO<sub>2</sub>-family.
  - 1.8.2. The engine speed  $n_{95h}$  of all other engines than the CO<sub>2</sub>-parent engine within the same CO<sub>2</sub>-family, determined from the engine full load curve recorded in accordance with paragraph 4.3.1 by applying the definitions of characteristic engine speeds in accordance with paragraph 7.4.6. of Annex 4 to UN/ECE Regulation 49 Rev.06, shall not deviate from the engine speed  $n_{95h}$  of the CO<sub>2</sub>-parent engine by more than  $\pm 3$  percent.
  - 1.8.3. The engine speed  $n_{57}$  of all other engines than the CO<sub>2</sub>-parent engine within the same CO<sub>2</sub>-family, determined from the engine full load curve recorded in accordance with paragraph 4.3.1 by applying the definitions in accordance with paragraph 4.3.5.2.1, shall not deviate from the engine speed  $n_{57}$  of the CO<sub>2</sub>-parent engine by more than  $\pm 3$  percent.
- 1.9. Minimum number of points in the fuel consumption map
  - 1.9.1. All engines within the same CO<sub>2</sub>-family shall have a minimum number of 54 mapping points of the fuel consumption map located below their respective engine full load curve determined in accordance with paragraph 4.3.1.
2. Choice of the CO<sub>2</sub>-parent engine

The CO<sub>2</sub>-parent engine of the engine CO<sub>2</sub>-family shall be selected in accordance with the following criteria:

  - 2.1. Highest power rating of all engines within the engine CO<sub>2</sub>-family.



## Appendix 4

### Conformity of CO<sub>2</sub> emissions and fuel consumption related properties

1. General provisions
  - 1.1 Conformity of CO<sub>2</sub> emissions and fuel consumption related properties shall be checked on the basis of the description in the certificates set out in Appendix 1 to this Annex and on the basis of the description in the information document set out in Appendix 2 to this Annex.
  - 1.2 If an engine certificate has had one or more extensions, the tests shall be carried out on the engines described in the information package relating to the relevant extension.
  - 1.3 All engines subject to tests shall be taken from the series production meeting the selection criteria according to paragraph 3 of this Appendix.
  - 1.4 The tests may be conducted with the applicable market fuels. However, at the manufacturer's request, the reference fuels specified in paragraph 3.2 may be used.
  - 1.5 If tests for the purpose of conformity of CO<sub>2</sub> emissions and fuel consumption related properties of gas engines (natural gas, LPG) are conducted with market fuels the engine manufacturer shall demonstrate to the approval authority the appropriate determination of the gas fuel composition for the determination of the NCV according to paragraph 4 of this Appendix by good engineering judgement.
2. Number of engines and engine CO<sub>2</sub>-families to be tested
  - 2.1 0.05 percent of all engines produced in the past production year within the scope of this regulation shall represent the basis to derive the number of engine CO<sub>2</sub>-families and number of engines within those CO<sub>2</sub>-families to be tested annually for verifying conformity of the certified CO<sub>2</sub> emissions and fuel consumption related properties. The resulting figure of 0.05 percent of relevant engines shall be rounded to the nearest whole number. This result shall be called  $n_{COP,base}$ .
  - 2.2 Notwithstanding the provisions in point 2.1, a minimum number of 30 shall be used for  $n_{COP,base}$ .
  - 2.3 The resulting figure for  $n_{COP,base}$  determined in accordance with points 2.1 and 2.2 of this Appendix shall be divided by 10 and the result rounded to the nearest whole number in order to determine the number of engine CO<sub>2</sub>-families to be tested annually,  $n_{COP,fam}$ , for verifying conformity of the certified CO<sub>2</sub> emissions and fuel consumption related properties.
  - 2.4 In the case that a manufacturer has less CO<sub>2</sub>-families than  $n_{COP,fam}$  determined in accordance with point 2.3, the number of CO<sub>2</sub>-families to be tested,  $n_{COP,fam}$ , shall be defined by the total number of CO<sub>2</sub>-families of the manufacturer.
3. Selection of engine CO<sub>2</sub>-families to be tested

From the number of engine CO<sub>2</sub>-families to be tested determined in accordance with paragraph 2 of this Appendix, the first two CO<sub>2</sub>-families shall be those with the highest production volumes.

The remaining number of engine CO<sub>2</sub>-families to be tested shall be randomly selected from all existing engine CO<sub>2</sub>-families and shall be agreed between the manufacturer and the approval authority.

4. Testrun to be performed

The minimum number of engines to be tested for each engine CO<sub>2</sub>-family,  $n_{COP,min}$ , shall be determined by dividing  $n_{COP,base}$  by  $n_{COP,fam}$ , both values determined in accordance with point 2. If the resulting value for  $n_{COP,min}$  is smaller than 4 it shall be set to 4.

For each of the engine CO<sub>2</sub>-families determined in accordance with paragraph 3 of this Appendix a minimum number of  $n_{COP,min}$  engines within that family shall be tested in order to reach a pass decision in accordance with paragraph 9 of this Appendix.

The number of testruns to be performed within an engine CO<sub>2</sub>-family shall be randomly assigned to the different engines within that CO<sub>2</sub>-family and this assignment shall be agreed between the manufacturer and the approval authority.

Conformity of the certified CO<sub>2</sub> emissions and fuel consumption related properties shall be verified by testing the engines in the WHSC test in accordance with paragraph 4.3.4.

All boundary conditions as specified in this Annex for the certification testing shall apply, except for the following:

- (1) The laboratory test conditions in accordance with paragraph 3.1.1 of this Annex. The conditions in accordance with paragraph 3.1.1 shall not be mandatory but shall be recommended. Deviations may occur under certain ambient conditions at the testing site and should be minimized by the use of good engineering judgment.
- (2) In case reference fuel of the type B7 (Diesel / CI) in accordance with paragraph 3.2 of this Annex is used, the determination of the NCV in accordance with paragraph 3.2 of this Annex shall not be required.
- (3) In case market fuel or reference fuel other than B7 (Diesel / CI) is used, the NCV of the fuel shall be determined in accordance with the applicable standards defined in Table 1 of this Annex. With exemption of gas engines the NCV measurement shall be performed by only one lab independent from the engine manufacturer instead of two as required in accordance with paragraph 3.2 of this Annex. NCV for reference gas fuels (G<sub>25</sub>, LPG fuel B) shall be calculated according to the applicable standards in Table 1 of this Annex from the fuel analysis submitted by the reference gas fuel supplier.
- (4) The lubricating oil shall be the one filled during engine production and shall not be changed for the purpose of testing conformity of CO<sub>2</sub> emissions and fuel consumption related properties.

5. Run-in of newly manufactured engines

- 5.1 The tests shall be carried out on newly manufactured engines taken from the series production which have a maximum run-in time of 15 hours before the testrun for the verification of conformity of the certified CO<sub>2</sub> emissions and fuel consumption related properties in accordance with paragraph 4 of this Appendix is started.
- 5.2 At the request of the manufacturer, the tests may be carried out on engines which have been run-in up to a maximum of 125 hours. In this case, the running-in procedure shall be conducted by the manufacturer who shall not make any adjustments to those engines.
- 5.3 When the manufacturer requests to conduct a running-in procedure in accordance with point 5.2 of this Appendix it may be carried out on either of the following:
  - a. all the engines that are tested
  - b. newly produced engine, with the determination of an evolution coefficient as follows:
    - A. The specific fuel consumption shall be measured over the WHSC test once on the newly manufactured engine with a maximum run-in time of 15 hours in accordance with point 5.1 of this Appendix and in the second test before the maximum of 125 hours set in point 5.2 of this Appendix on the first engine tested.
    - B. The values for the specific fuel consumption of both tests shall be adjusted to a corrected value in accordance with paragraphs 7.2 and 7.3 of this Appendix for the respective fuel used during each of the two tests.
    - C. The evolution coefficient of the fuel consumption shall be calculated by dividing the corrected specific fuel consumption of the second test by the corrected specific fuel consumption of the first test. The evolution coefficient may have a value less than one.
- 5.4 If the provisions defined in point 5.3 (b) of this Appendix are applied, the subsequent engines selected for testing of conformity of CO<sub>2</sub> emissions and fuel consumption related properties shall not be subjected to the running-in procedure, but their specific fuel consumption over the WHSC determined on the newly manufactured engine with a maximum run-in time of 15 hours in accordance with point 5.1 of this Appendix shall be multiplied by the evolution coefficient.
- 5.5 In the case described in point 5.4 of this Appendix the values for the specific fuel consumption over the WHSC to be taken shall be the following:
  - a. for the engine used for determination of the evolution coefficient in accordance with point 5.3 (b) of this Appendix, the value from the second test
  - b. for the other engines, the values determined on the newly manufactured engine with a maximum run-in time of 15 hours in accordance with point 5.1 of this Appendix multiplied by the evolution coefficient determined in accordance with point 5.3 (b)(C) of this Appendix

- 5.6. Instead of using a running-in procedure in accordance with points 5.2 to 5.5 of this Appendix, a generic evolution coefficient of 0.99 may be used at the request of the manufacturer. In this case the specific fuel consumption over the WHSC determined on the newly manufactured engine with a maximum run-in time of 15 hours in accordance with point 5.1 of this Appendix shall be multiplied by the generic evolution coefficient of 0.99.
- 5.7 If the evolution coefficient in accordance with point 5.3 (b) of this Appendix is determined using the parent engine of an engine family according to paragraphs 5.2.3. and 5.2.4. of Annex 4 to Regulation UN/ECE R.49.06, it may be carried across to all members of any CO<sub>2</sub>-family belonging to the same engine family according to paragraph 5.2.3. of Annex 4 to Regulation UN/ECE R.49.06.
6. Target value for assessment of conformity of the certified CO<sub>2</sub> emissions and fuel consumption related properties
- The target value to assess the conformity of the certified CO<sub>2</sub> emissions and fuel consumption related properties shall be the corrected specific fuel consumption over the WHSC,  $SFC_{WHSC,corr}$ , in g/kWh determined in accordance with paragraph 6.1.13 and documented in the information document as part of the certificates set out in Appendix 2 to this Annex for the specific engine tested.
7. Actual value for assessment of conformity of the certified CO<sub>2</sub> emissions and fuel consumption related properties
- 7.1 The specific fuel consumption over the WHSC,  $SFC_{WHSC}$ , shall be determined in accordance with paragraph 5.3.3 of this Annex from the testruns performed in accordance with paragraph 4 of this Appendix. At the request of the manufacturer the specific fuel consumption value determined shall be modified by applying the provisions defined in points 5.3 to 5.6 of this Appendix.
- 7.2 If market fuel was used during testing in accordance with point 1.4 of this Appendix, the specific fuel consumption over the WHSC,  $SFC_{WHSC}$ , determined in point 7.1 of this Appendix shall be adjusted to a corrected value,  $SFC_{WHSC,corr}$ , in accordance with paragraph 5.3.3.1 of this Annex.
- 7.3 If reference fuel was used during testing in accordance with point 1.4 of this Appendix the special provisions defined in paragraph 5.3.3.2 of this Annex shall be applied to the value determined in point 7.1 of this Appendix.
- 7.4 The measured emission of gaseous pollutants over the WHSC performed in accordance with paragraph 4 shall be adjusted by application of the appropriate deterioration factors (DF's) for that engine as recorded in the Addendum to the EC type-approval certificate granted in accordance with Commission Regulation (EU) No 582/2011.
8. Limit for conformity of one single test
- For diesel engines, the limit values for the assessment of conformity of one single engine tested shall be the target value determined in accordance with point (6) +3 percent.
- For gas engines, the limit values for the assessment of conformity of one single engine tested shall be the target value determined in accordance with point (6) +4 percent.

9. Assessment of conformity of the certified CO<sub>2</sub> emissions and fuel consumption related properties
- 9.1 The emission test results over the WHSC determined in accordance with point 7.4 of this Appendix shall meet the applicable limits values defined in Annex I to Regulation (EC) No 595/2009 for all gaseous pollutants except ammonia, otherwise the test shall be considered void for the assessment of conformity of the certified CO<sub>2</sub> emissions and fuel consumption related properties.
- 9.2 A single test of one engine tested in accordance with paragraph 4 of this Appendix shall be considered as nonconforming if the actual value in accordance with paragraph 7 of this Appendix is higher than the limit values defined in accordance with paragraph 8 of this Appendix.
- 9.3 For the current sample size of engines tested within one CO<sub>2</sub>-family in accordance with paragraph 4 of this Appendix the test statistic quantifying the cumulative number of nonconforming tests in accordance with point 9.2 of this Appendix at the n<sup>th</sup> test shall be determined.
- a. If the cumulative number of nonconforming tests at the n<sup>th</sup> test determined in accordance with point 9.3 of this Appendix is less than or equal to the pass decision number for the sample size given in Table 4 of Appendix 3 to UN/ECE Regulation 49 Rev.06, a pass decision is reached.
- b. If the cumulative number of nonconforming tests at the n<sup>th</sup> test determined in accordance with point 9.3 of this Appendix is greater than or equal to the fail decision number for the sample size given in Table 4 of Appendix 3 to UN/ECE Regulation 49 Rev.06, a fail decision is reached.
- c. Otherwise, an additional engine is tested in accordance with paragraph 4 of this Appendix and the calculation procedure in accordance with point 9.3 of this Appendix is applied to the sample increased by one more unit.
- 9.4 If neither a pass nor a fail decision is reached, the manufacturer may at any time decide to stop testing. In that case a fail decision is recorded.

## Appendix 5

### Determination of power consumption of engine components

#### 1. Fan

The engine torque shall be measured at engine motoring with and without fan engaged with the following procedure:

- i. Install the fan according to product instruction before the test starts.
- ii. Warm up phase: The engine shall be warmed up according to the recommendation of the manufacturer and by practicing good engineering judgement (eg operating the engine for 20 minutes at mode 9, as defined in Table 1 of paragraph 7.2.2. of Annex 4 to UN/ECE Regulation 49 Rev.06).
- iii. Stabilization phase: After the warm-up or optional warmup step (v) is completed the engine shall be operated with minimum operator demand (motoring) at engine speed  $n_{pref}$  for  $130 \pm 2$  seconds with the fan disengaged ( $n_{fan\_disengage} < 0.25 * n_{engine} * r_{fan}$ ) The first  $60 \pm 1$  seconds of this period are considered as a stabilization period, during which the actual engine speed shall be held within  $\pm 5 \text{ min}^{-1}$  of  $n_{pref}$ .
- iv. Measurement phase: During the following period of  $60 \pm 1$  seconds the actual engine speed shall be held within  $\pm 2 \text{ min}^{-1}$  of  $n_{pref}$  and the coolant temperature within  $\pm 5^{\circ}\text{C}$  while the torque for motoring the engine with the fan disengaged, the fan speed and the engine speed shall be recorded as an average value over this period of  $60 \pm 1$  seconds. The remaining period of  $10 \pm 1$  seconds shall be used for data post-processing and storage if necessary.
- v. Optional warmup phase: Upon manufacturer's request and according to good engineering judgement step (ii) can be repeated (e.g. if the temperature has dropped more than  $5^{\circ}\text{C}$ )
- vi. Stabilization phase: After the optional warm-up is completed the engine shall be operated with minimum operator demand (motoring) at engine speed  $n_{pref}$  for  $130 \pm 2$  seconds with the fan engaged ( $n_{fan\_engage} > 0.9 * n_{engine} * r_{fan}$ ) The first  $60 \pm 1$  seconds of this period are considered as a stabilization period, during which the actual engine speed shall be held within  $\pm 5 \text{ min}^{-1}$  of  $n_{pref}$ .
- vii. Measurement phase: During the following period of  $60 \pm 1$  seconds the actual engine speed shall be held within  $\pm 2 \text{ min}^{-1}$  of  $n_{pref}$  and the coolant temperature within  $\pm 5^{\circ}\text{C}$  while the torque for motoring the engine with the fan engaged, the fan speed and the engine speed shall be recorded as an average value over this period of  $60 \pm 1$  seconds. The remaining period of  $10 \pm 1$  seconds shall be used for data post-processing and storage if necessary.
- viii. Steps (iii) to (vii) shall be repeated at engine speeds  $n_{95h}$  and  $n_{hi}$  instead of  $n_{pref}$ , with an optional warmup step (v) before each stabilization step if needed to maintain a stable coolant temperature ( $\pm 5^{\circ}\text{C}$ ), according to good engineering judgement.
- ix. If the standard deviation of all calculated  $C_i$  according to the equation below at the three speeds  $n_{pref}$ ,  $n_{95h}$  and  $n_{hi}$  is equal or higher than 3 percent, the

measurement shall be performed for all engine speeds defining the grid for the fuel mapping procedure (FCMC) according to paragraph 4.3.5.2.1.

The actual fan constant shall be calculated from the measurement data according to the following equation:

$$C_i = \frac{MD_{fan\_disengage} - MD_{fan\_engage}}{(n_{fan\_engage}^2 - n_{fan\_disengage}^2)} \cdot 10^6$$

where:

|                       |   |
|-----------------------|---|
| $C_i$                 | fan constant at certain engine speed                        |
| $MD_{fan\_disengage}$ | measured engine torque at motoring with fan disengaged (Nm) |
| $MD_{fan\_engage}$    | measured engine torque at motoring with fan engaged (Nm)    |
| $n_{fan\_engage}$     | fan speed with fan engaged ( $\text{min}^{-1}$ )            |
| $n_{fan\_disengage}$  | fan speed with fan disengaged $\text{min}^{-1}$ )           |
| $r_{fan}$             | fan ratio   |

If the standard deviation of all calculated  $C_i$  at the three speeds  $n_{pref}$ ,  $n_{95h}$  and  $n_{hi}$  is less than 3%, an average value  $C_{avg-fan}$  determined over the three speeds  $n_{pref}$ ,  $n_{95h}$  and  $n_{hi}$  shall be used for the fan constant.

If the standard deviation of all calculated  $C_i$  at the three speeds  $n_{pref}$ ,  $n_{95h}$  and  $n_{hi}$  is equal or higher than 3%, individual values determined for all engine speeds according to point (ix) shall be used for the fan constant  $C_{ind-fan,i}$ . The value of the fan constant for the actual engine speed  $C_{fan}$ , shall be determined by linear interpolation between the individual values  $C_{ind-fan,i}$  of the fan constant.

The engine torque for driving the fan shall be calculated according to the following equation:

$$M_{fan} = C_{fan} \cdot n_{fan}^2 \cdot 10^{-6}$$

where:

|           |   |
|-----------|---|
| $M_{fan}$ | engine torque for driving fan (Nm)  |
| $C_{fan}$ | fan constant $C_{avg-fan}$ or $C_{ind-fan,i}$ corresponding to $n_{engine}$ |

The mechanical power consumed by the fan shall be calculated from the engine torque for driving the fan and the actual engine speed. Mechanical power and engine torque shall be taken into account in accordance with paragraph 3.1.2.

## 2. Electric components/equipment

The electric power supplied externally to electric engine components shall be measured. This measured value shall be corrected to mechanical power by dividing it by a generic efficiency value of 0.65. This mechanical power and the corresponding engine torque shall be taken into account in accordance with paragraph 3.1.2.

## Appendix 6

1. Markings

In the case of an engine being certified in accordance with this Annex, the engine shall bear:

- 1.1 The manufacturer's name and trade mark
- 1.2 The make and identifying type indication as recorded in the information referred to in point 0.1 and 0.2 of Appendix 2 to this Annex
- 1.3 The certification mark as a rectangle surrounding the lower-case letter 'e' followed by the distinguishing number of the Member State which has granted the certificate:




1 for Germany;  
2 for France;  
3 for Italy;  
4 for the Netherlands;  
5 for Sweden;  
6 for Belgium;  
7 for Hungary;  
8 for the Czech Republic;  
9 for Spain;  
11 for the United Kingdom;  
12 for Austria;  
13 for Luxembourg;  
17 for Finland;  
18 for Denmark;  
19 for Romania;  
20 for Poland;  
21 for Portugal;  
23 for Greece;  
24 for Ireland;  
25 for Croatia;  
26 for Slovenia;  
27 for Slovakia;  
29 for Estonia;  
32 for Latvia;  
34 for Bulgaria;  
36 for Lithuania;  
49 for Cyprus;  
50 for Malta

1.4 The certification mark shall also include in the vicinity of the rectangle the ‘base approval number’ as specified for Section 4 of the type-approval number set out in Annex VII to Directive 2007/46/EC, preceded by the two figures indicating the sequence number assigned to the latest technical amendment to this Regulation and by a character 'E' indicating that the approval has been granted for an engine.

For this Regulation, the sequence number shall be 00.


1.4.1 Example and dimensions of the certification mark (separate marking)

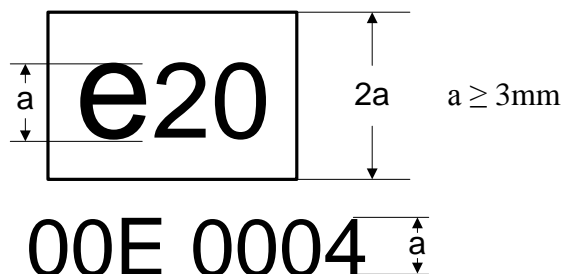

The above certification mark affixed to an engine shows that the type concerned has been certified in Poland (e20), pursuant to this Regulation. The first two digits (00) are indicating the sequence number assigned to the latest technical amendment to this Regulation. The following digit indicates that the certificate was granted for an engine (E). The last four digits (0004) are those allocated by the approval authority to the engine as the base approval number.

1.5 In the case that the certification in accordance with this Regulation is granted at the same time as the type approval in accordance with Regulation (EU) No 582/2011, the marking requirements laid down in point 1.4 may follow, separated by '/', the marking requirements laid down in Appendix 8 to Annex I to Regulation (EU) No 582/2011

1.5.1 Example of the certification mark (joined marking)

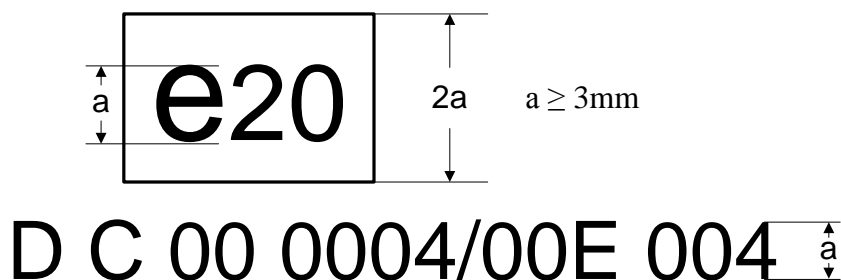

The above certification mark affixed to an engine shows that the type concerned has been certified in Poland (e20), pursuant to Regulation (EU) 582/2011 (Regulation (EU) No 133/2014). The “D” indicates Diesel followed by a “C” for the emission stage. The following two digits (00) are indicating the sequence number assigned to the latest technical amendment to the above mentioned regulation followed by four digits (0004) which are those allocated by the approval authority to the engine as the base approval number for Regulation (EU) 582/2011. After the dash the first two figures are indicating the sequence number assigned to the latest technical amendment to this Regulation, followed by a digit “E” for engine, followed by four

digits allocated by the approval authority for the purpose of certification in accordance with this Regulation (‘base approval number’ to this regulation).

- 1.6. On request of the applicant for certification and after prior agreement with the approval authority other type sizes than indicated in point 1.4.1 and 1.5.1 may be used. Those other type sizes shall remain clearly legible.
- 1.7. The markings, labels, plates or stickers must be durable for the useful life of the engine and must be clearly legible and indelible. The manufacturer shall ensure that the markings, labels, plates or sticker cannot be removed without destroying or defacing them.

## 2 Numbering

- 2.1 Certification number for engines shall comprise the following:

eX\*YYY/YYYY\*ZZZ/ZZZZ\*E\*0000\*00

| section 1                                       | section 2                                    | section 3                      | Additional digit to section 3 | section 4                         | section 5       |
|---|--|--------------------------------|-------------------------------|-----------------------------------|-----------------|
| Indication of country issuing the certification | CO <sub>2</sub> certification act (.../2017) | Latest amending act (zzz/zzzz) | E - engine                    | Base certification number<br>0000 | Extension<br>00 |

## Appendix 7

### Input parameters for the simulation tool

#### Introduction

This Appendix describes the list of parameters to be provided by the component manufacturer as input to the simulation tool. The applicable XML schema as well as example data are available at the dedicated electronic distribution platform.

The XML is automatically generated by the engine pre-processing tool.

#### Definitions

- (1) “Parameter ID”: Unique identifier as used in “Vehicle Energy Consumption calculation Tool” for a specific input parameter or set of input data
- (2) “Type”: Data type of the parameter
  - string ..... sequence of characters in ISO8859-1 encoding
  - token ..... sequence of characters in ISO8859-1 encoding, no leading/trailing whitespace
  - date ..... date and time in UTC time in the format: *YYYY-MM-DDTHH:MM:SSZ* with italic letters denoting fixed characters e.g. “2002-05-30T09:30:10Z”
  - integer ..... value with an integral data type, no leading zeros, e.g. “1800”
  - double, X .... fractional number with exactly X digits after the decimal sign (“.”) and no leading zeros e.g. for “double, 2”: “2345.67”; for “double, 4”: “45.6780”
- (3) “Unit” ... physical unit of the parameter

## Set of input parameters

Table 1: Input parameters “Engine/General”

| Parameter name    | Parameter ID | Type      | Unit               | Description/Reference   |
|-------------------|--------------|-----------|--------------------|---|
| Manufacturer      | P200         | token     | [-]                |   |
| Model             | P201         | token     | [-]                |   |
| TechnicalReportId | P202         | token     | [-]                |   |
| Date              | P203         | dateTime  | [-]                | Date and time when the component-hash is created                                  |
| AppVersion        | P204         | token     | [-]                | Version number of engine pre-processing tool                                      |
| Displacement      | P061         | int       | [cm <sup>3</sup> ] |   |
| IdlingSpeed       | P063         | int       | [1/min]            |   |
| RatedSpeed        | P249         | int       | [1/min]            |   |
| RatedPower        | P250         | int       | [W]                |   |
| MaxEngineTorque   | P259         | int       | [Nm]               |   |
| WHTCUrban         | P109         | double, 4 | [-]                |   |
| WHTCRural         | P110         | double, 4 | [-]                |   |
| WHTCMotorway      | P111         | double, 4 | [-]                |   |
| BFColdHot         | P159         | double, 4 | [-]                |   |
| CFRegPer          | P192         | double, 4 | [-]                |   |
| CFNCV             | P260         | double, 4 | [-]                |   |
| FuelType          | P193         | string    | [-]                | Allowed values: "Diesel CI", "Ethanol CI", "Petrol PI", "Ethanol PI", "LPG", "NG" |

Table 2: Input parameters “Engine/FullloadCurve” for each grid point in the full load curve

| Parameter name | Parameter ID | Type      | Unit    | Description/Reference |
|----------------|--------------|-----------|---------|-----------------------|
| EngineSpeed    | P068         | double, 2 | [1/min] |                       |
| MaxTorque      | P069         | double, 2 | [Nm]    |                       |
| DragTorque     | P070         | double, 2 | [Nm]    |                       |

Table 3: Input parameters “Engine/FuelMap” for each grid point in the fuel map

| Parameter name  | Parameter ID | Type      | Unit    | Description/Reference |
|-----------------|--------------|-----------|---------|-----------------------|
| EngineSpeed     | P072         | double, 2 | [1/min] |                       |
| Torque          | P073         | double, 2 | [Nm]    |                       |
| FuelConsumption | P074         | double, 2 | [g/h]   |                       |

## Appendix 8

### Important evaluation steps and equations of the engine pre-processing tool

This Appendix describes the most important evaluation steps and underlying basic equations that are performed by the engine pre-processing tool. The following steps are performed during evaluation of the input data in the order listed:

2. Reading of input files and automatic check of input data
  - 1.1 Check of requirements for input data according to the definitions in paragraph 6.1 of this Annex
  - 1.2 Check of requirements for recorded FCMC data according to the definitions in paragraph 4.3.5.2 and subpoint (1) of paragraph 4.3.5.5 of this Annex
3. Calculation of characteristic engine speeds from full load curves of parent engine and actual engine for certification according to the definitions in paragraph 4.3.5.2.1 of this Annex
4. Processing of fuel consumption (FC) map
  - 3.1 FC values at  $n_{idle}$  are copied to engine speed ( $n_{idle} - 100 \text{ min}^{-1}$ ) in the map
  - 3.2 FC values at  $n_{95h}$  are copied to engine speed ( $n_{95h} + 500 \text{ min}^{-1}$ ) in the map
  - 3.3 Extrapolation of FC values at all engine speed setpoints to a torque value of (1.1 times  $T_{max\_overall}$ ) by using least squares linear regression based on the 3 measured FC points with the highest torque values at each engine speed setpoint in the map
  - 3.4 Adding of FC = 0 for interpolated motoring torque values at all engine speed setpoints in the map
  - 3.5 Adding of FC = 0 for minimum of interpolated motoring torque values from subpoint (e) minus 100 Nm at all engine speed setpoints in the map
5. Simulation of FC and cycle work over WHTC and respective subparts for actual engine for certification
  - 5.1. WHTC reference points are denormalized using the full load curve input in originally recorded resolution
  - 5.2. FC is calculated for WHTC denormalized reference values for engine speed and torque from subpoint 4.1
  - 5.3. FC is calculated with engine inertia set to 0
  - 5.4. FC is calculated with standard PT1-function (as in main vehicle simulation) for engine torque response active
  - 5.5. FC for all motoring points is set to 0
  - 5.6. FC for all non-motoring engine operation points is calculated from FC map by Delaunay interpolation method (as in main vehicle simulation)
  - 5.7. Cycle work and FC are calculated according to equations defined in paragraphs 5.1 and 5.2 of this Annex
  - 5.8. Simulated specific FC values are calculated analogous to equations defined in paragraphs 5.3.1 and 5.3.2 of this Annex for measured values

6. Calculation of WHTC correction factors
  - 6.1. Measured values from input to pre-processing tool and simulated values from point (4) are used in accordance with the equations in points (5.2) to (5.4)
  - 6.2.  $CF_{Urban} = SFC_{meas,Urban} / SFC_{simu,Urban}$
  - 6.3.  $CF_{Rural} = SFC_{meas,Rural} / SFC_{simu,Rural}$
  - 6.4.  $CF_{MW} = SFC_{meas,MW} / SFC_{simu,MW}$
  - 6.5. In case that the calculated value for a correction factor is lower than 1, the respective correction factor is set to 1
7. Calculation of cold-hot emission balancing factor
  - 7.1. This factor is calculated in accordance with the equation in point (6.2)
  - 7.2.  $BF_{cold-hot} = 1 + 0.1 \times (SFC_{meas,cold} - SFC_{meas,hot}) / SFC_{meas,hot}$
  - 7.3. In case that the calculated value for this factor is lower than 1, the factor is set to 1
8. Correction of FC values in FC map to standard NCV
  - 8.1. This correction is performed in accordance with the equation in point (7.2)
  - 8.2.  $FC_{corrected} = FC_{measured,map} \times NCV_{meas} / NVC_{std}$
  - 8.3.  $FC_{measured,map}$  shall be the FC value in the FC map input data processed in accordance with point (3)
  - 8.4.  $NCV_{meas}$  and  $NVC_{std}$  shall be defined in accordance with paragraph 5.3.3.1 of this Annex
  - 8.5. In the case that reference fuel of the type B7 (Diesel / CI) in accordance with paragraph 3.2 of this Annex was used during testing, the correction in accordance with points (7.1) to (7.4) is not performed.
9. Converting of engine full load and motoring torque values of the actual engine for certification to a logging frequency of the engine speed of  $8 \text{ min}^{-1}$ 
  - 9.1. The conversion is performed by arithmetical averaging over intervals of  $\pm 4 \text{ min}^{-1}$  of the given setpoint for the output data based on the full load curve input in originally recorded resolution