

**DISCUSSION PAPER
DRAFT CONCEPT REPPR v3**

This document does not represent an official position of the European Commission. It is a tool to explore the views of interested parties. The suggestions contained in this document do not prejudice the form and content of any possible future proposal by the European Commission.

DRAFT

COMMISSION DELEGATED REGULATION (EU) No .../..

of **XXX**

on amending Annex V(A) of Regulation (EU) No [xxx/2013] and on the environmental and propulsion performance requirements of two- or three-wheel vehicles and quadricycles

(Text with EEA relevance)

THE EUROPEAN COMMISSION,

Having regard to the Treaty on the Functioning of the European Union, and in particular Article 290 thereof,

Having regard to Regulation (EU) No [xxx/2013] of the European Parliament and of the Council on the approval and market surveillance of two- or three-wheel vehicles and quadricycles¹, and in particular Articles 18, 23, 24 and 73 thereof,

Whereas:

- (1) The term ‘L-category vehicles’ is the family name of a wide range of ‘light’ vehicle types with two, three or four wheels like e.g. powered cycles, two- and three-wheel mopeds, two- and three-wheel motorcycles and motorcycles with side-cars. Examples of light four-wheel vehicles, also referred to as quadricycles, are on-road quads, all terrain vehicles and quadri-mobiles.
- (2) The internal market comprises an area without internal frontiers in which the free movement of goods, persons, services and capital is ensured. To that end, a comprehensive Union type-approval system for L-category vehicles will continue to be applicable as defined by Regulation (EU) No [xxx/2013]. The technical requirements for the type approval of motor vehicles with regard to their environmental and propulsion performance should therefore be harmonised to avoid requirements that differ from one Member State to another, and to ensure a high level of environmental protection and functional safety.
- (3) At the request of the European Parliament a new regulatory approach has been introduced in EU vehicle legislation. Regulation (EU) No [xxx/2013] laid down fundamental provisions on environmental and propulsion performance, whereas the technical specifications are laid down in this delegated act. For that purpose three delegated acts containing technically detailed requirements and one implementing act containing the administrative provisions and procedures form a the legal package for the approval of L-category vehicles. This Regulation regarding the environmental and propulsion

¹ OJ L , , p. .

performance is one of these three delegated acts. In addition there is a delegated act regarding functional vehicle safety requirements and a delegated act regarding vehicle construction in which requirements are compiled that are related to both environmental performance and vehicle functional safety or which cannot be attributed to either topic. All administrative provisions and approval related procedures are to be laid down in the implementing act to Regulation (EU) No [xxx/2013].

- (4) In March 2001 the Commission launched the Clean Air For Europe (CAFE) programme, the major elements of which are outlined in a communication of 4 May 2005. This has led to the adoption of a thematic strategy on air pollution by a communication of 21 September 2005. One of the conclusions of the thematic strategy is that further reductions in emissions from the transport sector (air, maritime and land transport), from households and from the energy, agricultural and industrial sectors are needed to achieve EU air quality objectives. In this context, the task of reducing vehicle emissions should be approached as part of an overall strategy. The Euro 3, 4 and 5 standards are one of the measures designed to reduce emissions of particulate matter and ozone precursors such as nitrogen oxides and hydrocarbons.
- (5) In particular, a considerable reduction in hydrocarbon emissions from L-category vehicles is necessary to improve air quality and comply with limit values for pollution, not only directly to significantly reduce the disproportionately high hydrocarbon tailpipe and evaporative emissions from these vehicles, but in addition to help reducing volatile particle levels in urban areas and in support of possible smog reduction.
- (6) A standardised method of measuring fuel consumption and carbon dioxide emissions of vehicles is necessary to ensure that no technical barriers to trade arise between Member States. Furthermore, it is also necessary to ensure that customers and users are supplied with objective and precise information.
- (7) By Council Decision 97/836/EC the Union has acceded to the Agreement of the United Nations Economic Commission for Europe concerning the adoption of uniform technical prescriptions for wheeled vehicles, equipment and parts which can be fitted to and/or be used on wheeled vehicles and the conditions for reciprocal recognition of approvals granted on the basis of these prescriptions ('Revised 1958 Agreement')²
- (8) In accordance with Regulation (EU) No [xxx/2013], vehicles manufacturers are seeking approval for L-category vehicles, their systems, components, or separate technical units. They have the choice of meeting the requirements of either the relevant EU Regulations or the corresponding UNECE regulations. Most of the requirements under Regulations on vehicle parts are taken over from the corresponding UNECE regulations. As technology progresses, UNECE regulations are constantly amended and the relevant regulations have to be regularly updated to keep them in line with the content of the respective UNECE regulations. In order to avoid this duplication, the CARS 21 High Level Group recommended the replacement of several Directives by the corresponding UNECE regulations.
- (9) The possibility to apply UNECE regulations for the purpose of EU vehicle approval on a compulsory basis and to replace Union legislation by those UNECE regulations is

² OJ L 346, 17.12.1997, p. 78.

provided for in Regulation (EU) No [xxx/2013]. According to this Regulation approval in accordance with UNECE regulations which apply on a compulsory basis is to be considered as EU type-approval in accordance with that Regulation and its delegated and implementing acts.

- (10) Replacing Union legislation by UNECE regulations helps to avoid duplication not only of technical requirements but also of certification and administrative procedures. In addition, approval that is directly based on internationally agreed standards should improve market access in third countries, in particular in those which are contracting parties to the Revised 1958 Agreement, thus enhancing the Union industry's competitiveness.
- (11) Therefore, Regulation (EU) No [xxx/2013] provides for the repeal of several Directives listed under Article 81 of that Regulation concerning the approval of L-category vehicles, their systems, components and separate technical units intended therefore, which, for the purposes of EU type-approval in accordance with that Regulation should be replaced by corresponding UNECE regulations or global technical regulation No 2 (WMTC), the provisions of the three delegated acts and the implementing act under that Regulation.
- (12) Whereas, pursuant to the provisions of Regulation (EU) No [xxx/2013], the L-category vehicles, systems components and separate technical units covered by this Regulation may not be placed or made available on the market or enter into service in the Member States unless they comply with the provisions of this Regulation; whereas the Member States shall take all the necessary measures to ensure fulfilment of the obligations resulting from this Regulation.
- (13) Whereas, given the scale and impact of the action proposed in the sector in question, the Union measures which are the subject of this Regulation are necessary, or even indispensable, to attain the environmental and safety objectives set, namely the approval of vehicles in the Union; whereas these objectives cannot be adequately achieved by the Member States individually;
- (14) Whereas technical progress requires rapid adaptation of the technical requirements; whereas, with the exception of the limit values for pollutants and sound level, this task should be assigned to the Commission in order to simplify and speed up the procedure; whereas, in all cases where the European Parliament and the Council confer upon the Commission authority to implement rules laid down in the L-category vehicle sector, it is appropriate to provide for a procedure for prior consultation between the Commission and Member States within a technical committee;
- (15) Whereas functional safety or environmental requirements call for restrictions on tampering with certain types of L-category vehicles; whereas, if they are not to prove an obstacle to owner servicing and maintenance, such restrictions shall be strictly limited to tampering which significantly modifies the vehicle's performance and pollutant emissions, noise emissions and vehicle functional safety in a harmful way. As harmful tampering affects both items the detailed requirements regarding powertrain and noise abatement tampering prevention requirements shall be laid down in the delegated act regarding vehicle construction.

(16) Whereas the methods of measuring the maximum design vehicle speed, maximum torque and maximum continuous total power of L-category vehicles differ from one Member State to another; whereas as a result of their differences, such methods constitute barriers to trade within the Community. Therefore it is necessary to draw up harmonized requirements for methods of measuring the maximum design vehicle speed, maximum torque and maximum continuous total power of the propulsion of L-category vehicles in order to enable the approval of vehicle, systems, component or separate technical units to be applied for each type of such vehicle.

(17) x

HAS ADOPTED THIS REGULATION:

CHAPTER I

SUBJECT MATTER, SCOPE AND DEFINITIONS

Article 1 **Subject matter**

This Regulation establishes the technical requirements and test procedures regarding environmental and propulsion performance for the approval and market surveillance of L-category vehicles and its systems, components and separate technical units in accordance with Articles 18, 23, 24 and 73 of Regulation (EU) No [xxx/2013].

Article 2 **Definitions**

The definitions of Regulation (EU) No [xxx/2013] shall apply. In addition, the following definitions shall apply:

Definitions related to test type I, tailpipe emissions after cold start and other emission related definitions:

- (1) ‘WMTC stage 1’ means World harmonised Motorcycle Test Cycle laid down in UNECE global technical regulation³ No 2
- (1) ‘WMTC stage 2’ means World harmonised Motorcycle Test Cycle laid down in UNECE global technical regulation (gtr) No 2 and includes:
 - (a) WMTC stage 1;
 - (b) addendum 2, corrigendum 2⁴ to gtr No 2;

³ ‘Measurement procedure for two wheeled motorcycles equipped with a positive or compression ignition engine with regard to the emissions of gaseous pollutants, CO₂ emissions and fuel consumption (UN document reference ECE/TRANS/180/Add2e of 30 August 2005)’ including amendment 1 (UNECE document reference ECE/TRANS/180a2a1e of 29 January 2008).

⁴ UNECE document reference ECE/TRANS/180a2c2e of 09 September 2009.

- (c) amendment 1, corrigendum 1⁵ to gtr No 2;
- (2) ‘WMTC stage 3’ or ‘revised WMTC’⁶ means WMTC stage 2 applicable for L3e, L4e, L5e-A, L5e-B, L7e-A, L7e-B and L7e-C (sub-)category vehicles and WMTC stage 2, part 1 cold and part 1 warm applicable for (sub-)categories L1e-A, L1e-B, L2e, L6e-A and L6e-B vehicles;
 - (3) ‘fuel consumption’ means the amount of fuel consumed, calculated by the carbon balance method;
 - (4) ‘fuel economy’ means one over fuel consumption (1/fuel consumption) in km/l;
 - (5) ‘maximum design vehicle speed’ (v_{max}) means the maximum speed of the vehicle as declared by the manufacturer, measured in accordance with this Regulation;
 - (6) ‘exhaust emissions’ means tailpipe emissions of gaseous pollutants and particulate matter;
 - (7) ‘particulate trap’ or ‘particulate filter’ means a filtering device fitted in the exhaust system of a vehicle to reduce particulate matter from the exhaust flow;
 - (8) ‘consumable reagent’ means a reactive substance injected into the exhaust flow of an engine to reduce tailpipe emissions;
 - (9) ‘selective catalytic reduction’ abbreviated as SCR means a system capable of converting gaseous pollutants into harmless or inert gasses by means of injecting a consumable reagent which is adsorbed onto a catalyst;
 - (10) ‘lean NO_x trap’ or ‘NO_x adsorber’ means a storage of NO_x fitted into the exhaust system of a vehicle which is purged by the release of a reactant in the exhaust flow;
 - (11) ‘exhaust gas recirculation’ abbreviated as EGR means part of the exhaust gas flow lead back to or remaining in the combustion chamber of an engine with the target to lower the combustion temperature;
 - (12) ‘cold start device’ means a device that temporarily enriches the air/fuel mixture of the engine thus assisting the engine to start;
 - (13) ‘starting aid’ means a device which assists engine start up without enrichment of the air/fuel mixture of the engine, e.g. glow plug, injection timing change, etc.;
 - (14) ‘properly maintained and used’ means, for the purpose of a test vehicle, that such a vehicle satisfies the criteria for acceptance of a selected vehicle laid down in this Regulation;

⁵ UNECE document reference ECE/TRANS/180a2a1c1e of 09 September 2009

⁶ In addition the corrigenda and amendments as identified in the environmental effect study, referred to in Article 23 of Regulation (EU) No [xxx/2013] will be taken into account as well as proposed and adopted corrigenda and amendments by UNECE WP29 as continuous improvement of the world-harmonised test cycle for L-category vehicles.

- (15) 'fuel requirement by the engine' means the type of fuel normally used by the engine:
- (a) petrol (E5);
 - (b) LPG (liquefied petroleum gas);
 - (c) NG/bio-methane (natural gas);
 - (d) either petrol (E5) or LPG;
 - (e) either petrol (E5) or NG/bio-methane;
 - (f) diesel fuel (B5);
 - (g) mixture of ethanol (E85) and petrol (E5) (Flex fuel);
 - (h) mixture of biodiesel and diesel (B5) (Flex fuel);
 - (i) hydrogen (H₂) or a mixture (H₂NG) of NG/bio-methane and hydrogen;
 - (j) either petrol (E5) or Hydrogen (Bi-fuel);
- (16) 'bio fuel' means liquid or gaseous fuel for transport, produced from biomass;
- (17) 'approval of the environmental performance of a vehicle' means the approval of a vehicle type or variant with regard to the limitation of the following conditions:
- (a) Annex V(B) of Regulation (EU) No [xxx/2013];
 - (b) falling within the same propulsion family according to the criteria set-out in Annex X.
- (18) 'periodically regenerating system' means an anti-pollution device (e.g. catalytic converter, particulate trap) that requires a periodical regeneration process in less than 4,000 km of normal vehicle operation. During cycles where regeneration occurs, emission standards can be exceeded. If a regeneration of an anti-pollution device occurs at least once per Type I test and that has already regenerated at least once during vehicle preparation cycle, it will be considered as a continuously regenerating system which does not require a special test procedure does not apply to continuously regenerating systems.
- (19) 'alternative fuel vehicle' means a vehicle designed to be capable of running on at least one type of fuel that is either gaseous at atmospheric temperature and pressure, or substantially non-mineral oil derived;
- (20) 'flex fuel H₂NG vehicle' means a flex fuel vehicle that can run on different mixtures of hydrogen and NG/biomethane;
- (21) 'hydrogen fuel cell vehicle' means a vehicle powered by a fuel cell that converts chemical energy from hydrogen into electric energy, for propulsion of the vehicle;

- (22) ‘parent vehicle’ means a vehicle representative for the propulsion family set-out in Annex X;
- (23) ‘original equipment pollution control devices’ mean pollution control devices such as oxygen sensors, catalytic converters, assemblies of catalytic converters, particulate traps or carbon canisters for evaporative emission control covered by the type-approval and originally delivered for the vehicle;
- (24) ‘replacement pollution control devices’ means pollution control devices such as oxygen sensors, catalytic converters, assemblies of catalytic converters, particulate traps or carbon canisters for evaporative emission control intended to replace an original equipment pollution control device on a vehicle type-approved in accordance with Appendix x which can be type-approved as a separate technical unit in accordance with Regulation (EU) No [xxx/2013];
- (25) ‘catalytic converter’ means...;
- (26) ‘original replacement catalytic converter’ means a catalytic converter or an assembly of catalytic converters whose types are indicated in the information folder but are offered on the market as separate technical units by the holder of the vehicle type-approval;
- (27) ‘type of pollution control device’ means a pollution control device that does not differ in its essential environmental performance and design characteristics.
- (28) ‘type of catalytic converter’ means a catalytic converter that does not differ in such essential respects as the following:
- (a) number of coated substrates, structure and material;
 - (b) type of catalytic activity (oxidising, three-way, etc.);
 - (c) volume, ratio of frontal area and substrate length;
 - (d) catalyst material content;
 - (e) catalyst material ratio;
 - (f) cell density;
 - (g) dimensions and shape;
 - (h) thermal protection;
 - (i) inseparable exhaust manifold, catalyst and/or muffler integrated in the exhaust system of a vehicle or separable exhaust system units that can be replaced.
- (29) ‘vehicle type with regard to environmental performance’ means L-category vehicles which do not differ in such essential respects as the following:
- (a) the equivalent inertia determined in relation to the reference mass, determined in accordance with appendixes 5, 7 or 8;

- (b) the characteristics of the propulsion set-out in Annex X regarding propulsion family;
- (30) ‘reference mass’ means the actual mass of the L-category vehicle determined in accordance with Article 2 of Regulation (EU) No [xxx/2013] regarding vehicle construction;
- (31) ‘drive train’ means the part of the powertrain after the output of the propulsion(s) including , the (torque converter) clutch(es), the transmission and its control, either a drive shaft or belt drive or chain drive, the differentials, the final drive, and the driven wheel tyre (radius);
- (32) ‘variable cam phasing or variable valve timing’ means allowing the lift, the opening and closing duration and/or timing of the intake and/or exhaust valves to be modified while the engine is in operation;
- (33) ‘stop-start system’ means automatic stop and start of the engine to reduce the amount of idling, thereby reducing fuel consumption, pollutant and CO₂ emissions;
- (34) ‘software’ of the powertrain / engine or drive train control units means a set of algorithms concerned with the operation of powertrain, engine or drive train data processing systems, containing an ordered sequence of instructions that change the state of the powertrain, engine or drive train control unit;
- (35) ‘calibration’ of the powertrain / engine or drive train control unit means the application specific set of data maps and parameters used by the control unit's software to tune the vehicle's powertrain / engine or drive train;
- (36) ‘powertrain control unit’ means a combined control unit of combustion engine(s), electric traction motors and/or drive train systems such as the transmission and/or clutch;
- (37) ‘engine control unit’ means the onboard computer that partly or entirely controls the engine(s);
- (38) ‘drive train control unit’ means the onboard computer that partly or entirely controls the vehicle's drive train;
- (39) ‘communication protocol’ means a system of digital message formats and rules for exchanging those messages in or between computing systems or units;
- (40) ‘sensor’ means a converter that measures a physical quantity or state and converts it into an electric signal that is used as input to a control unit;
- (41) ‘actuator’ means a converter of an output signal from a control unit into motion, heat or other physical state in order to control the powertrain, engine(s) or drive train;
- (42) ‘common rail’ means a fuel supply system to the engine in which a common high pressure;

- (43) ‘carburettor’ means a device that blends fuel and air into a mixture that can be combusted in a combustion engine;
- (44) ‘scavenging port’ means a connector between crankcase and combustion chamber of a two-stroke engine through which the fresh charge of air, fuel and lubrication oil mixture enters the combustion chamber;
- (45) ‘air induction system’ or ‘air intake system’ means a system composed of components allowing the fresh air charge or air-fuel mixture to enter the engine and includes if fitted the air filter, intake pipes, resonator(s), the throttle body and the intake manifold of an engine;
- (46) ‘boost control’ means a device to control the boost level produced in the induction system of a turbocharged or supercharged engine;
- (47) ‘turbocharger’ means an exhaust gas turbine-powered centrifugal compressor boosting the amount of air charge into the combustion engine thereby increasing propulsion performance;
- (48) ‘super-charger’ means an intake air compressor used for forced induction of a combustion engine thereby increasing propulsion performance;
- (49) ‘intercooler’ means a heat exchanger that removes waste heat from the compressed air by a charger before entering into the engine thereby improving volumetric efficiency by increasing intake air charge density;
- (50) ‘electronic throttle control’ abbreviated as ETC means the control system consisting of sensing of driver input via the accelerator pedal or handle, data processing by the control unit(s), resulting actuation of the throttle and throttle position feedback to the control unit in order to control the air charge to the combustion engine;
- (51) ‘manpower – electric hybrid vehicle’ means a vehicle designed to pedal equipped with an auxiliary electric propulsion to assist with pedalling;
- (52) ‘fuel cell’ means a converter of chemical energy from hydrogen into electric energy, for propulsion of the vehicle;

Definitions related to test type II, emissions of tailpipe emissions (increased) idle / free acceleration test

- (53) ‘smoke opacity’ means an optical measurement of the density of particulate matter in the exhaust flow of an engine and is expressed in m^{-1} ;

Definitions related to test type III, emissions of crankcase gases

- (54) ‘engine crankcase’ means the spaces in or external to an engine which are connected to the oil sump by internal or external ducts through which gases and vapour can escape;

Definitions related to test type IV, evaporative emissions

- (55) ‘tank breathing losses’ are hydrocarbon emissions caused by temperature changes in the fuel tank (assuming a ratio of $C_1H_{2.33}$);
- (56) ‘hot soak losses’ are hydrocarbon emissions arising from the fuel system of a stationary vehicle after a period of driving (assuming a ratio of $C_1 H_{2.20}$);

Definitions related to test type V, durability of pollution control devices

- (57) ‘mileage accumulation’ means a representative test vehicle or a fleet of representative test vehicles driving a predefined distance as set out in paragraph 3 of Article 23 and in part A of Annex VII, both of Regulation (EU) No [xxxx/2013] according to the requirements set-out in Annex V to Regulation (EU) No [xxxx/2013].

Definitions related to test type VII, measurement of CO₂ emissions, fuel consumption, electric energy consumption and electric range determination

- (58) ‘combustion engine vehicle’ means vehicle powered by an internal or external combustion engine only;
- (59) ‘electric powertrain’ means a system consisting of one or more electric energy storage devices (e.g. a battery, electromechanical flywheel or super capacitor), one or more electric power conditioning devices and one or more electric machines that convert stored electric energy to mechanical energy delivered at the wheels for propulsion of the vehicle;
- (60) ‘electric range’ means for vehicles powered by an electric powertrain only or by a hybrid electric powertrain with off-vehicle charging, means distance that can be driven electrically on one fully charged battery (or other electric energy storage device) as measured according to the procedure described in Appendix x;
- (61) ‘OVC range’ means the total distance covered during complete combined cycles run until the energy imparted by external charging of the battery (or other electric energy storage device) is depleted, as measured according to the procedure described in sub-appendix 3C of Annex VI;
- (62) ‘maximum thirty minutes speed of a vehicle’ means the maximum achievable vehicle speed measured during 30 minutes as a result of the 30 minute power set-out in UNECE Regulation No 85;

Definitions related to testing procedures and technical requirements on propulsion performance

- (63) ‘approval of the propulsion performance of a vehicle’ means the approval of a vehicle type or variant with regard to the performance of the propulsion(s) regarding the following conditions:
- (a) the maximum design vehicle speed(s);
 - (b) the maximum continuous rated torque or maximum net torque;
 - (c) the maximum continuous rated power or the maximum net power;

- (d) the maximum total torque and power in case of a hybrid application.
- (64) ‘net power’ means the power available on the test bench at the end of the crankshaft or equivalent component at the speed laid down by the manufacturer, together with the accessories listed in tables Ap2.1-1 or Ap2.2-1 of Annex IX. If the power can be measured only with the gearbox fitted to the propulsion the efficiency of the gearbox shall be taken into account;
- (65) ‘maximum net power’ means the maximum net power output measured from a propulsion that includes (a) combustion engine(s) under full engine load;
- (66) ‘torque’ means the torque measured under the conditions laid down in xx. of Annex IX;
- (67) ‘maximum torque’ means the maximum torque value measured under full engine load;
- (68) ‘accessories’ means all apparatus and devices listed in table Ap2.1-1 or Ap2.2-1 of Annex IX;
- (69) ‘standard-production equipment’ or ‘series-mounted equipment’ means all equipment intended by the manufacturer for a specific application;
- (70) ‘propulsion-type’ means (a) propulsion(s) whose characteristic(s) do not differ in any fundamental respect;
- (71) ‘power controlled pedal assistance’ means the auxiliary propulsion power related to the driver’s pedal power not exceeding three times the actual pedal power;
- (72) ‘driver’s pedal power’ means the power exerted on the pedals by the driver.

CHAPTER II

OBLIGATIONS OF MANUFACTURERS REGARDING THE ENVIRONMENTAL PERFORMANCE OF VEHICLES

Article 3 ***Manufacturers' obligations***

1. In order to comply with the emission performance limits and requirements laid down in Articles 23 and 24 and Annexes V, VI and VII to Regulation (EU) No [xxx/2013], the manufacturer shall equip L-category vehicles with systems, components and separate technical units affecting its environmental performance to be designed, constructed and assembled so as to enable the vehicle in normal use and maintained according to the prescriptions of the manufacturer to comply with the detailed technical requirements and testing procedures laid down in this Regulation. In accordance with Articles 5 to 12, the manufacturer shall demonstrate to the approval authority by means of physical demonstration testing that the L-category vehicles made available on the market, registered or entering into service in the Union comply with the environmental requirements of Articles 23 and 24 of Regulation (EU) No [xxx/2013] and comply with the detailed technical requirements and test procedures laid down in this Regulation.

2. If the manufacturer modifies the characteristics of the emission abatement system or any of the emission relevant component performance after the approved vehicle type is placed on the market, this shall be reported to the approval authority without delay. The manufacturer shall provide evidence to the approval authority that the changed emission abatement system or component characteristics do not worsen the environmental performance of a vehicle relative to the environmental performance of the vehicle demonstrated at type-approval.
3. The manufacturer shall demonstrate that replacement pollution control devices requiring type approval that are made available on the market or are entering into service in the Union are approved in accordance with the requirements of Regulation (EU) No [xxx/2013] and with the detailed technical requirements and test procedures in this Regulation.
4. A L-category vehicle equipped with a replacement pollution control device shall meet the same environmental test requirements and limit values than a vehicle equipped with an original equipment pollution control device up to and including the durability requirements set out in paragraphs 3 of Article 23 from Regulation (EU) No [xxx/2013].
5. For hybrid applications or applications equipped with a stop start system the manufacturer shall provide a 'service mode' that makes it possible for a hybrid vehicle or a vehicle equipped with a stop-start system, subject to environmental and propulsion performance testing or inspection, to continuously run the fuel consuming engine. If this inspection or test execution requires a special procedure, this shall be detailed in the service manual (or equivalent media). This special procedure shall not require the use of special equipment other than that provided with the vehicle.

Article 4

Technical specifications on environmental requirements and test procedures

1. For the purpose of accepting a vehicle to be type-approved the test types referred to in Annex V(A) of Regulation (EU) No [xxx/2013] shall be performed in accordance with the test procedures laid down in this Regulation.
2. In particular the test types I to IX (test type VI was not assigned) specified in Articles 5 to 12 shall be conducted to prove the environmental performance of the L-category vehicle to be type-approved in accordance with the technical details laid down in this Regulation.
3. The type approval regarding test types I, II, III, IV, V, VII and VIII shall be extended to different vehicle variants, versions and propulsion families, provided that the vehicle version, propulsion and/or pollution control system parameters specified in Annex X are identical or remain within the prescribed and declared tolerances.
4. Hybrid applications or applications equipped with a stop-start system shall be tested with the fuel consuming engine running if specified in the test procedure.
5. In addition the following environmental requirements shall be complied with, if applicable, related to:

- (a) reference fuels, such as the ones for petrol, diesel, gaseous and liquefied gaseous fuels, bio fuels such as bio ethanol, biodiesel and biogas, all according to appendix 2 of Annex I;
- (b) hybrid vehicle requirements according to appendix 11 of Annex I;
- (c) alternative fuel vehicle requirements according to appendix 12 of Annex I;
- (d) vehicles equipped with a periodically regenerating exhaust after treatment system according to appendix 13 of Annex I;
- (e) requirements for small series manufacturers;
- (f) extension of type approvals;
- (g) test equipment;

Article 5

Test type I requirements: tailpipe emissions test procedure after cold start

The detailed technical specifications of Test type I referred to in Annex V (A) of Regulation (EU) No [xxx/2013] are laid down in Annex I of this Regulation.

Article 6

Test type II tests, tailpipe emissions at (increased) idle / free acceleration test procedure

The detailed technical specifications of Test type II referred to in Annex V (A) of Regulation (EU) No [xxx/2013] are laid down in Annex II of this Regulation.

Article 7

Test type III requirements: emission test procedure of crankcase gases

The detailed technical specifications of Test type III referred to in Annex V (A) of Regulation (EU) No [xxx/2013] are laid down in Annex III of this Regulation.

Article 8

Test type IV requirements: evaporative emission test procedure

The detailed technical specifications of Test type IV referred to in Annex V (A) of Regulation (EU) No [xxx/2013] are laid down in Annex IV of this Regulation.

Article 9

Test type V requirements: durability test procedure of pollution control devices

The detailed technical specifications of Test type V referred to in Annex V (A) of Regulation (EU) No [xxx/2013] are laid down in Annex V of this Regulation.

Article 10

Test type VII requirements: measurement of CO₂ emissions, fuel consumption, electric energy consumption and electric range determination tests

The detailed technical specifications of Test type VII referred to in Annex V (A) of Regulation (EU) No [xxx/2013] are laid down in Annex VI of this Regulation.

Article 11

Test type VIII requirement: environmental and functional onboard diagnostic (OBD) tests

The detailed technical specifications of Test type VIII referred to in Annex V (A) of Regulation (EU) No [xxx/2013] are laid down in Annex VII of this Regulation.

Article 12

Test type IX requirements: sound level tests

The detailed technical specifications of Test type IX referred to in Annex V (A) of Regulation (EU) No [xxx/2013] are laid down in Annex VIII of this Regulation.

**CHAPTER III
OBLIGATIONS OF MANUFACTURERS REGARDING THE
PROPULSION PERFORMANCE OF VEHICLES**

Article 13

General obligations

1. The manufacturer shall demonstrate the propulsion performance of the L-category vehicle type to the approval authority under the testing requirements laid down in this Regulation prior to making available on the market of an L-category vehicle.
2. The manufacturer shall ensure that the propulsion performance of the L-category vehicle type shall not exceed the propulsion performance as reported to the approval authority in the information folder when making available on the market of the L-category vehicle, when registering it or before its entry into service.
3. The manufacturer shall demonstrate that a replacement system, component or separate technical unit placed on the market or entering into service in the Union is approved in accordance with the propulsion performance test requirements laid down in this Regulation. A vehicle equipped with a replacement system, component or separate technical unit shall not exceed the propulsion performance of a vehicle equipped with the original systems, components or separate technical units.

Article 14
Requirements on propulsion performance

The detailed technical propulsion performance specifications to measure maximum design vehicle speed, maximum torque and maximum power referred to in Annex II (A) of Regulation (EU) No [xxx/2013] , are laid down in Annex IX of this Regulation.

CHAPTER IV
OBLIGATIONS OF MEMBER STATES

Article 15
Type approval

1. In accordance with Article 23 and with effect from the application date laid down in Article 82 of Regulation (EU) No [xxx/2013], if a manufacturer so requests, the national authorities may not, on grounds relating to the environmental performance of vehicle, refuse to grant EU type approval or national type approval for a new type of vehicle, or prohibit the making available on the market, registration, or entry into service of a vehicle, system, component or separate technical unit, where the vehicle concerned complies with Regulation (EU) No [xxx/2013] and the detailed test requirements laid down in this Regulation , and in particular with:
 - (a) the Euro 4 environmental limit values set out in Annexes VI (A1), VI (B1), VI (C1), VI (D, Euro 4) and VII to Regulation (EU) No [xxx/2013];
 - (h) with the Euro 5 environmental limit values set out in Annexes VI (A2), VI (B2), VI (C2), VI (D, Euro 5) and VII to Regulation (EU) No [xxx/2013].
2. In accordance with Article 23 and with effect from the dates laid down in Annex IV to Regulation (EU) No [xxx/2013] national authorities shall, in the case of new vehicles that do not comply with Regulation (EU) No [xxx/2013] and this Regulation, and in particular with the Euro stages referred to in paragraph 1, consider certificates of conformity containing previous environmental limit values to be no longer valid for the purposes of Article 43(1) of Regulation (EU) No [xxx/2013] and shall, on grounds relating to emissions or fuel consumption, prohibit the making available on the market, registration, or entry into service of such vehicles.
3. If Article 77(5) of Regulation (EU) No [xxx/2013] is applied the type-approved vehicle shall be classified according to Annex I of that Regulation.

Article 16
Type approval of replacement pollution control devices

1. For new replacement pollution control devices intended to be fitted on vehicles approved under this Regulation, national authorities shall prohibit their making available on the market or installation on a vehicle if they are not of a type in respect of which a type approval has been granted in compliance with Article 23(10) of Regulation (EU) No [xxx/2013] and with this Regulation.

2. National authorities may continue to grant extensions to EU type approvals for replacement pollution control devices intended for standards preceding this Regulation under the terms which originally applied. National authorities shall prohibit the making available on the market or installation on a vehicle of such replacement pollution control devices unless they are of a type in respect of which a relevant type approval has been granted.
3. Replacement pollutant control devices intended to be fitted to vehicles type-approved in compliance with this Regulation shall be tested in accordance with appendix 10 to Annex I and Annex V concerning durability.
4. Original replacement pollutant devices, which are of a type covered and are intended for fitment to a vehicle to which the relevant type approval document refers, do not need to comply with the test requirements of Appendix 10 to Annex I, provided they fulfil the requirements of paragraphs 5.2.1 of appendix 10 to Annex I.

CHAPTER V FINAL PROVISIONS

Article 17

Amendment of Annex V(A) of Regulation (EU) No xxx/2013]

Annex V(A) of Regulation (EU) No [xxx/2013] shall be amended according to the details laid down in Annex XI.

Article 18

Entry into force and application

1. This Regulation shall enter into force on the 20th day following that of its publication in the *Official Journal of the European Union*.
2. It shall apply [date of application] of Regulation (EU) No xxx/2013]

This Regulation shall be binding in its entirety and directly applicable in the Member States in accordance with the Treaties.

Done at Brussels,

*For the Commission
The President*

On behalf of the President

[Position]

LIST OF ANNEXES

Annex Number	Annex title	Page #
I	Test type I requirements: tailpipe emissions after cold start	
II	Test type II requirements: tailpipe emissions at (increased idle) / free acceleration test	
III	Test type III requirements: emissions of crankcase gases	
IV	Test type IV requirements: evaporative emissions	
V	Test type V requirements: durability of pollution control devices	
VI	Test type VII requirements: measurement of CO ₂ emissions, fuel consumption, electric energy consumption and electric range determination	
VII	Test type VIII requirements: environmental onboard diagnostic (OBD) tests	
VIII	Test type IX requirements: sound level	
IX	Test procedures and technical requirements on propulsion performance	
X	Vehicle and propulsion family definition	
XI	Amendment of Annex V to Regulation (EU) No [xxx/2013] t	

ANNEX I
Test type I requirements: tailpipe emissions after cold start

Appendix Number	Appendix title	Page #
1	Used symbols in Annex I	.
2	Reference fuels	
3	Chassis dynamometer system	
4	Dilution system	
5	Equivalent inertia mass and running resistance	
6	Driving cycles for Type I tests	
7	Road tests of a L-category vehicle equipped with one wheel on the powered axle or twinned wheels for the determination of test bench settings	
8	Road tests of a L-category vehicle with two or more wheels on the powered axle(s) for the determination of test bench settings.	
9	Explanatory note on gearshift procedure for the Type I test	
10	Type-approval tests of replacement pollution control devices for a L-category vehicle as separate technical unit	
11	Type I test procedure for a hybrid L-category vehicle	
12	Type I test procedure for a L-category vehicle fuelled with LPG, NG/biomethane, flex fuel H ₂ NG or Hydrogen	
13	Type I test procedure for a L-category vehicle equipped with a periodically regenerating system	

1. Purpose

- 1.1. This Regulation provides a harmonized method for the determination of the levels of gaseous pollutant emissions and particulate matter, the emissions of carbon dioxide and the fuel consumption of the L-category vehicles in the scope of Regulation (EU) No [xxx/2013] that are representative for real world vehicle operation.
- 1.2. The results can build the basis for the limitation of gaseous pollutants and carbon dioxide and for the fuel consumption indicated by the manufacturer within the EU type approval procedures.

2. General requirements

- 2.1. The components liable to affect the emission of gaseous pollutants, carbon dioxide emissions and fuel consumption shall be so designed, constructed and assembled as to enable the vehicle in normal use, despite the vibration to which it may be subjected, to comply with the provisions of this Annex.

Note 1: The symbols used in Annex I are summarized in Appendix 1.

- 2.2. Any hidden strategy that 'optimises' the powertrain of the vehicle running the relevant emission laboratory test cycle in an advantageous way reducing tailpipe emissions and running significantly differently under real-world conditions is considered being a defeat strategy and is prohibited, unless the manufacturer has documented and declared this strategy to the satisfaction of the approval authority.

3. Performance requirements

The applicable performance requirements for EU type approval are referred to in Annexes VI (A), (B) and (C) to Regulation (EU) No [xxx/2013]

4. Test conditions

- 4.1. Test room and soak area

- 4.1.1. Test room.

The test room with the chassis dynamometer and the gas sample collection device shall have a temperature of $298\text{ K} \pm 5\text{ K}$ ($25\text{ °C} \pm 5\text{ °C}$). The room temperature shall be measured twice in the vicinity of vehicle cooling blower (fan), both before and after the Type I test.

- 4.1.2. Soak area.

The soak area shall have a temperature of $298\text{ K} \pm 5\text{ K}$ ($25\text{ °C} \pm 5\text{ °C}$) and be able to park the test vehicle to be preconditioned in accordance with paragraph 5.2.4. of this

Annex.

4.2. Test vehicle

4.2.1. General.

The test vehicle shall conform in all its components with the production series, or, if the L-category vehicle is different from the production series, a full description shall be given in the test report. In selecting the test vehicle, the manufacturer and the technical service shall agree to the satisfaction of the approval authority which L-category vehicle test model is representative for related vehicle variants.

4.2.2. Run-in.

The L-category vehicle shall be presented in good mechanical condition. It shall have been run in and driven at least 1,000 km before the test. The engine, transmission and L-category vehicle shall be properly run-in, in accordance with the manufacturer's requirements.

4.2.3. Adjustments.

The L-category vehicle shall be adjusted in accordance with the manufacturer's requirements, e.g. the viscosity of the oils, or, if the L-category vehicle is different from the production series, a full description shall be given in the test report.

4.2.4. Test mass and load distribution.

The test mass including the masses of the rider and the instruments shall be measured before the beginning of the tests. The distribution of the load between the wheels shall be in conformity with the manufacturer's instructions.

4.2.5. Tyres.

The tyres shall be of a type specified as original equipment by the vehicle manufacturer. The tyre pressures shall be adjusted to the specifications of the manufacturer or to those where the speed of the L-category vehicle during the road test and the L-category vehicle speed obtained on the chassis dynamometer are equalized. The tyre pressure shall be indicated in the test report.

4.3. L-category vehicle sub classification.

Figure 1-0 provides a graphical overview of the L-category vehicle sub classification in terms of engine capacity and maximum vehicle speed if subject to environmental test types I, VII and VIII, indicated by the (sub-) class numbers in the graph areas. The numerical values of the engine capacity and maximum vehicle speed shall not be rounded up or down.

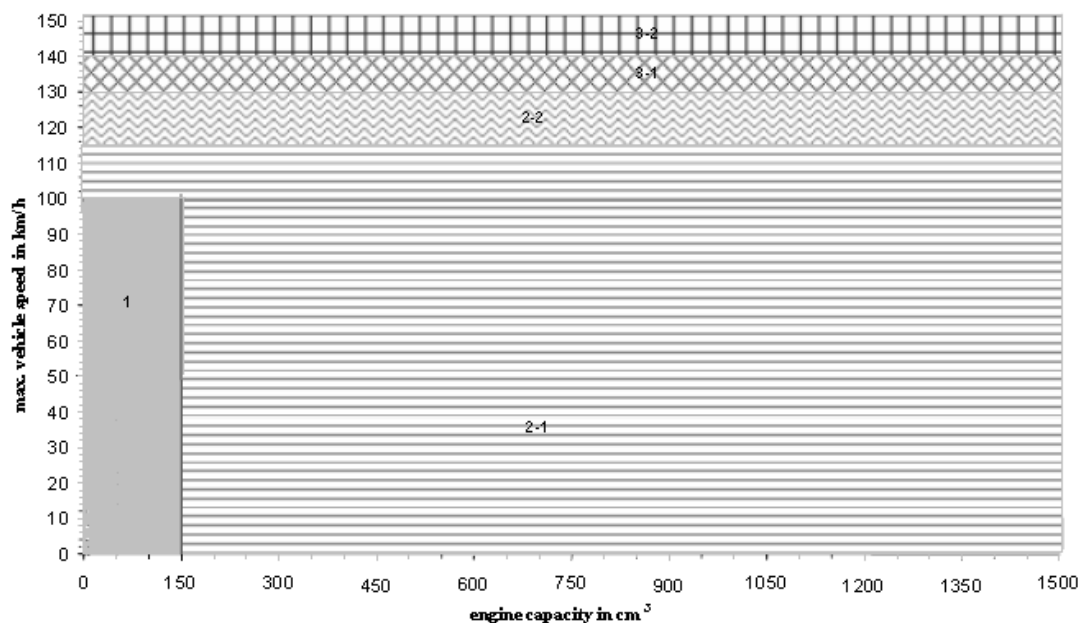


Figure 1-1: L-category vehicle sub classification for environmental testing, test types I, VII and VIII.

4.3.1. Class 1

L-category vehicles that fulfil the following specifications belong to class 1:

engine capacity < 150 cm ³ and $v_{\max} < 100$ km/h	class 1
---	---------

Table 1-1: sub classification criteria class 1 L-category vehicles

4.3.2. Class 2

L-category vehicles that fulfil the following specifications belong to class 2 and shall be sub classified in:

Engine capacity < 150 cm ³ and $100 \text{ km/h} \leq v_{\max} < 115 \text{ km/h}$ or engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} < 115 \text{ km/h}$	subclass 2-1,
$115 \text{ km/h} \leq v_{\max} < 130 \text{ km/h}$	subclass 2-2.

Table 1-2: sub classification criteria class 2 L-category vehicles

4.3.3. Class 3

L-category vehicles that fulfil the following specifications belong to class 3 and shall be sub classified in:

$130 \leq v_{\max} < 140$ km/h	subclass 3-1,
$v_{\max} \geq 140$ km/h	subclass 3-2.

Table 1-3: sub classification criteria class 3 L-category vehicles

4.3.4. WMTC, test cycle parts

The WMTC test cycle (vehicle speed patterns) for Type I, VII and VIII environmental tests consist of up to three parts as set out in Appendix 6. Depending on the L-vehicle category subject to the WMTC laid down in paragraph 4.5.4.1. and its classification depending on engine displacement and maximum design vehicle speed according to paragraph 4.3 the following WMTC test cycle parts have to be run:

L-category vehicle (sub)class:	Applicable part(s) of the WMTC as specified in appendix 6
Class 1:	part 1, reduced vehicle speed in cold condition, followed by part 1 reduced vehicle speed in hot condition.
Class 2 subdivided in:	
Subclass 2-1:	part 1, reduced vehicle speed in cold condition, followed by part 2, reduced vehicle speed in hot condition.
Subclass 2-2:	part 1 in cold condition, followed by part 2 in hot condition.
Class 3 subdivided in:	
Subclass 3-1:	part 1 in cold condition, followed by part 2 in hot condition, followed by part 3 reduced vehicle speed in hot condition.
Subclass 3-2:	part 1 in cold condition, followed by part 2 in hot condition, followed by part 3 in hot condition.

Table 1-4: WMTC test cycle parts for class 1,2 and 3 L-category vehicles

4.4. Specification of the reference fuel.

The appropriate reference fuels as specified in Annex I, Appendix 2 shall be used for testing. For the purpose of calculation mentioned in Annex VI, Appendix 1, chapter 1.4 for liquid fuels the density measured at 15 °C will be used.

4.5. Type I test

4.5.1. Driver.

The test driver shall have a mass of 75 kg ± 5 kg.

4.5.2. Test bench specifications and settings.

4.5.2.1. The dynamometer shall have a single roller for two-wheel L-category vehicles with a diameter of at least 0.400 m. A chassis dynamometer equipped with dual rollers is permitted when testing tricycles with two front wheels or quadricycles.

4.5.2.2. The dynamometer shall be equipped with a roller revolution counter for measuring actual distance travelled.

4.5.2.3. Flywheels of dynamometer or other means shall be used to simulate the inertia specified in paragraph 5.2.2..

4.5.2.4. The dynamometer rollers shall be clean, dry and free from anything, which might cause the tyre to slip.

4.5.2.5. Cooling fan specifications as follows:

4.5.2.5.1 Throughout the test, a variable speed cooling blower (fan) shall be positioned in front of the L-category vehicle, so as to direct the cooling air to the L-category vehicle in a manner, which simulates actual operating conditions. The blower speed shall be such that, within the operating range of 10 to 50 km/h, the linear velocity of the air at the blower outlet is within ±5 km/h of the corresponding roller speed. At the range of over 50 km/h, the linear velocity of the air shall be within ±10 per cent. At roller speeds of less than 10 km/h, air velocity may be zero.

4.5.2.5.2 The above mentioned air velocity shall be determined as an averaged value of 9 measuring points which are located at the centre of each rectangle dividing the whole of the blower outlet into 9 areas (dividing both of horizontal and vertical sides of the blower outlet into 3 equal parts). Each value at those 9 points shall be within 10 per cent of the averaged value of themselves.

4.5.2.5.3 The blower outlet shall have a cross section area of at least 0.4 m² and the bottom of the blower outlet shall be between 5 and 20 cm above floor level. The blower outlet shall be perpendicular to the longitudinal axis of the L-category vehicle between 30 and 45 cm in front of its front wheel. The device used to measure the linear velocity of the air shall be located at between 0 and 20 cm from the air outlet.

4.5.2.6. The detailed requirements regarding test bench specifications are listed in Appendix 1.

4.5.3. Exhaust gas measurement system

4.5.3.1. The gas-collection device shall be a closed type device that can collect all exhaust gases at the L-category vehicle exhaust outlet(s) on condition that it satisfies the

backpressure condition of $\pm 125 \text{ mm H}_2\text{O}$. An open system may be used as well if it is confirmed that all the exhaust gases are collected. The gas collection shall be such that there is no condensation, which could appreciably modify that nature of exhaust gases at the test temperature. The system of gas-collection devices is shown in Figure 1-2, for example:

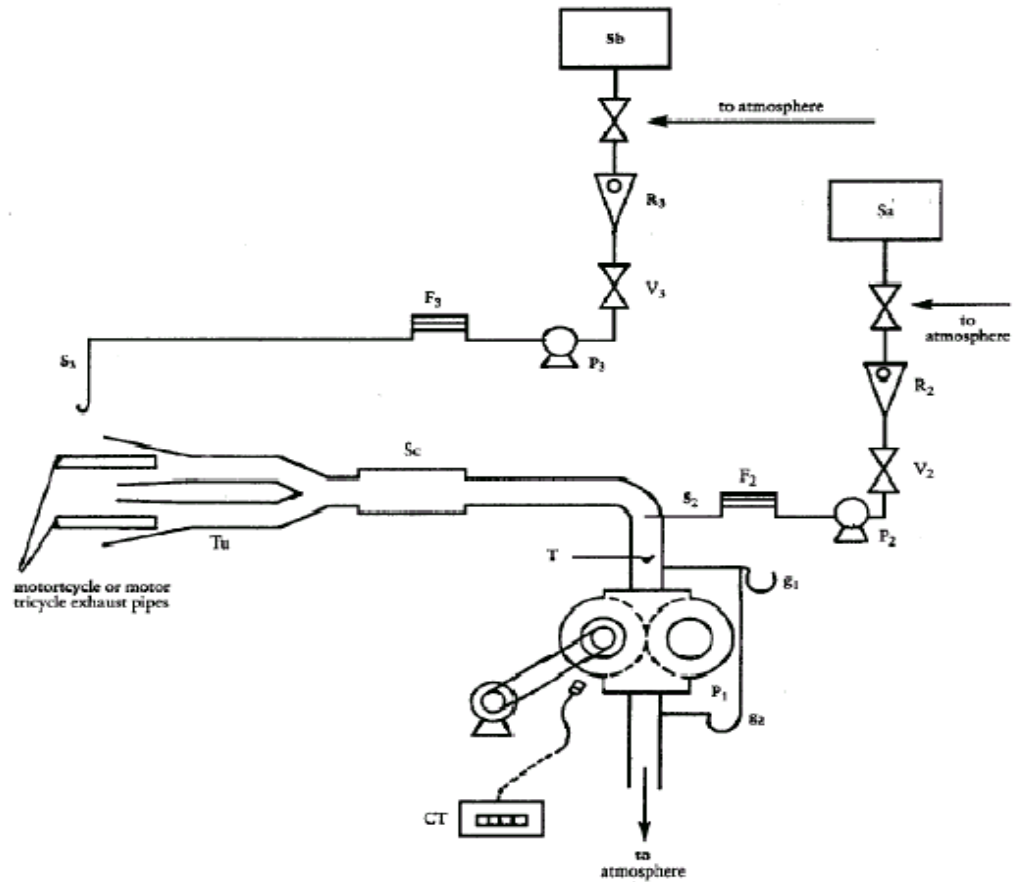


Figure 1-2: Equipment for sampling the gases and measuring their volume

- 4.5.3.2. A connecting tube between the device and the exhaust gas sampling system. This tube and the device shall be made of stainless steel, or of some other material, which does not affect the composition of the gases collected, and which withstands the temperature of these gases.
- 4.5.3.3. A heat exchanger capable of limiting the temperature variation of the diluted gases in the pump intake to $\pm 5 \text{ }^\circ\text{C}$ throughout the test. This exchanger shall be equipped with a preheating system able to bring the exchanger to its operating temperature (with the tolerance of $\pm 5 \text{ }^\circ\text{C}$) before the test begins.
- 4.5.3.4. A positive displacement pump to draw in the diluted exhaust mixture. This pump is

equipped with a motor having several strictly controlled uniform speeds. The pump capacity shall be large enough to ensure the intake of the exhaust gases. A device using a critical flow venture (CFV) may also be used.

- 4.5.3.5. A device (T) to allow continuous recording of the temperature of the diluted exhaust mixture entering the pump.
- 4.5.3.6. Two gauges; the first to ensure the pressure depression of the dilute exhaust mixture entering the pump, relative to atmospheric pressure, the other to measure the dynamic pressure variation of the positive displacement pump
- 4.5.3.7. A probe located near to, but outside the gas-collecting device, to collect, through a pump, a filter and a flow meter, samples of the dilution air stream, at constant flow rates throughout the test.
- 4.5.3.8. A sample probe pointed upstream into the dilute exhaust mixture flow, upstream of the positive displacement pump to collect, through a pump, a filter and a flow meter, samples of the dilute exhaust mixture, at constant flow rates, throughout the test. The minimum sample flow rate in the two sampling devices described above and in paragraph 4.5.3.7. shall be at least 150 litre/hour.
- 4.5.3.9. Three way valves on the sampling system described in paragraphs 4.5.3.7. and 4.5.3.8. to direct the samples either to their respective bags or to the outside throughout the test.
- 4.5.3.10. Gas-tight collection bags
- 4.5.3.10. For dilution air and dilute exhaust mixture of sufficient capacity so as not to impede normal sample flow and which will not change the nature of the pollutants concerned.
 - 1.
- 4.5.3.10. The bags shall have an automatic self-locking device and shall be easily and tightly fastened either to the sampling system or the analysing system at the end of the test.
 - 2.
- 4.5.3.11. A revolution counter to count the revolutions of the positive displacement pump throughout the test.

Note 2: Good care shall be taken on the connecting method and the material or configuration of the connecting parts because there is a possibility that each section (e.g. the adapter and the coupler) of the sampling system becomes very hot. If the measurement cannot be performed normally due to heat-damages of the sampling system, an auxiliary cooling device may be used as long as the exhaust gases are not affected.

Note 3: Open type devices have risks of incomplete gas collection and gas leakage into the test cell. There shall be no leakage throughout the sampling period.

Note 4: If a constant CVS flow rate is used throughout the test cycle that includes low and high speeds all in one (i.e. part 1, 2 and 3 cycles) special attention shall be paid to the higher risk of water condensation in the high speed range.

4.5.3.12. Particulate mass emissions measurement equipment

4.5.3.12.1 Specification

4.5.3.12.1.1. System Overview

4.5.3.12.1.1.1. The particulate sampling unit shall consist of a sampling probe located in the dilution tunnel, a particle transfer tube, a filter holder, a partial-flow pump, and flow rate regulators and measuring units.

4.5.3.12.1.1.2. It is recommended that a particle size pre-classifier (e.g. cyclone or impactor) be employed upstream of the filter holder. However, a sampling probe, acting as an appropriate size-classification device such as that shown in Figure 1-1, is acceptable.

4.5.3.12.1.2. General Requirements

4.5.3.12.1.2.1. The sampling probe for the test gas flow for particulates shall be so arranged within the dilution tract that a representative sample gas flow can be taken from the homogeneous air/exhaust mixture.

4.5.3.12.1.2.2. The particulate sample flow rate shall be proportional to the total flow of diluted exhaust gas in the dilution tunnel to within a tolerance of ± 5 per cent of the particulate sample flow rate.

4.5.3.12.1.2.3. The sampled dilute exhaust gas shall be maintained at a temperature below 325 K (52 C) within 20 cm upstream or downstream of the particulate filter face, except in the case of a regeneration test where the temperature shall be below 192 °C.

4.5.3.12.1.2.4. The particulate sample shall be collected on a single filter mounted within a holder in the sampled dilute exhaust gas flow

4.5.3.12.1.2.5. All parts of the dilution system and the sampling system from the exhaust pipe up to the filter holder, which are in contact with raw and diluted exhaust gas, shall be designed to minimise deposition or alteration of the particulates. All parts shall be made of electrically conductive materials that do not react with exhaust gas components, and shall be electrically grounded to prevent electrostatic effects.

4.5.3.12. If it is not possible to compensate for variations in the flow rate, provision shall be

1.2.6. made for a heat exchanger and a temperature control device as specified in Appendix 2 so as to ensure that the flow rate in the system is constant and the sampling rate accordingly proportional.

4.5.3.12. Specific Requirements
1.3.

4.5.3.12. PM Sampling Probe
1.3.1.

4.5.3.12. The sample probe shall deliver the particle-size classification performance described in paragraph 4.5.3.12.1.3.1.4. It is recommended that this performance be achieved by the use of a sharp-edged, open-ended probe facing directly into the direction of flow plus a pre-classifier (cyclone impactor, etc.). An appropriate sampling probe, such as that indicated in Figure 1-1, may alternatively be used provided it achieves the pre-classification performance described in paragraph 4.5.3.12.1.3.1.4.
1.3.1.1.

4.5.3.12. The sample probe shall be installed near the tunnel centreline, between 10 and 20 tunnel diameters downstream of the exhaust gas inlet to the tunnel and have an internal diameter of at least 12 mm.
1.3.1.2.

If more than one simultaneous sample is drawn from a single sample probe, the flow drawn from that probe shall be split into identical sub-flows to avoid sampling artefacts.

If multiple probes are used, each probe shall be sharp-edged, open-ended and facing directly into the direction of flow. Probes shall be equally spaced around the central longitudinal axis of the dilution tunnel, with the spacing between probes at least 5 cm.

4.5.3.12. The distance from the sampling tip to the filter mount shall be at least five probe diameters, but shall not exceed 1,020 mm.
1.3.1.3.

4.5.3.12. The pre-classifier (e.g. cyclone, impactor, etc.) shall be located upstream of the filter holder assembly. The pre-classifier 50 per cent cut point particle diameter shall be between 2.5 µm and 10 µm at the volumetric flow rate selected for sampling particulate mass emissions. The pre-classifier shall allow at least 99 per cent of the mass concentration of 1 µm particles entering the pre-classifier to pass through the exit of the pre-classifier at the volumetric flow rate selected for sampling particulate mass emissions. However, a sampling probe, acting as an appropriate size-classification device, such as that shown in Figure 1-1, is acceptable as an alternative to a separate pre-classifier.
1.3.1.4.

4.5.3.12. Sample Pump and Flow Meter
1.3.2.

4.5.3.12. The sample gas flow measurement unit shall consist of pumps, gas flow regulators and flow measuring units.
1.3.2.1.

4.5.3.12. The temperature of the gas flow in the flow meter may not fluctuate by more than ± 3 K, except during regeneration tests on vehicles equipped with periodically regenerating after treatment devices. In addition, the sample mass flow rate shall remain proportional to the total flow of diluted exhaust gas to within a tolerance of ± 5 per cent of the particulate sample mass flow rate. Should the volume of flow change unacceptably as a result of excessive filter loading, the test shall be stopped. When it is repeated, the rate of flow shall be decreased.
1.3.2.2.

4.5.3.12. Filter and Filter Holder
1.3.3.

4.5.3.12. A valve shall be located downstream of the filter in the direction of flow. The valve shall be quick enough acting to open and close within 1 s of the start and end of test.
1.3.3.1.

4.5.3.12. It is recommended that the mass collected on the 47 mm diameter filter (P_e) is ≥ 20 μg and that the filter loading should be maximized consistent with the requirements of paragraphs 4.5.3.12.1.2.3. and 4.5.3.12.1.3.3.
1.3.3.2.

4.5.3.12. For a given test the gas filter face velocity shall be set to a single value within the range 20 cm/s to 80 cm/s unless the dilution system is being operated with sampling flow proportional to CVS flow rate.
1.3.3.3.

4.5.3.12. Fluorocarbon coated glass fibre filters or fluorocarbon membrane filters are required. All filter types shall have a 0.3 μm DOP (di-octylphthalate) or PAO (poly-alpha-olefin) CS 68649-12-7 or CS 68037-01-4 collection efficiency of at least 99 per cent at a gas filter face velocity of 5.33 cm/s.
1.3.3.4.

4.5.3.12. The filter holder assembly shall be of a design that provides an even flow distribution across the filter stain area. The filter stain area shall be at least 1,075 mm².
1.3.3.5.

4.5.3.12. Filter Weighing Chamber and Balance
1.3.4.

4.5.3.12. The microgram balance used to determine the weight of a filter shall have a precision (standard deviation) of 2 μg and resolution of 1 μg or better.
1.3.4.1.

It is recommended that the microbalance be checked at the start of each weighing session by weighing one reference weight of 50 mg. This weight shall be weighed three times and the average result recorded. If the average result of the weighing is ± 5 μg of the result from the previous weighing session then the weighing session and balance are considered valid.

The weighing chamber (or room) shall meet the following conditions during all filter

conditioning and weighing operations:

- Temperature maintained at 295 ± 3 K (22 ± 3 C);
- Relative humidity maintained at 45 ± 8 per cent;
- Dew point maintained at 9.5 C ± 3 C.

It is recommended that temperature and humidity conditions are recorded along with sample and reference filter weights.

4.5.3.12. Buoyancy Correction

1.3.4.2.

All filter weights shall be corrected for filter buoyancy in air.

The buoyancy correction depends on the density of the sample filter medium, the density of air, and the density of the calibration weight used to calibrate the balance. The density of the air is dependent on the pressure, temperature and humidity.

It is recommended that the temperature and dew point of the weighing environment are controlled to 22 C ± 1 C and dew point of 9.5 C ± 1 C respectively. However, the minimum requirements stated in paragraph 4.5.3.12.1.3.4.1. will also result in an acceptable correction for buoyancy effects. The correction for buoyancy shall be applied as follows:

$$m_{corr} = m_{uncorr} \cdot \left(\frac{1 - ((\rho_{air})/(\rho_{weight}))}{1 - ((\rho_{air})/(\rho_{media}))} \right)$$

where:

m_{corr} = PM mass corrected for buoyancy

m_{uncorr} = PM mass uncorrected for buoyancy

ρ_{air} = density of air in balance environment

ρ_{weight} = density of calibration weight used to span balance

ρ_{media} = density of PM sample medium (filter) with filter medium Teflon coated glass fibre (e.g. TX40): $\rho_{media} = 2,300$ kg/m³

ρ_{air} can be calculated as follows:

$$\rho_{air} = \frac{P_{abs} \cdot M_{mix}}{R \cdot T_{amb}}$$

where:

P_{abs} = absolute pressure in balance environment,

M_{mix} = molar mass of air in balance environment (28.836 gmol^{-1}),

R = molar gas constant ($8.314 \text{ Jmol}^{-1}\text{K}^{-1}$),

T_{amb} = absolute ambient temperature of balance environment.

The chamber (or room) environment shall be free of any ambient contaminants (such as dust) that would settle on the particulate filters during their stabilisation.

Limited deviations from weighing room temperature and humidity specifications will be allowed provided their total duration does not exceed 30 minutes in any one filter conditioning period. The weighing room should meet the required specifications prior to personal entrance into the weighing room. During the weighing operation no deviations from the specified conditions are permitted.

4.5.3.12. The effects of static electricity shall be nullified. This may be achieved by grounding
1.3.4.3. the balance through placement upon an antistatic mat and neutralisation of the particulate filters prior to weighing using a Polonium neutraliser or a device of similar effect. Alternatively nullification of static effects may be achieved through equalisation of the static charge.

4.5.3.12. A test filter shall be removed from the chamber no earlier than an hour before the test
1.3.4.4. begins.

4.5.3.12. Recommended system description
1.4.

Figure 1-3 is a schematic drawing of the recommended particulate sampling system. Since various configurations can produce equivalent results, exact conformance with this figure is not required. Additional components such as instruments, valves, solenoids, pumps and switches may be used to provide additional information and co-ordinate the functions of component systems. Further components that are not needed to maintain accuracy with other system configurations may be excluded if their exclusion is based upon good engineering judgement.

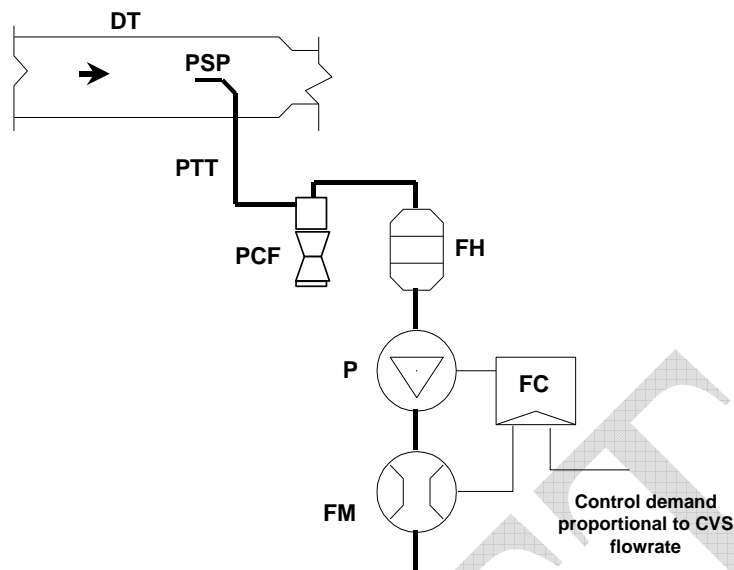


Figure 1-3: Particulate Sampling System

A sample of the diluted exhaust gas is taken from the full flow dilution tunnel DT through the particulate sampling probe PSP and the particulate transfer tube PTT by means of the pump P. The sample is passed through the particle size pre-classifier PCF and the filter holder(s) FH that contain the particulate sampling filter(s). The flow rate for sampling is set by the flow controller FC.

4.5.4. Driving schedules

4.5.4.1. Test cycles.

Test cycles (vehicle speed patterns), for the Type I test consists of up to three parts that are shown in Appendix 6. Depending on the vehicle (sub-)category the following test cycle parts have to be run:

Vehicle category	Vehicle category name	Test cycles
L1e-A	Powered cycle	ECE R47
L1e-B	Two-wheel moped	
L2e	Three-wheel moped	
L6e-A	Light On-road quad	
L6e-B	Light quadri-mobile	
L3e	Two-wheel motorcycle with and without side-car	WMTC, stage 2
L4e		
L5e-A		
L7e-A	Heavy on-road quad	
L5e-B	Commercial tricycle	ECE R40
L7e-B	All terrain vehicles	
L7e-C	Heavy quadric-mobile	

Table 1-5: Applicable test cycles for Euro 3 (Euro 4 for L3e motorcycles) and Euro 4 (Euro 5 for L3e motorcycles) Test type I.

Vehicle category	Vehicle category name	Test cycles
L1e-A	Powered cycle	Revised WMTC
L1e-B	Two-wheel moped	
L2e	Three-wheel moped	
L6e-A	Light On-road quad	
L6e-B	Light quadri-mobile	
L3e	Two-wheel motorcycle with and without side-car	
L4e		
L5e-A	Tricycle	
L7e-A	Heavy on-road quad	
L5e-B	Commercial tricycle	
L7e-B	All terrain vehicles	
L7e-C	Heavy quadri-mobile	

Table 1-6: Applicable test cycles for Euro 5 (Euro 6 for L3e motorcycles) Test type I.

4.5.4.2. Speed tolerances

- 4.5.4.2.1. The speed tolerance at any given time on the test cycles prescribed in paragraph 4.5.4.1. are defined by upper and lower limits. The upper limit is 3.2 km/h higher than the highest point on the trace within 1 second of the given time. The lower limit is 3.2 km/h lower than the lowest point on the trace within 1 second of the given time. Speed variations greater than the tolerances (such as may occur during gear changes) are acceptable provided they occur for

less than 2 seconds on any occasion. Speeds lower than those prescribed are acceptable provided the vehicle is operated at maximum available power during such occurrences. Figure 1-4 shows the range of acceptable speed tolerances for typical points.

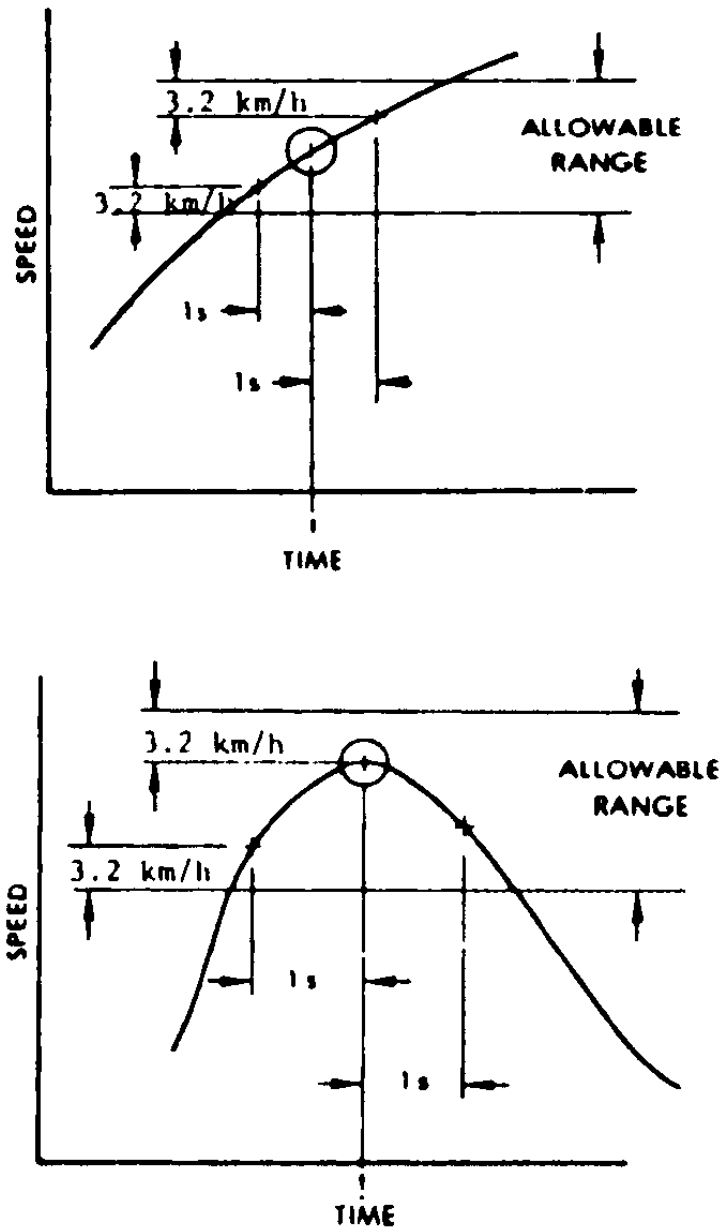


Figure 1-4: Drivers trace, allowable range

4.5.4.2.2. If the acceleration capability of the L-category vehicle is not sufficient to carry out the acceleration phases or if the maximum designed vehicle speed of the L-category vehicle is

lower than the prescribed cruising speed within the prescribed limits of tolerances, the L-category vehicle shall be driven with the throttle fully open, until the set speed shall be reached or maintaining the maximum designed vehicle speed achievable with fully opened throttle during the time that the set speed exceeds the maximum designed speed. In both cases, paragraph 4.5.4.2.1. is not applicable. The test cycle shall be normally carried on when the set speed is again lower than the maximum designed speed of the L-category vehicle.

- 4.5.4.2.3. If the period of deceleration is shorter than that prescribed for the corresponding phase, the set speed shall be restored by a constant vehicle speed or idling period merging into succeeding constant speed or idling operation. In that case, paragraph 4.5.4.2.1. is not applicable.
- 4.5.4.2.2. Apart from these exceptions the deviations of the roller speed from the set speed of the cycles shall meet the requirements described in paragraph 4.5.4.2.1. If not, the test results shall not be used for the further analysis and the run has to be repeated.
- 4.5.5. Gearshift prescriptions for the WMTC prescribed in appendix 6.
- 4.5.5.1. Test vehicles with automatic transmission.
 - 4.5.5.1.1. Vehicles equipped with transfer cases, multiple sprockets, etc., shall be tested in the manufacturer's recommended configuration for street or highway use.
 - 4.5.5.1.2. All tests shall be conducted with automatic transmissions in "Drive" (highest gear). Automatic clutch-torque converter transmissions may be shifted as manual transmissions at the option of the manufacturer
 - 4.5.5.1.3. Idle modes shall be run with automatic transmissions in "Drive" and the wheels braked.
 - 4.5.5.1.4. Automatic transmissions shall shift automatically through the normal sequence of gears. The torque converter clutch, if applicable, shall operate as under real-world conditions.
 - 4.5.5.1.5. The deceleration modes shall be run in gear using brakes or throttle as necessary to maintain the desired speed.
- 4.5.5.2. Test vehicles with manual transmission
 - 4.5.5.2.1. Mandatory Requirements
 - 4.5.5.2.1.1. Step 1 – Calculation of shift speeds.

Up-shift speeds ($v_{1 \rightarrow 2}$ and $v_{i \rightarrow i+1}$) in km/h during acceleration phases shall be calculated using the following formulas:

Equation 1-1:

$$v_{1 \rightarrow 2} = \left[(0.5753 \times e^{(-1.9 \times \frac{P_n}{m_k + 75})} - 0.1) \times (s - n_{idle}) + n_{idle} \right] \times \frac{1}{ndv_1}$$

Equation 1-2:

$$v_{i \rightarrow i+1} = \left[(0.5753 \times e^{(-1.9 \times \frac{P_n}{m_k + 75})} - 0.1) \times (s - n_{idle}) + n_{idle} \right] \times \frac{1}{ndv_i}, i = 2 \text{ to } ng - 1$$

where:

‘i’ is the gear number (≥ 2),

‘ng’ is the total number of forward gears,

‘ P_n ’ is the rated power in kW,

‘ m_k ’ is the kerb mass in kg,

‘ n_{idle} ’ is the idling speed in min^{-1} ,

‘s’ is the rated engine speed in min^{-1} ,

‘ ndv_i ’ is the ratio between engine speed in min^{-1} and vehicle speed in km/h in gear ‘i’

4.5.5.2.1.2. Downshift speeds ($v_{i \rightarrow i-1}$) in km/h during cruise or deceleration phases in gears 4 (4th gear) to ng shall be calculated using the following formula:

Equation 1-3:

$$v_{i \rightarrow i-1} = \left[(0.5753 \times e^{(-1.9 \times \frac{P_n}{m_k + 75})} - 0.1) \times (s - n_{idle}) + n_{idle} \right] \times \frac{1}{ndv_{i-2}}, i = 4 \text{ to } ng$$

where:

i is the gear number (≥ 4),

ng is the total number of forward gears,

P_n is the rated power in kW,

m_k is the kerb mass in kg,

n_{idle} is the idling speed in min^{-1} ,

s is the rated engine speed in min^{-1} ,

ndv_{i-2} is the ratio between engine speed in min^{-1} and vehicle speed in km/h in gear $i-2$.

The downshift speed from gear 3 to gear 2 ($v_{3 \rightarrow 2}$) shall be calculated using the following equation:

Equation 1-4:

$$v_{3 \rightarrow 2} = \left[(0.5753 \times e^{(-1.9 \times \frac{P_n}{m_k + 75})} - 0.1) \times (s - n_{idle}) + n_{idle} \right] \times \frac{1}{ndv_1}$$

where:

P_n is the rated power in kW,

m_k is the kerb mass in kg,

n_{idle} is the idling speed in min^{-1} ,

s is the rated engine speed in min^{-1} ,

ndv_1 is the ratio between engine speed in min^{-1} and vehicle speed in km/h in gear 1.

The downshift speed from gear 2 to gear 1 ($v_{2 \rightarrow 1}$) should be calculated using the following equation:

Equation 1-5:

$$v_{2 \rightarrow 1} = [0.03 \times (s - n_{idle}) + n_{idle}] \times \frac{1}{ndv_2}$$

Where:

ndv_2 is the ratio between engine speed in min^{-1} and vehicle speed in km/h in gear 2.

Since the cruise phases are defined by the phase indicator, slight speed increases could occur and it may be meaningful to apply an up shift. The up shift speeds ($v_{1 \rightarrow 2}$, $v_{2 \rightarrow 3}$ and

$v_{i \rightarrow i+1}$) in km/h during cruise phases may be calculated using the following equations:

Equation 1-6:

$$v_{1 \rightarrow 2} = \left[0.03 \times (s - n_{\text{idle}}) + n_{\text{idle}} \right] \times \frac{1}{ndv_2}$$

Equation 1-7:

$$v_{2 \rightarrow 3} = \left[\left(0.5753 \times e^{\left(-1.9 \times \frac{P_n}{m_k + 75} \right)} - 0.1 \right) \times (s - n_{\text{idle}}) + n_{\text{idle}} \right] \times \frac{1}{ndv_1}$$

Equation 1-8:

$$v_{i \rightarrow i+1} = \left[\left(0.5753 \times e^{\left(-1.9 \times \frac{P_n}{m_k + 75} \right)} \right) \times (s - n_{\text{idle}}) + n_{\text{idle}} \right] \times \frac{1}{ndv_{i-1}}, \quad i = 3 \text{ to } ng$$

4.5.5.2.1.3. Step 2 – Gear choice for each cycle sample.

In order to avoid different interpretations about acceleration, deceleration, cruise and stop phases corresponding indicators are added to the vehicle speed pattern as integral parts of the cycles (see tables in Appendix 6).

The appropriate gear for each sample shall then be calculated according to the vehicle speed ranges resulting from the shift speed equations of paragraph 4.5.5.2.1.1. and these phase indicators for the cycle parts appropriate for the test vehicle as follows:

Gear choice for stop phases:

For the last 5 seconds of a stop phase the gear lever shall be set to gear 1 and the clutch shall be disengaged. For the previous part of a stop phase the gear lever shall be set to neutral or the clutch shall be disengaged.

Gear choice for acceleration phases:

gear 1, if $v \leq v_{1 \rightarrow 2}$,

gear 2, if $v_{1 \rightarrow 2} < v \leq v_{2 \rightarrow 3}$,

gear 3, if $v_{2 \rightarrow 3} < v \leq v_{3 \rightarrow 4}$,

gear 4, if $v_{3 \rightarrow 4} < v \leq v_{4 \rightarrow 5}$,

gear 5, if $v_{4 \rightarrow 5} < v \leq v_{5 \rightarrow 6}$,

gear 6, if $v > v_{5 \rightarrow 6}$.

Gear choice for deceleration or cruise phases:

gear 1, if $v < v_{2 \rightarrow 1}$,

gear 2, if $v < v_{3 \rightarrow 2}$,

gear 3, if $v_{3 \rightarrow 2} \leq v < v_{4 \rightarrow 3}$,

gear 4, if $v_{4 \rightarrow 3} \leq v < v_{5 \rightarrow 4}$,

gear 5, if $v_{5 \rightarrow 4} \leq v < v_{6 \rightarrow 5}$,

gear 6, if $v \geq v_{4 \rightarrow 5}$.

The clutch shall be disengaged, if:

- (a) the vehicle speed drops below 10 km/h, or
- (b) the engine speed drops below $n_{idle} + 0.03 \times (s - n_{idle})$;
- (c) there is a risk of engine stalling during cold start phase.

4.5.5.2.3. Step 3 – Corrections according to additional requirements

4.5.5.2.3.1. The gear choice has then to be modified according to the following requirements:

- (a) no gearshift at a transition from an acceleration phase to a deceleration phase. The gear that was used for the last second of the acceleration phase shall be kept for the following deceleration phase unless the speed drops below a downshift speed;
- (b) no up shifts or downshifts by more than 1 gear, except from gear 2 to neutral during decelerations down to stop;
- (c) up shifts or downshifts for up to 4 seconds are replaced by the gear before, if the gears before and after are identical. (Examples: 2 3 3 3 2 will be replaced by 2 2 2 2 2, 4 3 3 3 3 4 will be replaced by 4 4 4 4 4 4);
- (d) no downshift during an acceleration phase.

4.5.5.2.2. Optional Provisions

The gear choice may be modified according to the following provisions:

The use of lower gears than determined by the requirements described in paragraph 4.5.5.2.1. is permitted in any cycle phase. Manufacturers' recommendations for gear use shall be followed, if they do not result in higher gears than determined by the requirements described in paragraph 4.5.5.2.1.

4.5.5.2.3. Optional Provisions

The calculation program to be found on the UN website at the URL below may be used as an aid for the gear selection:

<http://live.unece.org/trans/main/wp29/wp29wgs/wp29grpe/wmtc.html>

Explanations about the approach and the gearshift strategy and a calculation example are given in Appendix 9.

4.5.6. Dynamometer settings.

A full description of the chassis dynamometer and instruments shall be provided in accordance with Appendix 6. Measurements shall be made to the accuracies as specified in paragraph 4.5.7. The running resistance force for the chassis dynamometer settings can be derived either from on-road coast down measurements or from a running resistance table, refer to Appendixes 5 or 7 for a L-category vehicle equipped with one wheel on the powered axle and to Appendix 8 for a L-category vehicle with two or more wheels on the powered axle(s).

4.5.6.1. Chassis dynamometer setting derived from on-road coast down measurements.

To use this alternative on road coast down measurements shall be carried out as specified in Appendix 7 for a L-category vehicle equipped with one wheel on the powered axle and in Appendix 8 for a L-category vehicle equipped with two or more wheels on the powered axle(s).

4.5.6.1.1. Requirements for the equipment.

The instrumentation for the speed and time measurement shall have the accuracies as specified in paragraph 4.5.7.

4.5.6.1.2. Inertia mass setting

4.5.6.1.2.1. The equivalent inertia mass for the chassis dynamometer shall be the flywheel equivalent inertia mass, m_{ff} , closest to the actual mass of the L-category vehicle, m_a . The actual mass, m_a , is obtained by adding the rotating mass of the non-driven wheel(s), m_{rf} , to the total mass

of the L-category vehicle, rider and instruments measured during the road test. Alternatively, the equivalent inertia mass m_i can be derived from Appendix 5. The value of m_{rf} , in kilograms, may be measured or calculated as appropriate, or may be estimated as 3 per cent of m .

- 4.5.6.1.2.2. If the actual mass m_a cannot be equalized to the flywheel equivalent inertia mass m_i , to make the target running resistance force F^* equal to the running resistance force F_E (which is to be set to the chassis dynamometer), the corrected coast down time ΔT_E may be adjusted in accordance with the total mass ratio of the target coast down time ΔT_{road} in the following sequence:

Equation 1-9:

$$\Delta T_{road} = \frac{1}{3.6} (m_a + m_{r1}) \frac{2\Delta v}{F^*}$$

Equation 1-10:

$$\Delta T_E = \frac{1}{3.6} (m_i + m_{r1}) \frac{2\Delta v}{F_E}$$

Equation 1-11:

$$F_E = F^*$$

Equation 1-12:

$$\Delta T_E = \Delta T_{road} \times \frac{m_i + m_{r1}}{m_a + m_{r1}}$$

$$\text{with } 0.95 < \frac{m_i + m_{r1}}{m_a + m_{r1}} < 1.05$$

where:

m_{r1} may be measured or calculated, in kilograms, as appropriate. As an alternative, m_{r1} may be estimated as 4 per cent of m .

- 4.5.6.2. Running resistance force derived from a running resistance table

- 4.5.6.2.1. The chassis dynamometer can be set by the use of the running resistance table instead of the running resistance force obtained by the coast down method. In this table method, the chassis dynamometer shall be set by the mass in running order regardless of particular L-category vehicle characteristics.

Note 6: Care should be taken for the application of this method to L-category vehicles having extraordinary characteristics.

4.5.6.2.2. The flywheel equivalent inertia mass m_{fi} shall be the equivalent inertia mass m_i specified in Appendixes 5, 7 or 8 where applicable. The chassis dynamometer shall be set by the rolling resistance of the non-driven wheel(s) a and the aero drag coefficient b specified in Appendixes 5 or determined in accordance with the procedures set-out in appendixes 7 or 8 respectively.

4.5.6.2.3 The running resistance force on the chassis dynamometer F_E shall be determined from the following equation:

Equation 1-13:

$$F_E = F_T = a + b \times v^2$$

4.5.6.2.4. The target running resistance force F^* shall be equal to the running resistance force obtained from the running resistance table F_T , because the correction for the standard ambient conditions is not necessary.

4.5.7. Measurement accuracies.

Measurements have to be carried out using equipment that fulfil the accuracy requirements as described in table 1-7 below:

Measurement Items	At measured value	Resolution
a) Running resistance force, F	+ 2 per cent	-
b) L-category vehicle speed (v1, v2)	± 1 per cent	0.2 km/h
c) Coast down speed interval (2Δv = v1 - v2)	± 1 per cent	0.1 km/h
d) Coast down time (Δt)	± 0.5 per cent	0.01 s
e) Total L-category vehicle mass (mk + mrid)	± 0.5 per cent	1.0 kg
f) Wind speed	± 10 per cent	0.1 m/s
g) Wind direction	-	5 deg.
h) Temperatures	± 1 °C	1 °C
i) Barometric pressure	-	0.2 kPa

j) Distance	± 0.1 per cent	1 m
k) Time	± 0.1 s	0.1 s

Table 1-7: Required accuracy of measurements

5. Test procedures

5.1. Description of tests.

The test vehicle shall be subjected, according to its category, to Test type I as specified below.

5.1.1. Type I test (verifying the average emission of gaseous pollutants, CO₂ emissions and fuel consumption in a characteristic driving cycle).

5.1.1.1. The test shall be carried out by the method described in paragraph 5.2. to this regulation. The gases shall be collected and analysed by the prescribed methods.

5.1.1.2. Number of tests

5.1.1.2.1. The number of tests shall be determined as shown in figure 5-1. R_{i1} to R_{i3} describe the final measurement results for the first (No.1) test to the third (No.3) test and the gaseous pollutant, the carbon dioxide emission or fuel consumption as defined in paragraph 6.1.1.6. L represents the limit values L₁ to L₅ as defined in Annexes VI (A), (B) and (C) to Regulation (EU) No [xxx/2013]

5.1.1.2.2. In each test, the mass of the carbon monoxide, the mass of the hydrocarbons, the mass of the nitrogen oxides, the mass of carbon dioxide, the mass of particulate matter and the mass of the fuel, consumed during the test shall be determined.

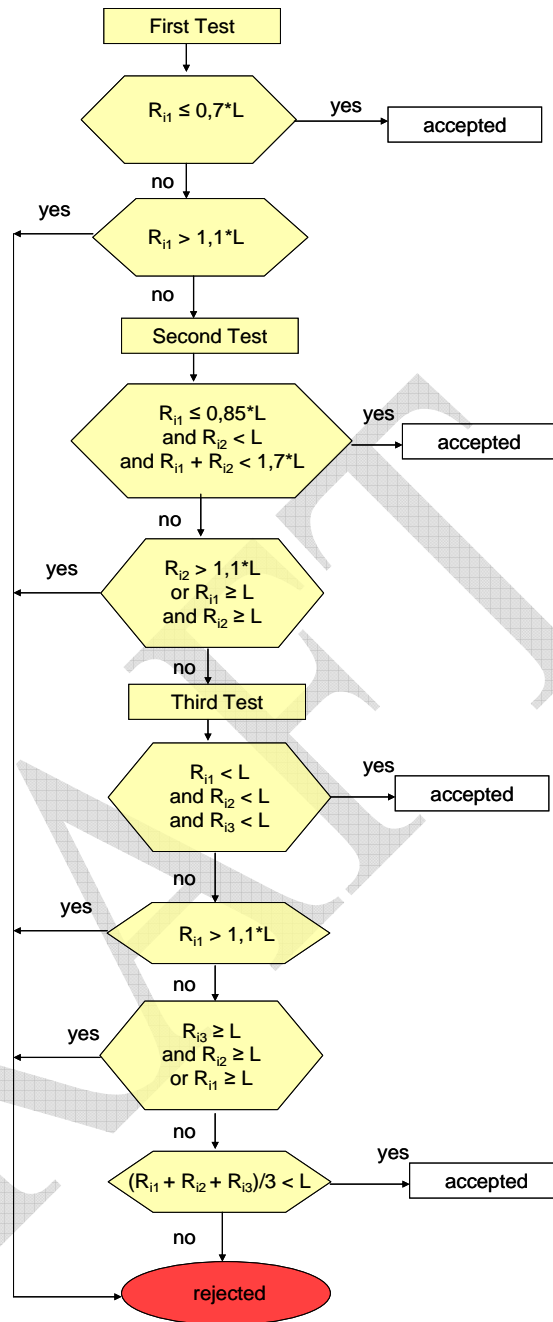


Figure 1-5: Flowchart for the number of Type I tests

5.2. Type I tests

5.2.1. Overview

5.2.1.1. The Type I test consists of prescribed sequences of dynamometer preparation, fuelling, parking, and operating conditions.

- 5.2.1.2. The test is designed to determine hydrocarbon, carbon monoxide, oxides of nitrogen, carbon dioxide, particulate matter mass emissions and fuel consumption while simulating real world operation. The test consists of engine start-ups and L-category vehicle operation on a chassis dynamometer, through a specified driving cycle. A proportional part of the diluted exhaust emissions is collected continuously for subsequent analysis, using a constant volume (variable dilution) sampler (CVS).
- 5.2.1.3. Except in cases of component malfunction or failure, all emission control systems installed on or incorporated in a tested L-category vehicle shall be functioning during all procedures.
- 5.2.1.4. Background concentrations are measured for all species for which emissions measurements are made. For exhaust testing, this requires sampling and analysis of the dilution air.
- 5.2.1.5. Background particulate mass measurement
- The particulate background level of the dilution air may be determined by passing filtered dilution air through the particulate filter. This shall be drawn from the same point as the particulate sample. One measurement may be performed prior to or after the test. Particulate mass measurements may be corrected by subtracting the background contribution from the dilution system. The permissible background contribution shall be $\leq 1\text{mg/km}$ (or equivalent mass on the filter). If the background exceeds this level, the default figure of 1 mg/km (or equivalent mass on the filter) shall be employed. Where subtraction of the background contribution gives a negative result, the particulate mass result shall be considered to be zero.
- 5.2.2. Dynamometer settings and verification
- 5.2.2.1. Test vehicle (L-category vehicle) preparation
- 5.2.2.1.1. The manufacturer shall provide additional fittings and adapters, as required to accommodate a fuel drain at the lowest point possible in the tank(s) as installed on the vehicle, and to provide for exhaust sample collection.
- 5.2.2.1.2. The tyre pressures shall be adjusted to the specifications of the manufacturer to the satisfaction of the technical service or to those at which the speed of the L-category vehicle during the road test and the L-category vehicle speed obtained on the chassis dynamometer are equal.
- 5.2.2.1.3. The test vehicle shall be warmed up on the chassis dynamometer to the same condition as it was during the road test.
- 5.2.2.2. Dynamometer preparation, if settings are derived from on-road coast down measurements.

Before the test, the chassis dynamometer shall be appropriately warmed up to the stabilized frictional force F_f . The load on the chassis dynamometer F_E is, in view of its construction, composed of the total friction loss F_f which is the sum of the chassis dynamometer rotating

frictional resistance, the tyre rolling resistance, the frictional resistance of the rotating parts in the powertrain of the L-category vehicle and the braking force of the power absorbing unit (pau) F_{pau} , as shown in the following equation:

Equation 1-14:

$$F_E = F_f + F_{pau}$$

The target running resistance force F^* derived from Appendixes 5 or 7 for a L-category vehicle equipped with one wheel on the powered axle and from Appendix 8 for a L-category vehicle with two or more wheels on the powered axle(s), shall be reproduced on the chassis dynamometer in accordance with the L-category vehicle speed. Namely:

Equation 1-15

$$F_E(v_i) = F^*(v_i)$$

The total friction loss F_f on the chassis dynamometer shall be measured by the method in paragraph 5.2.2.2.1. or paragraph 5.2.2.2.2.

5.2.2.2.1. Motoring by chassis dynamometer.

This method applies only to chassis dynamometers capable of driving an L-category vehicle. The L-category vehicle shall be driven by the chassis dynamometer steadily at the reference speed v_0 with the transmission engaged and the clutch disengaged. The total friction loss $F_f(v_0)$ at the reference speed v_0 is given by the chassis dynamometer force.

5.2.2.2.2. Coast down without absorption.

The method of measuring the coast down time is the coast down method for the measurement of the total friction loss F_f . The L-category vehicle coast down shall be performed on the chassis dynamometer by the procedure described in Appendixes 5 or 7 for a L-category vehicle equipped with one wheel on the powered axle and in Appendix 8 for a L-category vehicle equipped with two or more wheels on the powered axle(s), with zero chassis dynamometer absorption. The coast down time Δt_i corresponding to the reference speed v_0 shall be measured. The measurement shall be carried out at least three times, and the mean coast down time $\bar{\Delta t}$ shall be calculated by the following equation:

Equation 1-16:

$$\bar{\Delta t} = \frac{1}{n} \sum_{i=1}^n \Delta t_i$$

5.2.2.2.3. Total friction loss

The total friction loss $F_f(v_0)$ at the reference speed v_0 is calculated by the following equation:

Equation 1-17:

$$F_f(v_0) = \frac{1}{3.6} (m_i + m_{r1}) \frac{2\Delta v}{\Delta t}$$

5.2.2.2.4. Calculation of power absorption unit force

The force $F_{pau}(v_0)$ to be absorbed by the chassis dynamometer at the reference speed v_0 is calculated by subtracting $F_f(v_0)$ from the target running resistance force $F^*(v_0)$ as shown in the following equation:

Equation 1-18:

$$F_{pau}(v_0) = F^*(v_0) - F_f(v_0)$$

5.2.2.2.5. Chassis dynamometer setting

According to its type, the chassis dynamometer shall be set by one of the methods described in paragraphs 5.2.2.2.5.1. to 5.2.2.2.5.4. The chosen setting shall be applied to the pollutant emissions measurements as well as to the CO₂ emission measurements.

5.2.2.2.5.1. Chassis dynamometer with polygonal function

In the case of a chassis dynamometer with polygonal function, in which the absorption characteristics are determined by load values at several speed points, at least three specified speeds, including the reference speed, shall be chosen as the setting points. At each setting point, the chassis dynamometer shall be set to the value $F_{pau}(v_j)$ obtained in paragraph 5.2.2.2.4.

5.2.2.2.5.2. Chassis dynamometer with coefficient control

In the case of a chassis dynamometer with coefficient control, in which the absorption characteristics are determined by given coefficients of a polynomial function, the value of $F_{pau}(v_j)$ at each specified speed should be calculated by the procedure in paragraph 5.2.2.2.

Assuming the load characteristics to be:

Equation 1-19:

$$F_{pau}(v) = a \times v^2 + b \times v + c$$

where:

the coefficients a, b and c shall be determined by the polynomial regression method.

The chassis dynamometer shall be set to the coefficients a, b and c obtained by the polynomial regression method.

5.2.2.2.5.3. Chassis dynamometer with F^* polygonal digital setter

In the case of a chassis dynamometer with a polygonal digital setter, where a central processor unit (CPU) is incorporated in the system, F^* is input directly, and Δt_j , F_f and F_{pau} are automatically measured and calculated to set the chassis dynamometer to the target running resistance force $F^* = f^*_0 + f^*_2 \times v^2$.

In this case, several points in succession are directly input digitally from the data set of F^*_j and v_j , the coast down is performed and the coast down time Δt_j is measured. After the coast down test has been repeated several times, F_{pau} is automatically calculated and set at L-category vehicle speed intervals of 0.1 km/h, in the following sequence:

Equation 1-20:

$$F^* + F_f = \frac{1}{3.6} (m_i + m_{r1}) \frac{2\Delta v}{\Delta t_i}$$

Equation 1-21

$$F_f = \frac{1}{3.6} (m_i + m_{r1}) \frac{2\Delta v}{\Delta t_i} - F^*$$

Equation 1-22:

$$F_{pau} = F^* - F_f$$

5.2.2.2.5.4. Chassis dynamometer with f^*_0 , f^*_2 coefficient digital setter

In the case of a chassis dynamometer with a coefficient digital setter, where a CPU (central processor unit) is incorporated in the system, the target running resistance force $F^* = f^*_0 + f^*_2 \times v^2$ is automatically set on the chassis dynamometer.

In this case, the coefficients f^*_0 and f^*_2 are directly input digitally; the coast down is performed and the coast down time Δt_i is measured. F_{pau} is automatically calculated and set at L-category vehicle speed intervals of 0.06 km/h, in the following sequence:

Equation 1-23

$$F^* + F_f = \frac{1}{3.6} (m_i + m_{r1}) \frac{2\Delta v}{\Delta t_i}$$

Equation 1-24:

$$F_f = \frac{1}{3.6} (m_i + m_{r1}) \frac{2\Delta v}{\Delta t_i} - F^*$$

Equation 1-25:

$$F_{pau} = F^* - F_f$$

5.2.2.2.6. Dynamometer settings verification

5.2.2.2.6.1. Verification test

Immediately after the initial setting, the coast down time Δt_E on the chassis dynamometer corresponding to the reference speed (v_0), shall be measured by the same procedure set-out in Appendixes 5 or 7 for a L-category vehicle equipped with one wheel on the powered axle and in Appendix 8 for a L-category vehicle with two or more wheels on the powered axle(s). The measurement shall be carried out at least three times, and the mean coast down time Δt_E shall be calculated from the results. The set running resistance force at the reference speed, $F_E(v_0)$ on the chassis dynamometer is calculated by the following equation.

Equation 1-26:

$$F_E(v_0) = \frac{1}{3.6} (m_i + m_{r1}) \frac{2\Delta v}{\Delta t_E}$$

5.2.2.2.6.2. Calculation of setting error

The setting error ε is calculated by the following equation:

Equation 1-27:

$$\varepsilon = \frac{|F_E(v_0) - F^*(v_0)|}{F^*(v_0)} \times 100$$

The chassis dynamometer shall be readjusted if the setting error does not satisfy the following criteria:

$$\varepsilon \leq 2 \text{ per cent for } v_0 \geq 50 \text{ km/h}$$

$\varepsilon \leq 3$ per cent for $30 \text{ km/h} \leq v_0 < 50 \text{ km/h}$

$\varepsilon \leq 10$ per cent for $v_0 < 30 \text{ km/h}$

The procedure in paragraphs 5.2.2.2.6.1. to 5.2.2.2.6.2. shall be repeated until the setting error satisfies the criteria. The chassis dynamometer setting and the observed errors shall be recorded. The examples of the record forms are given in the Regulation for administrative requirements.

5.2.2.3. Dynamometer preparation, if settings are derived from a running resistance table

5.2.2.3.1. The specified speed for the chassis dynamometer

The running resistance on the chassis dynamometer shall be verified at the specified speed v . At least four specified speeds should be verified. The range of specified speed points (the interval between the maximum and minimum points) shall extend either side of the reference speed or the reference speed range, if there is more than one reference speed, by at least Δv , as defined in Appendixes 5 or 7 for a L-category vehicle equipped with one wheel on the powered axle and in Appendix 8 for a L-category vehicle with two or more wheels on the powered axle(s). The specified speed points, including the reference speed point(s), shall be no greater than 20 km/h apart and the interval of specified speeds should be the same.

5.2.2.3.2. Verification of chassis dynamometer

5.2.2.3.2.1. Immediately after the initial setting, the coast down time on the chassis dynamometer corresponding to the specified speed shall be measured. The L-category vehicle shall not be set up on the chassis dynamometer during the coast down time measurement. When the chassis dynamometer speed exceeds the maximum speed of the test cycle, the coast down time measurement shall start.

5.2.2.3.2.2. The measurement shall be carried out at least three times, and the mean coast down time Δt_E shall be calculated from the results.

5.2.2.3.2.3. The set running resistance force $F_E(v_j)$ at the specified speed on the chassis dynamometer is calculated by the following equation:

Equation 1-28:

$$F_E(v_j) = \frac{1}{3.6} \times m_i \times \frac{2\Delta v}{\Delta t_E}$$

5.2.2.3.2.4. The setting error ε at the specified speed is calculated by the following equation:

Equation 1-29:

$$\varepsilon = \frac{|F_E(v_j) - F_T|}{F_T} \times 100$$

5.2.2.3.2.5. The chassis dynamometer shall be readjusted if the setting error does not satisfy the following criteria:

$\varepsilon \leq 2$ per cent for $v \geq 50$ km/h

$\varepsilon \leq 3$ per cent for $30 \text{ km/h} \leq v < 50 \text{ km/h}$

$\varepsilon \leq 10$ per cent for $v < 30 \text{ km/h}$

5.2.2.3.2.6. The procedure described above shall be repeated until the setting error satisfies the criteria. The chassis dynamometer setting and the observed errors shall be recorded.

5.2.2.4. The chassis dynamometer system shall comply with the calibration and verification methods laid down in Appendix 3.

5.2.3. Calibration of analysers

5.2.3.1. The quantity of gas at the indicated pressure compatible with the correct functioning of the equipment shall be injected into the analyser with the aid of the flow metre and the pressure-reducing valve mounted on each gas cylinder. The apparatus shall be adjusted to indicate as a stabilized value the value inserted on the standard gas cylinder. Starting from the setting obtained with the gas cylinder of greatest capacity, a curve shall be drawn of the deviations of the apparatus according to the content of the various standard cylinders used. The flame ionisation analyser shall be recalibrated periodically, at intervals of not more than one month, using air/propane or air/hexane mixtures with nominal hydrocarbon concentrations equal to 50 per cent and 90 per cent of full scale.

5.2.3.2. Non-dispersive infrared absorption analysers shall be checked at the same intervals using nitrogen/CO and nitrogen/CO₂ mixtures in nominal concentrations equal to 10, 40, 60, 85 and 90 per cent of full scale.

5.2.3.3. To calibrate the NO_x chemiluminescence analyser, nitrogen/nitrogen oxide (NO) mixtures with nominal concentrations equal to 50 per cent and 90 per cent of full scale shall be used. The calibration of all three types of analysers shall be checked before each series of tests, using mixtures of the gases, which are measured in a concentration equal to 80 per cent of full scale. A dilution device can be applied for diluting a 100 per cent calibration gas to required concentration.

5.2.3.4. FID (heated flame ionisation analyser) hydrocarbon response check procedure

5.2.3.4.1. Detector response optimisation

The FID shall be adjusted, as specified by the instrument manufacturer. Propane in air should be used, to optimise the response, on the most common operating range.

5.2.3.4.2. Calibration of the HC analyser

The analyser should be calibrated using propane in air and purified synthetic air (see paragraph 3 of this Appendix).

Establish a calibration curve as described in paragraph 2.1. of this Appendix.

5.2.3.4.3. Response factors of different hydrocarbons and recommended limits

The response factor (Rf), for a particular hydrocarbon species is the ratio of the FID C1 reading to the gas cylinder concentration, expressed as ppm C1.

The concentration of the test gas shall be at a level to give a response of approximately 80 per cent of full-scale deflection, for the operating range. The concentration shall be known, to an accuracy of 2 per cent in reference to a gravimetric standard expressed in volume. In addition, the gas cylinder shall be pre-conditioned for 24 hours at a temperature between 293 K and 303 K (20 and 30 °C).

Response factors should be determined when introducing an analyser into service and thereafter at major service intervals. The test gases to be used and the recommended response factors are:

Methane and purified air: $1.00 < Rf < 1.15$

or $1.00 < Rf < 1.05$ for NG / bio methane fuelled vehicles

Propylene and purified air: $0.90 < Rf < 1.00$

Toluene and purified air: $0.90 < Rf < 1.00$

These are relative to a response factor (Rf) of 1.00 for propane and purified air.

5.2.3.5. Calibration and verification procedures of the particulate mass emissions measurement equipment

5.2.3.5.1 Flow Meter Calibration

The technical service shall ensure the existence of a calibration certificate for the flow meter demonstrating compliance with a traceable standard within a 12 month period prior to the test, or since any repair or change which could influence calibration.

5.2.3.5.2 Microbalance Calibration

The technical service shall ensure the existence of a calibration certificate for the

microbalance demonstrating compliance with a traceable standard within a 12 months period prior to the test.

5.2.3.5.3 Reference Filter Weighing

To determine the specific reference filter weights, at least two unused reference filters shall be weighed within 8 hours of, but preferably at the same time as, the sample filter weighing. Reference filters shall be of the same size and material as the sample filter.

If the specific weight of any reference filter changes by more than $\pm 5\mu\text{g}$ between sample filter weighings, then the sample filter and reference filters shall be reconditioned in the weighing room and then reweighed.

The comparison of reference filter weighings shall be made between the specific weights and the rolling average of that reference filter's specific weights.

The rolling average shall be calculated from the specific weights collected in the period since the reference filters were placed in the weighing room. The averaging period shall be at least 1 day but not exceed 30 days.

Multiple reconditioning and reweighings of the sample and reference filters are permitted until a period of 80 h has elapsed following the measurement of gases from the emissions test.


If, prior to or at the 80 h point, more than half the number of reference filters meet the $\pm 5\ \mu\text{g}$ criterion, then the sample filter weighing can be considered valid.

If, at the 80 h point, two reference filters are employed and one filter fails the $\pm 5\ \mu\text{g}$ criterion, the sample filter weighing can be considered valid under the condition that the sum of the absolute differences between specific and rolling averages from the two reference filters shall be less than or equal to $10\ \mu\text{g}$.

In case less than half of the reference filters meet the $\pm 5\ \mu\text{g}$ criterion the sample filter shall be discarded, and the emissions test repeated. All reference filters shall be discarded and replaced within 48 hours.

In all other cases, reference filters shall be replaced at least every 30 days and in such a manner that no sample filter is weighed without comparison to a reference filter that has been present in the weighing room for at least 1 day.

If the weighing room stability criteria outlined in paragraph 4.5.3.12.1.3.4. are not met, but the reference filter weighings meet the above criteria, the vehicle manufacturer has the option of accepting the sample filter weights or voiding the tests, fixing the weighing room control system and re-running the test.

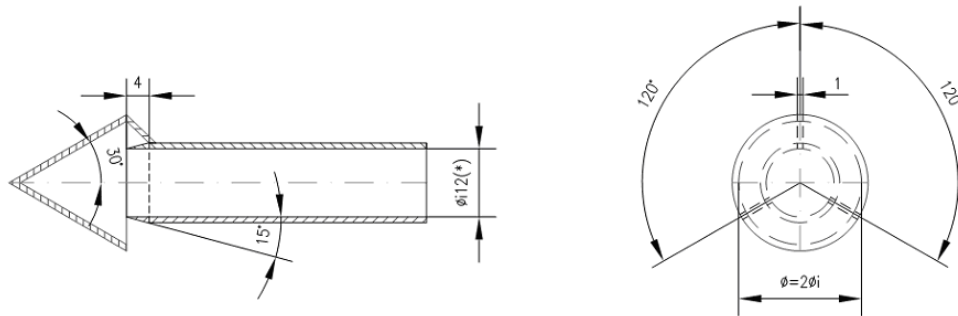

(*) Minimum internal diameter
Wall thickness ~ 1 mm - Material: stainless steel

Figure 1-6: Particulate sampling probe configuration

5.2.3.6. Reference gases

5.2.3.6.1. Pure gases

The following pure gases shall be available, if necessary, for calibration and operation:

Purified nitrogen: (purity: ≤ 1 ppm C_1 , ≤ 1 ppm CO, ≤ 400 ppm CO_2 , ≤ 0.1 ppm NO);

Purified synthetic air: (purity: ≤ 1 ppm C_1 , ≤ 1 ppm CO, ≤ 400 ppm CO_2 , ≤ 0.1 ppm NO); oxygen content between 18 and 21 per cent volume;

Purified oxygen: (purity > 99.5 per cent vol. O_2);

Purified hydrogen (and mixture containing helium): (purity ≤ 1 ppm C_1 , ≤ 400 ppm CO_2);

Carbon monoxide: (minimum purity 99.5 per cent);

Propane: (minimum purity 99.5 per cent).

5.2.3.6.2. Calibration and span gases

Mixtures of gases having the following chemical compositions shall be available:

- (a) C_3H_8 and purified synthetic air (see paragraph 5.2.3.5.1. above);
- (b) CO and purified nitrogen;
- (c) CO_2 and purified nitrogen.

NO and purified nitrogen (the amount of NO_2 contained in this calibration gas shall not exceed 5 per cent of the NO content).

The true concentration of a calibration gas shall be within ± 2 per cent of the stated figure.

5.2.3.6. Calibration and verification of the dilution system

The dilution system shall be calibrated and verified and comply with the requirements from Appendix 4.

5.2.4. Test vehicle preconditioning

5.2.4.1. The test vehicle shall be moved to the test area and the following operations performed:

- The fuel tank(s) shall be drained through the provided fuel tank(s) drain(s) and charged with the test fuel as specified in Annex I, Appendix x to half the tank(s) capacity.
- The test vehicle shall be placed, either by being driven or pushed, on a dynamometer and operated through the applicable test cycle as specified for the vehicle (sub-) category in paragraph 4.5.4. The vehicle need not be cold, and may be used to set dynamometer power.

5.2.4.2. Practice runs over the prescribed driving schedule may be performed at test points, provided an emission sample is not taken, for the purpose of finding the minimum throttle action to maintain the proper speed-time relationship, or to permit sampling system adjustments.

5.2.4.3. Within 5 minutes of completion of preconditioning, the test vehicle shall be removed from the dynamometer and may be driven or pushed to the soak area to be parked. The vehicle shall be stored for not less than 6 hours and not more than 36 hours prior to the cold start Type I test or until the engine oil temperature T_O or the coolant temperature T_C or the sparkplug seat/gasket temperature T_P (only for air cooled engine) equals the air temperature of the soak area within 2 K.

5.2.4.4. For the purpose of measuring particulates, at most 36 hours and at least 6 hours before testing, the applicable test cycle laid down in Regulation (EU) No [xxx/2013], Annex VI (A1), (A2) or (A3), which ever test cycle is applicable according to Annex IV to Regulation (EU) No [xxx/2013]. The technical details of the applicable test cycle are laid down in Appendix 6 and the applicable test cycle shall also be used for vehicle pre-conditioning. Three consecutive cycles shall be driven. The dynamometer setting shall be indicated as in paragraph 4.5.6.

5.2.4.5. At the request of the manufacturer, vehicles fitted with indirect injection positive-ignition engines may be preconditioned with one Part One, one Part Two and two Part Three driving cycles, if applicable, from the WMTC.

In a test facility in which there may be possible contamination of a low particulate emitting vehicle test with residue from a previous test on a high particulate emitting vehicle, it is recommended, for the purpose of sampling equipment pre-conditioning, that a 120 km/h steady state drive cycle of 20 minutes duration followed by three consecutive Part Two or

Part Three cycles from the WMTC will be driven by a low particulate emitting vehicle.

After this preconditioning, and before testing, vehicles shall be kept in a room in which the temperature remains relatively constant between 293 and 303 K (20 °C and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within ± 2 K of the temperature of the room.

If the manufacturer so requests, the test shall be carried out not later than 30 hours after the vehicle has been run at its normal temperature.

- 5.2.4.6. For vehicles equipped with a positive-ignition engine, fuelled with LPG, NG/bio methane, H₂NG, Hydrogen or so equipped that they can be fuelled with either petrol, LPG, NG/bio methane, H₂NG or Hydrogen between the tests on the first gaseous reference fuel and the second gaseous reference fuel, the vehicle shall be preconditioned before the test on the second reference fuel. This preconditioning is done on the second reference fuel by driving a preconditioning cycle consisting of one Part one, Part two and two times Part three of the WMTC described in Appendix 6. On the manufacturer's request and with the agreement of the technical service this preconditioning may be extended. The dynamometer setting shall be the one indicated in paragraph 4.5.6 of this Annex.
- 5.2.5. Emissions tests
- 5.2.5.1. Engine starting and restarting
- 5.2.5.1.1. The engine shall be started according to the manufacturer's recommended starting procedures. The test cycle run shall begin when the engine starts
- 5.2.5.1.2. Test vehicles equipped with automatic chokes shall be operated according to the instructions in the manufacturer's operating instructions or owner's manual including choke setting and "kick-down" from cold fast idle. In the case of the WMTC set-out in appendix 6 the transmission shall be placed in gear 15 seconds after the engine is started. If necessary, braking may be employed to keep the drive wheels from turning. In the case of the ECE R40 or 47 cycles the transmission shall be placed in gear 5s before the first acceleration.
- 5.2.5.1.3. Test vehicles equipped with manual chokes shall be operated according to the manufacturer's operating instructions or owner's manual. Where times are provided in the instructions, the point for operation may be specified, within 15 seconds of the recommended time.
- 5.2.5.1.4. The operator may use the choke, throttle etc. where necessary to keep the engine running.
- 5.2.5.1.5. If the manufacturer's operating instructions or owner's manual do not specify a warm engine starting procedure, the engine (automatic and manual choke engines) shall be started by opening the throttle about half way and cranking the engine until it starts.
- 5.2.5.1.6. If, during the cold start, the test vehicle does not start after 10 seconds of cranking, or ten

cycles of the manual starting mechanism, cranking shall cease and the reason for failure to start determined. The revolution counter on the constant volume sampler shall be turned off and the sample solenoid valves placed in the "standby" position during this diagnostic period. In addition, either the CVS blower shall be turned off or the exhaust tube disconnected from the tailpipe during the diagnostic period.

- 5.2.5.1.7. If failure to start is an operational error, the test vehicle shall be rescheduled for testing from a cold start. If failure to start is caused by vehicle malfunction, corrective action (following the unscheduled maintenance provisions) of less than 30 minutes duration may be taken and the test continued. The sampling system shall be reactivated at the same time cranking is started. When the engine starts, the driving schedule timing sequence shall begin. If failure to start is caused by vehicle malfunction and the vehicle cannot be started, the test shall be voided, the vehicle removed from the dynamometer, corrective action taken (following the unscheduled maintenance provisions), and the vehicle rescheduled for test. The reason for the malfunction (if determined) and the corrective action taken shall be reported.
- 5.2.5.1.8. If the test vehicle does not start during the hot start after ten seconds of cranking, or ten cycles of the manual starting mechanism, cranking shall cease, the test shall be voided, the vehicle removed from the dynamometer, corrective action taken and the vehicle rescheduled for test. The reason for the malfunction (if determined) and the corrective action taken shall be reported.
- 5.2.5.1.9. If the engine "false starts", the operator shall repeat the recommended starting procedure (such as resetting the choke, etc.)
- 5.2.5.2. Stalling
 - 5.2.5.2.1. If the engine stalls during an idle period, the engine shall be restarted immediately and the test continued. If the engine cannot be started soon enough to allow the vehicle to follow the next acceleration as prescribed, the driving schedule indicator shall be stopped. When the vehicle restarts, the driving schedule indicator shall be reactivated.
 - 5.2.5.2.2. If the engine stalls during some operating mode other than idle, the driving schedule indicator shall be stopped, and the test vehicle shall then be restarted and accelerated to the speed required at that point in the driving schedule and the test continued. During acceleration to this point, shifting shall be performed in accordance with paragraph 4.5.5.
 - 5.2.5.2.3. If the test vehicle will not restart within one minute, the test shall be voided, the vehicle removed from the dynamometer, corrective action taken, and the vehicle rescheduled for test. The reason for the malfunction (if determined) and the corrective action taken shall be reported.
- 5.2.6. Drive instructions
 - 5.2.6.1. The test vehicle shall be driven with minimum throttle movement to maintain the desired speed. No simultaneous use of brake and throttle shall be permitted.

- 5.2.6.2. If the test vehicle cannot accelerate at the specified rate, it shall be operated with the throttle fully opened until the roller speed reaches the value prescribed for that time in the driving schedule.
- 5.2.7. Dynamometer test runs
- 5.2.7.1. The complete dynamometer test consists of consecutive parts as described in paragraph 4.5.4.
- 5.2.7.2. The following steps shall be taken for each test:
- (a) place drive wheel of vehicle on dynamometer without starting engine;
 - (b) activate vehicle cooling fan;
 - (c) for all test vehicles, with the sample selector valves in the "standby" position connect evacuated sample collection bags to the dilute exhaust and dilution air sample collection systems;
 - (d) start the CVS (if not already on), the sample pumps and the temperature recorder. (The heat exchanger of the constant volume sampler, if used and sample lines should be preheated to their respective operating temperatures before the test begins.);
 - (e) adjust the sample flow rates to the desired flow rate and set the gas flow measuring devices to zero;
 - For gaseous bag samples (except hydrocarbon samples), the minimum flow rate is 0.08 litre/second;
 - For hydrocarbon samples, the minimum flame ionization detection (FID) (or heated flame ionization detection (HFID) in the case of methanol-fuelled vehicles) flow rate is 0.031 litre/second;
 - (f) attach the flexible exhaust tube to the vehicle tailpipe(s);
 - (g) start the gas flow measuring device, position the sample selector valves to direct the sample flow into the "transient" exhaust sample bag, the "transient" dilution air sample bag, turn the key on, and start cranking the engine;
 - (h) place the transmission in gear;
 - (i) begin the initial vehicle acceleration of the driving schedule;
 - (j) operate the vehicle according to the driving cycles specified in paragraph 4.5.4;
 - (k) at the end of the part 1 or part 1 in cold condition, simultaneously switch the sample flows from the first bags and samples to the second bags and samples, switch off gas

flow measuring device No. 1 and start gas flow measuring device No. 2;

- (l) in case of vehicles capable of running part 3 of the WMTC, at the end of part 2 simultaneously switch the sample flows from the second bags and samples to the third bags and samples, switch off gas flow measuring device No. 2 and, start gas flow measuring device No. 3;
- (m) before starting a new part, record the measured roll or shaft revolutions and reset the counter or switch to a second counter. As soon as possible, transfer the exhaust and dilution air samples to the analytical system and process the samples according to paragraph 6.1.1., obtaining a stabilised reading of the exhaust bag sample on all analysers within 20 minutes of the end of the sample collection phase of the test;
- (n) turn the engine off 2 seconds after the end of the last part of the test;
- (o) immediately after the end of the sample period, turn off the cooling fan;
- (p) turn off the constant volume sampler (CVS) or critical flow venturi (CFV) or disconnect the exhaust tube from the tailpipe(s) of the vehicle;
- (q) disconnect the exhaust tube from the vehicle tailpipe(s) and remove the vehicle from dynamometer;
- (r) for comparison and analysis reasons besides the bag results also second by second data of the emissions (diluted gas) shall be monitored.

6. Analysis of results

6.1. Type I tests

6.1.1. Exhaust emission and fuel consumption analysis

6.1.1.1. Analysis of the samples contained in the bags

The analysis shall begin as soon as possible, and in any event not later than 20 minutes after the end of the tests, in order to determine:

-the concentrations of hydrocarbons, carbon monoxide, nitrogen oxides and carbon dioxide in the sample of dilution air contained in bag(s) B;

-the concentrations of hydrocarbons, carbon monoxide, nitrogen oxides and carbon dioxide in the sample of diluted exhaust gases contained in bag(s) A.

6.1.1.2. Calibration of analysers and concentration results

The analysis of the results has to be carried out in the following steps:

- (a) prior to each sample analysis the analyser range to be used for each pollutant shall be set to zero with the appropriate zero gas;
- (b) the analysers are then set to the calibration curves by means of span gases of nominal concentrations of 70 per cent to 100 per cent of the range;
- (c) the analysers' zeros are then rechecked. If the reading differs by more than 2 per cent of range from that set in b), the procedure is repeated;
- (d) the samples are then analysed;
- (e) after the analysis, zero and span points are rechecked using the same gases. If these rechecks are within 2 per cent of those in c), the analysis is considered acceptable;
- (f) at all points in this section the flow-rates and pressures of the various gases shall be the same as those used during calibration of the analysers;
- (g) the figure adopted for the concentration of each pollutant measured in the gases is that read off after stabilisation on the measuring device.

6.1.1.3. Measuring the distance covered

The distance (S) actually covered for a test part shall be arrived at by multiplying the number of revolutions read from the cumulative counter (refer to paragraph 5.2.7.) by the circumference of the roller. This distance shall be measured in km.

6.1.1.4. Determination of the quantity of gas emitted

The reported test results shall be computed for each test and each cycle part by use of the following formulas. The results of all emission tests shall be rounded, using the "Rounding-Off Method" specified in ASTM E 29-67, to the number of places to the right of the decimal point indicated by expressing the applicable standard to three significant figures.

6.1.1.4.1. Total volume of diluted gas

The total volume of diluted gas, expressed in m³/cycle part, adjusted to the reference conditions of 0 °C (273.2 K) and 101.33 kPa is calculated by

Equation 1-30:

$$V = \frac{273.2 \cdot V_0 \cdot N \cdot (P_a - P_i)}{101.33 \cdot T_p}$$

where:

V₀ is the volume of gas displaced by pump P during one revolution, expressed in

$\text{m}^3/\text{revolution}$. This volume is a function of the differences between the intake and output sections of the pump,

N is the number of revolutions made by pump P during each part of the test;

P_a is the ambient pressure in kPa;

P_i is the average under-pressure during the test part in the intake section of pump P , expressed in kPa;

T_p is the temperature of the diluted gases during the test part in K , measured in the intake section of pump P .

6.1.1.4.2. Hydrocarbons (HC)

The mass of unburned hydrocarbons emitted by the vehicle's exhaust during the test shall be calculated by means of the following formula:

Equation 1-31:

$$HC_m = \frac{1}{S} \cdot V \cdot d_{HC} \cdot \frac{HC_c}{10^6}$$

where:

HC_m is the mass of hydrocarbons emitted during the test part, in g/km

S is the distance defined in paragraph 6.1.1.3. above;

V is the total volume, defined in paragraph 6.1.1.4.1.

d_{HC} is the density of the hydrocarbons at reference temperature and pressure (273.2 K and 101.33 kPa).

$d_{HC} = 0.631 \text{ kg/m}^3$ for petrol (E5) ($C_1H_{1.89}O_{0.016}$);

$= 0.932 \text{ kg/m}^3$ for ethanol (E85) ($C_1H_{2.74}O_{0.385}$);

$= 0.622 \text{ kg/m}^3$ for diesel (B5) ($C_1H_{1.86}O_{0.005}$);

$= 0.649 \text{ kg/m}^3$ for LPG ($C_1H_{2.525}$)

$= 0.714 \text{ kg/m}^3$ for NG / biogas (C_1H_4)

$= \frac{9.104 \cdot A + 136}{1524.152 - 0538 \cdot A} \text{ kg/m}^3$ for H_2NG (with $A = NG / \text{bio methane quantity within the}$

H₂NG mixture in [volume%])

HC_c is the concentration of diluted gases, expressed in parts per million (ppm) of carbon equivalent (e.g. the concentration in propane multiplied by 3), corrected to take account of the dilution air by the following equation:

Equation 1-32:

$$HC_c = HC_e - HC_d \cdot \left(1 - \frac{1}{DF}\right)$$

where:

HC_e is the concentration of hydrocarbons expressed in parts per million (ppm) of carbon equivalent, in the sample of diluted gases collected in bag(s) A,

HC_d is the concentration of hydrocarbons expressed in parts per million (ppm) of carbon equivalent, in the sample of dilution air collected in bag(s) B,

DF is the coefficient defined in paragraph 6.1.1.4.6. below.

The non-methane hydrocarbon (NMHC) concentration is calculated as follows:

$$C_{\text{NMHC}} = C_{\text{THC}} - (Rf_{\text{CH}_4} \times C_{\text{CH}_4})$$

where:

C_{NMHC} = corrected concentration of NMHC in the diluted exhaust gas, expressed in ppm carbon equivalent,

C_{THC} = concentration of total hydrocarbons (THC) in the diluted exhaust gas, expressed in ppm carbon equivalent and corrected by the amount of THC contained in the dilution air,

C_{CH₄} = concentration of methane (CH₄) in the diluted exhaust gas, expressed in ppm carbon equivalent and corrected by the amount of CH₄ contained in the dilution air,

Rf CH₄ is the FID response factor to methane as defined in paragraph x. of appendix y of Annex I

6.1.1.4.3. Carbon monoxide (CO)

The mass of carbon monoxide emitted by the vehicle's exhaust during the test shall be calculated by means of the following formula:

Equation 1-33:

$$CO_m = \frac{1}{S} \cdot V \cdot d_{CO} \cdot \frac{CO_c}{10^6}$$

where:

CO_m is the mass of carbon monoxide emitted during the test part, in g/km

S is the distance defined in paragraph 6.1.1.3.,

V is the total volume defined in paragraph 6.1.1.4.1.,

d_{CO} is the density of the carbon monoxide, $d_{CO} = 1.25 \text{ kg/m}^3$ at reference temperature and pressure (273.2 K and 101.33 kPa),

CO_c is the concentration of diluted gases, expressed in parts per million (ppm) of carbon monoxide, corrected to take account of the dilution air by the following equation:

Equation 1-34:

$$CO_c = CO_e - CO_d \cdot \left(1 - \frac{1}{DF}\right)$$

where:

CO_e is the concentration of carbon monoxide expressed in parts per million (ppm), in the sample of diluted gases collected in bag(s) A,

CO_d is the concentration of carbon monoxide expressed in parts per million (ppm), in the sample of dilution air collected in bag(s) B,

DF is the coefficient defined in paragraph 6.1.1.4.7. below.

6.1.1.4.4. Nitrogen oxides (NO_x)

The mass of nitrogen oxides emitted by the vehicle's exhaust during the test shall be calculated by means of the following formula:

Equation 1-35:

$$NO_{xm} = \frac{1}{S} \cdot V \cdot d_{NO_2} \cdot \frac{NO_{xc} \cdot K_h}{10^6}$$

where:

NO_{xm} is the mass of nitrogen oxides emitted during the test part, in g/km

S is the distance defined in paragraph 6.1.1.3.,

V is the total volume defined in paragraph 6.1.1.4.1.,

d_{NO_2} is the density of the nitrogen oxides in the exhaust gases, assuming that they will be in the form of nitric oxide, $d_{NO_2} = 2.05 \text{ kg/m}^3$ at reference temperature and pressure (273.2 K and 101.33 kPa),

NO_{xc} is the concentration of diluted gases, expressed in parts per million (ppm), corrected to take account of the dilution air by the following equation:

Equation 1-36:

$$NO_{xc} = NO_{xe} - NO_{xd} \cdot \left(1 - \frac{1}{DF}\right)$$

where:

NO_{xe} is the concentration of nitrogen oxides expressed in parts per million (ppm) of nitrogen oxides, in the sample of diluted gases collected in bag(s) A,

NO_{xd} is the concentration of nitrogen oxides expressed in parts per million (ppm) of nitrogen oxides, in the sample of dilution air collected in bag(s) B,

DF is the coefficient defined in paragraph 6.1.1.4.7. below,

K_h is the humidity correction factor, calculated by the following formula:

Equation 1-37:

$$K_h = \frac{1}{1 - 0.0329 \cdot (H - 10.7)}$$

where:

H is the absolute humidity in g of water per kg of dry air:

Equation 1-38:

$$H = \frac{6.2111 \cdot U \cdot P_d}{P_a - P_d \cdot \frac{U}{100}}$$

where:

U is the humidity in per cent,

P_d is the saturated pressure of water at the test temperature, in kPa,

P_a is the atmospheric pressure in kPa.

6.1.1.4.5. Particulate matter mass

Particulate emission M_p (g/km) is calculated by means of the following equation:

Equation 1-39:

$$M_p = \frac{(V_{\text{mix}} + V_{\text{ep}}) \cdot P_e}{V_{\text{ep}} \cdot d}$$

Where exhaust gases are vented outside tunnel;

Equation 1-40:

$$M_p = \frac{V_{\text{mix}} \cdot P_e}{V_{\text{ep}} \cdot d}$$

Where exhaust gases are returned to the tunnel;

Where:

V_{mix} = volume V of diluted exhaust gases under standard conditions, refer to equation 6.1

V_{ep} = volume of exhaust gas flowing through particulate filter under standard conditions,

P_e = particulate mass collected by filter(s),

$d = S$ = is the distance defined in paragraph 6.1.1.3.,

M_p = particulate emission in g/km.

Where correction for the particulate background level from the dilution system has been used, this shall be determined in accordance with paragraph 6.2.4. In this case, the particulate mass (g/km) shall be calculated as follows:

Equation 1-41:

$$M_p = \left[\frac{P_e}{V_{ep}} - \left(\frac{P_a}{V_{ap}} \cdot \left(1 - \frac{1}{DF} \right) \right) \right] \cdot \frac{(V_{mix} + V_{ep})}{d}$$

Where exhaust gases are vented outside tunnel;

Equation 1-42:

$$M_p = \left[\frac{P_e}{V_{ep}} - \left(\frac{P_a}{V_{ap}} \cdot \left(1 - \frac{1}{DF} \right) \right) \right] \cdot \frac{V_{mix}}{d}$$

Where exhaust gases are returned to the tunnel.

Where:

V_{ap} = volume of tunnel air flowing through the background particulate filter under standard conditions,

P_a = particulate mass collected by background filter,

DF = dilution factor as determined in paragraph 6.1.1.4.7...

Where application of a background correction results in a negative particulate mass (in g/km) the result shall be considered to be zero g/km particulate mass.

6.1.1.4.6. Carbon dioxide (CO₂)

The mass of carbon dioxide emitted by the vehicle's exhaust during the test shall be calculated by means of the following formula:

Equation 1-43:

$$CO_{2m} = \frac{1}{S} \cdot V \cdot d_{CO_2} \cdot \frac{CO_{2e}}{10^2}$$

where:

CO_{2m} is the mass of carbon dioxide emitted during the test part, in g/km

S is the distance defined in paragraph 6.1.1.3.,

V is the total volume defined in paragraph 6.1.1.4.1.,

d_{CO_2} is the density of the carbon monoxide, $d_{CO_2} = 1.964 \text{ kg/m}^3$ at reference temperature and pressure (273.2 K and 101.33 kPa),

CO_{2c} is the concentration of diluted gases, expressed in per cent carbon dioxide equivalent, corrected to take account of the dilution air by the following equation:

Equation 1-44:

$$CO_{2c} = CO_{2e} - CO_{2d} \times \left(1 - \frac{1}{DF}\right)$$

where:

CO_{2e} is the concentration of carbon dioxide expressed in per cent, in the sample of diluted gases collected in bag(s) A,

CO_{2d} is the concentration of carbon dioxide expressed in per cent, in the sample of dilution air collected in bag(s) B,

DF is the coefficient defined in paragraph 6.1.1.4.7. below.

6.1.1.4.7. Dilution factor DF

The dilution factor is calculated as follows:

For each reference fuel, except hydrogen:

Equation 1-45:

$$DF = \frac{X}{C_{CO_2} + (C_{HC} + C_{CO}) \cdot 10^{-4}}$$

For a fuel of composition C_xH_yO_z, the general formula is:

Equation 1-46:

$$X = 100 \frac{x}{x + \frac{y}{2} + 3,76 \cdot \left(x + \frac{y}{4} - \frac{z}{2}\right)}$$

In particular for H₂NG, the formula is:

Equation 1-47:

$$X = \frac{65,4 \cdot A}{4,922A + 195,84}$$

For hydrogen, the dilution factor is calculated as follows:

Equation 1-48:

$$DF = \frac{X}{C_{H_2O} - C_{H_2O-DA} + C_{H_2} \cdot 10^{-4}}$$

For the reference fuels contained in appendix x, the values of 'X' are as follows:

Fuel	X
Petrol (E5)	13.4
Diesel (B5)	13.5
LPG	11.9
NG/Biomethane	9.5
Ethanol (E85)	12.5
Ethanol (E75)	12.7
Hydrogen	35.03

Table 1-8: Factor 'X' in formulae to calculate DF

In these equations:

C_{CO_2} = concentration of CO_2 in the diluted exhaust gas contained in the sampling bag, expressed in per cent volume,

C_{HC} = concentration of HC in the diluted exhaust gas contained in the sampling bag, expressed in ppm carbon equivalent,

C_{CO} = concentration of CO in the diluted exhaust gas contained in the sampling bag, expressed in ppm,

C_{H_2O} = concentration of H_2O in the diluted exhaust gas contained in the sampling bag, expressed in per cent volume,

C_{H_2O-DA} = concentration of H_2O in the air used for dilution, expressed in per cent volume,

C_{H_2} = concentration of hydrogen in the diluted exhaust gas contained in the sampling bag, expressed in ppm,

A = quantity of NG/biomethane within the H2NG mixture, expressed in per cent volume.

6.1.1.5. Weighting of Type I test results

6.1.1.5.1. In case of repeated measurements (refer to paragraph 5.1.1.2.) the emission results in g/km and the fuel consumption in litre/100 km obtained by the calculation method described in paragraph 6.1.1. are averaged for each cycle part.

6.1.1.5.1.1 Weighting of results UNECE regulation No 40 and regulation No 47 test cycles

The (average) result of the cold phase of UNECE regulation No 40 and of regulation No 47 test cycle is named R_1 , the (average) result of the warm phase of UNECE regulation No 40 and of regulation No 47 test cycle is named R_2 . Using these emission results in g/km and the fuel consumption in litre/100 km; the final result R , depending on the vehicle class as defined in paragraph 6.3., shall be calculated by means of the following equations:

Equation 1-49:

$$R = R_1 \times w_1 + R_2 \times w_2$$

where:

w_1 = weighting factor cold phase

w_2 = weighting factor warm phase

6.1.1.5.1.2 Weighting of results WMTC

The (average) result of part 1 or part 1 is named R_1 , the (average) result of part 2 is named R_2 and the (average) result of part 3 is named R_3 . Using these emission results in g/km and the fuel consumption in litre/100 km; the final result R , depending on the vehicle class as defined in paragraph 6.3., shall be calculated by means of the following equations:

Equation 1-50:

$$R = R_{1\text{Cold}} \times w_1 + R_{1\text{Warm}} \times w_2$$

where:

w_1 = weighting factor cold phase

w_2 = weighting factor warm phase

Equation 1-51:

$$R = R_1 \times w_1 + R_2 \times w_2$$

Equation 1-53:

$$R = R_1 \times w_1 + R_2 \times w_2 + R_3 \times w_3$$

where:

w_n = weighting factor phase n (n=1,2,3)

- 6.1.1.6.2. For each pollutant, the carbon dioxide emission and the fuel consumption the weightings shown in Table 1-8, respectively Table 1-9 shall be used.

DRAFT

6.1.1.6.2.1.

Vehicle category	Vehicle category name	Test cycle	Equation #	Weighting factors
L1e-A	Powered cycle	ECE R47	6-21	$w_1 = 0.30$ $w_2 = 0.70$
L1e-B	Two-wheel moped			
L2e	Three-wheel moped			
L6e-A	Light on-road quad			
L6e-B	Light quadri-mobile			
L3e L4e	Two-wheel motorcycle with and without side-car $v_{max} < 130$ km/h	WMTC, stage 2	6-23	$w_1 = 0.30$ $w_2 = 0.70$
L5e-A	Tricycle $v_{max} < 130$ km/h			
L7e-A	Heavy on-road quad $v_{max} < 130$ km/h			
L3e L4e	Two-wheel motorcycle with and without side-car $v_{max} \geq 130$ km/h	WMTC, stage 2	6-24	$w_1 = 0.25$ $w_2 = 0.50$ $w_3 = 0.25$
L5e-A	Tricycle $v_{max} \geq 130$ km/h			
L7e-A	Heavy on-road quad $v_{max} \geq 130$ km/h			
L5e-B	Commercial tricycle	ECE R40	6-21	$w_1 = 0.30$ $w_2 = 0.70$
L7e-B	All terrain vehicles			
L7e-C	Heavy quadri-mobile			

Table 1-9: Euro 3 (Euro 4 for L3e motorcycles) and Euro 4 (Euro 5 for L3e motorcycles) test Type I test cycles (also applicable for test Types VII and VIII), applicable weighting equations and weighting factors

6.1.1.6.2.2.

Vehicle category	Vehicle category name	Test cycle	Equation #	Weighting factors
L1e-A	Powered cycle	WMTC stage 3	6-22	$w_1 = 0.50$ $w_2 = 0.50$
L1e-B	Two-wheel moped			
L2e	Three-wheel moped			
L6e-A	Light on-road quad			
L6e-B	Light quadri-mobile			
L3e L4e	Two-wheel motorcycle with and without side-car $v_{max} < 130$ km/h		6-23	$w_1 = 0.50$ $w_2 = 0.50$
L5e-A	Tricycle $v_{max} < 130$ km/h			
L7e-A	Heavy on-road quad $v_{max} < 130$ km/h			
L3e L4e	Two-wheel motorcycle with and without side-car $v_{max} \geq 130$ km/h		6-24	$w_1 = 0.25$ $w_2 = 0.50$ $w_3 = 0.25$
L5e-A	Tricycle $v_{max} \geq 130$ km/h			
L7e-A	Heavy on-road quad $v_{max} \geq 130$ km/h			
L5e-B	Commercial tricycle		6-23	$w_1 = 0.30$ $w_2 = 0.70$
L7e-B	All terrain vehicles			
L7e-C	Heavy quadri-mobile			

Table 1-10: Euro 5 (Euro 6 for L3e motorcycles) test Type I test cycles (also applicable for test Types VII and VIII), applicable weighting equations and weighting factors

7. Records required

The following information shall be recorded with respect to each test:

- (a) test number;
- (b) vehicle, system or component identification;
- (c) date and time of day for each part of the test schedule;

- (d) instrument operator;
- (e) driver or operator;
- (f) test vehicle: make, vehicle identification number, model year, transmission type, odometer reading at initiation of preconditioning, engine displacement, engine family, emission control system, recommended engine speed at idle, nominal fuel tank capacity, inertial loading, actual curb mass recorded at 0 kilometre, and drive wheel tyre pressure;
- (g) dynamometer serial number: as an alternative to recording the dynamometer serial number, a reference to a vehicle test cell number may be used, with the advance approval of the Administration, provided the test cell records show the pertinent instrument information;
- (h) all pertinent instrument information such as tuning-gain-serial number-detector number-range. As an alternative, a reference to a vehicle test cell number may be used, with the advance approval of the Administration, provided test cell calibration records show the pertinent instrument information;
- (i) recorder charts: Identify zero, span, exhaust gas, and dilution air sample traces;
- (j) test cell barometric pressure, ambient temperature and humidity;

Note 7: A central laboratory barometer may be used; provided, that individual test cell barometric pressures are shown to be within ± 0.1 per cent of the barometric pressure at the central barometer location.

- (k) pressure of the mixture of exhaust and dilution air entering the CVS metering device, the pressure increase across the device, and the temperature at the inlet. The temperature should be recorded continuously or digitally to determine temperature variations;
- (l) the number of revolutions of the positive displacement pump accumulated during each test phase while exhaust samples are being collected. The number of standard cubic meters metered by a critical flow venturi (CFV) during each test phase would be the equivalent record for a CFV-CVS;
- (m) the humidity of the dilution air.

Note 8: If conditioning columns are not used this measurement can be deleted. If the conditioning columns are used and the dilution air is taken from the test cell, the ambient humidity can be used for this measurement;

- (n) the driving distance for each part of the test, calculated from the measured roll or shaft revolutions;

- (o) the actual roller speed pattern of the test;
- (p) the gear use schedule of the test;
- (q) the emissions results of the Type I test for each part of the test;
- (r) the second by second emission values of the Type I tests, if deemed necessary;
- (s) the emissions results of the Type II test (refer to Annex II).

DRAFT

Appendix 1
Used symbols in Annex I

Symbol	Definition	Unit
a	Coefficient of polygonal function	-
a _T	Rolling resistance force of front wheel	N
b	Coefficient of polygonal function	-
b _T	Coefficient of aerodynamic function	N/(km/h) ²
c	Coefficient of polygonal function	-
C _{CO}	Concentration of carbon monoxide	per cent vol.
C _{CO corr}	Corrected concentration of carbon monoxide	per cent vol.
CO _{2 c}	Carbon dioxide concentration of diluted gas, corrected to take account of diluents air	per cent
CO _{2 d}	Carbon dioxide concentration in the sample of diluents air corrected to in bag B	per cent
CO _{2 e}	Carbon dioxide concentration in the sample of diluents air corrected to in bag A	per cent
CO _{2 m}	Mass of carbon dioxide emitted during the test part	g/km
CO _c	Carbon monoxide concentration of diluted gas, corrected to take account of diluents air	ppm
CO _d	Carbon monoxide concentration in the sample of diluents air, corrected to in bag B	ppm
CO _e	Carbon monoxide concentration in the sample of diluents air, corrected to in bag A	ppm
CO _m	Mass of carbon dioxide emitted during the test part	g/km
d ₀	Standard ambient relative air density	-
d _{CO}	Density of carbon monoxide	kg/m ³
d _{CO₂}	Density of carbon dioxide	kg/m ³
DF	Dilution factor	-
d _{HC}	Density of hydrocarbon	kg/m ³
S / d	Distance driven in a cycle part	km
d _{NO_X}	Density of nitrogen oxide	kg/m ³
d _T	Relative air density under test condition	-
Δt	Coast down time	s
Δt _{a i}	Coast down time measured the first road test	s
Δt _{b i}	Coast down time measured the second road test	s
ΔTE	Corrected coast down time for the inertia mass (m _T + m _r f)	s
Δt _E	Mean coast down time on the chassis dynamometer at the reference speed	s
ΔT _i	Average coast down time at specified speed	s
Δt _i	Coast down time corresponding speed	s
ΔT _j	Average coast down time at specified speed	s
ΔT _{road}	Target coast down time	s
$\bar{\Delta t}$	Mean coast down time on the chassis dynamometer without absorption	s
Δv	Coast down speed interval (2Δv = v ₁ - v ₂)	km/h
ε	Chassis dynamometer setting error	per cent
F	Running resistance force	N
F*	Target running resistance force	N
F*(v ₀)	Target running resistance force at reference speed on chassis dynamometer	N
F*(v _i)	Target running resistance force at specified speed on chassis dynamometer	N
f* ₀	Corrected rolling resistance in the standard ambient condition	N

Symbol	Definition	Unit
f^*2	Corrected coefficient of aerodynamic drag in the standard ambient condition	$N/(km/h)^2$
F^*j	Target running resistance force at specified speed	N
f_0	Rolling resistance	N
f_2	Coefficient of aerodynamic drag	$N/(km/h)^2$
F_E	Set running resistance force on the chassis dynamometer	N
$F_E(v_0)$	Set running resistance force at the reference speed on the chassis dynamometer	N
$F_E(v_2)$	Set running resistance force at the specified speed on the chassis dynamometer	N
F_f	Total friction loss	N
$F_f(v_0)$	Total friction loss at the reference speed	N
F_j	Running resistance force	N
$F_j(v_0)$	Running resistance force at the reference speed	N
F_{pau}	Braking force of the power absorbing unit	N
$F_{pau}(v_0)$	Braking force of the power absorbing unit at the reference speed	N
$F_{pau}(v_j)$	Braking force of the power absorbing unit at the specified speed	N
F_T	Running resistance force obtained from the running resistance table	N
H	Absolute humidity	g/km
HC_c	Concentration of diluted gases expressed in the carbon equivalent, corrected to take account of diluents air	ppm
HC_d	Concentration of hydrocarbons expressed in the carbon equivalent, in the sample of diluents air corrected to in bag B	ppm
HC_e	Concentration of hydrocarbons expressed in the carbon equivalent, in the sample of diluents air corrected to in bag A	ppm
HC_m	Mass of hydrocarbon emitted during the test part	g/km
K_0	Temperature correction factor for rolling resistance	-
K_h	Humidity correction factor	-
L	Limit values of gaseous emission	g/km
m	Test L-category vehicle mass	kg
m_a	Actual mass of the test L-category vehicle	kg
m_{fi}	Flywheel equivalent inertia mass	kg
m_i	Equivalent inertia mass	kg
m_k	Kerb mass (L-category vehicle)	kg
m_r	Equivalent inertia mass of all the wheel	kg
m_{ri}	Equivalent inertia mass of all the rear wheel and L-category vehicle parts rotating with wheel	kg
m_{ref}	Mass in running order of the vehicle (L-category vehicle)	kg
m_{rf}	Rotating mass of the front wheel	kg
m_{rid}	Rider mass	kg
n	Engine speed	min^{-1}
n	Number of data regarding the emission or the test	-
N	Number of revolution made by pump P	-
ng	Number of forward gears	-
n_{idle}	Idling speed	min^{-1}
$n_{max_acc}(1)$	Up shift speed from 1 to 2 gear during acceleration phases	min^{-1}
$n_{max_acc}(i)$	Up shift speed from i to i+1 gear during acceleration phases, $i>1$	min^{-1}
$n_{min_acc}(i)$	Minimum engine speed for cruising or deceleration in gear 1	min^{-1}
NO_{xc}	Nitrogen oxides concentration of diluted gases, corrected to take account of diluents air	ppm

Symbol	Definition	Unit
NO _{xd}	Nitrogen oxides concentration in the sample of diluents air corrected to in bag B	ppm
NO _{xe}	Nitrogen oxides concentration in the sample of diluents air corrected to in bag A	ppm
NO _{xm}	Mass of nitrogen oxides emitted during the test part	g/km
P ₀	Standard ambient pressure	kPa
P _a	Ambient/Atmospheric pressure	kPa
P _d	Saturated pressure of water at the test temperature	kPa
P _i	Average under-pressure during the test part in the section of pump P	kPa
P _n	Rated engine power	kW
P _T	Mean ambient pressure during the test	kPa
ρ ₀	Standard relative ambient air volumetric mass	kg/m ³
r(i)	Gear ratio in the gear i	-
R	Final test result of pollutant emissions, carbon dioxide or fuel consumption	g/km, 1/100km
R ₁	Test results of pollutant emissions, carbon dioxide emission or fuel consumption for cycle part 1 with cold start.	g/km, 1/100km
R _{1 hot}	Test results of pollutant emissions, carbon dioxide emission or fuel consumption for cycle part 2 with hot condition.	g/km, 1/100km
R ₂	Test results of pollutant emissions, carbon dioxide emission or fuel consumption for cycle part 3 with hot condition.	g/km, 1/100km
R ₃	Test results of pollutant emissions, carbon dioxide emission or fuel consumption for cycle part 1 with hot condition.	g/km, 1/100km
R _{i1}	First Type I test results of pollutant emissions	g/km
R _{i2}	Second Type I test results of pollutant emissions	g/km
R _{i3}	Third Type I test results of pollutant emissions	g/km
s	Rated engine speed	min ⁻¹
T ^C	Temperature of the coolant	°C
T ^O	Temperature of the engine oil	°C
T ^P	Temperature of the spark plug seat/gasket	°C
T ₀	Standard ambient temperature	K
T _p	Temperature of the diluted gases during the test part, measured in the intake section of pump P	°C
T _T	Mean ambient temperature during the test	K
U	humidity	per cent
v	Specified speed	
V	Total volume of diluted gas	m ³
v _{max}	Maximum design vehicle speed of test vehicle (L-category vehicle)	km/h
v ₀	Reference speed	km/h
V ₀	Volume of gas displaced by pump P during one revolution	m ³ /rev.
v ₁	Speed at which the measurement of the coast down time begins	km/h
v ₂	Speed at which the measurement of the coast down time ends	km/h
v _i	Specified speed which are selected for the coast down time measurement.	km/h
w ₁	Weighting factor of cycle part 1 with cold start	-
w _{1 hot}	Weighting factor of cycle part 1 with hot condition	-
w ₂	Weighting factor of cycle part 2 with hot condition	-
w ₃	Weighting factor of cycle part 3 with hot condition	-

Table Ap 1-1: used symbols in Annex I

Appendix 2
Reference fuels

1 Specifications of reference fuels for testing vehicles in environmental tests, in particular for tailpipe and evaporative emissions testing.

1.1. In the subsequent tables the technical data on liquid reference fuels to be used for environmental performance testing are listed. The fuel specifications in this appendix are coherent with the reference fuel specifications from UNECE regulation No 83, Rev.4, Annex 10.

Type: Petrol (E5)				
<i>Parameter</i>	<i>Unit</i>	<i>Limits¹</i>		<i>Test method</i>
		<i>Minimum</i>	<i>Maximum</i>	
Research octane number, RON		95.0	-	EN 25164 prEN ISO 5164
Motor octane number, MON		85.0	-	EN 25163 prEN ISO 5163
Density at 15 °C	kg/m ³	743	756	EN ISO 3675 EN ISO 12185
Vapour pressure	kPa	56.0	60.0	EN ISO 13016-1 (DVPE)
Water content	% v/v		0.015	ASTM E 1064
Distillation:				
– Evaporated at 70 °C	% v/v	24.0	44.0	EN-ISO 3405
– Evaporated at 100 °C	% v/v	48.0	60.0	EN-ISO 3405
– Evaporated at 150 °C	% v/v	82.0	90.0	EN-ISO 3405
– Final boiling point	°C	190	210	EN-ISO 3405
Residue	% v/v	—	2.0	EN-ISO 3405
Hydrocarbon analysis:				
– Olefins	% v/v	3.0	13.0	ASTM D 1319
– Aromatics	% v/v	29.0	35.0	ASTM D 1319
– Benzene	% v/v	-	1.0	EN 12177
– Saturates	% v/v	Report		ASTM 1319
Carbon/hydrogen ratio		Report		
Carbon/oxygen ratio		Report		
Induction period ²	minutes	480	-	EN-ISO 7536
Oxygen content ⁴	% m/m	Report		EN 1601
Existent gum	mg/ml	-	0.04	EN-ISO 6246
Sulphur content ³	mg/kg	-	10	EN ISO 20846 EN ISO 20884
Copper corrosion		-	Class 1	EN-ISO 2160
Lead content	mg/l	-	5	EN 237
Phosphorus content	mg/l	-	1.3	ASTM D 3231
Ethanol ⁵	% v/v	4.7	5.3	EN 1601 EN 13132

¹ The values quoted in the specifications are "true values". In establishment of their limit values the terms of ISO 4259 Petroleum products - Determination and application of precision data in relation

to methods of test have been applied and in fixing a minimum value, a minimum difference of 2R above zero has been taken into account; in fixing a maximum and minimum value, the minimum difference is 4R (R = reproducibility).

Notwithstanding this measure, which is necessary for technical reasons, the manufacturer of fuels shall nevertheless aim at a zero value where the stipulated maximum value is 2R and at the mean value in the case of quotations of maximum and minimum limits. Should it be necessary to clarify whether a fuel meets the requirements of the specifications, the terms of ISO 4259 shall be applied.

- 2 The fuel may contain oxidation inhibitors and metal deactivators normally used to stabilize refinery petrol streams, but detergent/dispersive additives and solvent oils shall not be added.
- 3 The actual sulphur content of the fuel used for the Type I Test shall be reported.
- 4 Ethanol meeting the specification of pr. EN 15376 is the only oxygenate that shall be intentionally added to the reference fuel.
- 5 There shall be no intentional addition of compounds containing phosphorus, iron, manganese, or lead to this reference fuel.

DRAFT

Type: Ethanol (E85)				
<i>Parameter</i>	<i>Unit</i>	<i>Limits</i> ¹		<i>Test method</i> ²
		<i>Minimum</i>	<i>Maximum</i>	
Research octane number, RON		95.0	-	EN ISO 5164
Motor octane number, MON		85.0	-	EN ISO 5163
Density at 15 °C	kg/m ³	Report		ISO 3675
Vapour pressure	kPa	40.0	60.0	EN ISO 13016-1 (DVPE)
Sulphur content ^{3, 4}	mg/kg	-	10	EN ISO 20846 EN ISO 20884
Oxidation stability	minutes	360		EN ISO 7536
Existent gum content (solvent washed)	mg/(100 ml)	-	5	EN-ISO 6246
Appearance This shall be determined at ambient temperature or 15 °C whichever is higher.		Clear and bright, visibly free of suspended or precipitated contaminants		Visual inspection
Ethanol and higher alcohols ⁷	% V/V	83	85	EN 1601 EN 13132 EN 14517
Higher alcohols (C3-C8)	% V/V	-	2.0	
Methanol	% V/V		0.5	
Petrol ⁵	% V/V	Balance		EN 228
Phosphorus	mg/l	0.3 ⁶		ASTM D 3231
Water content	% V/V		0.3	ASTM E 1064
Inorganic chloride content	mg/l		1	ISO 6227
pHe		6.5	9.0	ASTM D 6423
Copper strip corrosion (3h at 50 °C)	Rating	Class 1		EN ISO 2160
Acidity, (as acetic acid CH ₃ COOH)	% m/m (mg/l)	-	0.005 (40)	ASTM D 1613
Carbon/hydrogen ratio		report		
Carbon/oxygen ratio		report		

¹ The values quoted in the specifications are "true values". In establishment of their limit values the terms of ISO 4259 Petroleum products - Determination and application of precision data in relation to methods of test have been applied and in fixing a minimum value, a minimum difference of 2R above zero has been taken into account; in fixing a maximum and minimum value, the minimum difference is 4R (R = reproducibility).

Notwithstanding this measure, which is necessary for technical reasons, the manufacturer of fuels shall nevertheless aim at a zero value where the stipulated maximum value is 2R and at the mean value in the case of quotations of maximum and minimum limits. Should it be necessary to clarify whether a fuel meets the requirements of the specifications, the terms of ISO 4259 shall be applied.

² In cases of dispute, the procedures for resolving the dispute and interpretation of the results based on test method precision, described in EN ISO 4259 shall be used.

³ In cases of national dispute concerning sulphur content, either EN ISO 20846 or EN ISO 20884 shall be called up similar to the reference in the national annex of EN 228.

- 4 The actual sulphur content of the fuel used for the Type I Test shall be reported.
- 5 The unleaded petrol content can be determined as 100 minus the sum of the percentage content of water and alcohols.
- 6 There shall be no intentional addition of compounds containing phosphorus, iron, manganese, or lead to this reference fuel.
- 7 Ethanol to meet specification of EN 15376 is the only oxygenate that shall be intentionally added to this reference fuel.

Type: Diesel fuel (B5)				
<i>Parameter</i>	<i>Unit</i>	<i>Limits¹</i>		<i>Test method</i>
		<i>Minimum</i>	<i>Maximum</i>	
Cetane number ²		52.0	54.0	EN-ISO 5165
Density at 15 °C	kg/m ³	833	837	EN-ISO 3675
Distillation:				
- 50% point	°C	245	-	EN-ISO 3405
- 95% point	°C	345	350	EN-ISO 3405
- Final boiling point	°C	-	370	EN-ISO 3405
Flash point	°C	55	-	EN 22719
CFPP	°C	-	- 5	EN 116
Viscosity at 40 °C	mm ² /s	2.3	3.3	EN-ISO 3104
Polycyclic aromatic hydrocarbons	% m/m	2.0	6.0	EN 12916
Sulphur content ³	mg/kg	-	10	EN ISO 20846 /EN ISO 20884
Copper corrosion		-	Class 1	EN-ISO 2160
Conradson carbon residue (10% DR)	% m/m	-	0.2	EN-ISO 10370
Ash content	% m/m	-	0.01	EN-ISO 6245
Water content	% m/m	-	0.02	EN-ISO 12937
Neutralisation (strong acid) number	mg KOH/g	-	0.02	ASTM D 974
Oxidation stability ⁴	mg/ml	-	0.025	EN-ISO 12205
Lubricity (HFRR wear scan diameter at 60 °C)	µm	-	400	EN ISO 12156
Oxidation stability at 110 °C ^{4, 6}	h	20.0		EN 14112
FAME ⁵	% v/v	4.5	5.5	EN 14078

¹ The values quoted in the specifications are "true values". In establishment of their limit values the terms of ISO 4259 Petroleum products – Determination and application of precision data in relation to methods of test have been applied and in fixing a minimum value, a minimum difference of 2R above zero has been taken into account; in fixing a maximum and minimum value, the minimum difference is 4R (R = reproducibility).

Notwithstanding this measure, which is necessary for technical reasons, the manufacturer of fuels shall nevertheless aim at a zero value where the stipulated maximum value is 2R and at the mean value in the case of quotations of maximum and minimum limits. Should it be necessary to clarify whether a fuel meets the requirements of the specifications, the terms of ISO 4259 shall be

applied.

- ² The range for Cetane number is not in accordance with the requirements of a minimum range of 4R. However, in the case of a dispute between fuel supplier and fuel user, the terms of ISO 4259 may be used to resolve such disputes provided replicate measurements, of sufficient number to archive the necessary precision, are made in preference to single determinations.
- ³ The actual sulphur content of the fuel used for the Type I Test shall be reported.
- ⁴ Even though oxidation stability is controlled, it is likely that shelf life will be limited. Advice shall be sought from the supplier as to storage conditions and life.
- ⁵ FAME content to meet the specification of EN 14214.
- ⁶ Oxidation stability can be demonstrated by EN-ISO 12205 or by EN 14112. This requirement shall be reviewed based on CEN/TC19 evaluations of oxidative stability performance and test limits.

1.2. In the subsequent tables the technical data of gaseous reference fuels to be used for environmental performance testing are listed. The fuel specifications in this appendix are coherent with the reference fuel specifications from UNECE regulation No 83, Annex 10a.

Type: Liquefied Petroleum Gas (LPG)				
<i>Parameter</i>	<i>Unit</i>	<i>Fuel A</i>	<i>Fuel B</i>	<i>Test method</i>
<i>Composition:</i>				ISO 7941
C ₃ -content	per cent vol	30 ± 2	85 ± 2	
C ₄ -content	per cent vol	Balance ¹	Balance ¹	
< C ₃ , >C ₄	per cent vol	max. 2	max. 2	
Olefins	per cent vol	max. 12	max. 15	
Evaporation residue	mg/kg	max. 50	max. 50	ISO 13757 or EN 15470
Water at 0°C		free	free	EN 15469
Total sulphur content	mg/kg	max. 50	max. 50	EN 24260 or ASTM 6667
Hydrogen sulphide		none	none	ISO 8819
Copper strip corrosion	rating	Class 1	class 1	ISO 6251 ²
Odour		characteristic	characteristic	
Motor octane number		min. 89	min. 89	EN 589 Annex B
<i>Parameter</i>	<i>Unit</i>	<i>Fuel A</i>	<i>Fuel B</i>	<i>Test method</i>
<i>Composition:</i>				ISO 7941
C ₃ -content	per cent vol	30 ± 2	85 ± 2	
C ₄ -content	per cent vol	Balance ¹	Balance ¹	

¹ Balance has to be read as follows: balance = 100 – C₃ ≤ C₃ ≥ C₄.

² This method may not accurately determine the presence of corrosive materials if the sample contains corrosion inhibitors or other chemicals which diminish the corrosivity of the sample to

the copper strip. Therefore, the addition of such compounds for the sole purpose of biasing the test method is prohibited.

Type: Natural Gas (NG) / Bio methane				
<i>Parameter</i>	<i>Unit</i>	<i>Limits¹</i>		<i>Test method</i>
		<i>Minimum</i>	<i>Maximum</i>	
Reference fuel G ₂₀				
Methane	per cent mole	100	99	100
Balance ¹	per cent mole	-	-	1
N ₂	per cent mole			
Sulphur content ²	mg/m ³	-	-	10
Wobbe Index ³ (net)	MJ/m ³	48.2	47.2	49.2
Reference fuel G ₂₅				
Methane	per cent mole	86	84	88
Balance ¹	per cent mole	-	-	1
N ₂	per cent mole	14	12	16
Sulphur content	mg/m ³ 2	-	-	10
Wobbe Index (net)	MJ/m ³ 3	39.4	38.2	40.6

¹ Inerts (different from N₂) + C₂ + C₂₊.

² Value to be determined at 293.2 K (20 °C) and 101.3 kPa.

³ Value to be determined at 273.2 K (0 °C) and 101.3 kPa.

Type: Hydrogen for internal combustion engines				
<i>Parameter</i>	<i>Unit</i>	<i>Limits</i>		<i>Test method</i>
		<i>Minimum</i>	<i>Maximum</i>	
Hydrogen purity	% mole	98	100	ISO 14687
Total hydrocarbon	µmol/mol	0	100	ISO 14687
Water ⁽¹⁾	µmol/mol	0	(²)	ISO 14687
Oxygen	µmol/mol	0	(²)	ISO 14687
Argon	µmol/mol	0	(²)	ISO 14687
Nitrogen	µmol/mol	0	(²)	ISO 14687
CO	µmol/mol	0	1	ISO 14687
Sulphur	µmol/mol	0	2	ISO 14687
Permanent particulates ⁽³⁾				ISO 14687

(1) Not to be condensed.

(2) Combined water, oxygen, nitrogen and argon: 1.900 µmol/mol.

(3) The hydrogen shall not contain dust, sand, dirt, gums, oils, or other substances in an amount sufficient to damage the fuelling station equipment of the vehicle (engine) being fuelled.

Type: Hydrogen for fuel cell vehicles				
<i>Parameter</i>	<i>Unit</i>	<i>Limits</i>		<i>Test method</i>

		<i>Minimum</i>	<i>Maximum</i>	
Hydrogen fuel ⁽¹⁾	% mole	99,99	100	ISO 14687-2
Total gases ⁽²⁾	μmol/mol	0	100	
Total hydrocarbon	μmol/mol	0	2	ISO 14687-2
Water	μmol/mol	0	5	ISO 14687-2
Oxygen	μmol/mol	0	5	ISO 14687-2
Helium (He), Nitrogen (N ₂), Argon (Ar)	μmol/mol	0	100	ISO 14687-2
CO ₂	μmol/mol	0	2	ISO 14687-2
CO	μmol/mol	0	0.2	ISO 14687-2
Total sulphur compounds	μmol/mol	0	0.004	ISO 14687-2
Formaldehyde (HCHO)	μmol/mol	0	0.01	ISO 14687-2
Formic acid (HCOOH)	μmol/mol	0	0.2	ISO 14687-2
Ammonia (NH ₃)	μmol/mol	0	0.1	ISO 14687-2
Total halogenated compounds	μmol/mol	0	0.05	ISO 14687-2
Particulates size	μm	0	10	ISO 14687-2
Particulates concentration	μg/l	0	1	ISO 14687-2

- (1) The hydrogen fuel index is determined by subtracting the total content of non-hydrogen gaseous constituents listed in the table (Total gases), expressed in mole percent, from 100 mole percent. It is less than the sum of the maximum allowable limits of all non-hydrogen constituents shown in the Table.
- (2) The value of total gases is summation of the values of the non-hydrogen constituents listed in the table, except the particulates."

Appendix 3
Chassis dynamometer system

1. Specification

1.1. General Requirements

1.1.1. The dynamometer shall be capable of simulating road load within one of the following classifications:

(a) dynamometer with fixed load curve, i.e. a dynamometer whose physical characteristics provide a fixed load curve shape;

(b) dynamometer with adjustable load curve, i.e. a dynamometer with at least two road load parameters that can be adjusted to shape the load curve.

1.1.2. Dynamometers with electric inertia simulation shall be demonstrated to be equivalent to mechanical inertia systems. The means by which equivalence is established are described in Appendix x to this Annex.

1.1.3. In the event that the total resistance to progress on the road cannot be reproduced on the chassis dynamometer between speeds of 10 km/h and 120 km/h, it is recommended that a chassis dynamometer having the characteristics defined below should be used.

1.1.3.1. The load absorbed by the brake and the chassis dynamometer internal frictional effects between the speeds of 0 and 120 km/h is as follows:

Equation Ap3-1:

$$F = (a + b \cdot v^2) \pm 0.1 \cdot F_{80} \text{ (without being negative)}$$

where:

F = total load absorbed by the chassis dynamometer (N),

a = value equivalent to rolling resistance (N),

b = value equivalent to coefficient of air resistance (N/(km/h)²),

v = vehicle speed (km/h),

F₈₀ = load at 80 km/h (N).

1.2. Specific Requirements

- 1.2.1. The setting of the dynamometer shall not be affected by the lapse of time. It shall not produce any vibrations perceptible to the vehicle and likely to impair the vehicle's normal operations.
- 1.2.2. The chassis dynamometer may have one to test two-wheel vehicle or two rollers in case of three-wheel vehicles with 2 front wheels and in case of quadricycles. In this case the front roller shall drive, directly or indirectly, the inertial masses and the power absorption device.
- 1.2.3. It shall be possible to measure and read the indicated load to an accuracy of ± 5 per cent.
- 1.2.4. In the case of a dynamometer with a fixed load curve, the accuracy of the load setting at 80 km/h shall be ± 5 per cent. In the case of a dynamometer with adjustable load curve, the accuracy of matching dynamometer load to road load shall be ± 5 per cent at 120, 100, 80, 60, and 40 km/h and ± 10 per cent at 20 km/h. Below this, dynamometer absorption shall be positive.
- 1.2.5. The total inertia of the rotating parts (including the simulated inertia where applicable) shall be known and shall be within ± 10 kg of the inertia class for the test.
- 1.2.6. The speed of the vehicle shall be measured by the speed of rotation of the roller (the front roller in the case of a two-roller dynamometer). It shall be measured with an accuracy of ± 1 km/h at speeds above 10 km/h. The distance actually driven by the vehicle shall be measured by the movement of rotation of the roller (the front roller in the case of a two-roller dynamometer).

2. Dynamometer calibration procedure

2.1. Introduction

This section describes the method to be used to determine the load absorbed by a dynamometer brake. The load absorbed comprises the load absorbed by frictional effects and the load absorbed by the power-absorption device. The dynamometer is brought into operation beyond the range of test speeds. The device used for starting up the dynamometer is then disconnected: the rotational speed of the driven roller decreases. The kinetic energy of the rollers is dissipated by the power-absorption unit and by the frictional effects. This method disregards variations in the roller's internal frictional effects caused by rollers with or without the vehicle. The frictional effects of the rear roller shall be disregarded when the roller is free.

2.2. Calibration of the load indicator at 80 km/h

The following procedure shall be used for calibration of the load indicator to 80 km/h as a function of the load absorbed (see also Figure Ap3-1):

- 2.2.1. Measure the rotational speed of the roller if this has not already been done. A fifth wheel, a revolution counter or some other method may be used.
- 2.2.2. Place the vehicle on the dynamometer or devise some other method of starting-up the dynamometer.
- 2.2.3. Use the flywheel or any other system of inertia simulation for the particular inertia class to be used.

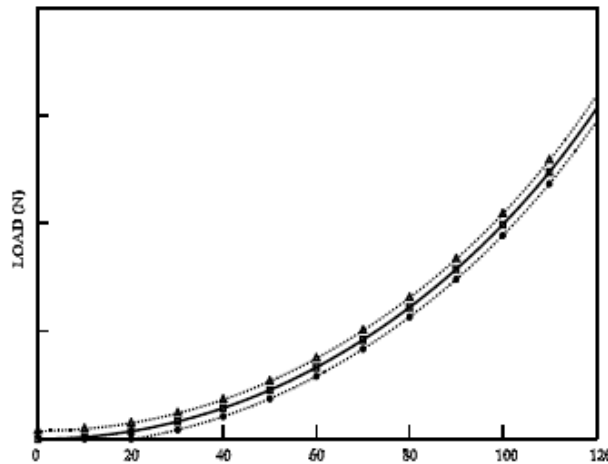


Figure Ap3-1: diagram illustrating the power absorbed by the chassis dynamometer

Graph legend:

$$\square = F = a + b \cdot v^2 \quad \bullet = (a + b \cdot v^2) - 0.1 \cdot F_{80} \quad \Delta = (a + b \cdot v^2) + 0.1 \cdot F_{80}$$

- 2.2.4. Bring the dynamometer to a speed of 80 km/h.
- 2.2.5. Note the load indicated F_i (N).
- 2.2.6. Bring the dynamometer to a speed of 90 km/h.
- 2.2.7. Disconnect the device used to start-up the dynamometer.
- 2.2.8. Note the time taken by the dynamometer to pass from a speed of 85 km/h to a speed of 75 km/h.
- 2.2.9. Set the power-absorption device at a different level.
- 2.2.10. The requirements of paragraphs 2.2.4. to 2.2.9. shall be repeated sufficiently often to cover the range of loads used.
- 2.2.11. Calculate the load absorbed using the formula:

Equation Ap3-2:

$$F = \frac{M_i \cdot \Delta V}{t}$$

where:

F = load absorbed (N),

M_i = equivalent inertia in kg (excluding the inertial effects of the free rear roller),

ΔV = speed deviation in m/s (10 km/h = 2.775 m/s),

t = time taken by the roller to pass from 85 km/h to 75 km/h.

2.2.12. Figure Ap3-2 shows the load indicated at 80 km/h in terms of load absorbed at 80 km/h.

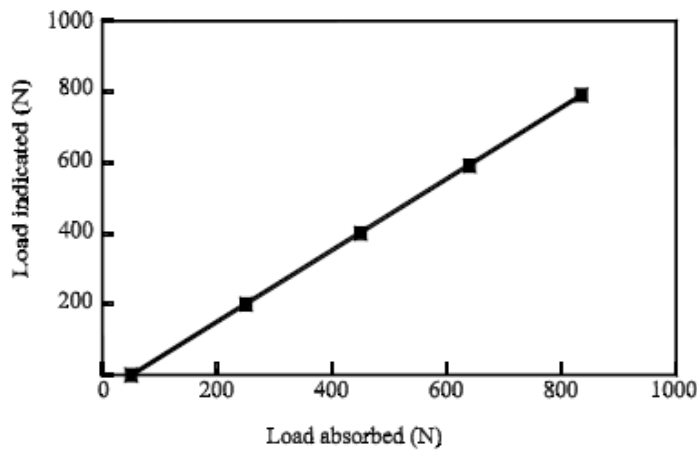


Figure Ap3-2: Load indicated at 80 km/h in terms of load absorbed at 80 km/h

2.2.13. The requirements of paragraphs 2.2.3. to 2.2.12. above shall be repeated for all inertia classes to be used.

2.3. Calibration of the load indicator at other speeds

The procedures described in paragraph 2.2. above shall be repeated as often as necessary for the chosen speeds.

2.4. Calibration of force or torque

The same procedure shall be used for force or torque calibration.

3. Verification of the load curve

3.1. Procedure

The load-absorption curve of the dynamometer from a reference setting at a speed of 80 km/h shall be verified as follows:

- 3.1.1. Place the vehicle on the dynamometer or devise some other method of starting-up the dynamometer.
- 3.1.2. Adjust the dynamometer to the absorbed load (F) at 80 km/h.
- 3.1.3. Note the load absorbed at 120, 100, 80, 60, 40 and 20 km/h.
- 3.1.4. Draw the curve F(V) and verify that it corresponds to the requirements of paragraph 1.1.3.1. of this appendix.
- 3.1.5. Repeat the procedure set out in paragraphs 3.1.1. to 3.1.4. above for other values of power F at 80 km/h and for other values of inertias.

4 Verification of simulated inertia

4.1. Object

The method described in this appendix makes it possible to check that the simulated total inertia of the dynamometer is carried out satisfactorily in the running phase of the operating cycle. The manufacturer of the chassis dynamometer shall specify a method for verifying the specifications according to paragraph 4.3. below.

4.2. Principle

4.2.1. Drawing-up working equations

Since the dynamometer is subjected to variations in the rotating speed of the roller(s), the force at the surface of the roller(s) can be expressed by:

Equation Ap3-3:

$$F = I \cdot \gamma = I_M \cdot \gamma + F_i$$

where:

F is the force at the surface of the roller(s) in N,

I is the total inertia of the dynamometer (equivalent inertia of the vehicle),

I_M is the inertia of the mechanical masses of the dynamometer,

γ is the tangential acceleration at roller surface,

F_1 is the inertia force.

Note: An explanation of this formula with reference to dynamometers with mechanically simulated inertia is appended.

Thus, total inertia is expressed as follows:

Equation Ap3-4:

$$I = I_m + F_1 / \gamma$$

where:

I_m can be calculated or measured by traditional methods,

F_1 can be measured on the dynamometer,

γ can be calculated from the peripheral speed of the rollers.

The total inertia (I) will be determined during an acceleration or deceleration test with values higher than or equal to those obtained on an operating cycle.

4.2.2. Specification for the calculation of total inertia

The test and calculation methods shall make it possible to determine the total inertia I with a relative error ($\Delta I/I$) of less than ± 2 per cent.

4.3. Specification

4.3.1. The mass of the simulated total inertia I shall remain the same as the theoretical value of the equivalent inertia (see Appendix 1) within the following limits:

4.3.1.1. ± 5 per cent of the theoretical value for each instantaneous value;

4.3.1.2. ± 2 per cent of the theoretical value for the average value calculated for each sequence of the cycle.

The limit given in paragraph 4.3.1.1. above is brought to ± 50 per cent for one second when starting and, for vehicles with manual transmission, for two seconds during gear changes.

4.4. Verification procedure

4.4.1. Verification is carried out during each test throughout the test cycles defined in Annex I, Appendix 6.

- 4.4.2. However, if the requirements of paragraph 4.3. above are met, with instantaneous accelerations which are at least three times greater or smaller than the values obtained in the sequences of the theoretical cycle, the verification described above will not be necessary.

DRAFT

Appendix 4
Exhaust dilution system

1. System specification

1.1. System Overview

A full-flow exhaust dilution system shall be used. This requires that the vehicle exhaust be continuously diluted with ambient air under controlled conditions. The total volume of the mixture of exhaust and dilution air shall be measured and a continuously proportional sample of the volume shall be collected for analysis. The quantities of pollutants are determined from the sample concentrations, corrected for the pollutant content of the ambient air and the totalised flow over the test period. The exhaust dilution system shall consist of a transfer tube, a mixing chamber and dilution tunnel, a dilution air conditioning, a suction device and a flow measurement device. Sampling probes shall be fitted in the dilution tunnel as specified in Appendices 3, 4 and 5. The mixing chamber described above will be a vessel, such as those illustrated in Figures 4-1 and 4-2, in which vehicle exhaust gases and the dilution air are combined so as to produce a homogeneous mixture at the chamber outlet.

1.2. General Requirements

- 1.2.1. The vehicle exhaust gases shall be diluted with a sufficient amount of ambient air to prevent any water condensation in the sampling and measuring system at all conditions which may occur during a test.
- 1.2.2. The mixture of air and exhaust gases shall be homogeneous at the point where the sampling probe is located (see paragraph 1.3.3. below). The sampling probe shall extract a representative sample of the diluted exhaust gas.
- 1.2.3. The system shall enable the total volume of the diluted exhaust gases to be measured.
- 1.2.4. The sampling system shall be gas-tight. The design of the variable dilution sampling system and the materials that go to make it up shall be such that they do not affect the pollutant concentration in the diluted exhaust gases. Should any component in the system (heat exchanger, cyclone separator, blower, etc.) change the concentration of any of the pollutants in the diluted exhaust gases and the fault cannot be corrected, then sampling for that pollutant shall be carried out upstream from that component.
- 1.2.5. All parts of the dilution system that are in contact with raw and diluted exhaust gas, shall be designed to minimise deposition or alteration of the particulates or particles. All parts shall be made of electrically conductive materials that do not react with exhaust gas components, and shall be electrically grounded to prevent electrostatic effects.

- 1.2.6. If the vehicle being tested is equipped with an exhaust pipe comprising several branches, the connecting tubes shall be connected as near as possible to the vehicle without adversely affecting its operation.
- 1.2.7. The variable-dilution system shall be so designed as to enable the exhaust gases to be sampled without appreciably changing the back-pressure at the exhaust pipe outlet.
- 1.2.8. The connecting tube between the vehicle and dilution system shall be designed so as to minimize heat loss.

1.3. Specific Requirements

1.3.1. Connection to Vehicle Exhaust

The connecting tube between the vehicle exhaust outlets and the dilution system shall be as short as possible; and satisfy the following requirements:

- (a) be less than 3.6 m long, or less than 6.1 m long if heat insulated. Its internal diameter may not exceed 105 mm;
- (b) shall not cause the static pressure at the exhaust outlets on the vehicle being tested to; differ by more than ± 0.75 kPa at 50 km/h, or more than ± 1.25 kPa for the whole duration of the test from the static pressures recorded when nothing is connected to the vehicle exhaust outlets. The pressure shall be measured in the exhaust outlet or in an extension having the same diameter, as near as possible to the end of the pipe. Sampling systems capable of maintaining the static pressure to within ± 0.25 kPa may be used if a written request from a manufacturer to the technical service substantiates the need for the closer tolerance;
- (c) shall not change the nature of the exhaust gas;
- (d) any elastomeric connectors employed shall be as thermally stable as possible and have minimum exposure to the exhaust gases

1.3.2. Dilution Air Conditioning

The dilution air used for the primary dilution of the exhaust in the CVS tunnel shall be passed through a medium capable of reducing particles in the most penetrating particle size of the filter material by ≥ 99.95 percent, or through a filter of at least class H13 of EN 1822:1998. This represents the specification of High Efficiency Particulate Air (HEPA) filters. The dilution air may optionally be charcoal scrubbed before being passed to the HEPA filter. It is recommended that an additional coarse particle filter is situated before the HEPA filter and after the charcoal scrubber, if used. At the vehicle manufacturer's request, the dilution air may be sampled according to good engineering practice to determine the tunnel contribution to background particulate mass levels, which can then be subtracted from the values measured in the

diluted exhaust.

1.3.3. Dilution Tunnel

Provision shall be made for the vehicle exhaust gases and the dilution air to be mixed. A mixing orifice may be used. In order to minimise the effects on the conditions at the exhaust outlet and to limit the drop in pressure inside the dilution-air conditioning device, if any, the pressure at the mixing point shall not differ by more than ± 0.25 kPa from atmospheric pressure. The homogeneity of the mixture in any cross-section at the location of the sampling probe shall not vary by more than ± 2 per cent from the average of the values obtained for at least five points located at equal intervals on the diameter of the gas stream. For particulate and particle emissions sampling, a dilution tunnel shall be used which:

- (a) shall consist of a straight tube of electrically-conductive material, which shall be earthed;
- (b) shall be small enough in diameter to cause turbulent flow (Reynolds number ≥ 4000) and of sufficient length to cause complete mixing of the exhaust and dilution air;
- (c) shall be at least 200 mm in diameter;
- (d) may be insulated.

1.3.4. Suction Device

This device may have a range of fixed speeds to ensure sufficient flow to prevent any water condensation. This result is generally obtained if the flow is either:

- (a) twice as high as the maximum flow of exhaust gas produced by accelerations of the driving cycle; or
- (b) sufficient to ensure that the CO₂ concentration in the dilute exhaust sample bag is less than 3 per cent by volume for petrol and diesel, less than 2.2 per cent by volume for LPG and less than 1.5 per cent by volume for NG/bio methane.

1.3.5. Volume Measurement in the Primary Dilution System

The method of measuring total dilute exhaust volume incorporated in the constant volume sampler shall be such that measurement is accurate to ± 2 per cent under all operating conditions. If the device cannot compensate for variations in the temperature of the mixture of exhaust gases and dilution air at the measuring point, a heat exchanger shall be used to maintain the temperature to within ± 6 K of the specified operating temperature. If necessary, some form of protection for the volume measuring device may be used e.g. a cyclone separator, bulk stream filter, etc. A

temperature sensor shall be installed immediately before the volume measuring device. This temperature sensor shall have an accuracy and a precision of ± 1 K and a response time of 0.1 s at 62 per cent of a given temperature variation (value measured in silicone oil). The measurement of the pressure difference from atmospheric pressure shall be taken upstream from and, if necessary, downstream from the volume measuring device. The pressure measurements shall have a precision and an accuracy of ± 0.4 kPa during the test.

1.4. Recommended System Descriptions

Figure Ap 4-1 and Figure Ap 4-2 are schematic drawings of two types of recommended exhaust dilution systems that meet the requirements of this annex. Since various configurations can produce accurate results, exact conformity with these figures is not essential. Additional components such as instruments, valves, solenoids and switches may be used to provide additional information and co-ordinate the functions of the component system.

1.4.1. Full Flow Dilution System with Positive Displacement Pump

Positive Displacement Pump Dilution System

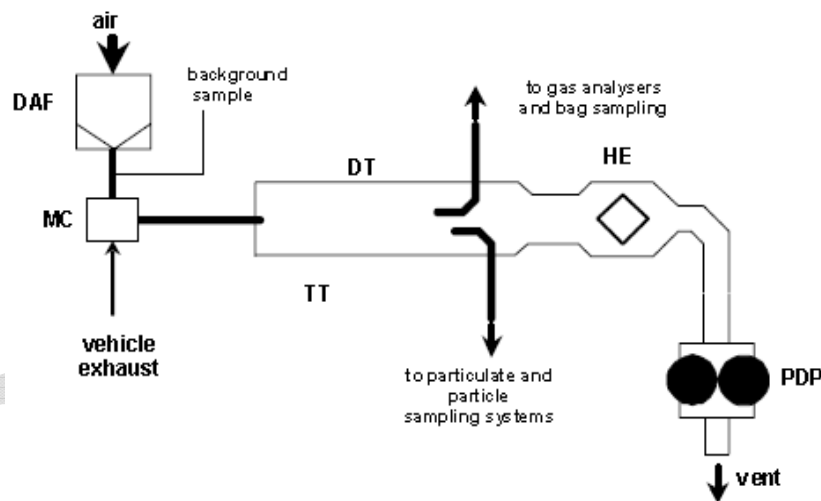


Figure Ap 4-1: Positive Displacement Pump Dilution System

The positive displacement pump (PDP) full flow dilution system satisfies the requirements of this annex by metering the flow of gas through the pump at constant temperature and pressure. The total volume is measured by counting the revolutions made by the calibrated positive displacement pump. The proportional sample is achieved by sampling with pump, flow meter and flow control valve at a constant flow rate. The collecting equipment consists of:

- 1.4.1.1. A filter (DAF) for the dilution air, which can be preheated if necessary. This filter shall consist of the following filters in sequence: an optional activated charcoal filter

(inlet side), and a high efficiency particulate air(HEPA) filter (outlet side). It is recommended that an additional coarse particle filter is situated before the HEPA filter and after the charcoal filter, if used. The purpose of the charcoal filter is to reduce and stabilize the hydrocarbon concentrations of ambient emissions in the dilution air;

- 1.4.1.2. A transfer tube (TT) by which vehicle exhaust is admitted into a dilution tunnel (DT) in which the exhaust gas and dilution air are mixed homogeneously;
- 1.4.1.3. The positive displacement pump (PDP), producing a constant-volume flow of the air/exhaust-gas mixture. The PDP revolutions, together with associated temperature and pressure measurement are used to determine the flow rate;
- 1.4.1.4. A heat exchanger (HE) of a capacity sufficient to ensure that throughout the test the temperature of the air/exhaust-gas mixture measured at a point immediately upstream of the positive displacement pump is within 6 K of the average operating temperature during the test. This device shall not affect the pollutant concentrations of diluted gases taken off after for analysis.
- 1.4.1.5. A mixing chamber (MC) in which exhaust gas and air are mixed homogeneously, and which may be located close to the vehicle so that the length of the transfer tube (TT) is minimized.
- 1.4.2. Full Flow Dilution System with Critical Flow Venturi

Critical-Flow Venturi Dilution System

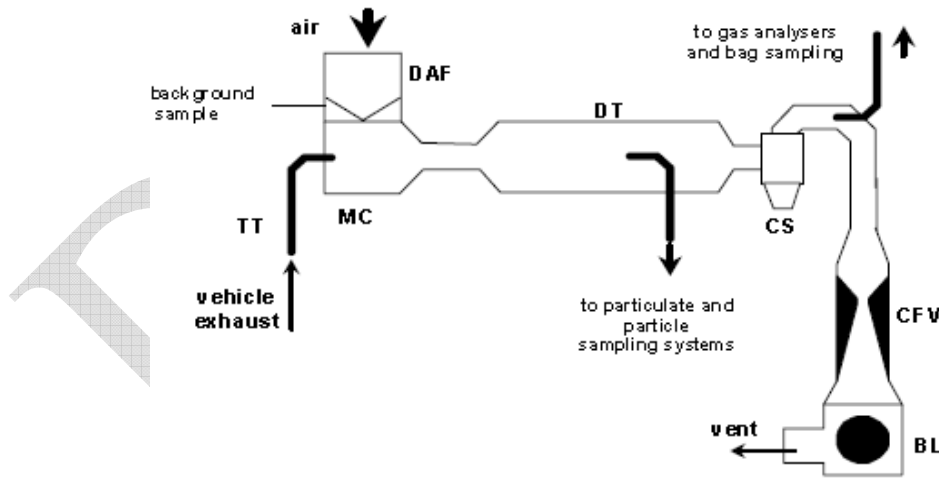


Figure Ap 4-2: Critical-Flow Venturi Dilution System

The use of a critical-flow venturi (CFV) for the full-flow dilution system is based on the principles of flow mechanics for critical flow. The variable mixture flow rate of dilution and exhaust gas is maintained at sonic velocity which is directly proportional to the square root of the gas temperature. Flow is continually monitored, computed

and integrated throughout the test. The use of an additional critical-flow sampling venturi ensures the proportionality of the gas samples taken from the dilution tunnel. As both pressure and temperature are equal at the two venturi inlets the volume of the gas flow diverted for sampling is proportional to the total volume of diluted exhaust-gas mixture produced, and thus the requirements of this annex are met. The collecting equipment consists of:

- 1.4.2.1. A filter (DAF) for the dilution air, which can be preheated if necessary. This filter shall consist of the following filters in sequence: an optional activated charcoal filter (inlet side), and a high efficiency particulate air(HEPA) filter (outlet side). It is recommended that an additional coarse particle filter is situated before the HEPA filter and after the charcoal filter, if used. The purpose of the charcoal filter is to reduce and stabilize the hydrocarbon concentrations of ambient emissions in the dilution air;
- 1.4.2.2. A mixing chamber (MC) in which exhaust gas and air are mixed homogeneously, and which may be located close to the vehicle so that the length of the transfer tube (TT) is minimized;
- 1.4.2.3. A dilution tunnel (DT) from which particulates and particles are sampled;
- 1.4.2.4. Some form of protection for the measurement system may be used e.g. a cyclone separator, bulk stream filter, etc.;
- 1.4.2.5. A measuring critical-flow venturi tube (CFV), to measure the flow volume of the diluted exhaust gas;
- 1.4.2.6. A blower (BL), of sufficient capacity to handle the total volume of diluted exhaust gas.

2. CVS Calibration procedure

2.1. General Requirements

The CVS system shall be calibrated by using an accurate flow-meter and a restricting device. The flow through the system shall be measured at various pressure readings and the control parameters of the system measured and related to the flows. The flow-metering device shall be dynamic and suitable for the high flow-rate encountered in constant volume sampler testing. The device shall be of certified accuracy traceable to an approved national or international standard.

- 2.1.1. Various types of flow-meter may be used, e.g. calibrated venturi, laminar flow-meter, calibrated turbine-meter, provided that they are dynamic measurement systems and can meet the requirements of paragraph 1.3.5. of this Appendix.
- 2.1.2. The following paragraphs give details of methods of calibrating PDP and CFV units,

using a laminar flow-meter, which gives the required accuracy, together with a statistical check on the calibration validity.

2.2. Calibration of the positive displacement pump (PDP)

2.2.1. The following calibration procedure outlines the equipment, the test configuration and the various parameters that are measured to establish the flow-rate of the CVS pump. All the parameters related to the pump are simultaneously measured with the parameters related to the flow meter which is connected in series with the pump. The calculated flow rate (given in m³/min at pump inlet, absolute pressure and temperature) can then be plotted versus a correlation function that is the value of specific combination of pump parameters. The linear equation that relates the pump flow and the correlation function is then determined. In the event that a CVS has a multiple speed drive, a calibration for each range used shall be performed.

2.2.2. This calibration procedure is based on the measurement of the absolute values of the pump and flow-meter parameters that relate the flow rate at each point. Three conditions shall be maintained to ensure the accuracy and integrity of the calibration curve:

2.2.2.1. The pump pressures shall be measured at tappings on the pump rather than at the external piping on the pump inlet and outlet. Pressure taps that are mounted at the top centre and bottom centre of the pump drive head plate are exposed to the actual pump cavity pressures, and therefore reflect the absolute pressure differentials;

2.2.2.2. Temperature stability shall be maintained during the calibration. The laminar flow-meter is sensitive to inlet temperature oscillations which cause the data points to be scattered. Gradual changes of ± 1 K in temperature are acceptable as long as they occur over a period of several minutes;

2.2.2.3. All connections between the flow-meter and the CVS pump shall be free of any leakage.

2.2.3. During an exhaust emission test, the measurement of these same pump parameters enables the user to calculate the flow rate from the calibration equation.

2.2.4. Figure Ap 4-3 of this Appendix shows one possible test set-up. Variations are permissible, provided that the technical service approves them as being of comparable accuracy. If the set-up shown in Figure Ap4-3 is used, the following data shall be found within the limits of precision given:

Barometric pressure (corrected)(P_b) ± 0.03 kPa

Ambient temperature (T) ± 0.2 K

Air temperature at LFE (ETI) ± 0.15 K

Pressure depression upstream of LFE (EPI) ± 0.01 kPa

Pressure drop across the LFE matrix (EDP) ± 0.0015 kPa

Air temperature at CVS pump inlet (PTI) ± 0.2 K

Air temperature at CVS pump outlet (PTO) ± 0.2 K

Pressure depression at CVS pump inlet (PPI) ± 0.22 kPa

Pressure head at CVS pump outlet (PPO) ± 0.22 kPa

Pump revolutions during test period (n) ± 1 min⁻¹

Elapsed time for period (minimum 250 s) (t) ± 0.1 s

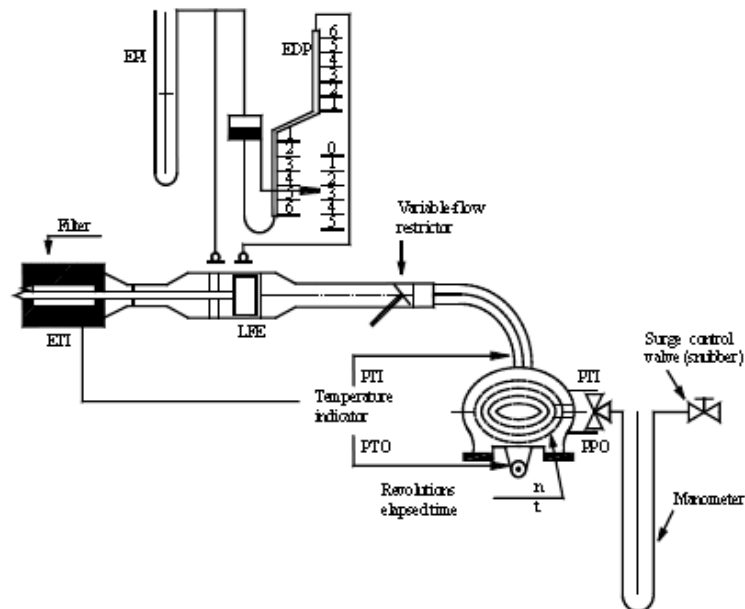


Figure Ap 4-3 PDP Calibration Configuration

- 2.2.5. After the system has been connected as shown in Figure Ap 4-3 of this Appendix, set the variable restrictor in the wide-open position and run the CVS pump for 20 minutes before starting the calibration.
- 2.2.6. Reset the restrictor valve to a more restricted condition in an increment of pump inlet depression (about 1 kPa) that will yield a minimum of six data points for the total calibration. Allow the system to stabilize for three minutes and repeat the data acquisition.

- 2.2.7. The air flow rate (Q_s) at each test point is calculated in standard m^3/min from the flow-meter data using the manufacturer's prescribed method.
- 2.2.8. The air flow-rate is then converted to pump flow (V_0) in m^3/rev at absolute pump inlet temperature and pressure.

Equation Ap 4 -1:

$$V_0 = \frac{Q_s}{n} \cdot \frac{T_p}{273.2} \cdot \frac{101.33}{P_p}$$

Where:

V_0 = pump flow rate at T_p and P_p (m^3/rev),

Q_s = air flow at 101.33 kPa and 273.2 K (m^3/min),

T_p = pump inlet temperature (K),

P_p = absolute pump inlet pressure (kPa),

n = pump speed (min^{-1}).

- 2.2.9. To compensate for the interaction of pump speed pressure variations at the pump and the pump slip rate, the correlation function (x_0) between the pump speed (n), the pressure differential from pump inlet to pump outlet and the absolute pump outlet pressure is then calculated as follows:

Equation Ap 4-2:

$$x_0 = \frac{1}{n} \sqrt{\frac{\Delta P_p}{P_e}}$$

where:

x_0 = correlation function,

ΔP_p = pressure differential from pump inlet to pump outlet (kPa),

P_e = absolute outlet pressure ($PPO + P_b$) (kPa).

- 2.2.9.1. A linear least-square fit is performed to generate the calibration equations which have the formula:

Equation Ap 4-3:

$$V_0 = D_0 - M(x_0)$$

$$n = A - B(\Delta P_p)$$

D_0 , M , A and B are the slope-intercept constants describing the lines.

2.2.10. A CVS system that has multiple speeds shall be calibrated on each speed used. The calibration curves generated for the ranges shall be approximately parallel and the intercept values (D_0) shall increase as the pump flow range decreases.

2.2.11 If the calibration has been performed carefully, the calculated values from the equation will be within 0.5 per cent of the measured value of V_0 . Values of M will vary from one pump to another. Calibration is performed at pump start-up and after major maintenance.

2.3. Calibration of the critical-flow venturi (CFV)

2.3.1. Calibration of the CFV is based upon the flow equation for a critical flow venturi:

Equation Ap 4-4

$$Q_s = \frac{K_v P}{\sqrt{T}}$$

where:

Q_s = flow,

K_v = calibration coefficient,

P = absolute pressure (kPa),

T = absolute temperature (K).

Gas flow is a function of inlet pressure and temperature. The calibration procedure described below establishes the value of the calibration coefficient at measured values of pressure, temperature and air flow.

2.3.2. The manufacturer's recommended procedure shall be followed for calibrating electronic portions of the CFV.

2.3.3. Measurements for flow calibration of the critical flow venturi are required and the following data shall be found within the limits of precision given:

Barometric pressure (corrected) (P_b) ± 0.03 kPa,

- LFE air temperature, flow-meter (ETI) ± 0.15 K,
- Pressure depression upstream of LFE (EPI) ± 0.01 kPa,
- Pressure drop across (EDP) LFE matrix ± 0.0015 kPa,
- Air flow (Q_s) ± 0.5 per cent,
- CFV inlet depression (PPI) ± 0.02 kPa,
- Temperature at venturi inlet (T_v) ± 0.2 K.

2.3.4. The equipment shall be set up as shown in Figure Ap 4-4 of this appendix and checked for leaks. Any leaks between the flow-measuring device and the critical-flow venturi will seriously affect the accuracy of the calibration.

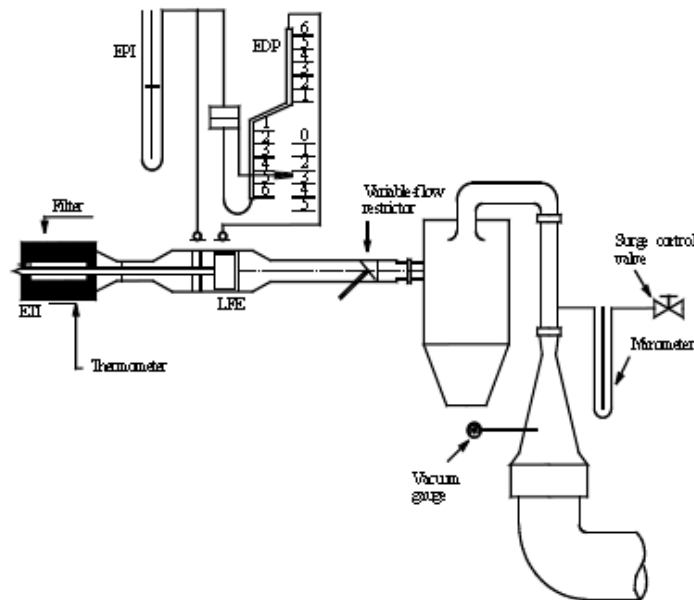


Figure Ap 4-4 CFV Calibration Configuration

- 2.3.5. The variable-flow restrictor shall be set to the open position, the blower shall be started and the system stabilized. Data from all instruments shall be recorded.
- 2.3.6. The flow restrictor shall be varied and at least eight readings across the critical flow range of the venturi shall be made.
- 2.3.7. The data recorded during the calibration shall be used in the following calculations. The air flow-rate (Q_s) at each test point is calculated from the flow-meter data using the manufacturer's prescribed method. Calculate values of the calibration coefficient (K_v) for each test point:

Equation Ap 4-5:

$$K_v = \frac{Q_s \sqrt{T_v}}{P_v}$$

where:

Q_s = flow-rate in m³/min at 273.2 K and 101.33 kPa,

T_v = temperature at the venturi inlet (K),

P_v = absolute pressure at the venturi inlet (kPa).

Plot K_v as a function of venturi inlet pressure. For sonic flow, K_v will have a relatively constant value. As pressure decreases (vacuum increases) the venturi becomes unchoked and K_v decreases. The resultant K_v changes are not permissible. For a minimum of eight points in the critical region, calculate an average K_v and the standard deviation. If the standard deviation exceeds 0.3 per cent of the average K_v , take corrective action.

3. System verification procedure

3.1. General Requirements

The total accuracy of the CVS sampling system and analytical system shall be determined by introducing a known mass of a pollutant gas into the system whilst it is being operated as if during a normal test and then analysing and calculating the pollutant mass according to the formula in paragraph 4 of this Appendix except that the density of propane shall be taken as 1.967 grams per litre at standard conditions. The following two techniques are known to give sufficient accuracy. The maximum permissible deviation between the quantity of gas introduced and the quantity of gas measured is 5 per cent.

3.2. CFO Method

3.2.1. Metering a constant flow of pure gas (CO or C₃H₈) using a critical flow orifice device

3.2.2. A known quantity of pure gas (CO or C₃H₈) is fed into the CVS system through the calibrated critical orifice. If the inlet pressure is high enough, the flow-rate (q), which is adjusted by means of the critical flow orifice, is independent of orifice outlet pressure (critical flow). If deviations exceeding 5 per cent occur, the cause of the malfunction shall be determined and corrected. The CVS system is operated as in an exhaust emission test for about 5 to 10 minutes. The gas collected in the sampling bag is analysed by the usual equipment and the results compared to the concentration of the gas samples which was known beforehand.

3.3. Gravimetric Method

3.3.1. Metering a limited quantity of pure gas (CO or C₃H₈) by means of a gravimetric technique.

3.3.2. The following gravimetric procedure may be used to verify the CVS system. The weight of a small cylinder filled with either carbon monoxide or propane is determined with a precision of ± 0.01 g. For about 5 to 10 minutes, the CVS system is operated as in a normal exhaust emission test, while CO or propane is injected into the system. The quantity of pure gas involved is determined by means of differential weighing. The gas accumulated in the bag is then analysed by means of the equipment normally used for exhaust-gas analysis. The results are then compared to the concentration figures computed in paragraph 6.6. of Annex XI except that the density of propane shall be taken as 1.967 grams per litre at standard conditions. The following two techniques are known to give sufficient accuracy. The maximum permissible deviation between the quantity of gas introduced and the quantity of gas measured is 5 per cent.

Appendix 5

Classification of equivalent inertia mass and running resistance

- 1 The chassis dynamometer can be set by the use of the running resistance table instead of the running resistance force obtained by the coast down methods set-out in appendixes 7 or 8. In this table method, the chassis dynamometer shall be set by the reference mass regardless of particular L-category vehicle characteristics.
2. The flywheel equivalent inertia mass m_{ref} shall be the equivalent inertia mass m_i specified in paragraph 4.5.6.1.2.. The chassis dynamometer shall be set by the rolling resistance of front wheel 'a' and the aerodynamic drag coefficient 'b' specified in the table below.

Mass in running order m_{ref} [kg]	Equivalent inertia mass m_i [kg]	Rolling resistance of front wheel a [N]	Aero drag coefficient b [N/(km/h) ²]
$0 < m_{ref} \leq 25$	20	1.8	0.0203
$25 < m_{ref} \leq 35$	30	2.6	0.0205
$35 < m_{ref} \leq 45$	40	3.5	0.0206
$45 < m_{ref} \leq 55$	50	4.4	0.0208
$55 < m_{ref} \leq 65$	60	5.3	0.0209
$65 < m_{ref} \leq 75$	70	6.8	0.0211
$75 < m_{ref} \leq 85$	80	7.0	0.0212
$85 < m_{ref} \leq 95$	90	7.9	0.0214
$95 < m_{ref} \leq 105$	100	8.8	0.0215
$105 < m_{ref} \leq 115$	110	9.7	0.0217
$115 < m_{ref} \leq 125$	120	10.6	0.0218
$125 < m_{ref} \leq 135$	130	11.4	0.0220
$135 < m_{ref} \leq 145$	140	12.3	0.0221

$145 < m_{\text{ref}} \leq 155$	150	13.2	0.0223
$155 < m_{\text{ref}} \leq 165$	160	14.1	0.0224
$165 < m_{\text{ref}} \leq 175$	170	15.0	0.0226
$175 < m_{\text{ref}} \leq 185$	180	15.8	0.0227
$185 < m_{\text{ref}} \leq 195$	190	16.7	0.0229
$195 < m_{\text{ref}} \leq 205$	200	17.6	0.0230
$205 < m_{\text{ref}} \leq 215$	210	18.5	0.0232
$215 < m_{\text{ref}} \leq 225$	220	19.4	0.0233
$225 < m_{\text{ref}} \leq 235$	230	20.2	0.0235
$235 < m_{\text{ref}} \leq 245$	240	21.1	0.0236
$245 < m_{\text{ref}} \leq 255$	250	22.0	0.0238
$255 < m_{\text{ref}} \leq 265$	260	22.9	0.0239
$265 < m_{\text{ref}} \leq 275$	270	23.8	0.0241
$275 < m_{\text{ref}} \leq 285$	280	24.6	0.0242
$285 < m_{\text{ref}} \leq 295$	290	25.5	0.0244
$295 < m_{\text{ref}} \leq 305$	300	26.4	0.0245
$305 < m_{\text{ref}} \leq 315$	310	27.3	0.0247
$315 < m_{\text{ref}} \leq 325$	320	28.2	0.0248
$325 < m_{\text{ref}} \leq 335$	330	29.0	0.0250
$335 < m_{\text{ref}} \leq 345$	340	29.9	0.0251
$345 < m_{\text{ref}} \leq 355$	350	30.8	0.0253
$355 < m_{\text{ref}} \leq 365$	360	31.7	0.0254

$365 < m_{ref} \leq 375$	370	32.6	0.0256
$375 < m_{ref} \leq 385$	380	33.4	0.0257
$385 < m_{ref} \leq 395$	390	34.3	0.0259
$395 < m_{ref} \leq 405$	400	35.2	0.0260
$405 < m_{ref} \leq 415$	410	36.1	0.0262
$415 < m_{ref} \leq 425$	420	37.0	0.0263
$425 < m_{ref} \leq 435$	430	37.8	0.0265
$435 < m_{ref} \leq 445$	440	38.7	0.0266
$445 < m_{ref} \leq 455$	450	39.6	0.0268
$455 < m_{ref} \leq 465$	460	40.5	0.0269
$465 < m_{ref} \leq 475$	470	41.4	0.0271
$475 < m_{ref} \leq 485$	480	42.2	0.0272
$485 < m_{ref} \leq 495$	490	43.1	0.0274
$495 < m_{ref} \leq 505$	500	44.0	0.0275
At every 10 kg	At every 10 kg	$a = 0.088 \times m_i$ */	$b = 0.000015 \times m_i + 0.02$ **/
*/The value shall be rounded to one decimal place.			
**/The value shall be rounded to four decimal places.			

Table Ap 5-1: Classification of equivalent inertia mass and running resistance used for L-category vehicles equipped with one wheel on the powered axle or with twinned wheels

Appendix 6
Driving cycles for Type I tests

1) UNECE Regulation 47 (ECE R47) based test cycle

1 Description of the ECE R47 test cycle

The ECE R47 test cycle to be used on the chassis dynamometer shall be that depicted in the graph shown below:

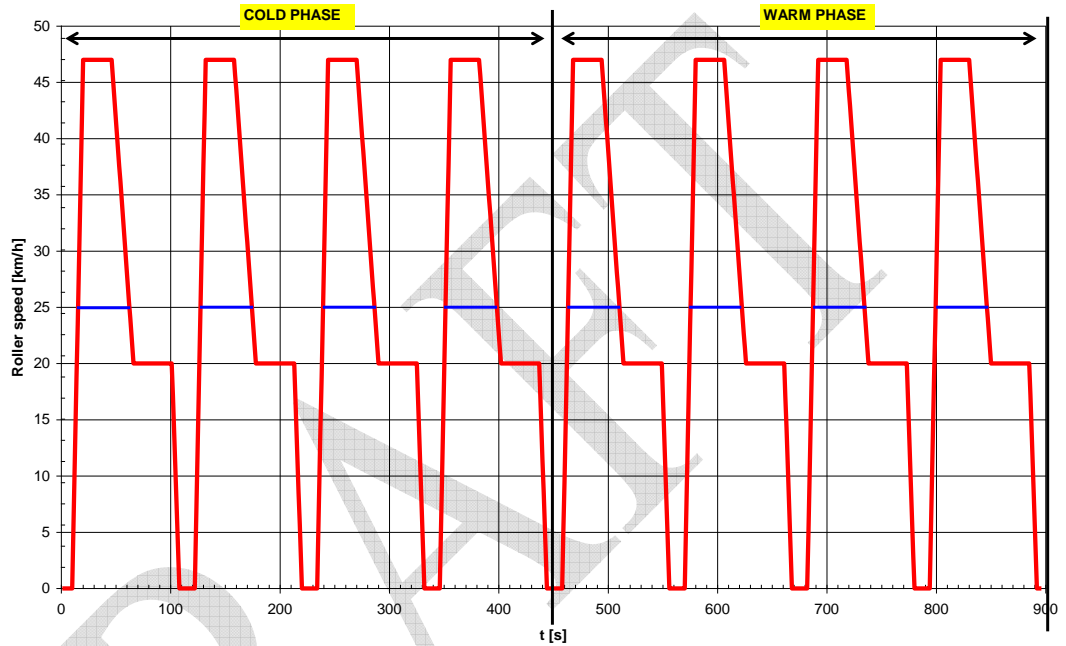


Figure Ap 6-1: ECE R47 based test cycle.

The ECE R47 based test cycle lasts in total 896 seconds and consists of eight elementary cycles to be carried out without interruption. Each cycle shall comprise of seven driving condition phases (idling, acceleration, steady speed, deceleration, etc.) laid down below. The [blue] vehicle speed trace restricted to maximum 25 km/h is applicable for L1e-A and L1e-B vehicles with a maximum designed vehicle speed of 25 km/h.

- 2** The following elementary cycle characteristic in the shape of the dynamometer roller speed profile versus test time shall be repeated eight times in total. The cold phase means the first 448 s (four cycles) after cold start of the propulsion and warming up. The warm or hot phase is comprised by the last 448 s (four cycles) when the propulsion is further warming up and finally running at operating temperature.

No. of operation	Operation	Acceleration [m/s ²]	Roller speed [km/h]	Duration of operation [s]	Total time [s] of one cycle
1	Idling	-	-	8	
2	Acceleration	full throttle	0-max		8
3	Constant speed	full throttle	max	57	
4	Deceleration	-0.56	max-20		65
5	Constant speed	-	20	36	101
6	Deceleration	-0.93	20-0	6	107
7	Idling	-	-	5	112

Table Ap 6-1: ECE R47 single cycle characteristic vehicle speed profile versus test time

3

ECE R47 test cycle tolerances

The test cycle tolerances as indicated in Figure Ap 6-2 for one elementary cycle of the ECE R47 test cycle shall be respected in principle during the whole test cycle.

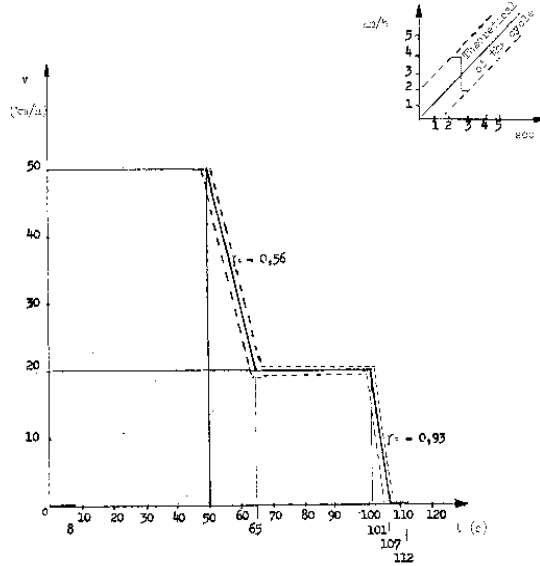


Figure Ap 6-2: ECE R47 based test cycle tolerances

2) UNECE Regulation 40 (ECE R40) based driving cycle

1 Description of the test cycle

The ECE R40 test cycle to be used on the chassis dynamometer shall be that depicted in the graph shown below:

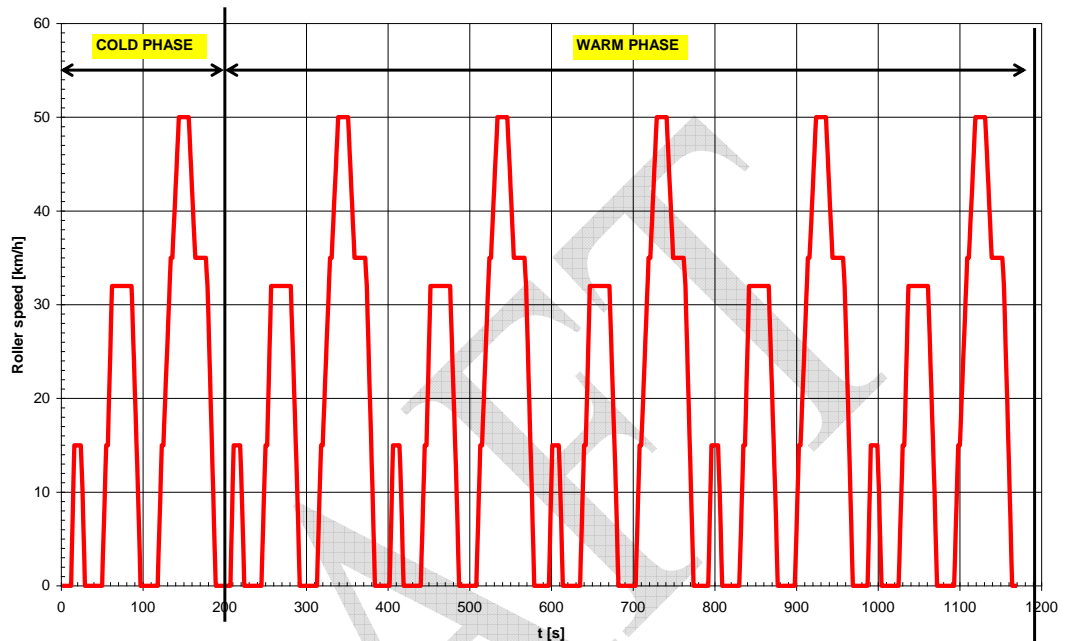


Figure Ap 6-3: ECE R40 based test cycle.

The ECE R40 based test cycle lasts in total 1170 seconds and consists of six elementary urban operating cycle cycles to be carried out without interruption. Each elementary urban cycle shall comprise of fifteen driving condition phases (idling, acceleration, steady speed, deceleration, etc.). laid down below. .

- 2 The following cycle characteristic dynamometer roller speed profile versus test time shall be repeated 6 times in total. The cold phase means the first 195 s (one elementary urban cycle) after cold start of the propulsion and warming up. The warm phase is comprised by the last 975 s (five elementary urban cycles) when the propulsion is further warming up and finally running at operating temperature.

2.1

No	Nature of operation	Phase	Acceleration (m/s ²)	Speed (km/h)	Duration of each		Cumulative time (s)	Gear to be used in the case of a manual-shift gearbox
					Operation (s)	Phase (s)		
1	Idling	1	0	0	11	11	11	6 s PM + 5 s K (*)
2	Acceleration	2	1.04	0-15	4	4	15	According to manufacturer's instructions
3	Steady speed	3	0	15	8	8	23	
4	Deceleration	4	-0.69	15-10	2	5	25	
5	Deceleration, clutch disengaged		-0.92	10-0	3		28	K (*)
6	Idling	5	0	0	21	21	49	16 s PM + 5 s K (*)
7	Acceleration	6	0.74	0-32	12	12	61	According to manufacturer's instructions
8	Steady speed	7		32	24	24	85	
9	Deceleration	8	-0.75	32-10	8	11	93	
10	Deceleration, clutch disengaged		-0.92	10-0	3		96	K (*)
11	Idling	9	0	0	21	21	117	16 s PM + 5 s K (*)
12	Acceleration	10	0.53	0-50	26	26	143	According to manufacturer's instructions
13	Steady speed	11	0	50	12	12	155	
14	Deceleration	12	-0.52	50-35	8	8	163	
15	Steady speed	13	0	35	13	13	176	
16	Deceleration	14	-0.68	35-10	9		185	
17	Deceleration clutch disengaged		-0.92	10-0	3		188	K (*)
18	Idling	15	0	0	7	7	195	7 s PM (*)

(*) PM = gears in neutral, clutch engaged. K = clutch disengaged.

Table Ap 6-2: ECE R40 elementary urban cycle characteristic, vehicle speed profile versus test time

3 ECE R40 test cycle tolerances

The test cycle tolerances as indicated in Figure Ap 6-4 for one elementary urban cycle of the ECE R40 test cycle shall be respected in principle during the whole test cycle.

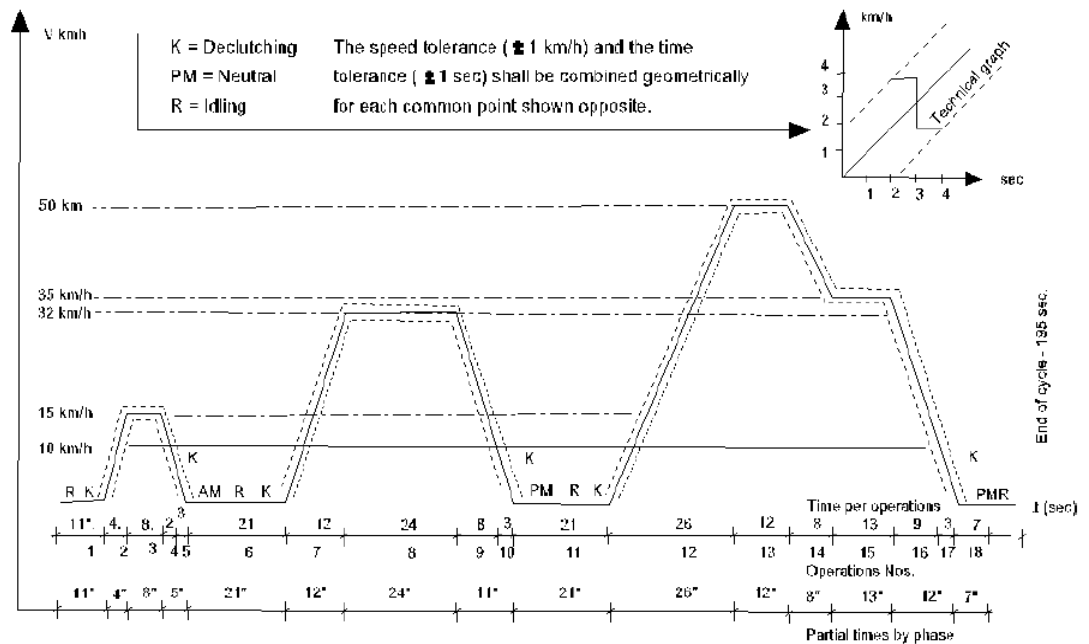


Figure Ap 6-4: ECE R40 based test cycle tolerances

4 Generic applicable ECE R40 and R47 test cycle tolerances

- 4.1. A tolerance of 1 km/h above or below the theoretical speed shall be allowed during all phases of the test cycle. Speed tolerances greater than those prescribed shall be accepted during phase changes provided that the tolerances are never exceeded for more than 0.5 second on any occasion with the exception of the provisions of paragraphs 4.3. and 4.4. The time tolerance shall be + 0.5 sec.
- 4.2. The distance driven during the cycle shall be measured to + 2 percent.
- 4.3. If the acceleration capability of the L-category vehicle is not sufficient to carry out the acceleration phases within the prescribed limits of tolerances or the prescribed maximum vehicle speed in the individual cycles cannot be achieved owing to lacking propulsion power, the L-category vehicle shall be driven with the throttle fully open, until the speed prescribed for the cycle shall be reached and the cycle shall be normally carried on.

4.4 If the period of deceleration is shorter than that prescribed for the corresponding phase, the timing of the theoretical cycle shall be restored by a constant speed or idling period merging into succeeding constant speed or idling operation. In that case, paragraph 4.1 is not applicable.

5 Sampling of the vehicle's exhaust flow in the ECE R40 and R47 test cycles

5.1. Check of back-pressure from sampling device.

During the preliminary tests, a check shall be made to ensure that the back-pressure set up by the sampling device is equal to the atmospheric pressure to within ± 12.3 mbar.

5.2. Sampling shall start as of $t=0$ just before cranking and start of the combustion engine if such an engine makes part of the propulsion.

5.3. The combustion engine shall be started up by means of the devices provided for that purpose - the choke, the starter valve, etc. - in accordance with the manufacturer's instructions.

5.4. The sampling bags shall be hermetically closed as soon as filling is completed.

5.5. At the end of the test cycle, the system of collection of dilute exhaust mixture and dilution air shall be closed and the gases produced by the engine shall be released into the atmosphere.

6. Gear shift procedures

6.1. The ECE R47 test shall be conducted using the gearshift procedure set-out in paragraph 2.3 of UNECE regulation No 47.

6.2. The ECE R40 test shall be conducted using the gearshift procedure set-out in paragraph 2.3 of UNECE regulation No 40.

3) World Harmonised Motorcycle Test Cycle (WMTC), stage 2

1 Description of the test cycle

The WMTC, stage 2 to be used on the chassis dynamometer shall be that depicted in the graph shown below:

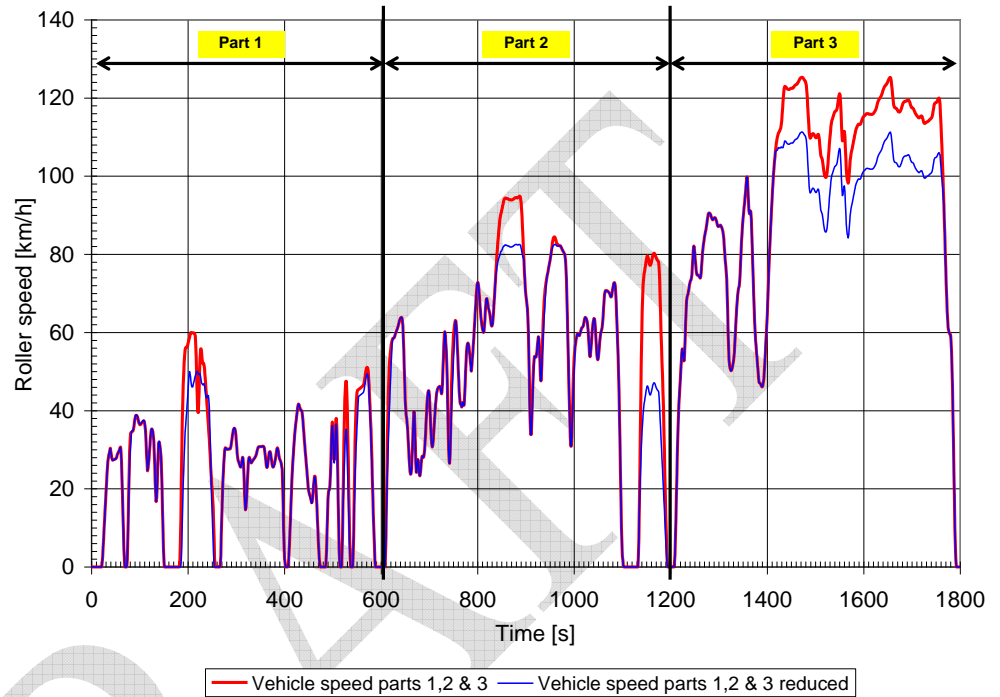


Figure Ap 6-5: WMTC stage 2.

- 1.1. The WMTC stage 2 lasts in total 1800 seconds and consists of 3 parts to be carried out without interruption. The characteristic driving conditions (idling, acceleration, steady speed, deceleration, etc.) are laid down in the following paragraphs and tables.

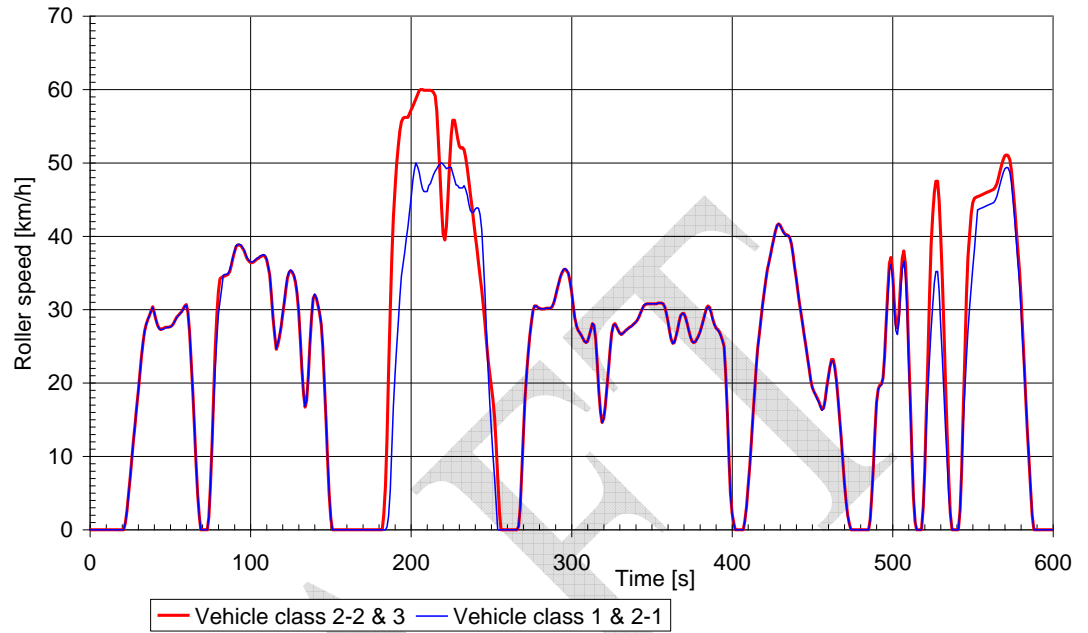


Figure Ap 6-6:WMTC, stage 2, part 1

2.1

The characteristic roller speed versus test time of WMTC, stage 2, cycle part 1 is characterised by the tables in the sub paragraphs associated to paragraph 2.2.

2.2.1.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec
0	0,0	x				61	29,6				x	121	31,2			x	
1	0,0	x				62	26,9				x	122	33,0			x	
2	0,0	x				63	23,0				x	123	34,4			x	
3	0,0	x				64	18,6				x	124	35,2			x	
4	0,0	x				65	14,1				x	125	35,4				x
5	0,0	x				66	9,3				x	126	35,2				x
6	0,0	x				67	4,8				x	127	34,7				x
7	0,0	x				68	1,9				x	128	33,9				x
8	0,0	x				69	0,0	x				129	32,4				x
9	0,0	x				70	0,0	x				130	29,8				x
10	0,0	x				71	0,0	x				131	26,1				x
11	0,0	x				72	0,0	x				132	22,1				x
12	0,0	x				73	0,0	x				133	18,6				x
13	0,0	x				74	1,7		x			134	16,8		x		
14	0,0	x				75	5,8		x			135	17,7		x		
15	0,0	x				76	11,8		x			136	21,1		x		
16	0,0	x				77	17,3		x			137	25,4		x		
17	0,0	x				78	22,0		x			138	29,2		x		
18	0,0	x				79	26,2		x			139	31,6		x		
19	0,0	x				80	29,4		x			140	32,1				x
20	0,0	x				81	31,1		x			141	31,6				x
21	0,0	x				82	32,9		x			142	30,7				x
22	1,0		x			83	34,7		x			143	29,7				x
23	2,6		x			84	34,8		x			144	28,1				x
24	4,8		x			85	34,8		x			145	25,0				x
25	7,2		x			86	34,9		x			146	20,3				x
26	9,6		x			87	35,4		x			147	15,0				x
27	12,0		x			88	36,2		x			148	9,7				x
28	14,3		x			89	37,1		x			149	5,0				x
29	16,6		x			90	38,0		x			150	1,6				x
30	18,9		x			91	38,7			x		151	0,0	x			
31	21,2		x			92	38,9			x		152	0,0	x			
32	23,5		x			93	38,9			x		153	0,0	x			
33	25,6		x			94	38,8			x		154	0,0	x			
34	27,1		x			95	38,5			x		155	0,0	x			
35	28,0		x			96	38,1			x		156	0,0	x			
36	28,7		x			97	37,5			x		157	0,0	x			
37	29,2		x			98	37,0			x		158	0,0	x			
38	29,8		x			99	36,7			x		159	0,0	x			
39	30,3			x		100	36,5			x		160	0,0	x			
40	29,6			x		101	36,5			x		161	0,0	x			
41	28,7			x		102	36,6			x		162	0,0	x			
42	27,9			x		103	36,8			x		163	0,0	x			
43	27,4			x		104	37,0			x		164	0,0	x			
44	27,3			x		105	37,1			x		165	0,0	x			
45	27,3			x		106	37,3			x		166	0,0	x			
46	27,4			x		107	37,4			x		167	0,0	x			
47	27,5			x		108	37,5			x		168	0,0	x			
48	27,6			x		109	37,4			x		169	0,0	x			
49	27,6			x		110	36,9				x	170	0,0	x			
50	27,6			x		111	36,0				x	171	0,0	x			
51	27,8				x	112	34,8				x	172	0,0	x			
52	28,1				x	113	31,9				x	173	0,0	x			
53	28,5				x	114	29,0				x	174	0,0	x			
54	28,9				x	115	26,9				x	175	0,0	x			
55	29,2				x	116	24,7			x		176	0,0	x			
56	29,4				x	117	25,4			x		177	0,0	x			
57	29,7				x	118	26,4			x		178	0,0	x			
58	30,0				x	119	27,7			x		179	0,0	x			
59	30,5				x	120	29,4			x		180	0,0	x			
60	30,6				x												

Table Ap 6 -3: WMTC, stage 2, cycle part 1, reduced speed for vehicle classes 1 and 2-1, 0 to 180 s.

2.2.2.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec
181	0,0	x				241	43,9			x		301	30,6				x
182	0,0	x				242	43,8				x	302	29,0				x
183	0,0	x				243	43,0					303	27,8				x
184	0,0	x				244	40,9				x	304	27,2				x
185	0,4		x			245	36,9				x	305	26,9				x
186	1,8		x			246	32,1				x	306	26,5				x
187	5,4		x			247	26,6				x	307	26,1				x
188	11,1		x			248	21,8				x	308	25,7				x
189	16,7		x			249	17,2				x	309	25,5				x
190	21,3		x			250	13,7				x	310	25,7				x
191	24,8		x			251	10,3				x	311	26,4				x
192	28,4		x			252	7,0				x	312	27,3				x
193	31,8		x			253	3,5				x	313	28,1				x
194	34,6		x			254	0,0	x				314	27,9				x
195	36,3		x			255	0,0	x				315	26,0				x
196	37,8		x			256	0,0	x				316	22,7				x
197	39,6		x			257	0,0	x				317	19,0				x
198	41,3		x			258	0,0	x				318	16,0				x
199	43,3		x			259	0,0	x				319	14,6		x		
200	45,1		x			260	0,0	x				320	15,2		x		
201	47,5		x			261	0,0	x				321	16,9		x		
202	49,0		x			262	0,0	x				322	19,3		x		
203	50,0			x		263	0,0	x				323	22,0		x		
204	49,5			x		264	0,0	x				324	24,6		x		
205	48,8			x		265	0,0	x				325	26,8		x		
206	47,6			x		266	0,0	x				326	27,9		x		
207	46,5			x		267	0,5		x			327	28,0				x
208	46,1			x		268	2,9		x			328	27,7				x
209	46,1			x		269	8,2		x			329	27,1				x
210	46,6			x		270	13,2		x			330	26,8				x
211	46,9			x		271	17,8		x			331	26,6				x
212	47,2			x		272	21,4		x			332	26,8				x
213	47,8			x		273	24,1		x			333	27,0				x
214	48,4			x		274	26,4		x			334	27,2				x
215	48,9			x		275	28,4		x			335	27,4				x
216	49,2			x		276	29,9		x			336	27,5				x
217	49,6			x		277	30,5			x		337	27,7				x
218	49,9			x		278	30,5			x		338	27,9				x
219	50,0			x		279	30,3			x		339	28,1				x
220	49,8			x		280	30,2			x		340	28,3				x
221	49,5			x		281	30,1			x		341	28,6				x
222	49,2			x		282	30,1			x		342	29,1				x
223	49,3			x		283	30,1			x		343	29,6				x
224	49,4			x		284	30,2			x		344	30,1				x
225	49,4			x		285	30,2			x		345	30,6				x
226	48,6			x		286	30,2			x		346	30,8				x
227	47,8			x		287	30,2			x		347	30,8				x
228	47,0			x		288	30,5			x		348	30,8				x
229	46,9			x		289	31,0			x		349	30,8				x
230	46,6			x		290	31,9			x		350	30,8				x
231	46,6			x		291	32,8			x		351	30,8				x
232	46,6			x		292	33,7			x		352	30,8				x
233	46,9			x		293	34,5			x		353	30,8				x
234	46,4			x		294	35,1			x		354	30,9				x
235	45,6			x		295	35,5			x		355	30,9				x
236	44,4			x		296	35,6			x		356	30,9				x
237	43,5			x		297	35,4			x		357	30,8				x
238	43,2			x		298	35,0			x		358	30,4				x
239	43,3			x		299	34,0			x		359	29,6				x
240	43,7			x		300	32,4			x		360	28,4				x

Table Ap 6 -4: WMTC, stage 2, cycle part 1, reduced speed for vehicle classes 1 and 2-1, 181 to 360 s

2.2.3.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec
361	27,1			x		421	34,0		x			481	0,0	x			
362	26,0			x		422	35,4		x			482	0,0	x			
363	25,4			x		423	36,5		x			483	0,0	x			
364	25,5			x		424	37,5		x			484	0,0	x			
365	26,3			x		425	38,6		x			485	0,0	x			
366	27,3			x		426	39,6		x			486	1,4		x		
367	28,3			x		427	40,7		x			487	4,5		x		
368	29,2			x		428	41,4		x			488	8,8		x		
369	29,5			x		429	41,7			x		489	13,4		x		
370	29,4			x		430	41,4			x		490	17,3		x		
371	28,9			x		431	40,9			x		491	19,2		x		
372	28,1			x		432	40,5			x		492	19,7		x		
373	27,1			x		433	40,2			x		493	19,8		x		
374	26,3			x		434	40,1			x		494	20,7		x		
375	25,7			x		435	40,1			x		495	23,7		x		
376	25,5			x		436	39,8			x		496	27,9		x		
377	25,6			x		437	38,9			x		497	31,9		x		
378	25,9			x		438	37,4			x		498	35,4		x		
379	26,3			x		439	35,8			x		499	36,2				x
380	26,9			x		440	34,1			x		500	34,2				x
381	27,6			x		441	32,5			x		501	30,2				x
382	28,4			x		442	30,9			x		502	27,1				x
383	29,3			x		443	29,4			x		503	26,6		x		
384	30,1			x		444	27,9			x		504	28,6		x		
385	30,4			x		445	26,5			x		505	32,6		x		
386	30,2			x		446	25,0			x		506	35,5		x		
387	29,5			x		447	23,4			x		507	36,6				x
388	28,6			x		448	21,8			x		508	34,6				x
389	27,9			x		449	20,3			x		509	30,0				x
390	27,5			x		450	19,3			x		510	23,1				x
391	27,2			x		451	18,7			x		511	16,7				x
392	26,9				x	452	18,3			x		512	10,7				x
393	26,4				x	453	17,8			x		513	4,7				x
394	25,7				x	454	17,4			x		514	1,2				x
395	24,9				x	455	16,8			x		515	0,0	x			
396	21,4				x	456	16,3			x		516	0,0	x			
397	15,9				x	457	16,5			x		517	0,0	x			
398	9,9				x	458	17,6			x		518	0,0	x			
399	4,9				x	459	19,2			x		519	3,0		x		
400	2,1				x	460	20,8			x		520	8,2		x		
401	0,9				x	461	22,2			x		521	14,3		x		
402	0,0	x				462	23,0			x		522	19,3		x		
403	0,0	x				463	23,0				x	523	23,5		x		
404	0,0	x				464	22,0				x	524	27,3		x		
405	0,0	x				465	20,1				x	525	30,8		x		
406	0,0	x				466	17,7				x	526	33,7		x		
407	0,0	x				467	15,0				x	527	35,2		x		
408	1,2			x		468	12,1				x	528	35,2				x
409	3,2			x		469	9,1				x	529	32,5				x
410	5,9			x		470	6,2				x	530	27,9				x
411	8,8			x		471	3,6				x	531	23,2				x
412	12,0			x		472	1,8				x	532	18,5				x
413	15,4			x		473	0,8				x	533	13,8				x
414	18,9			x		474	0,0	x				534	9,1				x
415	22,1			x		475	0,0	x				535	4,5				x
416	24,7			x		476	0,0	x				536	2,3				x
417	26,8			x		477	0,0	x				537	0,0	x			
418	28,7			x		478	0,0	x				538	0,0	x			
419	30,6			x		479	0,0	x				539	0,0	x			
420	32,4			x		480	0,0	x				540	0,0	x			

Table Ap 6 -5: WMTC, stage 2, cycle part 1, reduced speed for vehicle classes 1 and 2-1, 361 to 540 s

2.2.4.

time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec
541	0,0	x			
542	2,8		x		
543	8,1		x		
544	14,3		x		
545	19,2		x		
546	23,5		x		
547	27,2		x		
548	30,5		x		
549	33,1		x		
550	35,7		x		
551	38,3		x		
552	41,0		x		
553	43,6			x	
554	43,7			x	
555	43,8			x	
556	43,9			x	
557	44,0			x	
558	44,1			x	
559	44,2			x	
560	44,3			x	
561	44,4			x	
562	44,5			x	
563	44,6			x	
564	44,9			x	
565	45,5			x	
566	46,3			x	
567	47,1			x	
568	48,0			x	
569	48,7			x	
570	49,2			x	
571	49,4			x	
572	49,3			x	
573	48,7				x
574	47,3				x
575	45,0				x
576	42,3				x
577	39,5				x
578	36,6				x
579	33,7				x
580	30,1				x
581	26,0				x
582	21,8				x
583	17,7				x
584	13,5				x
585	9,4				x
586	5,6				x
587	2,1				x
588	0,0	x			
589	0,0	x			
590	0,0	x			
591	0,0	x			
592	0,0	x			
593	0,0	x			
594	0,0	x			
595	0,0	x			
596	0,0	x			
597	0,0	x			
598	0,0	x			
599	0,0	x			
600	0,0	x			

Table Ap 6 -6: WMTC, stage 2, cycle part 1, reduced speed for vehicle classes 1 and 2-1, 541 to 600 s

2.2.5.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec	
0	0,0	x				61	29,7				x	121	31,0				x	
1	0,0	x				62	27,0				x	122	32,8				x	
2	0,0	x				63	23,0				x	123	34,3				x	
3	0,0	x				64	18,7				x	124	35,1				x	
4	0,0	x				65	14,2				x	125	35,3					x
5	0,0	x				66	9,4				x	126	35,1					x
6	0,0	x				67	4,9				x	127	34,6					x
7	0,0	x				68	2,0				x	128	33,7					x
8	0,0	x				69	0,0	x				129	32,2					x
9	0,0	x				70	0,0	x				130	29,6					x
10	0,0	x				71	0,0	x				131	26,0					x
11	0,0	x				72	0,0	x				132	22,0					x
12	0,0	x				73	0,0	x				133	18,5					x
13	0,0	x				74	1,7		x			134	16,6			x		
14	0,0	x				75	5,8		x			135	17,6			x		
15	0,0	x				76	11,8		x			136	21,0			x		
16	0,0	x				77	18,3		x			137	25,2			x		
17	0,0	x				78	24,5		x			138	29,1			x		
18	0,0	x				79	29,4		x			139	31,4			x		
19	0,0	x				80	32,5		x			140	31,9					x
20	0,0	x				81	34,2		x			141	31,4					x
21	0,0	x				82	34,4		x			142	30,6					x
22	1,0		x			83	34,5		x			143	29,5					x
23	2,6		x			84	34,6		x			144	28,0					x
24	4,8		x			85	34,7		x			145	24,9					x
25	7,2		x			86	34,8		x			146	20,2					x
26	9,6		x			87	35,2		x			147	14,8					x
27	12,0		x			88	36,0		x			148	9,5					x
28	14,3		x			89	37,0		x			149	4,8					x
29	16,6		x			90	37,9		x			150	1,4					x
30	18,9		x			91	38,6		x			151	0,0	x				
31	21,2		x			92	38,8			x		152	0,0	x				
32	23,5		x			93	38,8			x		153	0,0	x				
33	25,6		x			94	38,7			x		154	0,0	x				
34	27,1		x			95	38,5			x		155	0,0	x				
35	28,0		x			96	38,0			x		156	0,0	x				
36	28,7		x			97	37,4			x		157	0,0	x				
37	29,2		x			98	36,9			x		158	0,0	x				
38	29,8		x			99	36,6			x		159	0,0	x				
39	30,4			x		100	36,4			x		160	0,0	x				
40	29,6			x		101	36,4			x		161	0,0	x				
41	28,7			x		102	36,5			x		162	0,0	x				
42	27,9			x		103	36,7			x		163	0,0	x				
43	27,5			x		104	36,9			x		164	0,0	x				
44	27,3			x		105	37,0			x		165	0,0	x				
45	27,4			x		106	37,2			x		166	0,0	x				
46	27,5			x		107	37,3			x		167	0,0	x				
47	27,6			x		108	37,4			x		168	0,0	x				
48	27,6			x		109	37,3			x		169	0,0	x				
49	27,6			x		110	36,8			x		170	0,0	x				
50	27,7			x		111	35,8				x	171	0,0	x				
51	27,8			x		112	34,7				x	172	0,0	x				
52	28,1			x		113	31,8				x	173	0,0	x				
53	28,6			x		114	28,9				x	174	0,0	x				
54	29,0			x		115	26,7				x	175	0,0	x				
55	29,2			x		116	24,6				x	176	0,0	x				
56	29,5			x		117	25,2				x	177	0,0	x				
57	29,7			x		118	26,2				x	178	0,0	x				
58	30,1			x		119	27,6				x	179	0,0	x				
59	30,5			x		120	29,2				x	180	0,0	x				
60	30,7			x														

Table Ap 6 -7: WMTC, stage 2, cycle part 1 for vehicle classes 2-2 and 3, 0 to 180 s

2.2.6.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec	
181	0,0	x				241	38,3				x	301	30,6				x	
182	0,0	x				242	36,4				x	302	28,9				x	
183	2,0		x			243	34,6				x	303	27,8				x	
184	6,0		x			244	32,7				x	304	27,2				x	
185	12,4		x			245	30,6				x	305	26,9				x	
186	21,4		x			246	28,1				x	306	26,5				x	
187	30,0		x			247	25,5				x	307	26,1				x	
188	37,1		x			248	23,1				x	308	25,7				x	
189	42,5		x			249	21,2				x	309	25,5				x	
190	46,6		x			250	19,5				x	310	25,7				x	
191	49,8		x			251	17,8				x	311	26,4				x	
192	52,4		x			252	15,3				x	312	27,3				x	
193	54,4		x			253	11,5				x	313	28,1				x	
194	55,6		x			254	7,2				x	314	27,9					x
195	56,1			x		255	2,5				x	315	26,0					x
196	56,2			x		256	0,0	x				316	22,7					x
197	56,2			x		257	0,0	x				317	19,0					x
198	56,2			x		258	0,0	x				318	16,0					x
199	56,7			x		259	0,0	x				319	14,6			x		
200	57,2			x		260	0,0	x				320	15,2			x		
201	57,7			x		261	0,0	x				321	16,9			x		
202	58,2			x		262	0,0	x				322	19,3			x		
203	58,7			x		263	0,0	x				323	22,0			x		
204	59,3			x		264	0,0	x				324	24,6			x		
205	59,8			x		265	0,0	x				325	26,8			x		
206	60,0			x		266	0,0	x				326	27,9			x		
207	60,0			x		267	0,5		x			327	28,1				x	
208	59,9			x		268	2,9		x			328	27,7				x	
209	59,9			x		269	8,2		x			329	27,2				x	
210	59,9			x		270	13,2		x			330	26,8				x	
211	59,9			x		271	17,8		x			331	26,6				x	
212	59,9			x		272	21,4		x			332	26,8				x	
213	59,8			x		273	24,1		x			333	27,0				x	
214	59,6				x	274	26,4		x			334	27,2				x	
215	59,1				x	275	28,4		x			335	27,4				x	
216	57,1				x	276	29,9		x			336	27,6				x	
217	53,2				x	277	30,5		x			337	27,7				x	
218	48,3				x	278	30,5			x		338	27,9				x	
219	43,9				x	279	30,3			x		339	28,1				x	
220	40,3				x	280	30,2			x		340	28,3				x	
221	39,5					x	281	30,1			x	341	28,6				x	
222	41,3					x	282	30,1			x	342	29,0				x	
223	45,2					x	283	30,1			x	343	29,6				x	
224	50,1					x	284	30,1			x	344	30,1				x	
225	53,7					x	285	30,1			x	345	30,5				x	
226	55,8					x	286	30,1			x	346	30,7				x	
227	55,8					x	287	30,2			x	347	30,8				x	
228	54,7					x	288	30,4			x	348	30,8				x	
229	53,3					x	289	31,0			x	349	30,8				x	
230	52,3					x	290	31,8			x	350	30,8				x	
231	52,0					x	291	32,7			x	351	30,8				x	
232	52,1					x	292	33,6			x	352	30,8				x	
233	51,8					x	293	34,4			x	353	30,8				x	
234	50,8					x	294	35,0			x	354	30,9				x	
235	49,2					x	295	35,4			x	355	30,9				x	
236	47,5					x	296	35,5			x	356	30,9				x	
237	45,7					x	297	35,3			x	357	30,8				x	
238	43,9					x	298	34,9			x	358	30,4				x	
239	42,0					x	299	33,9			x	359	29,6				x	
240	40,2					x	300	32,4			x	360	28,4				x	

Table Ap 6 -8: WMTC, stage 2, cycle part 1 for vehicle classes 2-2 and 3, 181 to 360 s

2.2.7.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec
361	27,1			x		421	34,0		x			481	0,0	x			
362	26,0			x		422	35,4		x			482	0,0	x			
363	25,4			x		423	36,5		x			483	0,0	x			
364	25,5			x		424	37,5		x			484	0,0	x			
365	26,3			x		425	38,6		x			485	0,0	x			
366	27,3			x		426	39,7		x			486	1,4		x		
367	28,4			x		427	40,7		x			487	4,5		x		
368	29,2			x		428	41,5		x			488	8,8		x		
369	29,5			x		429	41,7			x		489	13,4		x		
370	29,5			x		430	41,5			x		490	17,3		x		
371	29,0			x		431	41,0			x		491	19,2		x		
372	28,1			x		432	40,6			x		492	19,7		x		
373	27,2			x		433	40,3			x		493	19,8		x		
374	26,3			x		434	40,2			x		494	20,7		x		
375	25,7			x		435	40,1			x		495	23,6		x		
376	25,5			x		436	39,8				x	496	28,1		x		
377	25,6			x		437	38,9				x	497	32,8		x		
378	26,0			x		438	37,5				x	498	36,3		x		
379	26,4			x		439	35,8				x	499	37,1				x
380	27,0			x		440	34,2				x	500	35,1				x
381	27,7			x		441	32,5				x	501	31,1				x
382	28,5			x		442	30,9				x	502	28,0				x
383	29,4			x		443	29,4				x	503	27,5		x		
384	30,2			x		444	28,0				x	504	29,5		x		
385	30,5			x		445	26,5				x	505	34,0		x		
386	30,3			x		446	25,0				x	506	37,0		x		
387	29,5			x		447	23,5				x	507	38,0				x
388	28,7			x		448	21,9				x	508	36,1				x
389	27,9			x		449	20,4				x	509	31,5				x
390	27,5			x		450	19,4				x	510	24,5				x
391	27,3			x		451	18,8				x	511	17,5				x
392	27,0				x	452	18,4				x	512	10,5				x
393	26,5				x	453	18,0				x	513	4,5				x
394	25,8				x	454	17,5				x	514	1,0				x
395	25,0				x	455	16,9				x	515	0,0	x			
396	21,5				x	456	16,4				x	516	0,0	x			
397	16,0				x	457	16,6				x	517	0,0	x			
398	10,0				x	458	17,7				x	518	0,0	x			
399	5,0				x	459	19,4				x	519	2,9		x		
400	2,2				x	460	20,9				x	520	8,0		x		
401	1,0				x	461	22,3				x	521	16,0		x		
402	0,0	x				462	23,2				x	522	24,0		x		
403	0,0	x				463	23,2				x	523	32,0		x		
404	0,0	x				464	22,2				x	524	38,8		x		
405	0,0	x				465	20,3				x	525	43,1		x		
406	0,0	x				466	17,9				x	526	46,0		x		
407	0,0	x				467	15,2				x	527	47,5				x
408	1,2		x			468	12,3				x	528	47,5				x
409	3,2		x			469	9,3				x	529	44,8				x
410	5,9		x			470	6,4				x	530	40,1				x
411	8,8		x			471	3,8				x	531	33,8				x
412	12,0		x			472	2,0				x	532	27,2				x
413	15,4		x			473	0,9				x	533	20,0				x
414	18,9		x			474	0,0	x				534	12,8				x
415	22,1		x			475	0,0	x				535	7,0				x
416	24,8		x			476	0,0	x				536	2,2				x
417	26,8		x			477	0,0	x				537	0,0	x			
418	28,7		x			478	0,0	x				538	0,0	x			
419	30,6		x			479	0,0	x				539	0,0	x			
420	32,4		x			480	0,0	x				540	0,0	x			

Table Ap 6 -9: WMTC, stage 2, cycle part 1 for vehicle classes 2-2 and 3, 361 to 540
s

2.2.8.

time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec
541	0,0	x			
542	2,7		x		
543	8,0		x		
544	16,0		x		
545	24,0		x		
546	32,0		x		
547	37,2		x		
548	40,4		x		
549	43,1		x		
550	44,6		x		
551	45,2			x	
552	45,3			x	
553	45,4			x	
554	45,5			x	
555	45,6			x	
556	45,7			x	
557	45,8			x	
558	45,9			x	
559	46,0			x	
560	46,1			x	
561	46,2			x	
562	46,3			x	
563	46,4			x	
564	46,7			x	
565	47,2			x	
566	48,0			x	
567	48,9			x	
568	49,8			x	
569	50,5			x	
570	51,0			x	
571	51,1			x	
572	51,0			x	
573	50,4				x
574	49,0				x
575	46,7				x
576	44,0				x
577	41,1				x
578	38,3				x
579	35,4				x
580	31,8				x
581	27,3				x
582	22,4				x
583	17,7				x
584	13,4				x
585	9,3				x
586	5,5				x
587	2,0				x
588	0,0	x			
589	0,0	x			
590	0,0	x			
591	0,0	x			
592	0,0	x			
593	0,0	x			
594	0,0	x			
595	0,0	x			
596	0,0	x			
597	0,0	x			
598	0,0	x			
599	0,0	x			
600	0,0	x			

Table Ap 6 -10: WMTC, stage 2, cycle part 1 for vehicle classes 2-2 and 3, 541 to 600 s

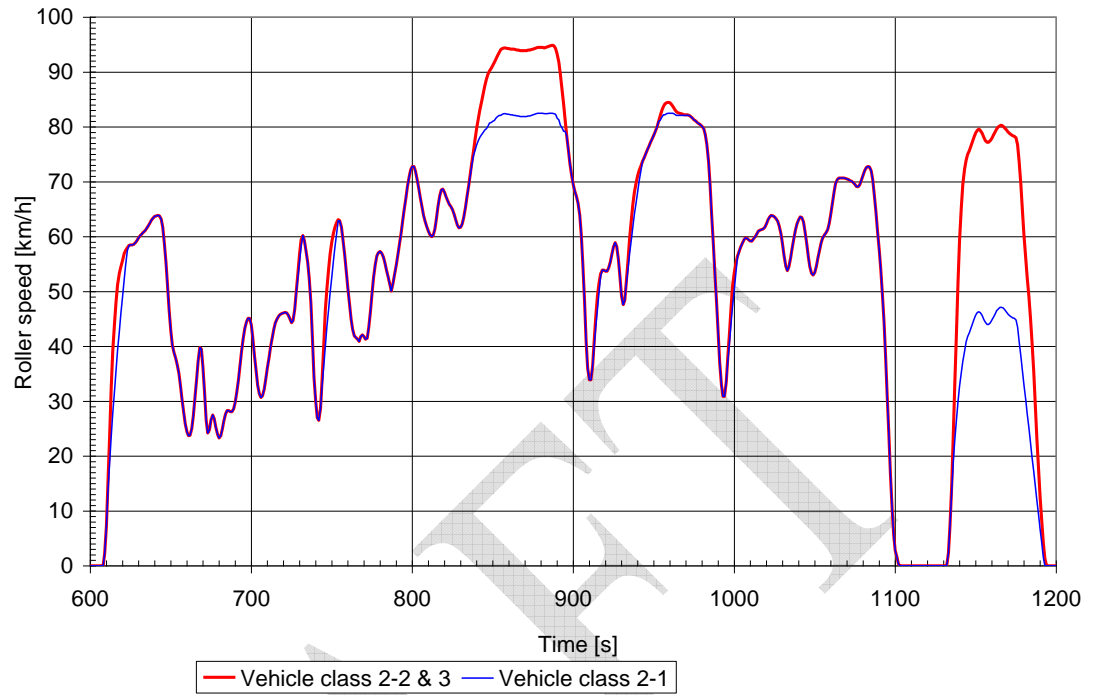


Figure Ap 6-7:WMTC, stage 2, part 2

3.1

The characteristic roller speed versus test time of WMTC, stage 2, part 2 is characterised by the following tables.

3.1.1.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec	
0	0,0	x				61	23,7		x			121	46,2				x	
1	0,0	x				62	23,8		x			122	46,1				x	
2	0,0	x				63	25,0		x			123	45,7				x	
3	0,0	x				64	27,3		x			124	45,0				x	
4	0,0	x				65	30,4		x			125	44,3				x	
5	0,0	x				66	33,9		x			126	44,7			x		
6	0,0	x				67	37,3		x			127	46,8			x		
7	0,0	x				68	39,8				x	128	49,9			x		
8	0,0	x				69	39,5				x	129	52,8			x		
9	2,3		x			70	36,3				x	130	55,6			x		
10	7,3		x			71	31,4				x	131	58,2			x		
11	13,6		x			72	26,5				x	132	60,2					x
12	18,9		x			73	24,2				x	133	59,3					x
13	23,6		x			74	24,8				x	134	57,5					x
14	27,8		x			75	26,6				x	135	55,4					x
15	31,8		x			76	27,5				x	136	52,5					x
16	35,6		x			77	26,8				x	137	47,9					x
17	39,3		x			78	25,3				x	138	41,4					x
18	42,7		x			79	24,0				x	139	34,4					x
19	46,0		x			80	23,3			x		140	30,0					x
20	49,1		x			81	23,7			x		141	27,0					x
21	52,1		x			82	24,9			x		142	26,5			x		
22	54,9		x			83	26,4			x		143	28,7			x		
23	57,5		x			84	27,7			x		144	32,7			x		
24	58,4			x		85	28,3			x		145	36,5			x		
25	58,5			x		86	28,3			x		146	40,0			x		
26	58,5			x		87	28,1			x		147	43,5			x		
27	58,6			x		88	28,1			x		148	46,7			x		
28	58,9			x		89	28,6			x		149	49,8			x		
29	59,3			x		90	29,8			x		150	52,7			x		
30	59,8			x		91	31,6			x		151	55,5			x		
31	60,2			x		92	33,9			x		152	58,1			x		
32	60,5			x		93	36,5			x		153	60,6			x		
33	60,8			x		94	39,1			x		154	62,9			x		
34	61,1			x		95	41,5			x		155	62,9					x
35	61,5			x		96	43,3			x		156	61,7					x
36	62,0			x		97	44,5			x		157	59,4					x
37	62,5			x		98	45,1				x	158	56,6					x
38	63,0			x		99	45,1				x	159	53,7					x
39	63,4			x		100	43,9				x	160	50,7					x
40	63,7			x		101	41,4				x	161	47,7					x
41	63,8			x		102	38,4				x	162	45,0					x
42	63,9			x		103	35,5				x	163	43,1					x
43	63,8			x		104	32,9				x	164	41,9				x	
44	63,2				x	105	31,3				x	165	41,6				x	
45	61,7				x	106	30,7				x	166	41,3				x	
46	58,9				x	107	31,0				x	167	40,9				x	
47	55,2				x	108	32,2				x	168	41,8				x	
48	51,0				x	109	34,0				x	169	42,1				x	
49	46,7				x	110	36,0				x	170	41,8				x	
50	42,8				x	111	37,9				x	171	41,3				x	
51	40,2				x	112	39,9				x	172	41,5			x		
52	38,8				x	113	41,6				x	173	43,5			x		
53	37,9				x	114	43,1				x	174	46,5			x		
54	36,7				x	115	44,3				x	175	49,7			x		
55	35,1				x	116	45,0				x	176	52,6			x		
56	32,9				x	117	45,5				x	177	55,0			x		
57	30,4				x	118	45,8				x	178	56,5			x		
58	28,0				x	119	46,0				x	179	57,1			x		
59	25,9				x	120	46,1				x	180	57,3					x
60	24,4				x													

Table Ap 6 -11: WMTC, stage 2, cycle part 2, reduced speed for vehicle class 2-1 , 0 to 180 s

3.1.2.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec
181	57,0				x	241	77,5		x			301	68,3				x
182	56,3				x	242	78,1			x		302	67,3				x
183	55,2				x	243	78,6			x		303	66,1				x
184	53,9				x	244	79,0			x		304	63,9				x
185	52,6				x	245	79,4			x		305	60,2				x
186	51,4				x	246	79,7			x		306	54,9				x
187	50,1		x			247	80,1			x		307	48,1				x
188	51,5		x			248	80,7			x		308	40,9				x
189	53,1		x			249	80,8			x		309	36,0				x
190	54,8		x			250	81,0			x		310	33,9				x
191	56,6		x			251	81,2			x		311	33,9		x		
192	58,5		x			252	81,6			x		312	36,5		x		
193	60,6		x			253	81,9			x		313	40,1		x		
194	62,8		x			254	82,1			x		314	43,5		x		
195	64,9		x			255	82,1			x		315	46,8		x		
196	67,0		x			256	82,3			x		316	49,8		x		
197	69,1		x			257	82,4			x		317	52,8		x		
198	70,9		x			258	82,4			x		318	53,9		x		
199	72,2		x			259	82,3			x		319	53,9		x		
200	72,8				x	260	82,3			x		320	53,7		x		
201	72,8				x	261	82,2			x		321	53,7		x		
202	71,9				x	262	82,2			x		322	54,3		x		
203	70,5				x	263	82,1			x		323	55,4		x		
204	68,8				x	264	82,1			x		324	56,8		x		
205	67,1				x	265	82,0			x		325	58,1		x		
206	65,4				x	266	82,0			x		326	58,9				x
207	63,9				x	267	81,9			x		327	58,2				x
208	62,8				x	268	81,9			x		328	55,8				x
209	61,8				x	269	81,9			x		329	52,6				x
210	61,0				x	270	81,9			x		330	49,2				x
211	60,4				x	271	81,9			x		331	47,6		x		
212	60,0		x			272	82,0			x		332	48,4		x		
213	60,2		x			273	82,0			x		333	51,4		x		
214	61,4		x			274	82,1			x		334	54,2		x		
215	63,3		x			275	82,2			x		335	56,9		x		
216	65,5		x			276	82,3			x		336	59,4		x		
217	67,4		x			277	82,4			x		337	61,8		x		
218	68,5		x			278	82,5			x		338	64,1		x		
219	68,7				x	279	82,5			x		339	66,2		x		
220	68,1				x	280	82,5			x		340	68,2		x		
221	67,3				x	281	82,5			x		341	70,2		x		
222	66,5				x	282	82,4			x		342	72,0		x		
223	65,9				x	283	82,4			x		343	73,7		x		
224	65,5				x	284	82,4			x		344	74,4		x		
225	64,9				x	285	82,5			x		345	75,1		x		
226	64,1				x	286	82,5			x		346	75,8		x		
227	63,0				x	287	82,5			x		347	76,5		x		
228	62,1				x	288	82,4			x		348	77,2		x		
229	61,6		x			289	82,3			x		349	77,8		x		
230	61,7		x			290	81,6			x		350	78,5		x		
231	62,3		x			291	81,3			x		351	79,2		x		
232	63,5		x			292	80,3			x		352	80,0		x		
233	65,3		x			293	79,9			x		353	81,0			x	
234	67,3		x			294	79,2			x		354	81,2			x	
235	69,2		x			295	79,2			x		355	81,8			x	
236	71,1		x			296	78,4				x	356	82,2			x	
237	73,0		x			297	75,7				x	357	82,2			x	
238	74,8		x			298	73,2				x	358	82,4			x	
239	75,7		x			299	71,1				x	359	82,5			x	
240	76,7		x			300	69,5				x	360	82,5			x	

Table Ap 6 -12: WMTC, stage 2, cycle part 2, reduced speed for vehicle class 2-1 , 181 to 360 s

3.1.3.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec
361	82,5			x		421	63,1			x		481	72,0			x	
362	82,5			x		422	63,6			x		482	72,6			x	
363	82,3			x		423	63,9			x		483	72,8			x	
364	82,1			x		424	63,8			x		484	72,7			x	
365	82,1			x		425	63,6			x		485	72,0				x
366	82,1			x		426	63,3				x	486	70,4				x
367	82,1			x		427	62,8				x	487	67,7				x
368	82,1			x		428	61,9				x	488	64,4				x
369	82,1			x		429	60,5				x	489	61,0				x
370	82,1			x		430	58,6				x	490	57,6				x
371	82,1			x		431	56,5				x	491	54,0				x
372	82,1			x		432	54,6				x	492	49,7				x
373	81,9			x		433	53,8			x		493	44,4				x
374	81,6			x		434	54,5			x		494	38,2				x
375	81,3			x		435	56,1			x		495	31,2				x
376	81,1			x		436	57,9			x		496	24,0				x
377	80,8			x		437	59,7			x		497	16,8				x
378	80,6			x		438	61,2			x		498	10,4				x
379	80,4			x		439	62,3			x		499	5,7				x
380	80,1			x		440	63,1			x		500	2,8				x
381	79,7				x	441	63,6				x	501	1,6				x
382	78,6				x	442	63,5				x	502	0,3				x
383	76,8				x	443	62,7				x	503	0,0	x			
384	73,7				x	444	60,9				x	504	0,0	x			
385	69,4				x	445	58,7				x	505	0,0	x			
386	64,0				x	446	56,4				x	506	0,0	x			
387	58,6				x	447	54,5				x	507	0,0	x			
388	53,2				x	448	53,3				x	508	0,0	x			
389	47,8				x	449	53,0			x		509	0,0	x			
390	42,4				x	450	53,5			x		510	0,0	x			
391	37,0				x	451	54,6			x		511	0,0	x			
392	33,0				x	452	56,1			x		512	0,0	x			
393	30,9				x	453	57,6			x		513	0,0	x			
394	30,9		x			454	58,9			x		514	0,0	x			
395	33,5		x			455	59,8			x		515	0,0	x			
396	37,2		x			456	60,3			x		516	0,0	x			
397	40,8		x			457	60,7			x		517	0,0	x			
398	44,2		x			458	61,3			x		518	0,0	x			
399	47,4		x			459	62,4			x		519	0,0	x			
400	50,4		x			460	64,1			x		520	0,0	x			
401	53,3		x			461	66,2			x		521	0,0	x			
402	56,1		x			462	68,1			x		522	0,0	x			
403	57,3		x			463	69,7			x		523	0,0	x			
404	58,1		x			464	70,4			x		524	0,0	x			
405	58,8		x			465	70,7			x		525	0,0	x			
406	59,4		x			466	70,7			x		526	0,0	x			
407	59,8			x		467	70,7			x		527	0,0	x			
408	59,7			x		468	70,7			x		528	0,0	x			
409	59,4			x		469	70,6			x		529	0,0	x			
410	59,2			x		470	70,5			x		530	0,0	x			
411	59,2			x		471	70,4			x		531	0,0	x			
412	59,6			x		472	70,2			x		532	0,0	x			
413	60,0			x		473	70,1			x		533	2,3		x		
414	60,5			x		474	69,8			x		534	7,2		x		
415	61,0			x		475	69,5			x		535	13,5		x		
416	61,2			x		476	69,1			x		536	18,7		x		
417	61,3			x		477	69,1			x		537	22,9		x		
418	61,4			x		478	69,5			x		538	26,7		x		
419	61,7			x		479	70,3			x		539	30,0		x		
420	62,3			x		480	71,2			x		540	32,8		x		

Table Ap 6 -13: WMTC, stage 2, cycle part 2, reduced speed for vehicle class 2-1 ,
361 to 540 s

3.1.4.

time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec
541	35,2		x		
542	37,3		x		
543	39,1		x		
544	40,8		x		
545	41,8		x		
546	42,5		x		
547	43,3		x		
548	44,1		x		
549	45,0		x		
550	45,7		x		
551	46,2			x	
552	46,3			x	
553	46,1			x	
554	45,6			x	
555	44,9			x	
556	44,4			x	
557	44,0			x	
558	44,0			x	
559	44,3			x	
560	44,8			x	
561	45,3			x	
562	45,9			x	
563	46,5			x	
564	46,8			x	
565	47,1			x	
566	47,1			x	
567	47,0			x	
568	46,7			x	
569	46,3			x	
570	45,9			x	
571	45,6			x	
572	45,4			x	
573	45,2			x	
574	45,1			x	
575	44,8				x
576	43,5				x
577	40,9				x
578	38,2				x
579	35,6				x
580	33,0				x
581	30,4				x
582	27,7				x
583	25,1				x
584	22,5				x
585	19,8				x
586	17,2				x
587	14,6				x
588	12,0				x
589	9,3				x
590	6,7				x
591	4,1				x
592	1,5				x
593	0,0	x			
594	0,0	x			
595	0,0	x			
596	0,0	x			
597	0,0	x			
598	0,0	x			
599	0,0	x			
600	0,0	x			

Table Ap 6 -14: WMTC, stage 2, cycle part 2, reduced speed for vehicle class 2-1 ,
541 to 600 s

3.1.5.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec	
0	0,0	x				61	23,7		x			121	46,2				x	
1	0,0	x				62	23,8		x			122	46,1				x	
2	0,0	x				63	25,0		x			123	45,7				x	
3	0,0	x				64	27,3		x			124	45,0				x	
4	0,0	x				65	30,4		x			125	44,3				x	
5	0,0	x				66	33,9		x			126	44,7				x	
6	0,0	x				67	37,3		x			127	46,8				x	
7	0,0	x				68	39,8		x			128	50,1				x	
8	0,0	x				69	39,5				x	129	53,6				x	
9	2,3		x			70	36,3				x	130	56,9				x	
10	7,3		x			71	31,4				x	131	59,4				x	
11	15,2		x			72	26,5				x	132	60,2					x
12	23,9		x			73	24,2				x	133	59,3					x
13	32,5		x			74	24,8				x	134	57,5					x
14	39,2		x			75	26,6				x	135	55,4					x
15	44,1		x			76	27,5				x	136	52,5					x
16	48,1		x			77	26,8				x	137	47,9					x
17	51,2		x			78	25,3				x	138	41,4					x
18	53,3		x			79	24,0				x	139	34,4					x
19	54,5		x			80	23,3				x	140	30,0					x
20	55,7		x			81	23,7				x	141	27,0					x
21	56,9			x		82	24,9				x	142	26,5				x	
22	57,5			x		83	26,4				x	143	28,7				x	
23	58,0			x		84	27,7				x	144	33,8				x	
24	58,4			x		85	28,3				x	145	40,3				x	
25	58,5			x		86	28,3				x	146	46,6				x	
26	58,5			x		87	28,1				x	147	50,4				x	
27	58,6			x		88	28,1				x	148	54,0				x	
28	58,9			x		89	28,6				x	149	56,9				x	
29	59,3			x		90	29,8				x	150	59,1				x	
30	59,8			x		91	31,6				x	151	60,6				x	
31	60,2			x		92	33,9				x	152	61,7				x	
32	60,5			x		93	36,5				x	153	62,6				x	
33	60,8			x		94	39,1				x	154	63,1					x
34	61,1			x		95	41,5				x	155	62,9					x
35	61,5			x		96	43,3				x	156	61,7					x
36	62,0			x		97	44,5				x	157	59,4					x
37	62,5			x		98	45,1				x	158	56,6					x
38	63,0			x		99	45,1				x	159	53,7					x
39	63,4			x		100	43,9				x	160	50,7					x
40	63,7			x		101	41,4				x	161	47,7					x
41	63,8			x		102	38,4				x	162	45,0					x
42	63,9			x		103	35,5				x	163	43,1					x
43	63,8			x		104	32,9				x	164	41,9					x
44	63,2				x	105	31,3				x	165	41,6					x
45	61,7				x	106	30,7				x	166	41,3					x
46	58,9				x	107	31,0				x	167	40,9					x
47	55,2				x	108	32,2				x	168	41,8					x
48	51,0				x	109	34,0				x	169	42,1					x
49	46,7				x	110	36,0				x	170	41,8					x
50	42,8				x	111	37,9				x	171	41,3					x
51	40,2				x	112	39,9				x	172	41,5					x
52	38,8				x	113	41,6				x	173	43,5					x
53	37,9				x	114	43,1				x	174	46,5					x
54	36,7				x	115	44,3				x	175	49,7					x
55	35,1				x	116	45,0				x	176	52,6					x
56	32,9				x	117	45,5				x	177	55,0					x
57	30,4				x	118	45,8				x	178	56,5					x
58	28,0				x	119	46,0				x	179	57,1					x
59	25,9				x	120	46,1				x	180	57,3					x
60	24,4				x													

Table Ap 6 -15: WMTC, stage 2, cycle part 2 for vehicle classes 2-2 and 3, 0 to 180 s

3.1.6.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec
181	57,0				x	241	81,5		x			301	68,3				x
182	56,3				x	242	83,1		x			302	67,3				x
183	55,2				x	243	84,6		x			303	66,1				x
184	53,9				x	244	86,0		x			304	63,9				x
185	52,6				x	245	87,4		x			305	60,2				x
186	51,4				x	246	88,7		x			306	54,9				x
187	50,1		x			247	89,6		x			307	48,1				x
188	51,5		x			248	90,2		x			308	40,9				x
189	53,1		x			249	90,7		x			309	36,0				x
190	54,8		x			250	91,2		x			310	33,9				x
191	56,6		x			251	91,8		x			311	33,9		x		
192	58,5		x			252	92,4		x			312	36,5		x		
193	60,6		x			253	93,0		x			313	41,0		x		
194	62,8		x			254	93,6		x			314	45,3		x		
195	64,9		x			255	94,1			x		315	49,2		x		
196	67,0		x			256	94,3			x		316	51,5		x		
197	69,1		x			257	94,4			x		317	53,2		x		
198	70,9		x			258	94,4			x		318	53,9		x		
199	72,2		x			259	94,3			x		319	53,9		x		
200	72,8				x	260	94,3			x		320	53,7		x		
201	72,8				x	261	94,2			x		321	53,7		x		
202	71,9				x	262	94,2			x		322	54,3		x		
203	70,5				x	263	94,2			x		323	55,4		x		
204	68,8				x	264	94,1			x		324	56,8		x		
205	67,1				x	265	94,0			x		325	58,1		x		
206	65,4				x	266	94,0			x		326	58,9				x
207	63,9				x	267	93,9			x		327	58,2				x
208	62,8				x	268	93,9			x		328	55,8				x
209	61,8				x	269	93,9			x		329	52,6				x
210	61,0				x	270	93,9			x		330	49,2				x
211	60,4				x	271	93,9			x		331	47,6		x		
212	60,0				x	272	94,0			x		332	48,4		x		
213	60,2				x	273	94,0			x		333	51,8		x		
214	61,4				x	274	94,1			x		334	55,7		x		
215	63,3				x	275	94,2			x		335	59,6		x		
216	65,5				x	276	94,3			x		336	63,0		x		
217	67,4				x	277	94,4			x		337	65,9		x		
218	68,5				x	278	94,5			x		338	68,1		x		
219	68,7				x	279	94,5			x		339	69,8		x		
220	68,1				x	280	94,5			x		340	71,1		x		
221	67,3				x	281	94,5			x		341	72,1		x		
222	66,5				x	282	94,4			x		342	72,9		x		
223	65,9				x	283	94,5			x		343	73,7		x		
224	65,5				x	284	94,6			x		344	74,4		x		
225	64,9				x	285	94,7			x		345	75,1		x		
226	64,1				x	286	94,8			x		346	75,8		x		
227	63,0				x	287	94,9			x		347	76,5		x		
228	62,1				x	288	94,8			x		348	77,2		x		
229	61,6		x			289	94,3				x	349	77,8		x		
230	61,7		x			290	93,3				x	350	78,5		x		
231	62,3		x			291	91,8				x	351	79,2		x		
232	63,5		x			292	89,6				x	352	80,0		x		
233	65,3		x			293	87,0				x	353	81,0		x		
234	67,3		x			294	84,1				x	354	82,0		x		
235	69,3		x			295	81,2				x	355	83,0		x		
236	71,4		x			296	78,4				x	356	83,7		x		
237	73,5		x			297	75,7				x	357	84,2				x
238	75,6		x			298	73,2				x	358	84,4				x
239	77,7		x			299	71,1				x	359	84,5				x
240	79,7		x			300	69,5				x	360	84,4				x

Table Ap 6 -16: WMTC, stage 2, cycle part 2 for vehicle classes 2-2 and 3, 181 to 360

s

3.1.7.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec	
361	84,1			x		421	63,1			x		481	72,0				x	
362	83,7			x		422	63,6			x		482	72,6				x	
363	83,2			x		423	63,9			x		483	72,8				x	
364	82,8			x		424	63,8			x		484	72,7				x	
365	82,6			x		425	63,6			x		485	72,0					x
366	82,5			x		426	63,3				x	486	70,4					x
367	82,4			x		427	62,8				x	487	67,7					x
368	82,3			x		428	61,9				x	488	64,4					x
369	82,2			x		429	60,5				x	489	61,0					x
370	82,2			x		430	58,6				x	490	57,6					x
371	82,2			x		431	56,5				x	491	54,0					x
372	82,1			x		432	54,6				x	492	49,7					x
373	81,9			x		433	53,8			x		493	44,4					x
374	81,6			x		434	54,5			x		494	38,2					x
375	81,3			x		435	56,1			x		495	31,2					x
376	81,1			x		436	57,9			x		496	24,0					x
377	80,8			x		437	59,7			x		497	16,8					x
378	80,6			x		438	61,2			x		498	10,4					x
379	80,4			x		439	62,3			x		499	5,7					x
380	80,1			x		440	63,1			x		500	2,8					x
381	79,7				x	441	63,6				x	501	1,6					x
382	78,6				x	442	63,5				x	502	0,3					x
383	76,8				x	443	62,7				x	503	0,0	x				
384	73,7				x	444	60,9				x	504	0,0	x				
385	69,4				x	445	58,7				x	505	0,0	x				
386	64,0				x	446	56,4				x	506	0,0	x				
387	58,6				x	447	54,5				x	507	0,0	x				
388	53,2				x	448	53,3				x	508	0,0	x				
389	47,8				x	449	53,0			x		509	0,0	x				
390	42,4				x	450	53,5			x		510	0,0	x				
391	37,0				x	451	54,6			x		511	0,0	x				
392	33,0				x	452	56,1			x		512	0,0	x				
393	30,9				x	453	57,6			x		513	0,0	x				
394	30,9		x			454	58,9			x		514	0,0	x				
395	33,5		x			455	59,8			x		515	0,0	x				
396	38,0		x			456	60,3			x		516	0,0	x				
397	42,5		x			457	60,7			x		517	0,0	x				
398	47,0		x			458	61,3			x		518	0,0	x				
399	51,0		x			459	62,4			x		519	0,0	x				
400	53,5		x			460	64,1			x		520	0,0	x				
401	55,1		x			461	66,2			x		521	0,0	x				
402	56,4		x			462	68,1			x		522	0,0	x				
403	57,3		x			463	69,7			x		523	0,0	x				
404	58,1		x			464	70,4			x		524	0,0	x				
405	58,8		x			465	70,7			x		525	0,0	x				
406	59,4		x			466	70,7			x		526	0,0	x				
407	59,8			x		467	70,7			x		527	0,0	x				
408	59,7			x		468	70,7			x		528	0,0	x				
409	59,4			x		469	70,6			x		529	0,0	x				
410	59,2			x		470	70,5			x		530	0,0	x				
411	59,2			x		471	70,4			x		531	0,0	x				
412	59,6			x		472	70,2			x		532	0,0	x				
413	60,0			x		473	70,1			x		533	2,3		x			
414	60,5			x		474	69,8			x		534	7,2			x		
415	61,0			x		475	69,5			x		535	14,6			x		
416	61,2			x		476	69,1			x		536	23,5			x		
417	61,3			x		477	69,1			x		537	33,0			x		
418	61,4			x		478	69,5			x		538	42,7			x		
419	61,7			x		479	70,3			x		539	51,8			x		
420	62,3			x		480	71,2			x		540	59,4			x		

Table Ap 6 -17: WMTC, stage 2, cycle part 2 for vehicle classes 2-2 and 3, 361 to 540

s

3.1.8.

time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec
541	65,3		x		
542	69,6		x		
543	72,3		x		
544	73,9		x		
545	75,0		x		
546	75,7		x		
547	76,5		x		
548	77,3		x		
549	78,2		x		
550	78,9		x		
551	79,4			x	
552	79,6			x	
553	79,3			x	
554	78,8			x	
555	78,1			x	
556	77,5			x	
557	77,2			x	
558	77,2			x	
559	77,5			x	
560	77,9			x	
561	78,5			x	
562	79,1			x	
563	79,6			x	
564	80,0			x	
565	80,2			x	
566	80,3			x	
567	80,1			x	
568	79,8			x	
569	79,5			x	
570	79,1			x	
571	78,8			x	
572	78,6			x	
573	78,4			x	
574	78,3			x	
575	78,0				x
576	76,7				x
577	73,7				x
578	69,5				x
579	64,8				x
580	60,3				x
581	56,2				x
582	52,5				x
583	49,0				x
584	45,2				x
585	40,8				x
586	35,4				x
587	29,4				x
588	23,4				x
589	17,7				x
590	12,6				x
591	8,0				x
592	4,1				x
593	1,3				x
594	0,0	x			
595	0,0	x			
596	0,0	x			
597	0,0	x			
598	0,0	x			
599	0,0	x			
600	0,0	x			

Table Ap 6 -18: WMTC, stage 2, cycle part 2 for vehicle classes 2-2 and 3, 541 to 600
s

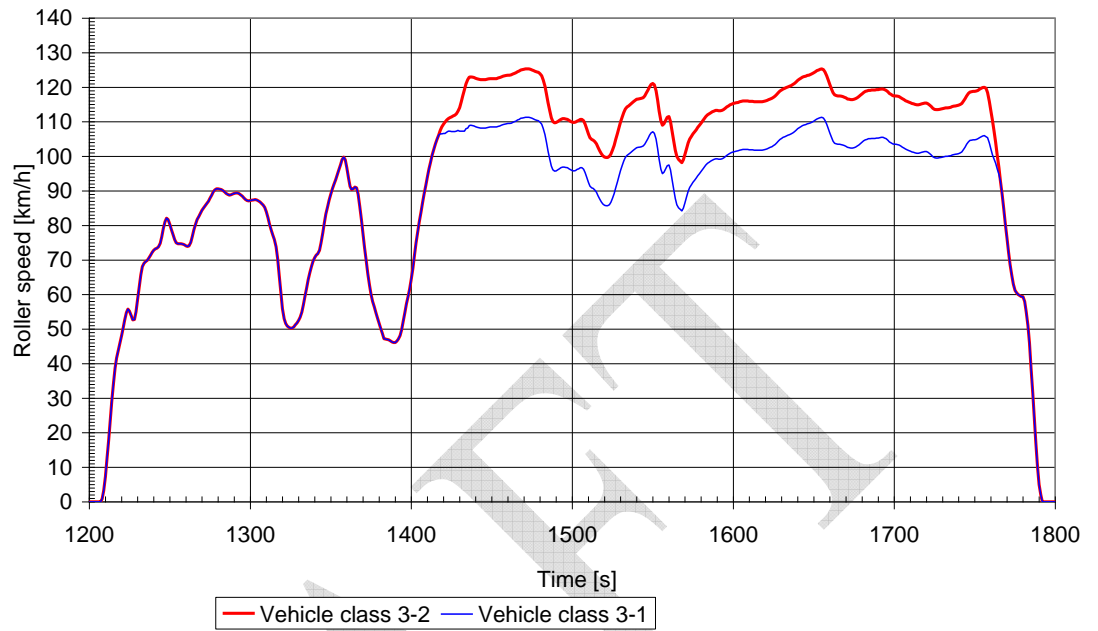


Figure Ap 6-8:WMTC, stage 2, part 3.

4.1

The characteristic roller speed versus test time of WMTC, stage 2, part 3 is characterised by the following tables

4.1.1.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec	
0	0,0	x				61	73,9				x	121	53,0					x
1	0,0	x				62	74,1		x			122	51,6					x
2	0,0	x				63	75,1		x			123	50,9					x
3	0,0	x				64	76,8		x			124	50,5					x
4	0,0	x				65	78,7		x			125	50,2					x
5	0,0	x				66	80,4		x			126	50,3				x	
6	0,0	x				67	81,7		x			127	50,6				x	
7	0,0	x				68	82,6		x			128	51,2				x	
8	0,9		x			69	83,5		x			129	51,8				x	
9	3,2		x			70	84,4		x			130	52,5				x	
10	7,3		x			71	85,1		x			131	53,4				x	
11	12,4		x			72	85,7		x			132	54,9				x	
12	17,9		x			73	86,3		x			133	57,0				x	
13	23,5		x			74	87,0		x			134	59,4				x	
14	29,1		x			75	87,9		x			135	61,9				x	
15	34,3		x			76	88,8		x			136	64,3				x	
16	38,6		x			77	89,7		x			137	66,4				x	
17	41,6		x			78	90,3			x		138	68,1				x	
18	43,9		x			79	90,6			x		139	69,6				x	
19	45,9		x			80	90,6			x		140	70,7				x	
20	48,1		x			81	90,5			x		141	71,4				x	
21	50,3		x			82	90,4			x		142	71,8				x	
22	52,6		x			83	90,1			x		143	72,8				x	
23	54,8		x			84	89,7			x		144	75,0				x	
24	55,8		x			85	89,3			x		145	77,8				x	
25	55,2		x			86	89,0			x		146	80,7				x	
26	53,9		x			87	88,8			x		147	83,3				x	
27	52,7		x			88	88,9			x		148	85,4				x	
28	52,8		x			89	89,1			x		149	87,3				x	
29	55,0		x			90	89,3			x		150	89,1				x	
30	58,5		x			91	89,4			x		151	90,6				x	
31	62,3		x			92	89,4			x		152	91,9				x	
32	65,7		x			93	89,2			x		153	93,2				x	
33	68,1		x			94	88,9			x		154	94,6				x	
34	69,1		x			95	88,5			x		155	96,0				x	
35	69,5		x			96	88,0			x		156	97,5				x	
36	69,9		x			97	87,5			x		157	99,0				x	
37	70,6		x			98	87,2			x		158	99,8					x
38	71,3		x			99	87,1			x		159	99,0					x
39	72,2		x			100	87,2			x		160	96,7					x
40	72,8		x			101	87,3			x		161	93,7					x
41	73,2		x			102	87,4			x		162	91,3					x
42	73,4		x			103	87,5			x		163	90,4					x
43	73,8		x			104	87,4			x		164	90,6					x
44	74,8		x			105	87,1			x		165	91,1					x
45	76,7		x			106	86,8			x		166	90,9					x
46	79,1		x			107	86,4			x		167	89,0					x
47	81,1		x			108	85,9			x		168	85,6					x
48	82,1				x	109	85,2				x	169	81,6					x
49	81,7				x	110	84,0				x	170	77,6					x
50	80,3				x	111	82,2				x	171	73,6					x
51	78,8				x	112	80,3				x	172	69,7					x
52	77,3				x	113	78,6				x	173	66,0					x
53	75,9				x	114	77,2				x	174	62,7					x
54	75,0				x	115	75,9				x	175	60,0					x
55	74,7				x	116	73,8				x	176	58,0					x
56	74,7				x	117	70,4				x	177	56,4					x
57	74,7				x	118	65,7				x	178	54,8					x
58	74,6				x	119	60,5				x	179	53,3					x
59	74,4				x	120	55,9				x	180	51,7					x
60	74,1				x													

Table Ap 6 -19: WMTC, stage 2, cycle part 3, reduced speed for vehicle class 3-1, 1 to 180 s

4.1.2.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec
181	50,2				x	241	108,4			x		301	95,8			x	
182	48,7				x	242	108,3			x		302	95,9			x	
183	47,2			x		243	108,2			x		303	96,2			x	
184	47,1			x		244	108,2			x		304	96,4			x	
185	47,0			x		245	108,2			x		305	96,7			x	
186	46,9			x		246	108,2			x		306	96,7			x	
187	46,6			x		247	108,3			x		307	96,3			x	
188	46,3			x		248	108,4			x		308	95,3				x
189	46,1			x		249	108,5			x		309	94,0				x
190	46,1		x			250	108,5			x		310	92,5				x
191	46,5		x			251	108,5			x		311	91,4				x
192	47,1		x			252	108,5			x		312	90,9				x
193	48,1		x			253	108,5			x		313	90,7				x
194	49,8		x			254	108,7			x		314	90,3				x
195	52,2		x			255	108,8			x		315	89,6				x
196	54,8		x			256	109,0			x		316	88,6				x
197	57,3		x			257	109,2			x		317	87,7				x
198	59,5		x			258	109,3			x		318	86,8				x
199	61,7		x			259	109,4			x		319	86,2				x
200	64,4		x			260	109,5			x		320	85,8				x
201	67,7		x			261	109,5			x		321	85,7				x
202	71,4		x			262	109,6			x		322	85,7				x
203	74,9		x			263	109,8			x		323	86,0			x	
204	78,2		x			264	110,0			x		324	86,7			x	
205	81,1		x			265	110,2			x		325	87,8			x	
206	83,9		x			266	110,5			x		326	89,2			x	
207	86,6		x			267	110,7			x		327	90,9			x	
208	89,1		x			268	111,0			x		328	92,6			x	
209	91,6		x			269	111,1			x		329	94,3			x	
210	94,0		x			270	111,2			x		330	95,9			x	
211	96,3		x			271	111,3			x		331	97,4			x	
212	98,4		x			272	111,3			x		332	98,7			x	
213	100,4		x			273	111,3			x		333	99,7			x	
214	102,1		x			274	111,2			x		334	100,3			x	
215	103,6		x			275	111,0			x		335	100,6			x	
216	104,9		x			276	110,8			x		336	101,0			x	
217	106,2			x		277	110,6			x		337	101,4			x	
218	106,5			x		278	110,4			x		338	101,8			x	
219	106,5			x		279	110,3			x		339	102,2			x	
220	106,6			x		280	109,9			x		340	102,5			x	
221	106,6			x		281	109,3				x	341	102,6			x	
222	107,0			x		282	108,1				x	342	102,7			x	
223	107,3			x		283	106,3				x	343	102,8			x	
224	107,3			x		284	104,0				x	344	103,0			x	
225	107,2			x		285	101,5				x	345	103,5			x	
226	107,2			x		286	99,2				x	346	104,3			x	
227	107,2			x		287	97,2				x	347	105,2			x	
228	107,3			x		288	96,1				x	348	106,1			x	
229	107,5			x		289	95,7			x		349	106,8			x	
230	107,3			x		290	95,8			x		350	107,1				x
231	107,3			x		291	96,1			x		351	106,7				x
232	107,3			x		292	96,4			x		352	105,0				x
233	107,3			x		293	96,7			x		353	102,3				x
234	108,0			x		294	96,9			x		354	99,1				x
235	108,2			x		295	96,9			x		355	96,3				x
236	108,9			x		296	96,8			x		356	95,0				x
237	109,0			x		297	96,7			x		357	95,4				x
238	108,9			x		298	96,4			x		358	96,4				x
239	108,8			x		299	96,1			x		359	97,3				x
240	108,6			x		300	95,9			x		360	97,5				x

Table Ap 6 -20: WMTC, stage 2, cycle part 3, reduced speed for vehicle class 3-1, 181 to 360 s

4.1.3.

time in s	roller speed in km/h	phase indicator				time in s	roller speed in km/h	phase indicator				time in s	roller speed in km/h	phase indicator			
		cbp	aoa	orulce	deo			cbp	aoa	orulce	deo			cbp	aoa	orulce	deo
361	96,1				x	421	102,2				x	481	104,5				x
362	93,4				x	422	102,4				x	482	104,8				x
363	90,4				x	423	102,6				x	483	104,9				x
364	87,8				x	424	102,8				x	484	105,1				x
365	86,0				x	425	103,1				x	485	105,1				x
366	85,1				x	426	103,4				x	486	105,2				x
367	84,7				x	427	103,9				x	487	105,2				x
368	84,2				x	428	104,4				x	488	105,2				x
369	85,0				x	429	104,9				x	489	105,3				x
370	86,5				x	430	105,2				x	490	105,3				x
371	88,3				x	431	105,5				x	491	105,4				x
372	89,9				x	432	105,7				x	492	105,5				x
373	91,0				x	433	105,9				x	493	105,5				x
374	91,8				x	434	106,1				x	494	105,3				x
375	92,5				x	435	106,3				x	495	105,1				x
376	93,1				x	436	106,5				x	496	104,7				x
377	93,7				x	437	106,8				x	497	104,2				x
378	94,4				x	438	107,1				x	498	103,9				x
379	95,0				x	439	107,5				x	499	103,6				x
380	95,6				x	440	108,0				x	500	103,5				x
381	96,3				x	441	108,3				x	501	103,5				x
382	96,9				x	442	108,6				x	502	103,4				x
383	97,5				x	443	108,9				x	503	103,3				x
384	98,0				x	444	109,1				x	504	103,0				x
385	98,3				x	445	109,2				x	505	102,7				x
386	98,6				x	446	109,4				x	506	102,4				x
387	98,9				x	447	109,5				x	507	102,1				x
388	99,1				x	448	109,7				x	508	101,9				x
389	99,3				x	449	109,9				x	509	101,7				x
390	99,3				x	450	110,2				x	510	101,5				x
391	99,2				x	451	110,5				x	511	101,3				x
392	99,2				x	452	110,8				x	512	101,2				x
393	99,3				x	453	111,0				x	513	101,0				x
394	99,5				x	454	111,2				x	514	100,9				x
395	99,9				x	455	111,3				x	515	100,9				x
396	100,3				x	456	111,1				x	516	101,0				x
397	100,6				x	457	110,4				x	517	101,2				x
398	100,9				x	458	109,3				x	518	101,3				x
399	101,1				x	459	108,1				x	519	101,4				x
400	101,3				x	460	106,8				x	520	101,4				x
401	101,4				x	461	105,5				x	521	101,2				x
402	101,5				x	462	104,4				x	522	100,8				x
403	101,6				x	463	103,8				x	523	100,4				x
404	101,8				x	464	103,6				x	524	99,9				x
405	101,9				x	465	103,5				x	525	99,6				x
406	102,0				x	466	103,5				x	526	99,5				x
407	102,0				x	467	103,4				x	527	99,5				x
408	102,0				x	468	103,3				x	528	99,6				x
409	102,0				x	469	103,1				x	529	99,7				x
410	101,9				x	470	102,9				x	530	99,8				x
411	101,9				x	471	102,6				x	531	99,9				x
412	101,9				x	472	102,5				x	532	100,0				x
413	101,8				x	473	102,4				x	533	100,0				x
414	101,8				x	474	102,4				x	534	100,1				x
415	101,8				x	475	102,5				x	535	100,2				x
416	101,8				x	476	102,7				x	536	100,4				x
417	101,8				x	477	103,0				x	537	100,5				x
418	101,8				x	478	103,3				x	538	100,6				x
419	101,9				x	479	103,7				x	539	100,7				x
420	102,0				x	480	104,1				x	540	100,8				x

Table Ap 6 -21: WMTC, stage 2, cycle part 3, reduced speed for vehicle class 3-1, 361 to 540 s

4.1.4.

time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec
541	101,0			x	
542	101,3			x	
543	102,0			x	
544	102,7			x	
545	103,5			x	
546	104,2			x	
547	104,6			x	
548	104,7			x	
549	104,8			x	
550	104,8			x	
551	104,9			x	
552	105,1			x	
553	105,4			x	
554	105,7			x	
555	105,9			x	
556	106,0			x	
557	105,7				x
558	105,4				x
559	103,9				x
560	102,2				x
561	100,5				x
562	99,2				x
563	98,0				x
564	96,4				x
565	94,8				x
566	92,8				x
567	88,9				x
568	84,9				x
569	80,6				x
570	76,3				x
571	72,3				x
572	68,7				x
573	65,5				x
574	63,0				x
575	61,2				x
576	60,5				x
577	60,0				x
578	59,7				x
579	59,4				x
580	59,4				x
581	58,0				x
582	55,0				x
583	51,0				x
584	46,0				x
585	38,8				x
586	31,6				x
587	24,4				x
588	17,2				x
589	10,0				x
590	5,0				x
591	2,0				x
592	0,0	x			
593	0,0	x			
594	0,0	x			
595	0,0	x			
596	0,0	x			
597	0,0	x			
598	0,0	x			
599	0,0	x			
600	0,0	x			

Table Ap 6 -22: WMTC, stage 2, cycle part 3, reduced speed for vehicle class 3-1, 541 to 600 s

4.1.5.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec	
0	0,0	x				61	73,9				x	121	53,0					x
1	0,0	x				62	74,1		x			122	51,6					x
2	0,0	x				63	75,1		x			123	50,9					x
3	0,0	x				64	76,8		x			124	50,5					x
4	0,0	x				65	78,7		x			125	50,2					x
5	0,0	x				66	80,4		x			126	50,3				x	
6	0,0	x				67	81,7		x			127	50,6				x	
7	0,0	x				68	82,6		x			128	51,2				x	
8	0,9		x			69	83,5		x			129	51,8				x	
9	3,2		x			70	84,4		x			130	52,5				x	
10	7,3		x			71	85,1		x			131	53,4				x	
11	12,4		x			72	85,7		x			132	54,9				x	
12	17,9		x			73	86,3		x			133	57,0				x	
13	23,5		x			74	87,0		x			134	59,4				x	
14	29,1		x			75	87,9		x			135	61,9				x	
15	34,3		x			76	88,8		x			136	64,3				x	
16	38,6		x			77	89,7		x			137	66,4				x	
17	41,6		x			78	90,3			x		138	68,1				x	
18	43,9		x			79	90,6			x		139	69,6				x	
19	45,9		x			80	90,6			x		140	70,7				x	
20	48,1		x			81	90,5			x		141	71,4				x	
21	50,3		x			82	90,4			x		142	71,8				x	
22	52,6		x			83	90,1			x		143	72,8				x	
23	54,8		x			84	89,7			x		144	75,0				x	
24	55,8		x			85	89,3			x		145	77,8				x	
25	55,2		x			86	89,0			x		146	80,7				x	
26	53,9		x			87	88,8			x		147	83,3				x	
27	52,7		x			88	88,9			x		148	85,4				x	
28	52,8		x			89	89,1			x		149	87,3				x	
29	55,0		x			90	89,3			x		150	89,1				x	
30	58,5		x			91	89,4			x		151	90,6				x	
31	62,3		x			92	89,4			x		152	91,9				x	
32	65,7		x			93	89,2			x		153	93,2				x	
33	68,1		x			94	88,9			x		154	94,6				x	
34	69,1		x			95	88,5			x		155	96,0				x	
35	69,5		x			96	88,0			x		156	97,5				x	
36	69,9		x			97	87,5			x		157	99,0				x	
37	70,6		x			98	87,2			x		158	99,8					x
38	71,3		x			99	87,1			x		159	99,0					x
39	72,2		x			100	87,2			x		160	96,7					x
40	72,8		x			101	87,3			x		161	93,7					x
41	73,2		x			102	87,4			x		162	91,3					x
42	73,4		x			103	87,5			x		163	90,4					x
43	73,8		x			104	87,4			x		164	90,6					x
44	74,8		x			105	87,1			x		165	91,1					x
45	76,7		x			106	86,8			x		166	90,9					x
46	79,1		x			107	86,4			x		167	89,0					x
47	81,1		x			108	85,9			x		168	85,6					x
48	82,1				x	109	85,2				x	169	81,6					x
49	81,7				x	110	84,0				x	170	77,6					x
50	80,3				x	111	82,2				x	171	73,6					x
51	78,8				x	112	80,3				x	172	69,7					x
52	77,3				x	113	78,6				x	173	66,0					x
53	75,9				x	114	77,2				x	174	62,7					x
54	75,0				x	115	75,9				x	175	60,0					x
55	74,7				x	116	73,8				x	176	58,0					x
56	74,7				x	117	70,4				x	177	56,4					x
57	74,7				x	118	65,7				x	178	54,8					x
58	74,6				x	119	60,5				x	179	53,3					x
59	74,4				x	120	55,9				x	180	51,7					x
60	74,1				x													

Table Ap 6 -23: WMTC, stage 2, cycle part 3 for vehicle class 3-2, 0 to 180 s

4.1.6.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec
181	50,2				x	241	122,4				x	301	109,8				x
182	48,7				x	242	122,3				x	302	109,9				x
183	47,2				x	243	122,2				x	303	110,2				x
184	47,1				x	244	122,2				x	304	110,4				x
185	47,0				x	245	122,2				x	305	110,7				x
186	46,9				x	246	122,2				x	306	110,7				x
187	46,6				x	247	122,3				x	307	110,3				x
188	46,3				x	248	122,4				x	308	109,3				x
189	46,1				x	249	122,5				x	309	108,0				x
190	46,1		x			250	122,5				x	310	106,5				x
191	46,5		x			251	122,5				x	311	105,4				x
192	47,1		x			252	122,5				x	312	104,9				x
193	48,1		x			253	122,5				x	313	104,7				x
194	49,8		x			254	122,7				x	314	104,3				x
195	52,2		x			255	122,8				x	315	103,6				x
196	54,8		x			256	123,0				x	316	102,6				x
197	57,3		x			257	123,2				x	317	101,7				x
198	59,5		x			258	123,3				x	318	100,8				x
199	61,7		x			259	123,4				x	319	100,2				x
200	64,4		x			260	123,5				x	320	99,8				x
201	67,7		x			261	123,5				x	321	99,7				x
202	71,4		x			262	123,6				x	322	99,7				x
203	74,9		x			263	123,8				x	323	100,0				x
204	78,2		x			264	124,0				x	324	100,7				x
205	81,1		x			265	124,2				x	325	101,8				x
206	83,9		x			266	124,5				x	326	103,2				x
207	86,6		x			267	124,7				x	327	104,9				x
208	89,1		x			268	125,0				x	328	106,6				x
209	91,6		x			269	125,1				x	329	108,3				x
210	94,0		x			270	125,2				x	330	109,9				x
211	96,3		x			271	125,3				x	331	111,4				x
212	98,4		x			272	125,3				x	332	112,7				x
213	100,4		x			273	125,3				x	333	113,7				x
214	102,1		x			274	125,2				x	334	114,3				x
215	103,6		x			275	125,0				x	335	114,6				x
216	104,9		x			276	124,8				x	336	115,0				x
217	106,2		x			277	124,6				x	337	115,4				x
218	107,5		x			278	124,4				x	338	115,8				x
219	108,5		x			279	124,3				x	339	116,2				x
220	109,3		x			280	123,9				x	340	116,5				x
221	109,9		x			281	123,3				x	341	116,6				x
222	110,5		x			282	122,1				x	342	116,7				x
223	110,9		x			283	120,3				x	343	116,8				x
224	111,2		x			284	118,0				x	344	117,0				x
225	111,4		x			285	115,5				x	345	117,5				x
226	111,7		x			286	113,2				x	346	118,3				x
227	111,9		x			287	111,2				x	347	119,2				x
228	112,3		x			288	110,1				x	348	120,1				x
229	113,0		x			289	109,7				x	349	120,8				x
230	114,1		x			290	109,8				x	350	121,1				x
231	115,7		x			291	110,1				x	351	120,7				x
232	117,5		x			292	110,4				x	352	119,0				x
233	119,3		x			293	110,7				x	353	116,3				x
234	121,0		x			294	110,9				x	354	113,1				x
235	122,2				x	295	110,9				x	355	110,3				x
236	122,9				x	296	110,8				x	356	109,0				x
237	123,0				x	297	110,7				x	357	109,4				x
238	122,9				x	298	110,4				x	358	110,4				x
239	122,8				x	299	110,1				x	359	111,3				x
240	122,6				x	300	109,9				x	360	111,5				x

Table Ap 6 -24: WMTC, stage 2, cycle part 3 for vehicle class 3-2, 181 to 360 s

4.1.7.

time in c	roller speed in km/h	phase indicators				time in c	roller speed in km/h	phase indicators				time in c	roller speed in km/h	phase indicators			
		cbp	aoa	oruce	deo			cbp	aoa	oruce	deo			cbp	aoa	oruce	deo
361	110,1				x	421	116,2			x		481	118,5			x	
362	107,4				x	422	116,4			x		482	118,8			x	
363	104,4				x	423	116,6			x		483	118,9			x	
364	101,8				x	424	116,8			x		484	119,1			x	
365	100,0				x	425	117,1			x		485	119,1			x	
366	99,1				x	426	117,4			x		486	119,2			x	
367	98,7				x	427	117,9			x		487	119,2			x	
368	98,2			x		428	118,4			x		488	119,2			x	
369	99,0			x		429	118,9			x		489	119,3			x	
370	100,5			x		430	119,2			x		490	119,3			x	
371	102,3			x		431	119,5			x		491	119,4			x	
372	103,9			x		432	119,7			x		492	119,5			x	
373	105,0			x		433	119,9			x		493	119,5			x	
374	105,8			x		434	120,1			x		494	119,3			x	
375	106,5			x		435	120,3			x		495	119,1			x	
376	107,1			x		436	120,5			x		496	118,7			x	
377	107,7			x		437	120,8			x		497	118,2			x	
378	108,4			x		438	121,1			x		498	117,9			x	
379	109,0			x		439	121,5			x		499	117,6			x	
380	109,6			x		440	122,0			x		500	117,5			x	
381	110,3			x		441	122,3			x		501	117,5			x	
382	110,9			x		442	122,6			x		502	117,4			x	
383	111,5			x		443	122,9			x		503	117,3			x	
384	112,0			x		444	123,1			x		504	117,0			x	
385	112,3			x		445	123,2			x		505	116,7			x	
386	112,6			x		446	123,4			x		506	116,4			x	
387	112,9			x		447	123,5			x		507	116,1			x	
388	113,1			x		448	123,7			x		508	115,9			x	
389	113,3			x		449	123,9			x		509	115,7			x	
390	113,3			x		450	124,2			x		510	115,5			x	
391	113,2			x		451	124,5			x		511	115,3			x	
392	113,2			x		452	124,8			x		512	115,2			x	
393	113,3			x		453	125,0			x		513	115,0			x	
394	113,5			x		454	125,2			x		514	114,9			x	
395	113,9			x		455	125,3			x		515	114,9			x	
396	114,3			x		456	125,1			x		516	115,0			x	
397	114,6			x		457	124,4			x		517	115,2			x	
398	114,9			x		458	123,3			x		518	115,3			x	
399	115,1			x		459	122,1			x		519	115,4			x	
400	115,3			x		460	120,8			x		520	115,4			x	
401	115,4			x		461	119,5			x		521	115,2			x	
402	115,5			x		462	118,4			x		522	114,8			x	
403	115,6			x		463	117,8			x		523	114,4			x	
404	115,8			x		464	117,6			x		524	113,9			x	
405	115,9			x		465	117,5			x		525	113,6			x	
406	116,0			x		466	117,5			x		526	113,5			x	
407	116,0			x		467	117,4			x		527	113,5			x	
408	116,0			x		468	117,3			x		528	113,6			x	
409	116,0			x		469	117,1			x		529	113,7			x	
410	115,9			x		470	116,9			x		530	113,8			x	
411	115,9			x		471	116,6			x		531	113,9			x	
412	115,9			x		472	116,5			x		532	114,0			x	
413	115,8			x		473	116,4			x		533	114,0			x	
414	115,8			x		474	116,4			x		534	114,1			x	
415	115,8			x		475	116,5			x		535	114,2			x	
416	115,8			x		476	116,7			x		536	114,4			x	
417	115,8			x		477	117,0			x		537	114,5			x	
418	115,8			x		478	117,3			x		538	114,6			x	
419	115,9			x		479	117,7			x		539	114,7			x	
420	116,0			x		480	118,1			x		540	114,8			x	

Table Ap 6 -25: WMTC, stage 2, cycle part 3 for vehicle class 3-2, 361 to 540 s

4.1.8.

time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec
541	115,0			x	
542	115,3			x	
543	116,0			x	
544	116,7			x	
545	117,5			x	
546	118,2			x	
547	118,6			x	
548	118,7			x	
549	118,8			x	
550	118,8			x	
551	118,9			x	
552	119,1			x	
553	119,4			x	
554	119,7			x	
555	119,9			x	
556	120,0			x	
557	119,7				x
558	118,4				x
559	115,9				x
560	113,2				x
561	110,5				x
562	107,2				x
563	104,0				x
564	100,4				x
565	96,8				x
566	92,8				x
567	88,9				x
568	84,9				x
569	80,6				x
570	76,3				x
571	72,3				x
572	68,7				x
573	65,5				x
574	63,0				x
575	61,2				x
576	60,5				x
577	60,0				x
578	59,7				x
579	59,4				x
580	59,4				x
581	58,0				x
582	55,0				x
583	51,0				x
584	46,0				x
585	38,8				x
586	31,6				x
587	24,4				x
588	17,2				x
589	10,0				x
590	5,0				x
591	2,0				x
592	0,0	x			
593	0,0	x			
594	0,0	x			
595	0,0	x			
596	0,0	x			
597	0,0	x			
598	0,0	x			
599	0,0	x			
600	0,0	x			

Table Ap 6 -26: WMTC, stage 2, cycle part 3 for vehicle class 3-2, 541 to 600 s

4) World Harmonised Motorcycle Test Cycle (WMTC), stage 3 (Revised WMTC)

1 Description of the test cycle WMTC, stage 3 for L3e, L4e, L5e-A, L7e-A, L7e-B and L7e-C (sub)category vehicles

The WMTC, stage 3 to be used on the chassis dynamometer shall be that depicted in the graph shown below for (sub)category L3e, L4e, L5e-A, L7e-A, L7e-B and L7e-C vehicles:

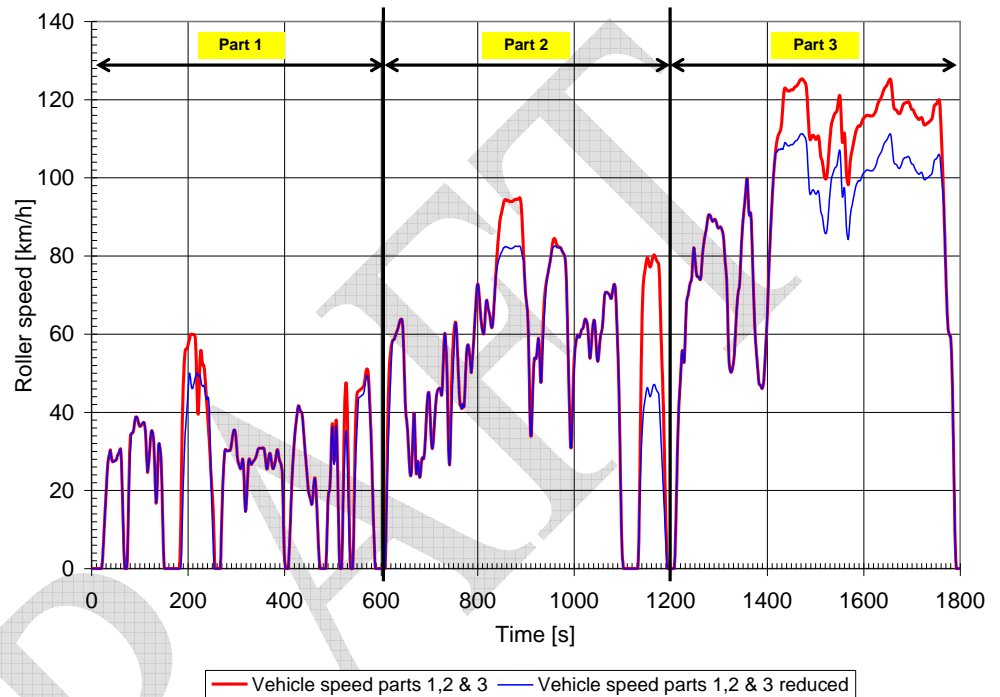


Figure Ap 6-9: WMTC stage 3 for L3e, L4e, L5e-A, L7e-A, L7e-B and L7e-C category vehicles.

The WMTC stage 3 as shown in Figure Ap 6-9 is applicable for L3e, L4e, L5e-A, L7e-A, L7e-B and L7e-C vehicles and the vehicle speed trace of WMTC stage 3 is equivalent to WMTC stage 2. The WMTC stage 3 lasts in total 1800 seconds and consists of 3 parts to be carried out without interruption if feasible owing to maximum vehicle speed limitation. The characteristic driving conditions (idling, acceleration, steady speed, deceleration, etc.) of WMTC stage 3 are laid down in chapter 3 that sets out the detailed vehicle speed trace of WMTC stage 2.

2

Description of the test cycle WMTC, stage 3 for L1e-A, L1e-B, L2e, L5e-B, L6e-A and L6e-B (sub)category vehicles

The WMTC, stage 3 to be used on the chassis dynamometer shall be that depicted in the graph shown below for (sub)category L1e-A, L1e-B, L2e, L6e-A and L6e-B vehicles:

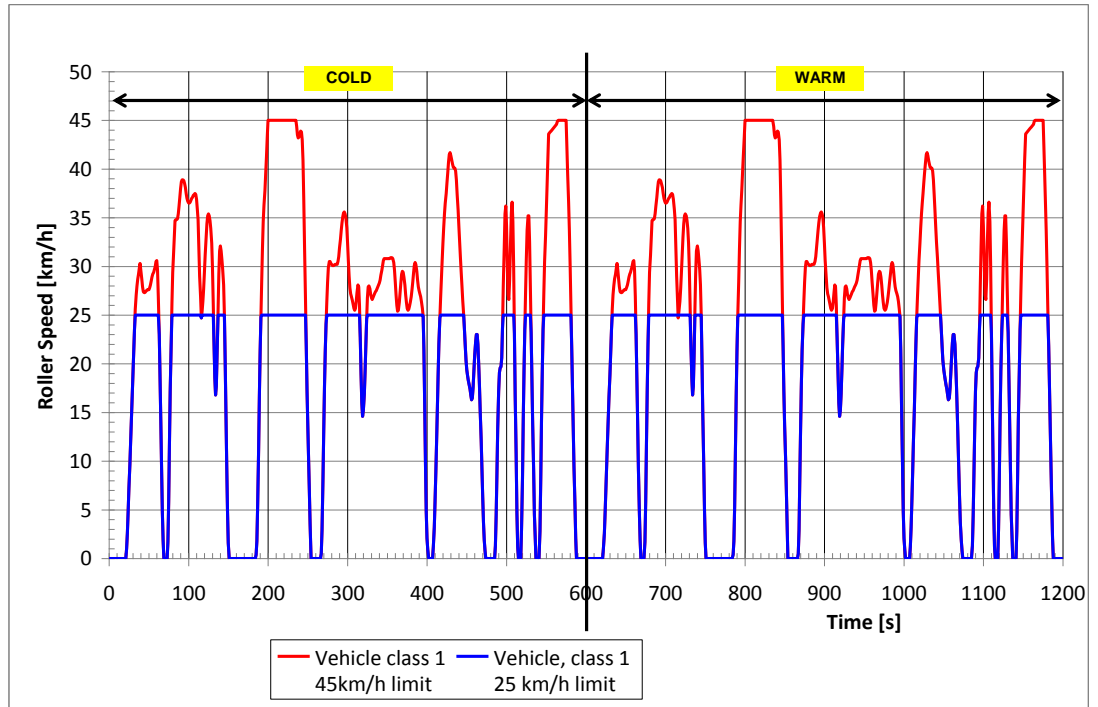


Figure Ap 6-10: WMTC stage 3 for L1e-A, L1e-B, L2e, L5e-B, L6e-A and L6e-B vehicles. The [blue] vehicle speed trace limited to 25 km/h is applicable for L1e-A and L1e-B vehicles with a limited maximum vehicle speed of 25 km/h.

2.1

The cold and warm vehicle speed traces are identical.

3

Description of the test cycle WMTC, stage 3 for L1e-A, L1e-B, L2e, L5e-B, L6e-A and L6e-B (sub)category vehicles

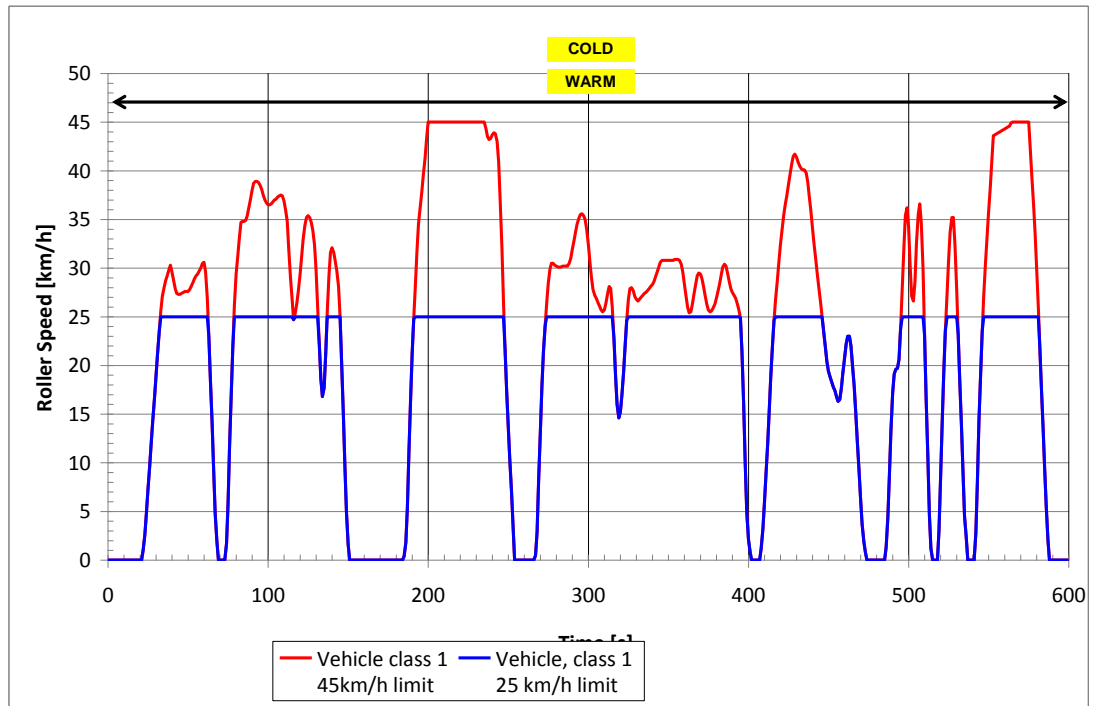


Figure Ap 6-11: WMTC stage 3 for L1e-A, L1e-B, L2e, L5e-B, L6e-A and L6e-B (sub)category vehicles. The [blue] vehicle speed trace limited to 25 km/h is applicable for L1e-A and L1e-B vehicles with a limited maximum vehicle speed of 25 km/h.

3.1

The vehicle speed trace WMTC stage 3 as shown in Figure Ap 6-10 is applicable for L1e-A, L1e-B, L2e, L5e-B, L6e-A and L6e-B (sub)category vehicles and is equivalent to the vehicle speed trace WMTC stage 2, part 1 for class 1 vehicles, driven once cold followed by the same vehicle speed driven with a warmed-up propulsion. The WMTC stage 3 for L1e-A, L1e-B, L2e, L5e-B, L6e-A and L6e-B (sub)category vehicles lasts in total 1200 seconds and consists of 2 equivalent parts to be carried out without interruption.

3.2

The characteristic driving conditions (idling, acceleration, steady speed, deceleration, etc.) of WMTC stage 3 for L1e-A, L1e-B, L2e, L5e-B, L6e-A and L6e-B vehicles are laid down in the following paragraphs and tables.

3.2.1.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec	
0	0,0	x				61	25,0					121	25,0				x	
1	0,0	x				62	25,0					122	25,0				x	
2	0,0	x				63	23,0					123	25,0				x	
3	0,0	x				64	18,6					124	25,0				x	
4	0,0	x				65	14,1					125	25,0					
5	0,0	x				66	9,3					126	25,0					
6	0,0	x				67	4,8					127	25,0					
7	0,0	x				68	1,9					128	25,0					
8	0,0	x				69	0,0	x				129	25,0					
9	0,0	x				70	0,0	x				130	25,0					
10	0,0	x				71	0,0	x				131	25,0					
11	0,0	x				72	0,0	x				132	22,1					x
12	0,0	x				73	0,0	x				133	18,6					x
13	0,0	x				74	1,7		x			134	16,8			x		
14	0,0	x				75	5,8		x			135	17,7			x		
15	0,0	x				76	11,8		x			136	21,1			x		
16	0,0	x				77	17,3		x			137	25,0					
17	0,0	x				78	22,0		x			138	25,0					
18	0,0	x				79	25,0					139	25,0					
19	0,0	x				80	25,0					140	25,0					
20	0,0	x				81	25,0					141	25,0					
21	0,0	x				82	25,0					142	25,0					
22	1,0		x			83	25,0					143	25,0					
23	2,6		x			84	25,0					144	25,0					
24	4,8		x			85	25,0					145	25,0					
25	7,2		x			86	25,0					146	20,3					x
26	9,6		x			87	25,0					147	15,0					x
27	12,0		x			88	25,0					148	9,7					x
28	14,3		x			89	25,0					149	5,0					x
29	16,6		x			90	25,0					150	1,6					x
30	18,9		x			91	25,0			x		151	0,0	x				
31	21,2		x			92	25,0			x		152	0,0	x				
32	23,5		x			93	25,0			x		153	0,0	x				
33	25,0					94	25,0			x		154	0,0	x				
34	25,0					95	25,0			x		155	0,0	x				
35	25,0					96	25,0			x		156	0,0	x				
36	25,0					97	25,0			x		157	0,0	x				
37	25,0					98	25,0			x		158	0,0	x				
38	25,0					99	25,0			x		159	0,0	x				
39	25,0			x		100	25,0			x		160	0,0	x				
40	25,0			x		101	25,0			x		161	0,0	x				
41	25,0			x		102	25,0			x		162	0,0	x				
42	25,0			x		103	25,0			x		163	0,0	x				
43	25,0			x		104	25,0			x		164	0,0	x				
44	25,0			x		105	25,0			x		165	0,0	x				
45	25,0			x		106	25,0			x		166	0,0	x				
46	25,0			x		107	25,0			x		167	0,0	x				
47	25,0			x		108	25,0			x		168	0,0	x				
48	25,0			x		109	25,0			x		169	0,0	x				
49	25,0			x		110	25,0					170	0,0	x				
50	25,0			x		111	25,0					171	0,0	x				
51	25,0			x		112	25,0					172	0,0	x				
52	25,0			x		113	25,0					173	0,0	x				
53	25,0			x		114	25,0					174	0,0	x				
54	25,0			x		115	25,0					175	0,0	x				
55	25,0			x		116	24,7			x		176	0,0	x				
56	25,0			x		117	25,0			x		177	0,0	x				
57	25,0			x		118	25,0			x		178	0,0	x				
58	25,0			x		119	25,0			x		179	0,0	x				
59	25,0			x		120	25,0			x		180	0,0	x				
60	25,0				x													

Table Ap 6 -27: WMTC, stage 3, part 1, class 1, applicable for L1e-A and L1e-B ($v_{max} \leq 25$ km/h) subcategory vehicles, cold or warm, 0 – 180 s.

3.2.2.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec	
181	0,0	x				241	25,0			x		301	25,0				x	
182	0,0	x				242	25,0					302	25,0				x	
183	0,0	x				243	25,0					303	25,0				x	
184	0,0	x				244	25,0					304	25,0				x	
185	0,4		x			245	25,0					305	25,0				x	
186	1,8		x			246	25,0					306	25,0				x	
187	5,4		x			247	25,0					307	25,0				x	
188	11,1		x			248	21,8				x	308	25,0				x	
189	16,7		x			249	17,2				x	309	25,0				x	
190	21,3		x			250	13,7				x	310	25,0				x	
191	24,8		x			251	10,3				x	311	25,0				x	
192	25,0					252	7,0				x	312	25,0				x	
193	25,0					253	3,5				x	313	25,0				x	
194	25,0					254	0,0	x				314	25,0					
195	25,0					255	0,0	x				315	25,0					
196	25,0					256	0,0	x				316	22,7					x
197	25,0					257	0,0	x				317	19,0					x
198	25,0					258	0,0	x				318	16,0					x
199	25,0					259	0,0	x				319	14,6			x		
200	25,0					260	0,0	x				320	15,2			x		
201	25,0					261	0,0	x				321	16,9			x		
202	25,0					262	0,0	x				322	19,3			x		
203	25,0			x		263	0,0	x				323	22,0			x		
204	25,0			x		264	0,0	x				324	24,6			x		
205	25,0			x		265	0,0	x				325	25,0					
206	25,0			x		266	0,0	x				326	25,0					
207	25,0			x		267	0,5		x			327	25,0				x	
208	25,0			x		268	2,9		x			328	25,0				x	
209	25,0			x		269	8,2		x			329	25,0				x	
210	25,0			x		270	13,2		x			330	25,0				x	
211	25,0			x		271	17,8		x			331	25,0				x	
212	25,0			x		272	21,4		x			332	25,0				x	
213	25,0			x		273	24,1		x			333	25,0				x	
214	25,0			x		274	25,0					334	25,0				x	
215	25,0			x		275	25,0					335	25,0				x	
216	25,0			x		276	25,0					336	25,0				x	
217	25,0			x		277	25,0			x		337	25,0				x	
218	25,0			x		278	25,0			x		338	25,0				x	
219	25,0			x		279	25,0			x		339	25,0				x	
220	25,0			x		280	25,0			x		340	25,0				x	
221	25,0			x		281	25,0			x		341	25,0				x	
222	25,0			x		282	25,0			x		342	25,0				x	
223	25,0			x		283	25,0			x		343	25,0				x	
224	25,0			x		284	25,0			x		344	25,0				x	
225	25,0			x		285	25,0			x		345	25,0				x	
226	25,0			x		286	25,0			x		346	25,0				x	
227	25,0			x		287	25,0			x		347	25,0				x	
228	25,0			x		288	25,0			x		348	25,0				x	
229	25,0			x		289	25,0			x		349	25,0				x	
230	25,0			x		290	25,0			x		350	25,0				x	
231	25,0			x		291	25,0			x		351	25,0				x	
232	25,0			x		292	25,0			x		352	25,0				x	
233	25,0			x		293	25,0			x		353	25,0				x	
234	25,0			x		294	25,0			x		354	25,0				x	
235	25,0			x		295	25,0			x		355	25,0				x	
236	25,0			x		296	25,0			x		356	25,0				x	
237	25,0			x		297	25,0			x		357	25,0				x	
238	25,0			x		298	25,0			x		358	25,0				x	
239	25,0			x		299	25,0			x		359	25,0				x	
240	25,0			x		300	25,0			x		360	25,0				x	

Table Ap 6 -28: WMTC, stage 3, part 1, class 1, applicable for L1e-A and L1e-B ($v_{max} \leq 25$ km/h) subcategory vehicles, cold or warm, 181 – 360 s.

3.2.3.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec
361	25,0			x		421	25,0		x			481	0,0	x			
362	25,0			x		422	25,0		x			482	0,0	x			
363	25,0			x		423	25,0		x			483	0,0	x			
364	25,0			x		424	25,0		x			484	0,0	x			
365	25,0			x		425	25,0		x			485	0,0	x			
366	25,0			x		426	25,0		x			486	1,4		x		
367	25,0			x		427	25,0		x			487	4,5		x		
368	25,0			x		428	25,0		x			488	8,8		x		
369	25,0			x		429	25,0			x		489	13,4		x		
370	25,0			x		430	25,0			x		490	17,3		x		
371	25,0			x		431	25,0			x		491	19,2		x		
372	25,0			x		432	25,0			x		492	19,7		x		
373	25,0			x		433	25,0			x		493	19,8		x		
374	25,0			x		434	25,0			x		494	20,7		x		
375	25,0			x		435	25,0			x		495	23,7		x		
376	25,0			x		436	25,0					496	25,0				
377	25,0			x		437	25,0					497	25,0				
378	25,0			x		438	25,0					498	25,0				
379	25,0			x		439	25,0					499	25,0				
380	25,0			x		440	25,0					500	25,0				
381	25,0			x		441	25,0					501	25,0				
382	25,0			x		442	25,0					502	25,0				
383	25,0			x		443	25,0					503	25,0				
384	25,0			x		444	25,0					504	25,0				
385	25,0			x		445	25,0					505	25,0				
386	25,0			x		446	25,0					506	25,0				
387	25,0			x		447	23,4				x	507	25,0				
388	25,0			x		448	21,8				x	508	25,0				
389	25,0			x		449	20,3				x	509	25,0				
390	25,0			x		450	19,3				x	510	23,1				x
391	25,0			x		451	18,7				x	511	16,7				x
392	25,0					452	18,3				x	512	10,7				x
393	25,0					453	17,8				x	513	4,7				x
394	25,0					454	17,4				x	514	1,2				x
395	24,9				x	455	16,8				x	515	0,0		x		
396	21,4				x	456	16,3				x	516	0,0		x		
397	15,9				x	457	16,5				x	517	0,0		x		
398	9,9				x	458	17,6				x	518	0,0		x		
399	4,9				x	459	19,2				x	519	3,0			x	
400	2,1				x	460	20,8				x	520	8,2			x	
401	0,9				x	461	22,2				x	521	14,3			x	
402	0,0	x				462	23,0				x	522	19,3			x	
403	0,0	x				463	23,0				x	523	23,5			x	
404	0,0	x				464	22,0				x	524	25,0				
405	0,0	x				465	20,1				x	525	25,0				
406	0,0	x				466	17,7				x	526	25,0				
407	0,0	x				467	15,0				x	527	25,0				
408	1,2		x			468	12,1				x	528	25,0				
409	3,2		x			469	9,1				x	529	25,0				
410	5,9		x			470	6,2				x	530	25,0				
411	8,8		x			471	3,6				x	531	23,2				x
412	12,0		x			472	1,8				x	532	18,5				x
413	15,4		x			473	0,8				x	533	13,8				x
414	18,9		x			474	0,0	x				534	9,1				x
415	22,1		x			475	0,0	x				535	4,5				x
416	24,7		x			476	0,0	x				536	2,3				x
417	25,0					477	0,0	x				537	0,0		x		
418	25,0					478	0,0	x				538	0,0		x		
419	25,0					479	0,0	x				539	0,0		x		
420	25,0					480	0,0	x				540	0,0		x		

Table Ap 6 -29: WMTC, stage 3, part 1, class 1, applicable for L1e-A and L1e-B ($v_{max} \leq 25$ km/h) subcategory vehicles, cold or warm, 361 – 540 s.

3.2.4.

time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec
541	0,0	x			
542	2,8		x		
543	8,1		x		
544	14,3		x		
545	19,2		x		
546	23,5		x		
547	25,0				
548	25,0				
549	25,0				
550	25,0				
551	25,0				
552	25,0				
553	25,0			x	
554	25,0			x	
555	25,0			x	
556	25,0			x	
557	25,0			x	
558	25,0			x	
559	25,0			x	
560	25,0			x	
561	25,0			x	
562	25,0			x	
563	25,0			x	
564	25,0			x	
565	25,0			x	
566	25,0			x	
567	25,0			x	
568	25,0			x	
569	25,0			x	
570	25,0			x	
571	25,0			x	
572	25,0			x	
573	25,0				
574	25,0				
575	25,0				
576	25,0				
577	25,0				
578	25,0				
579	25,0				
580	25,0				
581	25,0				
582	21,8				x
583	17,7				x
584	13,5				x
585	9,4				x
586	5,6				x
587	2,1				x
588	0,0	x			
589	0,0	x			
590	0,0	x			
591	0,0	x			
592	0,0	x			
593	0,0	x			
594	0,0	x			
595	0,0	x			
596	0,0	x			
597	0,0	x			
598	0,0	x			
599	0,0	x			
600	0,0	x			

Table Ap 6 -30: WMTC, stage 3, part 1, class 1, applicable for L1e-A and L1e-B ($v_{\max} \leq 25$ km/h) subcategory vehicles, cold or warm, 641 – 800 s.

3.2.5.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec	
0	0,0	x				61	29,6				x	121	31,2				x	
1	0,0	x				62	26,9				x	122	33,0				x	
2	0,0	x				63	23,0				x	123	34,4				x	
3	0,0	x				64	18,6				x	124	35,2				x	
4	0,0	x				65	14,1				x	125	35,4					x
5	0,0	x				66	9,3				x	126	35,2					x
6	0,0	x				67	4,8				x	127	34,7					x
7	0,0	x				68	1,9				x	128	33,9					x
8	0,0	x				69	0,0	x				129	32,4					x
9	0,0	x				70	0,0	x				130	29,8					x
10	0,0	x				71	0,0	x				131	26,1					x
11	0,0	x				72	0,0	x				132	22,1					x
12	0,0	x				73	0,0	x				133	18,6					x
13	0,0	x				74	1,7		x			134	16,8			x		
14	0,0	x				75	5,8		x			135	17,7			x		
15	0,0	x				76	11,8		x			136	21,1			x		
16	0,0	x				77	17,3		x			137	25,4			x		
17	0,0	x				78	22,0		x			138	29,2			x		
18	0,0	x				79	26,2		x			139	31,6			x		
19	0,0	x				80	29,4		x			140	32,1					x
20	0,0	x				81	31,1		x			141	31,6					x
21	0,0	x				82	32,9		x			142	30,7					x
22	1,0		x			83	34,7		x			143	29,7					x
23	2,6		x			84	34,8		x			144	28,1					x
24	4,8		x			85	34,8		x			145	25,0					x
25	7,2		x			86	34,9		x			146	20,3					x
26	9,6		x			87	35,4		x			147	15,0					x
27	12,0		x			88	36,2		x			148	9,7					x
28	14,3		x			89	37,1		x			149	5,0					x
29	16,6		x			90	38,0		x			150	1,6					x
30	18,9		x			91	38,7			x		151	0,0	x				
31	21,2		x			92	38,9			x		152	0,0	x				
32	23,5		x			93	38,9			x		153	0,0	x				
33	25,6		x			94	38,8			x		154	0,0	x				
34	27,1		x			95	38,5			x		155	0,0	x				
35	28,0		x			96	38,1			x		156	0,0	x				
36	28,7		x			97	37,5			x		157	0,0	x				
37	29,2		x			98	37,0			x		158	0,0	x				
38	29,8		x			99	36,7			x		159	0,0	x				
39	30,3			x		100	36,5			x		160	0,0	x				
40	29,6			x		101	36,5			x		161	0,0	x				
41	28,7			x		102	36,6			x		162	0,0	x				
42	27,9			x		103	36,8			x		163	0,0	x				
43	27,4			x		104	37,0			x		164	0,0	x				
44	27,3			x		105	37,1			x		165	0,0	x				
45	27,3			x		106	37,3			x		166	0,0	x				
46	27,4			x		107	37,4			x		167	0,0	x				
47	27,5			x		108	37,5			x		168	0,0	x				
48	27,6			x		109	37,4			x		169	0,0	x				
49	27,6			x		110	36,9				x	170	0,0	x				
50	27,6			x		111	36,0				x	171	0,0	x				
51	27,8			x		112	34,8				x	172	0,0	x				
52	28,1			x		113	31,9				x	173	0,0	x				
53	28,5			x		114	29,0				x	174	0,0	x				
54	28,9			x		115	26,9				x	175	0,0	x				
55	29,2			x		116	24,7				x	176	0,0	x				
56	29,4			x		117	25,4				x	177	0,0	x				
57	29,7			x		118	26,4				x	178	0,0	x				
58	30,0			x		119	27,7				x	179	0,0	x				
59	30,5			x		120	29,4				x	180	0,0	x				
60	30,6				x													

Table Ap 6 -31: WMTC, stage 3, part 1, class 1, applicable for L1e-A and L1e-B ($v_{max} \leq 45$ km/h) subcategory vehicles, cold or warm, 0 – 180 s.

3.2.6.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec	
181	0,0	x				241	43,9			x		301	30,6				x	
182	0,0	x				242	43,8				x	302	29,0				x	
183	0,0	x				243	43,0				x	303	27,8				x	
184	0,0	x				244	40,9				x	304	27,2				x	
185	0,4		x			245	36,9				x	305	26,9				x	
186	1,8		x			246	32,1				x	306	26,5				x	
187	5,4		x			247	26,6				x	307	26,1				x	
188	11,1		x			248	21,8				x	308	25,7				x	
189	16,7		x			249	17,2				x	309	25,5				x	
190	21,3		x			250	13,7				x	310	25,7				x	
191	24,8		x			251	10,3				x	311	26,4				x	
192	28,4		x			252	7,0				x	312	27,3				x	
193	31,8		x			253	3,5				x	313	28,1				x	
194	34,6		x			254	0,0	x				314	27,9					x
195	36,3		x			255	0,0	x				315	26,0					x
196	37,8		x			256	0,0	x				316	22,7					x
197	39,6		x			257	0,0	x				317	19,0					x
198	41,3		x			258	0,0	x				318	16,0					x
199	43,3		x			259	0,0	x				319	14,6			x		
200	45,0					260	0,0	x				320	15,2			x		
201	45,0					261	0,0	x				321	16,9			x		
202	45,0					262	0,0	x				322	19,3			x		
203	45,0			x		263	0,0	x				323	22,0			x		
204	45,0			x		264	0,0	x				324	24,6			x		
205	45,0			x		265	0,0	x				325	26,8			x		
206	45,0			x		266	0,0	x				326	27,9			x		
207	45,0			x		267	0,5		x			327	28,0					x
208	45,0			x		268	2,9		x			328	27,7					x
209	45,0			x		269	8,2		x			329	27,1					x
210	45,0			x		270	13,2		x			330	26,8					x
211	45,0			x		271	17,8		x			331	26,6					x
212	45,0			x		272	21,4		x			332	26,8					x
213	45,0			x		273	24,1		x			333	27,0					x
214	45,0			x		274	26,4		x			334	27,2					x
215	45,0			x		275	28,4		x			335	27,4					x
216	45,0			x		276	29,9		x			336	27,5					x
217	45,0			x		277	30,5			x		337	27,7					x
218	45,0			x		278	30,5			x		338	27,9					x
219	45,0			x		279	30,3			x		339	28,1					x
220	45,0			x		280	30,2			x		340	28,3					x
221	45,0			x		281	30,1			x		341	28,6					x
222	45,0			x		282	30,1			x		342	29,1					x
223	45,0			x		283	30,1			x		343	29,6					x
224	45,0			x		284	30,2			x		344	30,1					x
225	45,0			x		285	30,2			x		345	30,6					x
226	45,0			x		286	30,2			x		346	30,8					x
227	45,0			x		287	30,2			x		347	30,8					x
228	45,0			x		288	30,5			x		348	30,8					x
229	45,0			x		289	31,0			x		349	30,8					x
230	45,0			x		290	31,9			x		350	30,8					x
231	45,0			x		291	32,8			x		351	30,8					x
232	45,0			x		292	33,7			x		352	30,8					x
233	45,0			x		293	34,5			x		353	30,8					x
234	45,0			x		294	35,1			x		354	30,9					x
235	45,0			x		295	35,5			x		355	30,9					x
236	44,4			x		296	35,6			x		356	30,9					x
237	43,5			x		297	35,4			x		357	30,8					x
238	43,2			x		298	35,0			x		358	30,4					x
239	43,3			x		299	34,0			x		359	29,6					x
240	43,7			x		300	32,4			x		360	28,4					x

Table Ap 6 -28: WMTC, stage 3, part 1, class 1, applicable for L1e-A and L1e-B ($v_{max} \leq 45$ km/h) subcategory vehicles, cold or warm, 181 – 360 s.

3.2.7.

time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators				time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec			stop	acc	cruise	dec			stop	acc	cruise	dec
361	27,1			x		421	34,0		x			481	0,0	x			
362	26,0			x		422	35,4		x			482	0,0	x			
363	25,4			x		423	36,5		x			483	0,0	x			
364	25,5			x		424	37,5		x			484	0,0	x			
365	26,3			x		425	38,6		x			485	0,0	x			
366	27,3			x		426	39,6		x			486	1,4		x		
367	28,3			x		427	40,7		x			487	4,5		x		
368	29,2			x		428	41,4		x			488	8,8		x		
369	29,5			x		429	41,7			x		489	13,4		x		
370	29,4			x		430	41,4			x		490	17,3		x		
371	28,9			x		431	40,9			x		491	19,2		x		
372	28,1			x		432	40,5			x		492	19,7		x		
373	27,1			x		433	40,2			x		493	19,8		x		
374	26,3			x		434	40,1			x		494	20,7		x		
375	25,7			x		435	40,1			x		495	23,7		x		
376	25,5			x		436	39,8				x	496	27,9		x		
377	25,6			x		437	38,9				x	497	31,9		x		
378	25,9			x		438	37,4				x	498	35,4		x		
379	26,3			x		439	35,8				x	499	36,2				x
380	26,9			x		440	34,1				x	500	34,2				x
381	27,6			x		441	32,5				x	501	30,2				x
382	28,4			x		442	30,9				x	502	27,1				x
383	29,3			x		443	29,4				x	503	26,6		x		
384	30,1			x		444	27,9				x	504	28,6		x		
385	30,4			x		445	26,5				x	505	32,6		x		
386	30,2			x		446	25,0				x	506	35,5		x		
387	29,5			x		447	23,4				x	507	36,6				x
388	28,6			x		448	21,8				x	508	34,6				x
389	27,9			x		449	20,3				x	509	30,0				x
390	27,5			x		450	19,3				x	510	23,1				x
391	27,2			x		451	18,7				x	511	16,7				x
392	26,9				x	452	18,3				x	512	10,7				x
393	26,4				x	453	17,8				x	513	4,7				x
394	25,7				x	454	17,4				x	514	1,2				x
395	24,9				x	455	16,8				x	515	0,0		x		
396	21,4				x	456	16,3					x	516	0,0		x	
397	15,9				x	457	16,5					x	517	0,0		x	
398	9,9				x	458	17,6					x	518	0,0		x	
399	4,9				x	459	19,2					x	519	3,0		x	
400	2,1				x	460	20,8					x	520	8,2		x	
401	0,9				x	461	22,2						x	521	14,3		x
402	0,0		x			462	23,0						x	522	19,3		x
403	0,0		x			463	23,0						x	523	23,5		x
404	0,0		x			464	22,0						x	524	27,3		x
405	0,0		x			465	20,1						x	525	30,8		x
406	0,0		x			466	17,7						x	526	33,7		x
407	0,0		x			467	15,0						x	527	35,2		x
408	1,2			x		468	12,1						x	528	35,2		x
409	3,2			x		469	9,1						x	529	32,5		x
410	5,9			x		470	6,2						x	530	27,9		x
411	8,8			x		471	3,6						x	531	23,2		x
412	12,0			x		472	1,8						x	532	18,5		x
413	15,4			x		473	0,8						x	533	13,8		x
414	18,9			x		474	0,0		x					534	9,1		x
415	22,1			x		475	0,0		x					535	4,5		x
416	24,7			x		476	0,0		x					536	2,3		x
417	26,8			x		477	0,0		x					537	0,0		x
418	28,7			x		478	0,0		x					538	0,0		x
419	30,6			x		479	0,0		x					539	0,0		x
420	32,4			x		480	0,0		x					540	0,0		x

Table Ap 6 -29: WMTC, stage 3, part 1, class 1, applicable for L1e-A and L1e-B ($v_{max} \leq 45$ km/h) subcategory vehicles, cold or warm, 361 – 540 s.

3.2.8.

time in s	roller speed in km/h	phase indicators			
		stop	acc	cruise	dec
541	0,0	x			
542	2,8		x		
543	8,1		x		
544	14,3		x		
545	19,2		x		
546	23,5		x		
547	27,2		x		
548	30,5		x		
549	33,1		x		
550	35,7		x		
551	38,3		x		
552	41,0		x		
553	43,6			x	
554	43,7			x	
555	43,8			x	
556	43,9			x	
557	44,0			x	
558	44,1			x	
559	44,2			x	
560	44,3			x	
561	44,4			x	
562	44,5			x	
563	44,6			x	
564	44,9			x	
565	45,			x	
566	45,0			x	
567	45,0			x	
568	45,0			x	
569	45,0			x	
570	45,0			x	
571	45,0			x	
572	45,0			x	
573	45,0			x	
574	45,0			x	
575	45,0			x	
576	42,3				x
577	39,5				x
578	36,6				x
579	33,7				x
580	30,1				x
581	26,0				x
582	21,8				x
583	17,7				x
584	13,5				x
585	9,4				x
586	5,6				x
587	2,1				x
588	0,0	x			
589	0,0	x			
590	0,0	x			
591	0,0	x			
592	0,0	x			
593	0,0	x			
594	0,0	x			
595	0,0	x			
596	0,0	x			
597	0,0	x			
598	0,0	x			
599	0,0	x			
600	0,0	x			

Table Ap 6 -30: WMTC, stage 3, part 1, class 1, applicable for L1e-A and L1e-B ($v_{\max} \leq 45$ km/h) subcategory vehicles, cold or warm, 541 – 600 s.

Appendix 7

Road tests of a L-category vehicle equipped with one wheel on the driven axle or with twinned wheels for the determination of test bench settings

1. Requirements for the rider

- 1.1. The rider shall wear a well-fitting suit (one-piece) or similar clothing, and a protective helmet, eye protection, boots and gloves.
- 1.2. The rider in the conditions given in paragraph 1.1. above shall have a mass of $75 \text{ kg} \pm 5 \text{ kg}$ and be $1.75 \text{ m} \pm 0.05 \text{ m}$ tall.
- 1.3. The rider shall be seated on the seat provided, with his feet on the footrests and his arms normally extended. This position shall allow the rider at all times to have proper control of the L-category vehicle during the tests.

2. Requirement for the road and ambient conditions

- 2.1. The test road shall be flat, level, straight and smoothly paved. The road surface shall be dry and free of obstacles or wind barriers that might impede the measurement of the running resistance. The slope of the surface shall not exceed 0.5 per cent between any two points at least 2 m apart.
- 2.2. During data collecting periods, the wind shall be steady. The wind speed and the direction of the wind shall be measured continuously or with adequate frequency at a location where the wind force during coast down is representative.
- 2.3. The ambient conditions shall be within the following limits:
 - maximum wind speed: 3 m/s
 - maximum wind speed for gusts: 5 m/s
 - average wind speed, parallel: 3 m/s
 - average wind speed, perpendicular: 2 m/s
 - maximum relative humidity: 95 per cent
 - air temperature: 278 K to 308 K
- 2.4. Standard ambient conditions shall be as follows:
 - pressure, P_0 : 100 kPa
 - temperature, T_0 : 293 K

- relative air density, d_0 : 0.9197

- air volumetric mass, ρ_0 : 1.189 kg/m³

- 2.5. The relative air density when the vehicle (L-category vehicle) is tested, calculated in accordance with the formula below, shall not differ by more than 7.5 per cent from the air density under the standard conditions.
- 2.6. The relative air density, d_T , shall be calculated by the following formula:

Equation Ap 7-1

$$d_T = d_0 \times \frac{P_T}{P_0} \times \frac{T_0}{T_T}$$

where:

p_T is the mean ambient pressure during test, in kPa

T_T is the mean ambient temperature during test, in K.

3. Condition of the test vehicle

- 3.1. The test vehicle shall comply with the conditions described in paragraph 6.2.
- 3.2. When installing the measuring instruments on the test L-category vehicle, care shall be taken to minimise their effects on the distribution of the load between the wheels. When installing the speed sensor outside the L-category vehicle, care shall be taken to minimise the additional aerodynamic loss.

3.3. Checks

The following checks shall be made in accordance with the manufacturer's specifications for the use considered: wheels, wheel rims, tyres (make, type, pressure), front axle geometry, brake adjustment (elimination of parasitic drag), lubrication of front and rear axles, adjustment of the suspension and vehicle ground clearance, etc. Check that during freewheeling, there is no electrical braking

4. Specified coast down speeds

- 4.1. The coast down times have to be measured between v_1 and v_2 as specified in Table Ap 7-1 depending on the vehicle class as defined in paragraph 6.3.

4.2

Maximum designed vehicle speed (km/h)	v_j in (km/h)	v_1 in (km/h)	v_2 in (km/h)
≤ 25			
	20	25	15
	15	20	10
	10	15	5
≤ 45 km/h			
	40	45	35
	30	35	25
	20	25	15
$45 < \text{maximum designed vehicle speed} \leq 130$ km/h and > 130 km/h			
	120	130*/	110
	100	110*/	90
	80	90*/	70
	60	70	50
	40	45	35
	20	25	15

Table Ap 7-1: Coast down time measurement beginning speed and ending speed.

4.3. When the running resistance is verified in accordance with paragraph 7.2.2.3.2., the test can be executed at $v_j \pm 5$ km/h, provided that the coast down time accuracy according to paragraph 6.5.7. in this regulation is ensured.

5. Measurement of coast down time

5.1. After a warm-up period, the L-category vehicle shall be accelerated to the coast down starting speed, at which point the coast down measurement procedure shall be started.

5.2. Since it can be dangerous and difficult from the viewpoint of its construction to have

the transmission shifted to neutral, the coasting may be performed solely with the clutch disengaged. For those L-category vehicles that have no way of cutting the transmitted engine power off prior to coasting, the L-category vehicle may be towed until it reaches the coast down starting speed. When the coast down test is reproduced on the chassis dynamometer, the transmission and clutch shall be in the same condition as during the road test.

- 5.3. The L-category vehicle steering shall be altered as little as possible and the brakes shall not be operated until the end of the coast down measurement period.
- 5.4. The first coast down time ΔT_{ai} corresponding to the specified speed v_j shall be measured as the elapsed time from the L-category vehicle speed $v_j + \Delta v$ to $v_j - \Delta v$.
- 5.5. The above procedure shall be repeated in the opposite direction to measure the second coast down time ΔT_{bi} .
- 5.6. The average ΔT_j of the two coast down times ΔT_{ai} and ΔT_{bi} shall be calculated by the following equation:

Equation Ap 7-2:

$$\Delta T_i = \frac{\Delta T_{a_i} + \Delta T_{b_i}}{2}$$

- 5.7. At least four tests shall be performed and the average coast down time ΔT_j calculated by the following equation:

Equation Ap 7-3

$$\Delta T_j = \frac{1}{n} \times \sum_{i=1}^n \Delta T_i$$

- 5.8. Tests shall be performed until the statistical accuracy P is equal to or less than 3 per cent ($P \leq 3$ per cent).

The statistical accuracy P as a percentage, is calculated by the following equation:

Equation Ap7-4

$$P = \frac{t \times s}{\sqrt{n}} \times \frac{100}{\Delta T_j}$$

where:

t is the coefficient given in Table Ap 7-2;

s is the standard deviation given by the following formula:

Equation Ap 7-5

$$s = \sqrt{\frac{\sum_{i=1}^n (\Delta T_i - \Delta T_j)^2}{n-1}}$$

where:

n is the number of tests.

n	t	$\frac{t}{\sqrt{n}}$
4	3.2	1.60
5	2.8	1.25
6	2.6	1.06
7	2.5	0.94
8	2.4	0.85
9	2.3	0.77
10	2.3	0.73
11	2.2	0.66
12	2.2	0.64
13	2.2	0.61
14	2.2	0.59
15	2.2	0.57

Table Ap7-2: Coefficients for the statistical accuracy

- 5.9. In repeating the test, care shall be taken to start the coast down after observing the same warm-up procedure and at the same coast down starting speed.
- 5.10. The measurement of the coast down times for multiple specified speeds may be made by a continuous coast down. In this case, the coast down shall be repeated after observing the same warm-up procedure and at the same coast down starting speed.
- 5.11. The coast down time shall be recorded. The example of the record form is given in

the Regulation for administrative requirements.

6. Data processing

6.1. Calculation of running resistance force

6.1.1. The running resistance force F_j , in Newton, at the specified speed v_j shall be calculated by the following equation:

Equation Ap7-6

$$F_j = \frac{1}{3.6} \times (m + m_r) \times \frac{2\Delta v}{\Delta T_j}$$

where:

m_r should be measured or calculated as appropriate. As an alternative, m_r may be estimated as 7 per cent of the L-category vehicle mass in running order.

6.1.2. The running resistance force F_j shall be corrected in accordance with paragraph 6.2. below.

6.2. Running resistance curve fitting

The running resistance force, F , shall be calculated as follows:

6.2.1. This following equation shall be fitted to the data set of F_j and v_j obtained above by linear regression to determine the coefficients f_0 and f_2 ,

Equation Ap7-7

$$F = f_0 + f_2 \times v^2$$

6.2.2. The coefficients f_0 and f_2 determined shall be corrected to the standard ambient conditions by the following equations:

Equation Ap7-8

$$f^*_0 = f_0 [1 + K_0 (T_T - T_0)]$$

Equation Ap7-9

$$f^*_2 = f_2 \times \frac{T_T}{T_0} \times \frac{p_0}{p_T}$$

where:

K_0 should be determined based on the empirical data for the particular L-category vehicle and tyre tests, or should be assumed as follows, if the information is not available:

$$K_0 = 6 \times 10^{-3} \text{ K}^{-1}.$$

6.3. Target running resistance force F^* for chassis dynamometer setting

The target running resistance force $F^*(v_0)$ on the chassis dynamometer at the reference L-category vehicle speed v_0 , in Newton, is determined by the following equation:

Equation Ap7-10

$$F^*(v_0) = f_0^* + f_2^* \times v_0^2$$

Appendix 8

Road tests of a L-category vehicle equipped with two or more wheels on the powered axle(s) for the determination of test bench settings

1 Preparation of the vehicle

1.1. Running-in

The test vehicle shall be in normal running order and adjustment after having been run in for at least 300 km. The tyres shall be run in at the same time as the vehicle or shall have a tread depth within 90 and 50 per cent of the initial tread depth..

1.2. Checks

The following checks shall be made in accordance with the manufacturer's specifications for the use considered: wheels, wheel rims, tyres (make, type, pressure), front axle geometry, brake adjustment (elimination of parasitic drag), lubrication of front and rear axles, adjustment of the suspension and vehicle ground clearance, etc. Check that during freewheeling, there is no electrical braking

1.3. Preparation for the test

1.3.1. The test vehicle shall be loaded to its test mass including driver and measurement equipments, spread in a uniform way in the loading areas.

1.3.2. The windows of the vehicle shall be closed. Any covers for air conditioning systems, headlamps, etc. shall be closed.

1.3.3. The test vehicle shall be clean.

1.3.4. Immediately before the test, the vehicle shall be brought to the normal running temperature in an appropriate manner.

1.3.5. When installing the measuring instruments on the test vehicle, care shall be taken to minimise their effects on the distribution of the load between the wheels. When installing the speed sensor outside the test vehicle, care shall be taken to minimise the additional aerodynamic loss.

2. Specified vehicle speed v

The specified speed is required for determining the running resistance at the reference speed from the running resistance curve. To determine the running resistance as a function of vehicle speed in the vicinity of the reference speed v_0 , running resistances shall be measured at the specified speed v . At least four to five points indicating the specified speeds, along with the reference speeds, are desired to be measured.

Table Ap 8-1 shows the specified vehicle speeds to perform coast down testing in accordance with the maximum designed vehicle speed (v_{\max}) of the vehicle.

The asterisk * indicates the reference speed in the table.

Category V_{\max} .	Specified speeds (km/h)					
> 130	120**/	100	80*	60	40	20
130 – 100	90	80*	60	40	20	-
100 – 70	60	50*	40	30	20	-
< 70	50**	40*	30	20	-	-
**/ if it could be reached by the vehicle.						

Table Ap 8-1: coast down test reference vehicle speeds

3. Energy variation during coast down procedure

3.1. Total road load power determination

3.1.1. Measurement equipment and accuracy

The margin of measurement error shall be less than 0.1 second for time and less than ± 0.5 km/h for speed. Bring the vehicle and the chassis dynamometer to the stabilized operating temperature, in order to approximate the road conditions.

3.1.2. Test procedure

3.1.2.1. Accelerate the vehicle to a speed of 5 km/h greater than the speed at which test measurement begins.

3.1.2.2. Put the gearbox to neutral, or disconnect the power supply.

3.1.2.3. Measure the time t_1 taken by the vehicle to decelerate from:

$$v_2 = v + \Delta v \text{ [km/h]} \text{ to } v_1 = v - \Delta v \text{ km/h}$$

where:

$$\Delta v < 5 \text{ km/h for nominal vehicle speed } < 50 \text{ km/h}$$

$$\Delta v < 10 \text{ km/h for nominal vehicle speed } > 50 \text{ km/h}$$

3.1.2.4. Carry out the same test in the opposite direction, measuring time t_2 .

3.1.2.5. Take the average T_1 of the two times t_1 and t_2 .

3.1.2.6. Repeat these tests until the statistical accuracy (p) of the average:

Equation Ap 8-1:

$$T = \frac{l}{n} \sum_{i=1}^n T_i$$

is equal to or less than 4 per cent ($p \leq 4$ per cent).

The statistical accuracy (p) is defined by:

Equation Ap 8-2:

$$p = \frac{t \cdot s}{\sqrt{n}} \cdot \frac{100}{T}$$

where:

t is the coefficient given by the Table Ap 8-2 below;

s is the standard deviation

Equation Ap 8-3:

$$s = \sqrt{\frac{\sum_{i=1}^n (T_i - T)^2}{n-1}}$$

n is the number of tests

n	4	5	6	7	8	9	10
t	3.2	2.8	2.6	2.5	2.4	2.3	2.3
t/√n	1.6	1.25	1.06	0.94	0.85	0.77	0.73

Table Ap 8-2: factors t and t/√n depending on the number of coast down tests performed.

3.1.2.7. Calculation of the running resistance force

The running resistance force F at the specified speed V is calculated as follows:

Equation Ap 8-4:

$$F = (M_{HP} + M_r) \cdot \frac{2\Delta V}{\Delta T} \cdot \frac{l}{3.6} \quad [N]$$

where:

M_{HP} is the test mass.

M_r is the equivalent inertia mass of all the wheels and vehicle portions rotating with the wheels during coast down on the road. M_r should be measured or calculated by an appropriate manner.

3.1.2.8. The running resistance determined on the track shall be corrected to the reference ambient conditions as follows:

Equation Ap 8-5:

$$F_{\text{corrected}} = k \cdot F_{\text{measured}}$$

Equation Ap 8-6:

$$k = \frac{R_R}{R_T} \left[1 + K_R(t - t_0) \right] + \frac{R_{AERO}}{R_T} \frac{d_s}{d_t}$$

where:

R_R is the rolling resistance at speed V [N]

R_{AERO} is the aerodynamic drag at speed V [N]

R_T is the total road load = $R_R + R_{AERO}$ [N]

K_R is the temperature correction factor of rolling resistance, taken to be equal to: $3.6 \times 10^{-3}/^{\circ}\text{C}$

t is the road test ambient temperature in $^{\circ}\text{C}$

t_0 is the reference ambient temperature(20°C)

d_t is the air density at the test conditions [kg/m^3]

d_0 is the air density at the reference conditions (20°C , 100 kPa) = $1.189\text{ kg}/\text{m}^3$.

The ratios R_R/R_T and R_{AERO}/R_T shall be specified by the vehicle manufacturer on the basis of the data normally available to the company to the satisfaction of the technical service. If these values are not available or if the technical service or approval authority are not satisfied, the following figures for the rolling/total resistance ratio given by the following formula may be used:

Equation Ap 8-7:

$$\frac{R_a}{R_r} = aM_{HP} + b$$

where:

M_{HP} is the test mass and for each speed the coefficients a and b are as shown in the following table:

V (km/h)	a	b
20	$7.24 \cdot 10^{-5}$	0.82
40	$1.59 \cdot 10^{-4}$	0.54
60	$1.96 \cdot 10^{-4}$	0.33
80	$1.85 \cdot 10^{-4}$	0.23
100	$1.63 \cdot 10^{-4}$	0.18
120	$1.57 \cdot 10^{-4}$	0.14

Table Ap 8- 3

3.2. Setting of the chassis dynamometer

The purpose of this procedure is to simulate on the dynamometer the total road load power at a given speed.

3.2.1. Measurement equipment and accuracy

The measuring equipment shall be similar to that used on the test track.

3.2.2. Test procedure

3.2.2.1 Install the vehicle on the chassis dynamometer.

3.2.2.2. Adjust the tyre pressure (cold) of the driving wheels as required for the chassis dynamometer.

3.2.2.3. Adjust the equivalent inertia mass of the chassis dynamometer, according to Table Ap 8-4 below.

3.2.2.3.1.

Reference mass (m_{ref}) (in kg)	Equivalent inertias (in kg)
$m_{ref} \leq 105$	100

$105 < m_{ref} \leq 115$	110
$115 < m_{ref} \leq 125$	120
$125 < m_{ref} \leq 135$	130
$135 < m_{ref} \leq 150$	140
$150 < m_{ref} \leq 165$	150
$165 < m_{ref} \leq 185$	170
$185 < m_{ref} \leq 205$	190
$205 < m_{ref} \leq 225$	210
$225 < m_{ref} \leq 245$	230
$245 < m_{ref} \leq 270$	260
$270 < m_{ref} \leq 300$	280
$300 < m_{ref} \leq 330$	310
$330 < m_{ref} \leq 360$	340
$360 < m_{ref} \leq 395$	380
$395 < m_{ref} \leq 435$	410
$435 < m_{ref} \leq 480$	450
$480 < m_{ref} \leq 540$	510
$540 < m_{ref} \leq 600$	570
$600 < m_{ref} \leq 650$	620
$650 < m_{ref} \leq 710$	680
$710 < m_{ref} \leq 770$	740
$770 < m_{ref} \leq 820$	800
$820 < m_{ref} \leq 880$	850
$880 < m_{ref} \leq 940$	910
$940 < m_{ref} \leq 990$	960
$990 < m_{ref} \leq 1050$	1020

$1050 < m_{ref} \leq 1110$	1080
$1110 < m_{ref} \leq 1160$	1130
$1160 < m_{ref} \leq 1220$	1190
$1220 < m_{ref} \leq 1280$	1250
$1280 < m_{ref} \leq 1330$	1300
$1330 < m_{ref} \leq 1390$	1360
$1390 < m_{ref} \leq 1450$	1420
$1450 < m_{ref} \leq 1500$	1470
$1500 < m_{ref} \leq 1560$	1530
$1560 < m_{ref} \leq 1620$	1590
$1620 < m_{ref} \leq 1670$	1640
$1670 < m_{ref} \leq 1730$	1700
$1730 < m_{ref} \leq 1790$	1760
$1790 < m_{ref} \leq 1870$	1810
$1870 < m_{ref} \leq 1980$	1930
$1980 < m_{ref} \leq 2100$	2040
$2100 < m_{ref} \leq 2210$	2150
$2210 < m_{ref} \leq 2320$	2270
$2320 < m_{ref} \leq 2440$	2380
$2440 < RM$	2490

Table Ap 8-4: determination of equivalent inertia mass for a L-category vehicle equipped with two or more wheels on the powered axle(s).

- 3.2.2.4. Bring the vehicle and the chassis dynamometer to the stabilized operating temperature, in order to approximate the road conditions.
- 3.2.2.5. Carry out the operations specified in paragraph 3.1.2. of this appendix with the exception of paragraphs 3.1.2.4. and 3.1.2.5., replacing M_{HP} by I and M_f by M_{rm} in Equation Ap 8-4 given in paragraph 3.1.2.7.

- 3.2.2.6. Adjust the brake to reproduce the corrected running resistance half payload (paragraph 3.1.2.8. to this appendix) and to take into account the difference between the vehicle mass on the track and the equivalent inertia test mass (I) to be used. This may be done by calculating the mean corrected road coast down time from V₂ to V₁ and reproducing the same time on the dynamometer by the following relationship:

Equation Ap 8-8:

$$T_{corrected} = (I + M_{rm}) \frac{2\Delta V}{F_{corrected}} \cdot \frac{1}{3.6}$$

where:

I is the flywheel equivalent inertia mass of chassis dynamometer.

M_{rm} is the equivalent inertia mass of the powered wheels and vehicle portions rotating with the wheels during coast down. M_{rm} shall be measured or calculated by an appropriate manner.

- 3.2.2.7. The power P_a to be absorbed by the bench shall be determined in order to enable the same total road load power to be reproduced for the same vehicle on different days or on different chassis dynamometers of the same type.

Appendix 9

Explanatory note on the gearshift procedure for a Type I test

- 0 This explanatory note is not a part of this Regulation, but explains matters specified or described in the Regulation, Annexes or Appendixes, and matters related thereto.
1. **Approach**
- 1.1. The development of the gearshift procedure was based on an analysis of the gearshift points in the in-use data. In order to get generalised relations between technical specifications of the vehicles and gearshift speeds the engine speeds were normalised to the utilisable band between rated speed and idling speed.
- 1.2. In a second step the end speeds (vehicle speed as well as normalised engine speed) for up shifts and downshifts were determined and collected in a separate table. The averages of these speeds for each gear and vehicle were calculated and correlated with technical specifications of the vehicles.
- 1.3. The results of these analyses and calculations can be summarised as follows:
- (a) the gearshift behaviour is engine speed related rather than vehicle speed related;
 - (b) the best correlation between gearshift speeds and technical data was found for normalised engine speeds and the power to mass ratio (maximum continuous rated power/(mass in running order + 75 kg));
 - (c) the residual variations cannot be explained by other technical data or by different transmission ratios. They are most probably assigned to differences in traffic conditions and individual driver behaviour;
 - (d) the best approximation between gearshift speeds and power to mass ratio was found for exponential functions;
 - (e) the gearshift function for the first gear is significantly lower than for all other gears;
 - (f) the gearshift speeds for all other gears can be approximated by one common function;
 - (g) no differences were found between five-speed and six-speed gearboxes;
 - (h) the gearshift behaviour in Japan is significantly different from the equal-type gearshift behaviour in the European Union (EU) and in the United States of America (USA).
- 1.4. In order to find a balanced compromise between the three regions a new approximation function for normalised up shift speeds versus power to mass ratio was calculated as weighted average of the EU/USA curve (with 2/3 weighting) and the Japanese curve (with 1/3 weighting), resulting in the following equations for normalised engine up shift speeds:

Equation Ap9-1, normalised up shift speed in 1st gear (gear 1).

$$n_{\text{max_acc}}(1) = (0.5753 \times e^{(-1.9 \times \frac{P_n}{m_k + 75})} - 0.1) \times (s - n_{\text{idle}}) + n_{\text{idle}}$$

Equation Ap9-2, normalised up shift speed in gears > 1

$$n_{\text{max_acc}}(i) = (0.5753 \times e^{(-1.9 \times \frac{P_n}{m_k + 75})} - 0.1) \times (s - n_{\text{idle}}) + n_{\text{idle}}$$

2. Calculation example

2.1 Figure Ap 9-1 shows an example of gearshift use for a small vehicle:

(a) the lines in bold show the gear use for acceleration phases;

(b) the dotted lines show the downshift points for deceleration phases;

(c) the cruising phases the whole speed range between downshift speed and up shift speed may be used.

2.2

In case of gradually increase of vehicle speed during cruise phases, up shift speeds ($v_{1 \rightarrow 2}$, $v_{2 \rightarrow 3}$ and $v_{i \rightarrow i+1}$) in km/h may be calculated using the following equations:

Equation Ap9-3:


$$v_{1 \rightarrow 2} = [0.03 \times (s - n_{\text{idle}}) + n_{\text{idle}}] \times \frac{1}{ndv_2}$$

Equation Ap9-4:

$$v_{2 \rightarrow 3} = \left[(0.5753 \times e^{(-1.9 \times \frac{P_n}{m_k + 75})} - 0.1) \times (s - n_{\text{idle}}) + n_{\text{idle}} \right] \times \frac{1}{ndv_1}$$

Equation Ap9-5:

$$v_{i \rightarrow i+1} = \left[(0.5753 \times e^{(-1.9 \times \frac{P_n}{m_k + 75})} - 0.1) \times (s - n_{\text{idle}}) + n_{\text{idle}} \right] \times \frac{1}{ndv_{i-1}}, \quad i = 3 \text{ to } ng$$

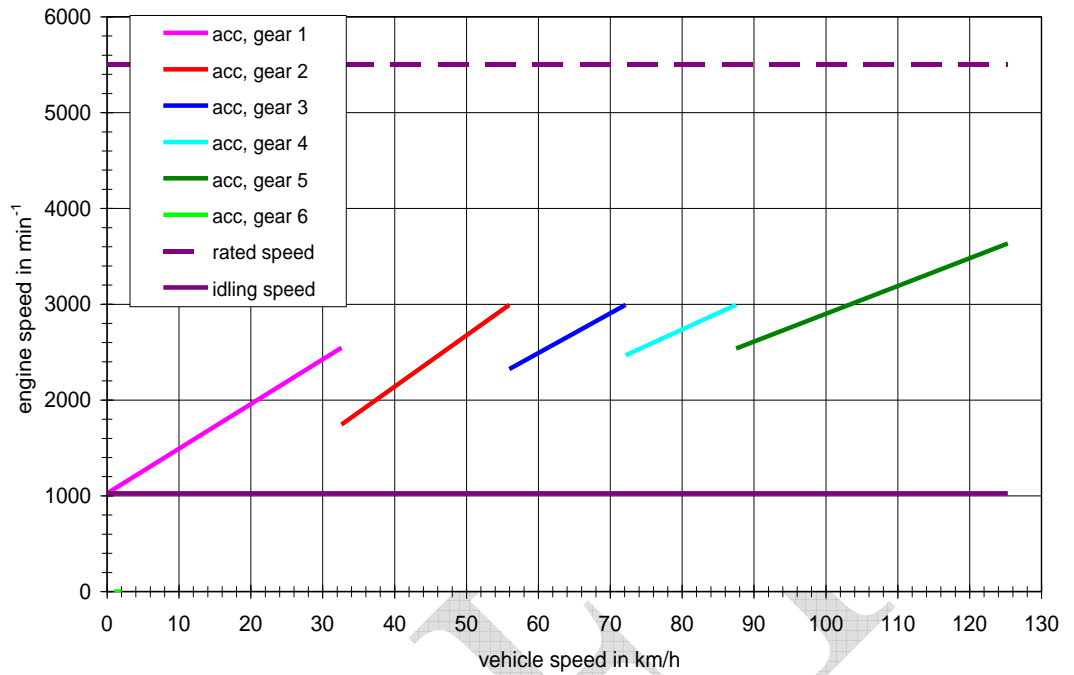

Gear use during acceleration phases

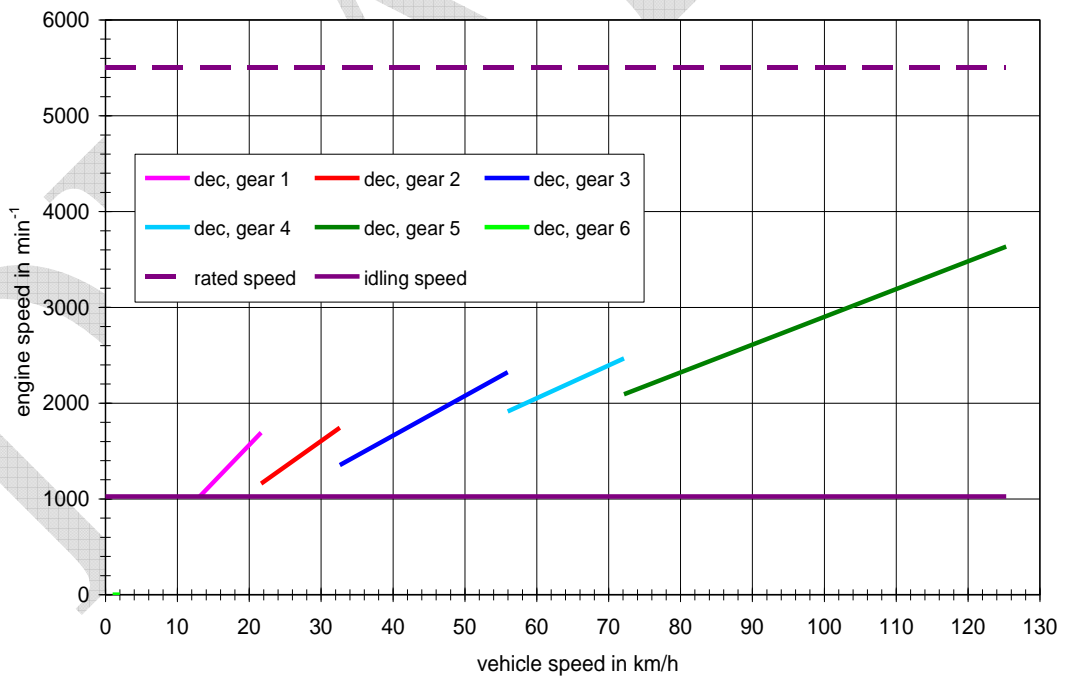


Figure Ap9-1: Example of a gearshift sketch - Gear during deceleration and cruise phases.

In order to allow to the test service more flexibility and to assure driveability the gearshift regression functions should be considered as lower limits. Higher engine speeds are permitted in any cycle phase.

3. Phase indicators

3.1 In order to avoid different interpretations in the application of the gearshift equations and thus to improve the comparability of the test, fixed phase indicators are assigned to the speed pattern of the cycles. The specification of the phase indicators is based on JARI's definition of the 4 driving modes as shown in the following table:

4 modes	Definition
Idle mode	vehicle speed < 5 km/h and -0.5 km/h/s (-0.139 m/s ²) < acceleration < 0.5 km/h/s (0.139 m/s ²)
Acceleration mode	acceleration > 0.5 km/h/s (0.139 m/s ²)
Deceleration mode	acceleration < -0.5 km/h/s (-0.139 m/s ²)
Cruise mode	vehicle speed ≥ 5 km/h and -0.5 km/h/s (-0.139 m/s ²) < acceleration < 0.5 km/h/s (0.139 m/s ²)

Table Ap9-1: Definition of driving modes

3.2

The indicators were then modified in order to avoid frequent changes during relatively homogeneous cycle parts and thus improve the driveability. Figure Ap9-2 shows an example from cycle part 1.

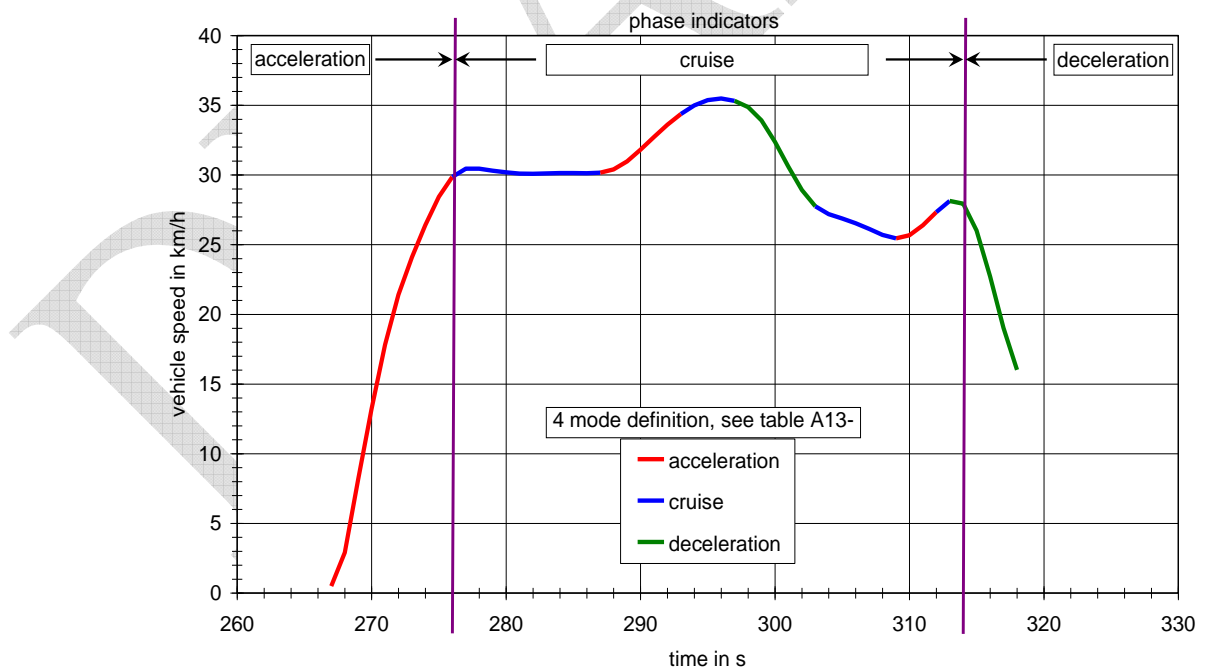


Figure Ap9-2: Example for modified phase indicators

4. Calculation example

4.1. An example of input data necessary for the calculation of shift speeds is shown in

Table Ap 9-2. The up shift speeds for acceleration phases for the first gear and higher gears are calculated using Equations 9-1 and 9-2. The denormalisation of engine speeds can be performed by using the equation $n = n_{\text{norm}} \times (s - n_{\text{idle}}) + n_{\text{idle}}$.

- 4.2. The downshift speeds for deceleration phases can be calculated with Equations 9-3 and 9-4. The ndv values in Table Ap 9-2 can be used as gear ratios. These values can also be used to calculate the affiliated vehicle speeds (vehicle shift speed in gear $i =$ engine shift speed in gear $i / ndvi$). The corresponding results are shown in Tables Ap9-3 and Ap9-4.
- 4.3. In a further step the possibility of a simplification of the above-described gearshift algorithms was examined by additional analyses and calculations. It should especially be checked whether engine shift speeds could be replaced by vehicle shift speeds. The analysis showed that vehicle speeds could not be brought in line with the gearshift behaviour of the in-use data.

4.3.1.

Item	Input Data
Engine capacity in cm^3	600
P_n in kW	72
m_k in kg	199
s in min^{-1}	11,800
n_{idle} in min^{-1}	1,150
$ndv1$ */	133.66
$ndv2$	94.91
$ndv3$	76.16
$ndv4$	65.69
$ndv5$	58.85
$ndv6$	54.04
pmr **/ in kW/t	262.8
*/ ndv means the ratio between engine speed in min^{-1} and vehicle speed in km/h	
**/ pmr means the power to mass ratio calculated by	
1. $P_n / (m_k + 75) \cdot 1,000$; P_n IN kW, m_k IN KG	

Table Ap9-2: Input data for the calculation of engine and vehicle shift speeds

4.3.2.

	2. EU/USA/JAPAN DRIVING BEHAVIOUR	
	EU/USA/Japan driving behaviour	n_acc_max (1) n_acc_max (i)
n_norm */ in per cent	24.9	34.9
n in min-1	3,804	4,869
*/n_norm means the calculated value by equation Ap9-1 and equation Ap9-2.		

Table Ap9-3: Shift speeds for acceleration phases for the first gear and for higher gears (according to Table Ap9-1)

4.3.3.

Gearshift		EU/USA/Japan driving behaviour		
		v in km/h	n_norm (i) in percent	n in min ⁻¹
Up shift	1→2	28.5	24.9	3,804
	2→3	51.3	34.9	4,869
	3→4	63.9	34.9	4,869
	4→5	74.1	34.9	4,869
	5→6	82.7	34.9	4,869
Downshift	2→cl */	15.5	3.0	1,470
	3→2	28.5	9.6	2,167
	4→3	51.3	20.8	3,370
	5→4	63.9	24.5	3,762
	6→5	74.1	26.8	4,005
*/"cl" means "Clutch-Off" timing.				

Table Ap9-4: Engine and vehicle shift speeds according to Table Ap 9-2

Appendix 10
Type-approval tests of replacement pollution control devices for a L-category vehicle as separate technical unit

1 Scope of the appendix

This Appendix applies to the type-approval of separate technical units within the meaning of Article 23(10) of Regulation (EU) No [xxx/2013] , of pollution control devices to be fitted, on one or more types of L-category vehicles, as replacement parts.

2 Definitions

For the purposes of this Appendix, the definitions of Article 2 shall apply.

3. Application for type-approval

3.1. An application for type-approval of a type of replacement catalytic converter as a separate technical unit shall be submitted by the manufacturer of the system or by his authorised representative.

3.2. A model for the information document is provided in the Regulation for administrative provisions (EC) No [xxx/2013].

3.3. For each type of catalytic converter for which approval is requested, the type-approval application shall be accompanied by the following documents in triplicate, and by the following particulars:

3.3.1. A description of the type(s) of vehicle for which the device is intended, in respect of the characteristics referred to in Article 17;

3.3.2. the numbers and/or symbols specific to the type of propulsion and vehicle;

3.3.3. description of the replacement catalytic converter stating the relative position of each of its components, together with the fitting instructions;

3.3.4. drawings of each component to facilitate location and identification, and statement of materials used. These drawings shall also indicate the intended location of the mandatory type-approval number

3.4. The following shall be submitted to the technical service responsible for the type approval test:

3.4.1. Vehicle(s) of a type approved in accordance with this appendix equipped with a new original pollutant control device. This (these) vehicle(s) shall be selected by the applicant with the agreement of the technical service to the satisfaction of the approval authority. It (they) shall comply with the requirements of Annex I, Type I test.

3.4.2. The test vehicle(s) shall have no emission control system defects; any excessively worn out or malfunctioning emission-related original part shall be repaired or

replaced. The test vehicle(s) shall be tuned properly and set to the manufacturer's specification prior to emission testing.

- 3.4.3. One sample of the type of the pollutant control device. This sample shall be clearly and indelibly marked with the applicant's trade name or mark and its commercial designation.

4. Granting of type-approvals

- 4.1. If the requirements of this Regulation are fulfilled the approval authority shall issue a certificate based on the model set out in the Regulation for administrative requirements (EU) No [xxx/2013].
- 4.2. An approval number in accordance with the provisions of the Regulation for administrative requirements shall be assigned to each type of pollution control device approved. The same Member State shall not assign the same number to another replacement pollution control device. The same type-approval number may cover the use of that replacement pollution control device on a number of different vehicle types.

5. Marking requirements

- 5.1. Every replacement catalytic converter conforming to the type approved under this Regulation as a separate technical unit, but not the mounting parts and pipes, shall bear a type-approval mark composed in accordance with the requirements of Article 37 of Regulation (EU) No [xxx/2013], supplemented by further information as referred to in section 5.2. The type-approval mark shall be affixed in such a way as to be legible and indelible and also visible (where possible) in the position at which it is to be fitted.

The dimensions of 'a' shall be ≥ 3 mm.

- 5.2. Further information contained in the type-approval mark
 - 5.2.1. Every replacement pollution control device, but not the mounting parts and pipes, shall bear, in the type-approval mark, the number 5 under which the type approval has been granted.
 - 5.2.1.1. Replacement pollution control devices which consists of a sole part integrating both the pollution control devices, such as the catalytic converter, oxygen sensor(s) or particulate trap and the exhaust system (silencer). The type-approval mark referred to in section 4.1 shall be followed by two circles surrounding a number 5 and a number 9, respectively.
 - 5.2.1.2. Replacement pollutant control devices separated from the exhaust system (silencer). The mark of the type-approval referred to in section 4.1 affixed to the replacement catalytic converter shall be followed by a circle surrounding a number 5.

6. Requirements

- 6.1. General requirements

The design, construction and mounting of the replacement catalytic converter shall be such that:

- 6.1.1. the vehicle complies with the requirements of this Regulation under normal conditions of use, and in particular regardless of any vibrations to which it may be subjected;
 - 6.1.2. the replacement pollution control device displays reasonable resistance to the corrosion phenomena to which it is exposed, with due regard to the normal conditions of use of the vehicle;
 - 6.1.3. the ground clearance available under the original equipment pollution control device, and the angle at which the vehicle can lean over, are not reduced;
 - 6.1.4. the surface of the pollutant control device does not reach unduly high temperatures;
 - 6.1.5. the outline of the pollution control device has no projections or sharp edges;
 - 6.1.6. shock absorbers and suspension have adequate clearance;
 - 6.1.7. adequate safety clearance is provided for pipes;
 - 6.1.8. it is impact-resistant in a way that is compatible with clearly-defined maintenance and installation requirements;
 - 6.1.9. if the original pollution control device includes thermal protection, the replacement pollution control device shall include equivalent protection;
 - 6.1.10. if (an) oxygen probe(s) and other sensors are originally installed on the exhaust line, the installation of the replacement catalytic converter shall be at the exact position of the original equipment catalytic converter, and the position on the exhaust line of the oxygen probe(s) and other sensors, shall not be modified.
- 6.2. Requirements regarding emissions
- 6.2.1. The vehicle referred to in section 3.4.1, equipped with a replacement pollutant control device of the type for which type-approval is requested, shall undergo the tests laid down in Annex I , x,x, (according to the type-approval of the vehicle)⁷.
 - 6.2.1.1. Evaluation of the emission of pollutants of vehicles equipped with replacement catalytic converter

Requirements regarding tailpipe or evaporative emissions are deemed to be complied with if the test vehicle equipped with the replacement pollutant control device complies with the limit values according to Annex VI of Regulation (EU) No [xxx/2013] ,(according to the type-approval of the vehicle)⁸.

⁷ As provided for in this Regulation in the version applicable to the type-approval of that vehicle.

⁸ As provided for in this Regulation in the version applicable to the type-approval of that vehicle.

- 6.2.1.2. Where type-approval is applied for different types of vehicles from the same manufacturer, and provided that these different types of vehicle are fitted with the same type of original equipment pollutant control device, the Type I test may be limited to at least two vehicles selected after agreement with the technical service to the satisfaction of the approval authority.
- 6.2.2. Requirements regarding permissible sound level
- The vehicle referred to in section 3.4.1, equipped with a replacement pollutant control device that possibly can deteriorate the sound emissions of the type for which type-approval is requested, shall satisfy the requirements of Annex VIII (according to the type approval of the vehicle). The test result for the vehicle in motion and for the stationary test shall be mentioned in the test report.
- 6.3. Testing of the vehicle's propulsion performance
- 6.3.1. The replacement catalytic converter or particulate trap shall be such as to ensure that the vehicle's propulsion performance is comparable to that achieved with the original equipment catalytic converter or particulate trap.
- 6.3.2. The replacement catalytic converter or particulate trap shall be compared with an original equipment catalytic converter or particulate trap, also in new condition, fitted in turn to the vehicle referred to in section 3.4.1. in terms of propulsion performance.
- 6.3.3. This test is carried out by performing the applicable test procedure set-out in Annex IX. The maximum total torque and power as well as the maximum attainable vehicle speed, if applicable, measured with the replacement catalytic converter or particulate trap shall not deviate from the type-approved under the same conditions with the original equipment catalytic converter or particulate trap by more than +5%.

Appendix 11
Type I test procedure for a hybrid L-category vehicle

1. Introduction

- 1.1. This annex defines the specific provisions regarding type-approval of hybrid electric L-category vehicles (HEV) as defined in paragraph 4 of this Regulation.
- 1.2. As a general principle, for the tests of Type I to IX, hybrid electric vehicles shall be tested according to this Regulation, unless modified by this appendix.
- 1.3. For the Type I and Type VII tests, OVC vehicles (as categorised in paragraph 2.) shall be tested according to condition A and to condition B. The test results under both conditions A and B and the weighted values shall be reported in the communication form laid down in the Regulation for administrative requirements (EU) No [xxx/2013].
- 1.4. The emissions test results shall comply with the limits under all specified test conditions of this Regulation.

2. Categories of hybrid vehicles

Vehicle charging	Off-Vehicle Charging ⁹ (OVC)		Not Off-Vehicle Charging ¹⁰ (NOVC)	
	Without	With	Operating mode switch	Without
Operating mode switch				

Table Ap11-1: hybrid vehicle categories

3. Type I test methods

For the Type I test, hybrid electric L-category vehicles shall be tested according to the applicable test procedure prescribed in Annex VI of Regulation (EU) No [xxx/2013]. For each of test condition, the pollutant emission test result shall comply with the limits specified in Regulation (EU) No [xxx/2013], Annex VI (A1), (A2) or (A3), whichever is applicable according to Annex IV of Regulation (EU) No [xxx/2013].

- 3.1. Externally chargeable (OVC HEV) without an operating mode switch
 - 3.1.1. Two tests shall be performed under the following conditions:
 - a) Condition A: test shall be carried out with a fully charged electrical energy/power storage device.
 - b) Condition B: test shall be carried out with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

⁹ also known as ‘externally chargeable’
¹⁰ also known as ‘not externally chargeable’

The profile of the state of charge (SOC) of the electrical energy/power storage device during different stages of the test is given in sub-appendix 3C of Annex VI..

3.1.2. Condition A

3.1.2.1. The procedure shall start with the discharge of the electrical energy/power storage device of the vehicle while driving (on the test track, on a chassis dynamometer, etc.):

(a) at a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up, or

(b) if a vehicle cannot reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run a lower steady speed where the fuel consuming engine does not start up for a defined time/distance (to be specified between technical service and manufacturer subject to satisfaction of the approval authority), or

(c) with the manufacturer's recommendation.

The fuel consuming engine shall be stopped within 10 seconds of it being automatically started.

3.1.2.2. Conditioning of vehicle

The vehicle shall be conditioned by driving the applicable type I driving cycle set-out in appendix 6.

3.1.2.3. After this preconditioning, and before testing, the vehicle shall be kept in a room in which the temperature remains relatively constant between 293 and 303 K (20 °C and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within ± 2 K of the temperature of the room, and the electrical energy/power storage device is fully charged as a result of the charging prescribed in paragraph 3.1.2.4. below.

3.1.2.4. During soak, the electrical energy/power storage device shall be charged:

(a) with the on board charger if fitted, or

(b) with an external charger recommended by the manufacturer referred to in the user manual, using the normal overnight charging procedure set-out in paragraph 3.2.2.4. of appendix 3 of Annex VI..

This procedure excludes all types of special charges that could be automatically or manually initiated like, for instance, the equalization charges or the servicing charges.

The manufacturer shall declare that during the test, a special charge procedure has not occurred.

3.1.2.5. Test procedure

3.1.2.5.1. The vehicle shall be started up by the means provided for normal use to the driver.

The first test cycle starts on the initiation of the vehicle start-up procedure.

3.1.2.5.2. The test procedures defined in paragraph 3.1.2.5.2.1. or 3.1.2.5.2.2. shall be used in accordance with the type I test procedure set-out in appendix 6.

3.1.2.5.2.1. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and end on conclusion of the final idling period of the applicable test type I test cycle (end of sampling (ES)).

3.1.2.5.2.2. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and continue over a number of repeat test cycles. It shall end on conclusion of the final idling period in the applicable type I test cycle during which the battery reached the minimum state of charge according to the criterion defined below (end of sampling (ES)).

The electricity balance Q [Ah] is measured over each combined cycle, using the procedure specified in sub-appendix 3B of Annex VI, and used to determine when the battery minimum state of charge has been reached.

The battery minimum state of charge is considered to have been reached in combined cycle N if the electricity balance Q measured during combined cycle $N+1$ is not more than a 3 per cent discharge, expressed as a percentage of the nominal capacity of the battery (in Ah) in its maximum state of charge, as declared by the manufacturer. At the manufacturer's request additional test cycles may be run and their results included in the calculations in paragraphs 3.1.2.5.5. and 3.1.4.2. provided that the electricity balance Q for each additional test cycle shows less discharge of the battery than over the previous cycle.

In between each of the cycles a hot soak period of up to 10 minutes is allowed. The powertrain shall be switched off during this period.

3.1.2.5.3. The vehicle shall be driven according to the provisions in appendix 6.

3.1.2.5.4. The exhaust gases shall be analyzed according to the provisions in Annex I

3.1.2.5.5. The test results shall be compared to the limits prescribed in paragraph 5.3.1.4. of this Regulation and the average emission of each pollutant in grams per kilometre for Condition A shall be calculated (M_{1i}).

In the case of testing according to paragraph 3.1.2.5.2.1., (M_{1i}) is simply the result of the single combined cycle run.

In the case of testing according to paragraph 3.1.2.5.2.2., the test result of each combined cycle run (M_{1ia}), multiplied by the appropriate deterioration factor and K_i factors, shall be less than the limits prescribed in Annex VI(A) of Regulation (EU) No [xxx/2013]. For the purposes of the calculation in paragraph 3.1.4 M_{1i} shall be defined as:

Equation Ap11-1:

$$M_{1i} = \frac{1}{N} \sum_{a=1}^N M_{1ia}$$

where:

i: pollutant

a: test cycle

3.1.3. Condition B

3.1.3.1. Conditioning of vehicle.

The vehicle shall be conditioned by driving the applicable type I driving cycle set-out in appendix 6.

3.1.3.2. The electrical energy/power storage device of the vehicle shall be discharged while driving (on the test track, on a chassis dynamometer, etc.):

(a) at a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up, or

(b) if a vehicle can not reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run a lower steady speed where the fuel consuming engine just does not start up for a defined time/distance (to be specified between technical service and manufacturer), or

(c) with manufacturers' recommendation.

The fuel consuming engine shall be stopped within 10 seconds of it being automatically started.

3.1.3.3. After this preconditioning, and before testing, the vehicle shall be kept in a room in which the temperature remains relatively constant between 293 and 303 K (20 °C and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within ±2 K of the temperature of the room.

3.1.3.4. Test procedure

3.1.3.4.1. The vehicle shall be started up by the means provided for normal use to the driver. The first cycle starts on the initiation of the vehicle start-up procedure.

3.1.3.4.2. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and end on conclusion of the final idling period of the applicable test type I test cycle (end of sampling (ES)).

3.1.3.4.3. The vehicle shall be driven according to the provisions of appendix 6.

3.1.3.4.4. The exhaust gases shall be analyzed according to Annex I.

3.1.3.5. The test results shall be compared to the limits prescribed in Annex VI(A) of Regulation (EU) No [xxx/2013] and the average emission of each pollutant for Condition B shall be calculated (M_{2i}). The test results M_{2i} , multiplied by the appropriate deterioration and K_i factors, shall be less than the limits prescribed in Annex VI(A) of Regulation (EU) No [xxx/2013].

3.1.4. Test results

3.1.4.1. In the case of testing according to paragraph 3.1.2.5.2.1.

For communication, the weighted values shall be calculated as below:

Equation Ap11-2

$$M_i = (D_e \cdot M_{1i} + D_{av} \cdot M_{2i}) / (D_e + D_{av})$$

where:

M_i = mass emission of the pollutant i in grams per kilometre,

M_{1i} = average mass emission of the pollutant i in grams per kilometre with a fully charged electrical energy/power storage device calculated in paragraph 3.1.2.5.5.,

M_{2i} = average mass emission of the pollutant i in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity) calculated in paragraph 3.1.3.5.,

D_e = vehicle electric range, according to the procedure described in UNECE regulation No 101, Annex 9, where the manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric mode,

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity $< 150 \text{ cm}^3$;
- 6 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} < 130 \text{ km/h}$;
- 10 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} \geq 130 \text{ km/h}$

3.1.4.2. In the case of testing according to paragraph 3.1.2.5.2.2.

For communication, the weighted values shall be calculated as below:

Equation Ap11-3:

$$M_i = (D_{ovc} \cdot M_{1i} + D_{av} \cdot M_{2i}) / (D_{ovc} + D_{av})$$

where:

M_i = mass emission of the pollutant i in grams per kilometre,

M_{1i} = average mass emission of the pollutant i in grams per kilometre with a

M_{2i} = average mass emission of the pollutant i in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity) calculated in paragraph 3.1.3.5.,

D_{ovc} = OVC range according to the procedure described in sub-appendix 3C of Annex VI,

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity $< 150 \text{ cm}^3$;
- 6 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} < 130 \text{ km/h}$;
- 10 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} \geq 130 \text{ km/h}$.

3.2. Externally chargeable (OVC HEV) with an operating mode switch.

3.2.1. Two tests shall be performed under the following conditions:

3.2.1.1. Condition A: Test shall be carried out with a fully charged electrical energy/power storage device.

3.2.1.2. Condition B: Test shall be carried out with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

3.2.1.3. The operating mode switch shall be positioned according the table below:

	Hybrid-modes	-Pure electric - Hybrid	-Pure fuel consuming - Hybrid	-Pure electric -Pure fuel consuming - Hybrid	-Hybrid mode n ¹¹ -Hybrid mode m ¹
Battery state of charge		Switch in position	Switch in position	Switch in position	Switch in position
Condition A Fully charged		Hybrid	Hybrid	Most electric hybrid mode ¹²	Hybrid

¹¹ For instance: sport, economic, urban, extra-urban position etc.

¹² Most electric hybrid mode: the hybrid mode which can be proven to have the highest electricity consumption of all selectable hybrid modes when tested in accordance with condition A of paragraph 4. of Annex 10 to UNECE regulation No 101, to be established based on information provided by the manufacturer and in agreement with the technical service.

Condition B Min. state of charge		Fuel consuming	Fuel consuming	Most fuel consuming mode ¹³	Hybrid
-------------------------------------	--	-------------------	-------------------	--	--------

Table Ap11-2: Look-up table to determine condition A or B dependent on different hybrid vehicle concepts and on the hybrid mode selection switch position.

3.2.2. Condition A

3.2.2.1. If the pure electric range of the vehicle is higher than one complete cycle, on the request of the manufacturer, the Type I test may be carried out in pure electric mode. In this case, engine preconditioning prescribed in paragraph 3.2.2.3.1. or 3.2.2.3.2. can be omitted.

3.2.2.2. The procedure shall start with the discharge of the electrical energy/power storage device of the vehicle while driving with the switch in pure electric position (on the test track, on a chassis dynamometer, etc.) at a steady speed of 70 per cent \pm 5 per cent of the maximum thirty minutes speed of the vehicle.

Stopping the discharge occurs:

- (a) when the vehicle is not able to run at 65 per cent of the maximum thirty minutes speed, or
- (b) when an indication to stop the vehicle is given to the driver by the standard on-board instrumentation, or
- (c) after covering the distance of 100 km.

If the vehicle is not equipped with a pure electric mode, the electrical energy/power storage device discharge shall be achieved by driving the vehicle (on the test track, on a chassis dynamometer, etc.):

- (a) at a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up, or
- (b) if a vehicle cannot reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run a lower steady speed where the fuel consuming engine does not start up for a defined time/distance (to be specified between technical service and manufacturer), or
- (c) with manufacturers' recommendation.

The fuel consuming engine shall be stopped within 10 seconds of it being automatically started.

¹³ Most fuel consuming mode: the hybrid mode which can be proven to have the highest fuel consumption of all selectable hybrid modes when tested in accordance with condition B of paragraph 4. of Annex 10 to UNECE regulation No 101, to be established based on information provided by the manufacturer and in agreement with the technical service.

3.2.2.3. Conditioning of vehicle

3.2.2.4. After this preconditioning, and before testing, the vehicle shall be kept in a room in which the temperature remains relatively constant between 293 and 303 K (20 °C and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within ± 2 K of the temperature of the room, and the electrical energy/power storage device is fully charged as a result of the charging prescribed in paragraph 3.2.2.5.

3.2.2.5. During soak, the electrical energy/power storage device shall be charged:

(a) with the on board charger if fitted, or

(b) with an external charger recommended by the manufacturer, using the normal overnight charging procedure.

This procedure excludes all types of special charges that could be automatically or manually initiated like, for instance, the equalisation charges or the servicing charges.

The manufacturer shall declare that during the test, a special charge procedure has not occurred.

3.2.2.6. Test procedure

3.2.2.6.1. The vehicle shall be started up by the means provided for normal use to the driver. The first cycle starts on the initiation of the vehicle start-up procedure.

3.2.2.6.1.1. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and end on conclusion of the final idling period of the applicable test type I test cycle (end of sampling (ES)).

3.2.2.6.1.2. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and continue over a number of repeat test cycles. It shall end on conclusion of the final idling period of the applicable test type I test cycle during which the battery has reached the minimum state of charge according to the criterion defined below (end of sampling (ES)).

The electricity balance Q [Ah] is measured over each combined cycle, using the procedure specified in sub-appendix 3B of Annex VI, and used to determine when the battery minimum state of charge has been reached.

The battery minimum state of charge is considered to have been reached in combined cycle N if the electricity balance measured during combined cycle $N+1$ is not more than a 3 per cent discharge, expressed as a percentage of the nominal capacity of the battery (in Ah) in its maximum state of charge, as declared by the manufacturer. At the manufacturer's request additional test cycles may be run and their results included in the calculations in paragraphs 3.2.2.7. and 3.2.4.3. provided that the electricity balance for each additional test cycle shows less discharge of the battery than over the previous cycle.

In between each of the cycles a hot soak period of up to 10 minutes is allowed. The powertrain shall be switched off during this period.

- 3.2.2.6.2. The vehicle shall be driven according to the provisions of appendix 6.
- 3.2.2.6.3. The exhaust gases shall be analysed according to Annex I.
- 3.2.2.7. The test results shall be compared to the limits prescribed in paragraph 5.3.1.4. of this Regulation and the average emission of each pollutant in grams per kilometre for Condition A shall be calculated (M_{1i}).

The test result of each combined cycle run M_{1ia} , multiplied by the appropriate deterioration and K_i factors, shall be less than the emission limits set-out Regulation (EU) No [xxx/2013]. For the purposes of the calculation in paragraph 3.2.4., M_{1i} shall be calculated according to Equation Ap11-1.

3.2.3. Condition B

3.2.3.1. Conditioning of vehicle.

The vehicle shall be conditioned by driving the applicable type I driving cycle set-out in appendix 6.

- 3.2.3.2. The electrical energy/power storage device of the vehicle shall be discharged according to paragraph 3.2.2.2.

- 3.2.3.3. After this preconditioning, and before testing, the vehicle shall be kept in a room in which the temperature remains relatively constant between 293 and 303 K (20 °C and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within ± 2 K of the temperature of the room.

3.2.3.4. Test procedure

- 3.2.3.4.1. The vehicle shall be started up by the means provided for normal use to the driver. The first cycle starts on the initiation of the vehicle start-up procedure.

- 3.2.3.4.2. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and end on conclusion of the final idling period of the applicable test type I test cycle (end of sampling (ES)).

- 3.2.3.4.3. The vehicle shall be driven according to the provisions of appendix 6.

- 3.2.3.4.4. The exhaust gases shall be analysed according to provisions in Annex I.

- 3.2.3.5. The test results shall be compared to the limits prescribed in paragraph 5.3.1.4. of this Regulation and the average emission of each pollutant for Condition B shall be calculated (M_{2i}). The test results M_{2i} , multiplied by the appropriate deterioration and K_i factors, shall be less than the limits prescribed in paragraph 5.3.1.4. of this Regulation.

3.2.4. Test results

3.2.4.1. In the case of testing according to paragraph 3.2.2.6.2.1.

For communication, the weighted values shall be calculated as in Equation Ap11-2

where:

M_i = mass emission of the pollutant i in grams per kilometre,

M_{1i} = average mass emission of the pollutant i in grams per kilometre with a fully charged electrical energy/power storage device calculated in paragraph 3.2.2.7.,

M_{2i} = average mass emission of the pollutant i in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity) calculated in paragraph 3.2.3.5

D_e = vehicle electric range with the switch in pure electric position, according to the procedure described Annex VI. If there is not a pure electric position, the manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric mode.

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity $< 150 \text{ cm}^3$;
- 6 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} < 130 \text{ km/h}$;
- 10 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} \geq 130 \text{ km/h}$.

3.2.4.2. In the case of testing according to paragraph 3.2.2.6.2.2.

For communication, the weighted values shall be calculated as in Equation Ap11-3

where:

M_i = mass emission of the pollutant i in grams per kilometre,

M_{1i} = average mass emission of the pollutant i in grams per kilometre with a fully charged electrical energy/power storage device calculated in paragraph 3.2.2.7.

M_{2i} = average mass emission of the pollutant i in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity) calculated in paragraph 3.2.3.5.

D_{ovc} = OVC range according to the procedure described sub-appendix 3C of Annex VI;

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity $< 150 \text{ cm}^3$;
- 6 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\text{max}} < 130 \text{ km/h}$;
- 10 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\text{max}} \geq 130 \text{ km/h}$.

3.3. Not externally chargeable (not-OVC HEV) without an operating mode switch

3.3.1. These vehicles shall be tested according to appendix 6.

3.3.2. For preconditioning, at least two consecutive complete driving cycles are carried out without soak.

3.3.3. The vehicle shall be driven according to the provisions of appendix 6.

3.4. Not externally chargeable (not-OVC HEV) with an operating mode switch.

3.4.1. These vehicles are preconditioned and tested in hybrid mode according to Annex I. If several hybrid modes are available, the test shall be carried out in the mode that is automatically set after turn on of the ignition key (normal mode). On the basis of information provided by the manufacturer, the technical service will make sure that the limit values are met in all hybrid modes.

3.4.2. For preconditioning, at least two consecutive complete applicable driving cycles shall be carried out without soak.

3.4.3. The vehicle shall be driven according to the provisions of Annex I.

Appendix 12
Type I test procedure for a L-category vehicle fuelled with LPG, NG/biomethane, flex fuel
H₂NG or Hydrogen

1. Introduction

- 1.1. This appendix describes the special requirements that apply in the case of an approval of a vehicle that runs on LPG, NG/biomethane, H₂NG or Hydrogen or that can run either on petrol, LPG, NG/biomethane, H₂NG or Hydrogen in so far as the testing on LPG, NG/biomethane, H₂NG or Hydrogen gas is concerned.
- 1.2. In the case of these gaseous fuels there is a large variation in fuel composition on the market, requiring the fuelling system to adapt its fuelling rates to these compositions. To demonstrate this capability, the parent vehicle equipped with a representative LPG, NG/biomethane or H₂NG fuel system shall be tested in type I tests on two extreme reference fuels and demonstrate the self-adaptability of the fuelling system.
- 1.3. The requirements set-out in this appendix with respect to hydrogen shall only apply for vehicles using hydrogen as fuel for combustion and shall not apply to vehicles equipped with a fuel cell operating on hydrogen.

2. Granting of a type approval for a L-category vehicle equipped with a gaseous fuel system

Type approval is granted subject to the following requirements:

- 2.1. Exhaust emissions approval of a L-category vehicle equipped with a gaseous fuelling system
- The L-category parent vehicle equipped with a representative LPG, NG/biomethane, H₂NG or hydrogen fuel system shall demonstrate its capability to adapt to any fuel composition that may occur across the market and comply with the following:
- 2.1.1. In the case of LPG there are variations in C₃/C₄ composition (test fuel A and B) and therefore the parent vehicle shall be tested on reference fuels A and B referred to in appendix 2;
- 2.1.2. In the case of NG/biomethane there are generally two types of fuel, high calorific fuel (G20) and low calorific fuel (G25), but with a significant spread within both ranges; they differ significantly in Wobbe index. These variations are reflected in the reference fuels. The parent vehicle shall be tested on both reference fuels referred to in appendix 2;
- 2.1.3. In the case of a flex fuel H₂NG vehicle, the composition range may vary from 0% hydrogen (L-gas) to a maximum percentage of hydrogen within the mixture (H-gas), which shall be specified by the manufacturer. The parent vehicle shall demonstrate its capability to adapt to any percentage, within the range specified by the manufacturer and it shall be tested in the type 1 test on 100% H-gas and 100% L-gas. It shall also demonstrate its capability to adapt to any NG/biomethane composition that may occur across the market, regardless of the percentage of hydrogen in the mixture.

- 2.1.4. For L-category vehicles equipped with hydrogen fuel system compliance shall be tested on the single hydrogen reference fuel set-out in appendix 2.
- 2.1.5. If the transition from one fuel to another is in practice aided through the use of a switch, this switch shall not be used during type approval. In such a case on the manufacturer's request and with the agreement of the technical service the pre-conditioning cycle referred in paragraph 5.2.4 of Annex I may be extended.
- 2.1.6. The ratio of emission results 'r' shall be determined for each pollutant as shown below for LPG, NG/Biomethane and H₂NG vehicles:

- 2.1.6.1. In the case of LPG and NG/biomethane vehicles, the ratios of emission results 'r' shall be determined for each pollutant as follows:

Type(s) of fuel	Reference fuels	Calculation of 'r'
LPG and petrol (Approval B)	Fuel A	$r = \frac{B}{A}$
or LPG only (Approval D)	Fuel B	
NG/biomethane	fuel G20	$r = \frac{G25}{G20}$
	fuel G25	

Table: Ap12-2 Calculation ratio 'r' for LPG and NG/Biomethane vehicles

- 2.1.6.2. In the case of flex fuel H₂NG vehicles, two ratios of emission results 'r₁' and 'r₂', shall be determined for each pollutant as follows:

Type(s) of fuel	Reference fuels	Calculation of 'r'
NG/biomethane	fuel G20	$r_1 = \frac{G25}{G20}$
	fuel G25	
H ₂ NG	Mixture of hydrogen and G20 with the maximum percentage of hydrogen specified by the manufacturer	$r_2 = \frac{H2G25}{H2G20}$
	Mixture of hydrogen and G25 with the maximum percentage of hydrogen specified by the manufacturer	

Table: Ap12-2: look-up table ratio 'r' for NG/bio methane or H₂NG gaseous fuels

- 2.2. Exhaust emissions approval of a member of the propulsion family

For the type-approval of a mono- fuel gas vehicle and bi-fuel gas vehicles operating in gas mode, fuelled by LPG, NG/biomethane, H₂NG or Hydrogen, as a member of the propulsion family set-out in Annex X, a type I test shall be performed with one gaseous reference fuel. For LPG, NG/biomethane and H₂NG vehicles this reference fuel may be either of the reference fuels set-out in appendix 2. The gasoues fuelled

vehicle vehicle is considered to comply if the following requirements are met:

- 2.2.1. the test vehicle shall comply with the definition of a propulsion family member set- in Annex X;
- 2.2.2. If the test fuel is reference fuel A for LPG or G20 for NG/biomethane, the emission result shall be multiplied by the relevant factor 'r' if $r > 1$; if $r < 1$, no correction is needed.
- 2.2.3. If the test fuel is reference fuel B for LPG or G25 for NG/biomethane, the emission result shall be divided by the relevant factor 'r' if $r < 1$; if $r > 1$, no correction is needed.
- 2.2.4. On the manufacturer's request, the type I test may be performed on both reference fuels, so that no correction is needed.
- 2.2.5. The parent vehicle shall comply with the emission limits valid for the relevant category set-out in Regulation (EU) No [xxx/2013] for both measured and calculated emissions.
- 2.2.6. If repeated tests are conducted on the same engine the results on reference fuel G20, or A, and those on reference fuel G25, or B, shall first be averaged; the "r" factor shall then be calculated from these averaged results.
- 2.2.7. For the type-approval of a flex fuel H₂NG vehicle as a member of a family, two type 1 tests shall be performed, the first test with 100% of either G20 or G25, and the second test with the mixture of hydrogen and the same NG/biomethane fuel used during the first test, with the maximum hydrogen percentage specified by the manufacturer.
 - 2.2.7.1. if the NG/biomethane fuel is the reference fuel G20, the emission result for each pollutant shall be multiplied by the relevant factors (r_1 for the first test and r_2 for the second test) set-out in paragraph 2.1.6. if the relevant factor > 1 ; if the correspondent relevant factor < 1 , no correction is needed;
 - 2.2.7.2. if the NG/biomethane fuel is the reference fuel G25, the emission result for each pollutant shall be divided by the correspondent relevant factor (r_1 for the first test and r_2 for the second test) calculated in accordance with paragraph 2.1.6., if the correspondent relevant factor < 1 ; if the correspondent relevant factor > 1 , no correction is needed;
 - 2.2.7.3. on the manufacturer's request the type 1 test shall be performed with the four possible combinations of reference fuels, according to paragraph 2.1.6., so that no correction is needed;
 - 2.2.7.4. if repeated tests are made on the same engine the results on reference fuel G20, or H₂G20, and those on reference fuel G25, or H₂G25 with the maximum hydrogen percentage specified by the manufacturer, shall first be averaged; the 'r₁' and 'r₂' factors shall then be calculated from these averaged results.
- 2.2.8. During the type I test the vehicle shall only use petrol for a maximum of 60

consecutive seconds directly after engine crank and start when operating in gaseous fuelling mode.

DRAFT

Appendix 13

Type I test procedure for a L-category vehicle equipped with a periodically regenerating system

1. Introduction

This Appendix defines the specific provisions regarding type-approval of a vehicle equipped with a periodically regenerating system.

2. **Scope of the type approval for vehicles with a periodically regenerating system regarding type I tests.**

2.1. The L-category vehicles in the scope of Regulation (EU) No [xxx/2013] that are equipped with periodically regenerating systems shall comply with the requirements laid down in this Appendix.

2.2. Instead of carrying out the test procedures defined in the following paragraph, a fixed K_i value of 1.05 may be used, if the technical service sees no reason that this value could be exceeded and after approval of the approval authority.

3. **Test Procedure**

The vehicle may be equipped with a switch capable of preventing or permitting the regeneration process provided that this operation has no effect on original engine calibration. This switch shall be permitted only for the purpose of preventing regeneration during loading of the regeneration system and during the pre-conditioning cycles. However, it shall not be used during the measurement of emissions during the regeneration phase; rather the emission test shall be carried out with the unchanged Original Equipment Manufacturer's (OEM) control unit.

3.1. Measurement of carbon dioxide emission and fuel consumption between two cycles where regenerative phases occur.

3.1.1. The average of carbon dioxide emission and fuel consumption between regeneration phases and during loading of the regenerative device shall be determined from the arithmetic mean of several approximately equidistant (if more than 2) Type I operating cycles.

As an alternative, the manufacturer may provide data to show that the carbon dioxide emission and fuel consumption remain constant (+4 per cent) between regeneration phases. In this case, the carbon dioxide emission and fuel consumption measured during the regular Type I test may be used. In any other case emissions measurement for at least two Type I operating cycles shall be completed: one immediately after regeneration (before new loading) and one as close as possible prior to a regeneration phase. All emissions measurements and calculations shall be carried out according to Annex I.. Determination of average emissions for a single regenerative system shall be according to paragraph 3.3. and for multiple regeneration systems according to paragraph 3.4.

3.1.2. The loading process and K_i determination shall be made during the Type I operating cycles, on a chassis dynamometer. These cycles may be run continuously (i.e. without

the need to switch the engine off between cycles). After any number of completed cycles, the vehicle may be removed from the chassis dynamometer, and the test continued at a later time.

- 3.1.3. The number of cycles (D) between two cycles where regeneration phases occur, the number of cycles over which emissions measurements are made (n), and each emissions measurement (M'_{si_j}) shall be reported in Annex I, items 4.1.11.2.1.10.1. to 4.1.11.2.1.10.4. or 4.1.11.2.5.4.1. to 4.1.11.2.5.4.4. as applicable.
- 3.2. Measurement of carbon dioxide emission and fuel consumption during regeneration.
- 3.2.1. Preparation of the vehicle, if required, for the emissions test during a regeneration phase, may be completed using the preparation cycles in appendix 6.
- 3.2.2. The test and vehicle conditions for the Type I test described in Annex I apply before the first valid emission test is carried out.
- 3.2.3. Regeneration shall not occur during the preparation of the vehicle. This may be ensured by one of the following methods:
- 3.2.3.1. A "dummy" regenerating system or partial system may be fitted for the pre-conditioning cycles.
- 3.2.3.2. Any other method agreed between the manufacturer and the type approval authority.
- 3.2.4. A cold-start exhaust emission test including a regeneration process shall be performed according to the applicable Type I operating cycle.
- 3.2.5. If the regeneration process requires more than one operating cycle, subsequent test cycle(s) shall be driven immediately, without switching the engine off, until complete regeneration has been achieved (each cycle shall be completed). The time necessary to set up a new test shall be as short as possible (e.g. particulate matter filter change of the test analysing equipment). The engine shall be switched off during this period.
- 3.2.6. The emission values, including the pollutant and carbon dioxide emission values, and fuel consumption during regeneration (M_{ri}) shall be calculated according to Annex I, and paragraph 3.3. The number of operating cycles (d) measured for complete regeneration shall be recorded.
- 3.3. Calculation of the combined exhaust emissions of a single regenerative system:

Equation Ap13-1

$$M_{si} = \frac{\sum_{j=1}^n M'_{si_j}}{n} \quad n \geq 2$$

Equation Ap13-2:

$$M_{ri} = \frac{\sum_{j=1}^d M'_{rij}}{d}$$

Equation Ap13-3:

$$M_{pi} = \left\{ \frac{M_{si} * D + M_{ri} * d}{D + d} \right\}$$

where for each pollutant (i) considered:

M'_{sij} = mass emissions of pollutant (i), mass emissions of CO₂ in g/km and fuel consumption in l/100 km over one Type I operating cycle without regeneration,

M'_{rij} = mass emissions of pollutant (i), mass emissions of CO₂ in g/km and fuel consumption in l/100 km over one Type I operating cycle during regeneration ((when $n > 1$, the first Type I test is run cold, and subsequent cycles are hot),

M_{si} = mean mass emissions of pollutant (i) in g/km or mean mass emissions of CO₂ in g/km and fuel consumption in l/100 km over one part (i) of the operating cycle without regeneration,

M_{ri} = mean mass emissions of pollutant (i) in g/km or mean mass emissions of CO₂ in g/km and fuel consumption in l/100 km over one part (i) of the operating cycle during regeneration,

M_{pi} = mean mass emissions of pollutant (i) in g/km or mean mass emissions of CO₂ in g/km and fuel consumption in l/100 km,

n = number of test points at which emissions measurements (Type I operating cycles) are made between two cycles where regenerative phases occur, ≥ 2 ,

d = number of operating cycles required for regeneration,

D = number of operating cycles between two cycles where regenerative phases occur.

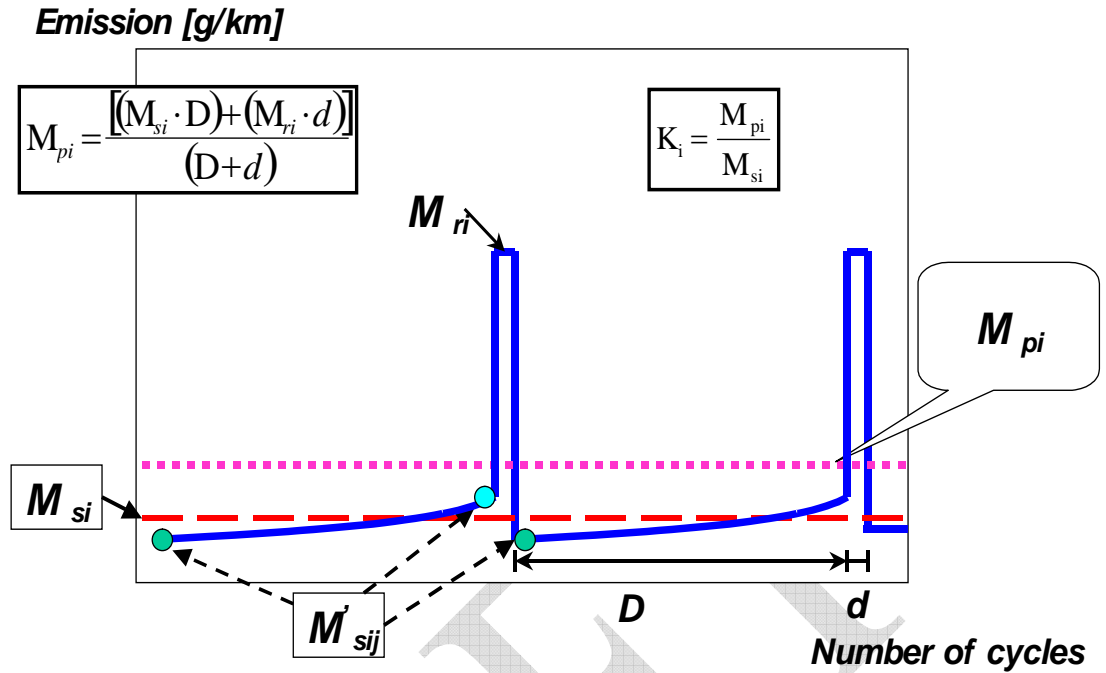


Figure Ap13-1: Exemplary illustration of measurement parameters. Parameters measured during emissions or fuel consumption test during and between cycles where regeneration occurs (schematic example, the emissions during ‘D’ may increase or decrease).

- 3.3.1. Calculation of the regeneration factor K for each pollutant (i), carbon dioxide emission and fuel consumption (i) considered:

Equation Ap13-4:

$$K_i = M_{pi} / M_{si}$$

M_{si} , M_{pi} and K_i results shall be recorded in the test report delivered by the technical service.

K_i may be determined following the completion of a single sequence.

- 3.4. Calculation of combined exhaust emissions, carbon dioxide emission and fuel consumption of multiple periodic regenerating systems.

Equation Ap13-5:

$$M_{sik} = \frac{\sum_{j=1}^{n_k} M'_{sik,j}}{n_k} \quad n_k \geq 2$$

Equation Ap13-6:

$$M_{rik} = \frac{\sum_{j=1}^{d_k} M'_{rik,j}}{d_j}$$

Equation Ap13-7:

$$M_{si} = \frac{\sum_{k=1}^x M_{sik} \cdot D_k}{\sum_{k=1}^x D_k}$$

Equation Ap13-8:

$$M_{ri} = \frac{\sum_{k=1}^x M_{rik} \cdot d_k}{\sum_{k=1}^x d_k}$$

Equation Ap13-9:

$$M_{pi} = \frac{M_{si} \cdot \sum_{k=1}^x D_k + M_{ri} \cdot \sum_{k=1}^x d_k}{\sum_{k=1}^x (D_k + d_k)}$$

Equation Ap13-10:

$$M_{pi} = \frac{\sum_{k=1}^x (M_{sik} \cdot D_k + M_{rik} \cdot d_k)}{\sum_{k=1}^x (D_k + d_k)}$$

Equation Ap13-11:

$$K_i = \frac{M_{pi}}{M_{si}}$$

Where for each pollutant (i) considered:

M'_{sik} = mass emissions of event k of pollutant (i) in g/km, mass emissions of CO₂ in g/km and fuel consumption in l/100 km over one Type I operating cycle without regeneration,

M_{rik} = mass emissions of event k of pollutant (i) in g/km, mass emissions of CO₂ in g/km and fuel consumption in l/100 km over one Type I operating cycle during regeneration (if $d > 1$, the first Type I test is run cold, and subsequent cycles are hot),

$M'_{sik,j}$ = mass emissions of event k of pollutant (i) in g/km, mass emissions of CO₂ in g/km and fuel consumption in l/100 km over one Type I operating cycle without regeneration measured at point j; $1 \leq j \leq n$;

$M'_{rik,j}$ = mass emissions of event k of pollutant (i) in g/km, mass emissions of CO₂ in g/km and fuel consumption in l/100 km over one Type I operating cycle during regeneration (when $j > 1$, the first Type I test is run cold, and subsequent cycles are hot) measured at operating cycle j; $1 \leq j \leq d$;

M_{si} = mass emission of all events k of pollutant (i) in g/km, of CO₂ in g/km and fuel consumption in l/100 km without regeneration,

M_{ri} = mass emission of all events k of pollutant (i) in g/km, of CO₂ in g/km and fuel consumption in l/100 km during regeneration,

M_{pi} = mass emission of all events k of pollutant (i) in g/km, of CO₂ in g/km and fuel consumption in l/100 km,

n_k = number of test points of event k at which emissions measurements (Type I operating cycles) are made between two cycles where regenerative phases occur,

d_k = number of operating cycles of event k required for regeneration,

D_k = number of operating cycles of event k between two cycles where regenerative phases occur.

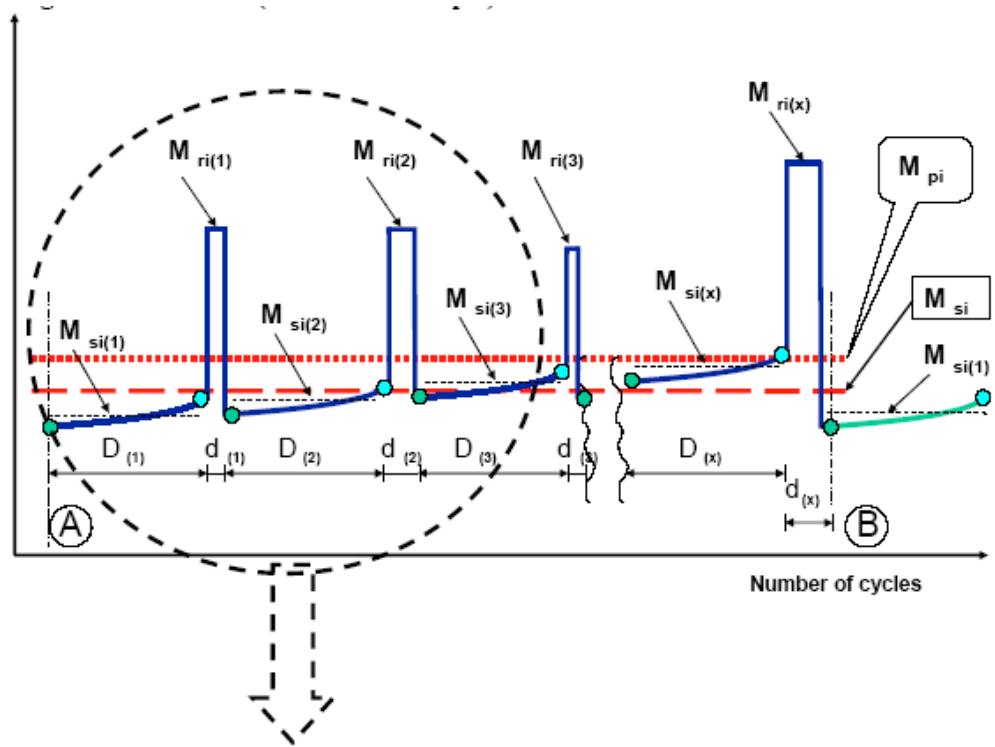


Figure Ap13-2: parameters measured during emissions test during and between cycles where regeneration occurs (schematic example)

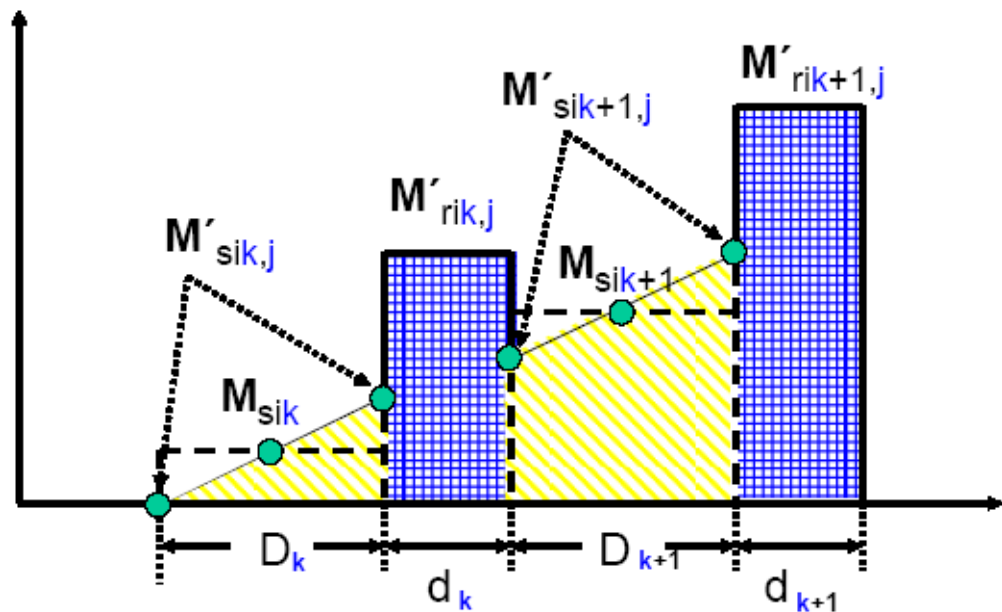


Figure Ap13-3: Parameters measured during emissions test during and between cycles where regeneration occurs (schematic example)

For application of a simple and realistic case, the following description gives a detailed explanation of the schematic example shown in Figure Ap13-3 above:

1. "DPF": regenerative, equidistant events, similar emissions (± 15 per cent) from event to event

Equation Ap13-12:

$$D_k = D_{k+1} = D_1$$

Equation Ap13-13:

$$d_k = d_{k+1} = d_1$$

Equation Ap13-14:

$$M_{rik} - M_{sik} = M_{rik+1} - M_{sik+1}$$

$$n_k = n$$

2. 'DeNO_x': the desulphurisation (SO₂ removal) event is initiated before an influence of sulphur on emissions is detectable (±15 per cent of measured emissions) and in this example for exothermic reason together with the last DPF regeneration event performed.

Equation Ap13-15

$$M'_{sik,j=1} = \text{constant} \rightarrow M_{sik} = M_{sik+1} = M_{si2}$$

$$M_{rik} = M_{rik+1} = M_{ri2}$$

For SO₂ removal event: $M_{ri2}, M_{si2}, d_2, D_2, n_2 = 1$

3. Complete system (DPF + DeNO_x):

Equation Ap13-16:

$$M_{si} = \frac{n \cdot M_{si1} \cdot D_1 + M_{si2} \cdot D_2}{n \cdot (D_1 + d_1) + D_2 + d_2}$$

Equation Ap13-17:

$$M_{ri} = \frac{n \cdot M_{ri1} \cdot d_1 + M_{ri2} \cdot d_2}{n \cdot (D_1 + d_1) + D_2 + d_2}$$

Equation Ap13-18:

$$M_{pi} = \frac{M_{si} + M_{ri}}{n \cdot (D_1 + d_1) + D_2 + d_2} = \frac{n \cdot (M_{si1} \cdot D_1 + M_{ri1} \cdot d_1) + M_{si2} \cdot D_2 + M_{ri2} \cdot d_2}{n \cdot (D_1 + d_1) + D_2 + d_2}$$

The calculation of the factor (K_i) for multiple periodic regenerating systems is only possible after a certain number of regeneration phases for each system. After performing the complete procedure (A to B, see Figure Ap13-2), the original starting conditions A should be reached again.

3.4.1. Extension of approval for a multiple periodic regeneration system

3.4.1.1. If the technical parameter(s) and or the regeneration strategy of a multiple

regeneration system for all events within this combined system are changed, the complete procedure including all regenerative devices should be performed by measurements to update the multiple K_i – factor

3.4.1.2. If a single device of the multiple regeneration system changed only in strategy parameters (i.e. such as "D" and/or "d" for DPF) and the manufacturer could present technical feasible data and information to the technical service that:

- (a) there is no detectable interaction to the other device(s) of the system, and
- (b) the important parameters (i.e. construction, working principle, volume, location etc.) are identical;

The necessary update procedure for k_i could be simplified.

As agreed between the manufacturer and the technical service in such a case only a single event of sampling/storage and regeneration should be performed and the test results (" M_{si} ", " M_{ri} ") in combination with the changed parameters ("D" and/or "d") could be introduced in the relevant formula(s) to update the multiple K_i - factor in a mathematical way under substitution of the existing basis K_i - factor formula(s).

ANNEX II

Test type II requirements: tailpipe emissions at (increased idle) / free acceleration test

1. Introduction

In order to satisfy the emission measurement requirements performed during roadworthiness testing this Annex describes the procedure for Type II testing defined in Article 6. The purpose of the requirements of this Annex is to demonstrate that the approved vehicle is capable of meeting the requirements of Directive 2009/40/EC¹⁴ amended by Directive 2010/40/EC¹⁵ of the Council and of the European Parliament.

2. Scope

2.1. During the type-approval process it shall be demonstrated to the technical service and approval authority that the L-category vehicles in the scope of Regulation (EU) No [xxx/2013] comply with the test type II requirements.

2.2. Vehicles equipped with a propulsion of which a positive ignition combustion engine makes part of shall be only subject to a Type II emission test.

2.3. Vehicles equipped with a propulsion of which a compression ignition combustion engine make part of shall be only subject to a Type II free acceleration emission test.

3. General conditions of Type II emission testing.

3.1. A visual inspection of any emission control equipment shall be conducted prior to start of the Type II emission test in order to check that the vehicle is complete, in a satisfactory condition and that there are no leaks present in the fuel, air supply or exhaust systems.

3.2. The fuel used to conduct the Type II test shall be the reference fuel, specifications for which are given in Annex I, Appendix 2.

3.2.1. Bi-fuel vehicles shall be tested with the reference fuel(s) used for the Type I test.

3.2.2. Hybrid electric vehicles shall be tested according to the requirements of Annex I, Appendix 11, paragraph 4.

3.3. During the test, the environmental temperature shall be between 293 and 303 K (20 and 30 °C).

3.4. In the case of vehicles with manually-operated or semi-automatic-shift gearboxes, the test Type II test shall be carried out with the gear lever in the "neutral" position and with the clutch engaged.

3.5. In the case of vehicles with automatic-shift gearboxes, the idle Type II test shall be carried out with the gear selector in either the "neutral" or the "parking" position. In

¹⁴ OJ L 141, 6.6.2009, p. 12.

¹⁵ OJ L xxx, x.x.2010, p. x.

case in addition an automatic clutch is fitted, the driven axle shall be lifted up to the point that the wheels can freely rotate.

- 3.6. The Type II emission test shall be conducted immediately after the Type I emission test. In any case the engine shall be warmed up until all temperatures of cooling and lubrication means and the pressure of lubrication means have reached equilibrium and are at warm, operation temperature.
- 3.7. The exhaust outlets shall be provided with an air-tight extension, so that the sample probe used to collect exhaust gases may be inserted into the exhaust outlet at least 60 cm, without increasing the back pressure of more than 125 mm H₂O, and without disturbance of the vehicle running. The shape of this extension shall be chosen in order to avoid, at the location of the sample probe, any appreciable dilution of exhaust gases in the air. Where a L-category vehicle is equipped with an exhaust system having multiple outlets, either these shall be joined to a common pipe or the content of carbon monoxide shall be collected from each of them, the result of the measurement being reached from the arithmetical average of these contents.
- 3.8. The emission test equipment and analyzers to perform the Type II testing shall be regularly calibrated and maintained.
- 3.9. The vehicle(s) shall be tested with the fuel consuming engine running.
- 3.9.1. The manufacturer shall provide a Type II test 'service mode' that makes it possible to inspect the vehicle for roadworthiness tests on a running fuel consuming engine in order to determine its performance in relation to the data collected. If this inspection requires a special procedure, this shall be detailed in the service manual (or equivalent media). This special procedure shall not require the use of special equipment other than that provided with the vehicle.

4. Test type II, description of test procedure to measure tailpipe emissions at (increased) idle / free acceleration test

4.1 Components for adjusting the idling speed.

4.1.1. Definition

For the purposes of this Regulation, 'components for adjusting the idling speed' means controls for changing the idling conditions of the engine which may be easily operated by a mechanic using only the tools described in paragraph 4.1.2. below. In particular, devices for calibrating fuel and air flows are not considered as adjustment components if their setting requires the removal of the set-stops, an operation which cannot normally be performed except by a professional mechanic.

4.1.2. Tools which may be used to control components for adjusting the idling speed: screwdrivers (ordinary or cross-headed), spanners (ring, open-end or adjustable), pliers, Allen keys, generic scan tool.

4.2 Determination of measurement points and Type II idle test pass/fail criteria

4.2.1. A measurement at the setting in accordance with the conditions fixed by the

manufacturer is performed first;

- 4.2.2. For each adjustment component with a continuous variation, a sufficient number of characteristic positions shall be determined. The test has to be carried out with the engine at normal idling speed and at 'high idle' speed. High idle engine speed is defined by the manufacturer but it has to be higher than $2,000 \text{ min}^{-1}$.
- 4.2.3. The measurement of the carbon-monoxide content of exhaust gases shall be carried out for all the possible positions of the adjustment components, but for components with a continuous variation only the positions defined in paragraph 4.2.2. above shall be adopted.
- 4.2.4. The Type II idle test shall be considered passed if one or both of the two following conditions is met:
- 4.2.4.1. None of the values measured in accordance with paragraph 4.2.3. above exceed the limit values laid down in Directive 2009/40/EC¹⁶ as amended by Directive 2010/40/EC¹⁷, Annex II, paragraph 8.4.;
- 4.2.4.2. The maximum content obtained by continuously varying one of the adjustment components while the other components are kept stable does not exceed the limit value referred to in paragraph 4.2.4.1., this condition being met for the various combinations of adjustment components other than the one which was varied continuously.
- 4.2.5. The possible positions of the adjustment components shall be limited:
- 4.2.5.1. by the larger of the following two values: the lowest idling speed which the engine can reach; the speed recommended by the manufacturer, minus 100 revolutions per minute or;
- 4.2.5.2. by the smallest of the following three values:
- (a) the highest speed the engine can attain by activation of the idling speed components;
 - (b) the speed recommended by the manufacturer, plus 250 revolutions per minute;
 - (c) the cut-in speed of automatic clutches.
- 4.2.6. Settings incompatible with correct running of the engine shall not be adopted as measurement settings. In particular, when the engine is equipped with several carburettors all the carburettors shall have the same setting.
- 4.3. The following parameters shall be measured and recorded at normal idling speed and at high idle speed:
- (a) the carbon monoxide (CO) content by volume of the exhaust gases emitted (in

¹⁶ OJ L 141, 6.6.2009, p. 12.

¹⁷ OJ L xxx, x.x.2010, p. x.

vol%);

(b) the carbon dioxide (CO₂) content by volume of the exhaust gases emitted (in vol%);

(c) hydrocarbons (THC) in ppm;

(d) the oxygen (O₂) content by volume of the exhaust gases emitted (in vol%);

(e) the engine speed during the test, including any tolerances;

(f) the engine oil temperature at the time of the test. Alternatively for liquid cooled engines the coolant temperature shall be acceptable.

5. CO concentration calculation in the Type II idle test.

5.1. The concentration in CO (C_{CO}) and CO₂ (C_{CO2}) shall be determined from the measuring instrument readings or recordings, by use of appropriate calibration curves.

5.2. The corrected concentration for carbon monoxide is:

Equation 2-1:

$$C_{COcorr} = 15 \times \frac{C_{CO}}{C_{CO} + C_{CO_2}}$$

5.3. The concentration in C_{CO}, refer to paragraph 5.1., shall be measured according to the formulae contained in paragraph 5.2. need not be corrected if the total of the concentrations measured (C_{CO} + C_{CO2}) is at least:

(a) for petrol (E5): 15 per cent;

(b) for LPG: 13.5 per cent;

(c) for NG/biomethane: 11.5 per cent.

6 Test type II, free acceleration test procedure

6.1. The combustion engine and any turbocharger fitted, shall be running at idle before the start of each free acceleration test cycle.

6.2. To initiate each free acceleration cycle, the throttle pedal shall be fully depressed quickly and continuously (in less than one second) but not violently, so as to obtain maximum delivery from the fuel pump.

6.3. During each free acceleration cycle, the engine shall reach cut-off speed or, for vehicles with automatic transmissions, the speed specified by the manufacturer or if this data is not available then two-thirds of the cut-off speed, before the throttle is released. This could be checked, for instance, by monitoring engine speed or by allowing a sufficient time to elapse between initial throttle depression and release, which should be at least two seconds.

- 6.4. For vehicles equipped with CVT and automatic clutch it is permissible to lift the driven wheels from the ground.

For engines having safety limits in the engine control (e.g. max 1500 rpm without running wheels or without gear): this maximum engine speed shall be reached.

- 6.5. The average concentration level of the particulate matter (in m^{-1}) in the exhaust flow (opacity) shall be measured during five free acceleration tests.

7 Test type II, free acceleration test results and limits

- 7.1. The measured level of concentration shall not exceed the limit values of the coefficient of absorption laid down in Directive 96/96/EC as amended by Directive 2009/40/EC, Annex II, paragraph 8.2.2 (d), limit values for light duty vehicles equipped with naturally aspirated / turbo charged compression ignition engines.

DRAFT

ANNEX III

Test type III requirements: emissions of crankcase gases

1 Introduction

This Annex describes the procedure for the Type III test defined in Article 7 of this Regulation

2. General provisions

2.1. The manufacturer shall prove to the approval authority by providing technical details and drawings of the engine design that the construction of the engine(s) does not allow any fuel, lubrication oil or crankcase gasses to escape to the atmosphere from the crankcase gas ventilation system.

2.2. In the following case the technical service and approval authority shall request the manufacturer to execute the type III test:

2.2.1. For new vehicle types; in this case a parent vehicle, representative for the crankcase concept of the approved, ensuring that crankcase emissions shall not be discharged directly into the ambient atmosphere, may be selected at the choice of the manufacturer and to the satisfaction of the technical service and approval authority to demonstrate passing of the type III test;

2.3. For new or existing vehicle types: in case there is no doubt that the technical qualities, configuration, characteristics and rationale as well as the relevant technical and engine mechanisation drawings provided by the manufacturer are conforming to and representative of the specifications and thus performance of an initially tested parent vehicle, the test may be waived.

2.4. If the technical service and approval authority decide to request the manufacturer to conduct the type III test based on the criterion set-out in paragraph 2.2. the test shall be conducted according to paragraph 4.1 or 4.2. at the choice of the manufacturer.

2.5. Variants and versions under a vehicle type of which the manufacturer can proof to the approval authority that the type III test has been conducted on a representative parent vehicle and which passed the test previously shall be exempted from type III demonstration testing. In this case a review of the engine construction drawings and a visual inspection of the variant or version shall be sufficient to pass the type III test. The manufacturer shall attach a copy of the test report of the parent vehicle with positive test result of the type III test to the information folder referred to in Article 27 of Regulation (EU) No [xxx/2013]

2.6 L-category vehicles with the following combustion engine characteristics may be exempted from Type III testing at the request of the manufacturer:

2.6.1. L-category vehicles equipped with a two-stroke engine containing a scavenging port between the crank case and the cylinder(s);

3. Test Conditions

- 3.1. The Type III test shall be carried out on an L-category test vehicle which has been subjected to the Type I set-out in Annex I and the Type II testing set-out in Annex II.
- 3.2. The L-category vehicles tested shall include (a) leak-proof engine(s) other than those so designed that even a slight leak may cause unacceptable operating faults.

4. Test methods

- 4.1. The type III test shall be conducted according to the following test procedure:
- 4.1.1. Idling shall be regulated in conformity with the manufacturer's recommendations.
- 4.1.2. The measurement shall be performed in the following sets of conditions of engine operation.

Condition Number	Vehicle speed (km/h)
1	Idling
2	Highest of:
3	(a) 50 ±2 (in 3rd gear or "drive") or (b) if (a) not achievable 50% of max design vehicle speed..

Condition Number	Power absorbed by the brake
1	Nil
2	That corresponding to the setting for Type I test at 50 km/h or if not achievable Type I test at 50% of max design vehicle speed.
3	That for conditions No. 2, multiplied by a factor of 1.7

Table 3-1: idle operation or steady state vehicle test speeds and power absorbed by the chassis dynamometer when performing the test Type III test

- 4.1.3. For all operation conditions listed in paragraph 4.1.2. the reliable functioning of the crankcase ventilation system shall be checked.
- 4.1.4. Method of verification of the crankcase ventilation system
- 4.1.4.1. The engine's apertures shall be left as found.
- 4.1.4.2. The pressure in the crankcase shall be measured at an appropriate location. It may be measured at the dip-stick hole with an inclined-tube manometer.
- 4.1.4.3. The vehicle shall be deemed satisfactory if, in every condition of measurement defined in paragraph 4.1.2., the pressure measured in the crankcase does not exceed the atmospheric pressure prevailing at the time of measurement.
- 4.1.5. For the test by the method described above, the pressure in the intake manifold shall be measured to within ±1 kPa.

- 4.1.6. The vehicle speed as indicated at the dynamometer shall be measured to within ± 2 km/h.
- 4.1.7. The pressures measured in the crankcase as well as the ambient pressure shall be measured to within ± 0.1 kPa and shall be sampled with a frequency ≥ 1 Hz within a time period of ≥ 60 s when the conditions set-out in paragraph 4.1.2. are continuously operated and stabilised.
- 4.2. If in one or more of the conditions of measurement defined in paragraph 4.1.2., the highest pressure value measured in the crankcase within the time period set-out in paragraph 4.1.7. exceeds the atmospheric pressure, an additional test as defined in paragraph 4.2.1. or 4.2.2. shall be performed at the choice of the manufacturer and to the satisfaction of the approval authority.
- 4.2.1. Additional type III test method (No 1)
- 4.2.1.1. The engine's apertures shall be left as found.
- 4.2.1.2. A flexible bag impervious to crankcase gases and having a capacity of approximately five litres shall be connected to the dipstick hole. The bag shall be empty before each measurement.
- 4.2.1.3. The bag shall be closed before each measurement. It shall be opened to the crankcase for five minutes for each condition of measurement prescribed in paragraph 4.1.2.
- 4.2.1.4. The vehicle shall be deemed satisfactory if, in every condition of measurement defined in paragraphs 4.1.2. and 4.2.1.3. above, no visible inflation of the bag occurs.
- 4.2.2. If the structural layout of the engine is such that the test cannot be performed by the methods described above in paragraph 4.2.1., the measurements shall be effected by that method modified as follows:
- 4.2.2.1. Before the test, all apertures other than that required for the recovery of the gases shall be closed;
- 4.2.2.2. The bag shall be placed on a suitable take-off which does not introduce any additional loss of pressure and is installed on the recycling circuit of the device directly at the engine-connection aperture.
- 4.2.2.3.

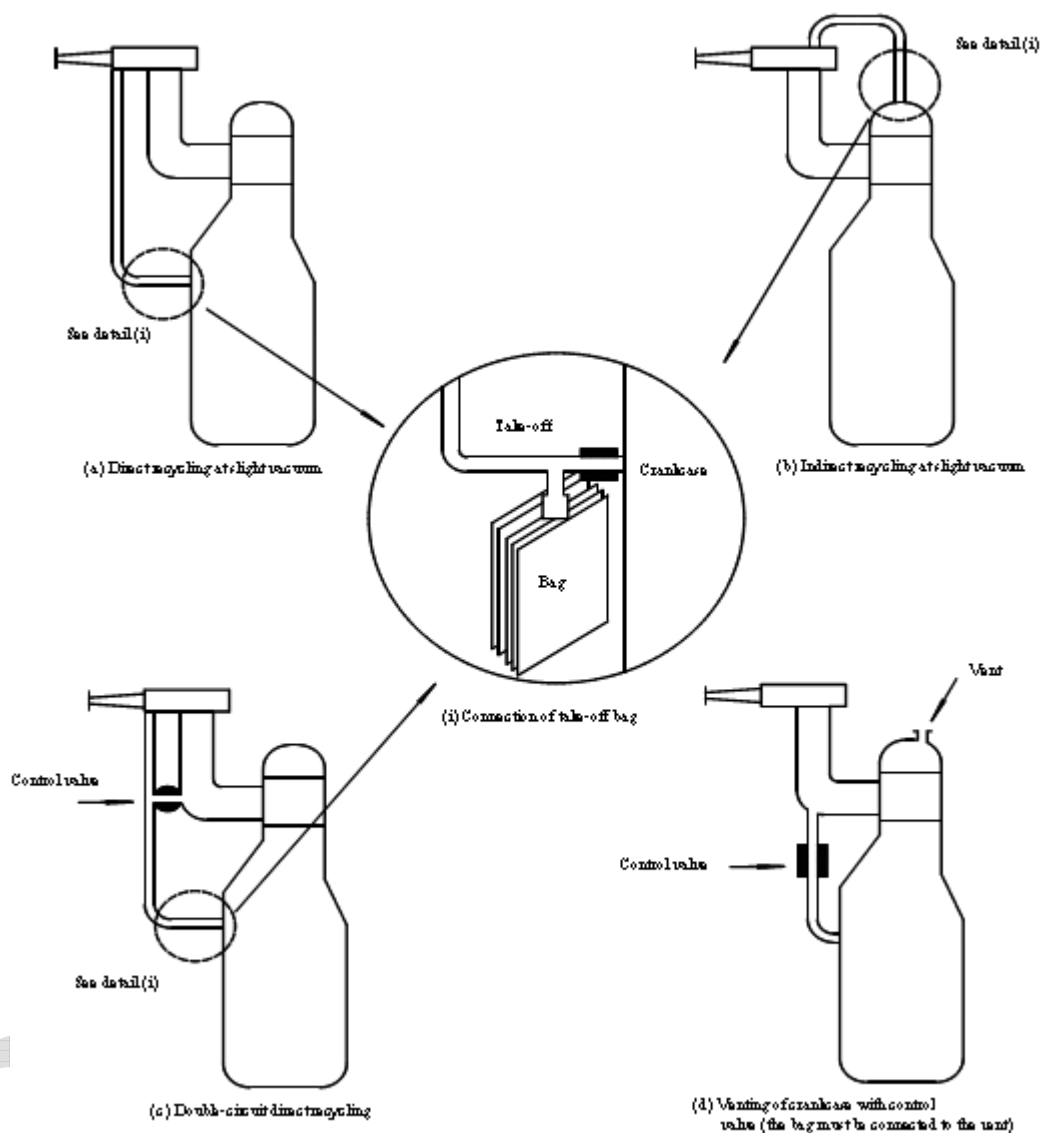


Figure 3-1: various test set-ups for type III test method No 1

4.2.3. Alternative additional type III test method (No 2)

4.2.3.1. The manufacturer shall prove to the approval authority that the crankcase ventilation system of the engine is leak tight by performing a leak check with compressed air inducing an overpressure in the crankcase ventilation system.

4.2.3.2. The vehicle's engine may be installed on a test rig and the intake and exhaust manifolds may be removed and replaced with plugs that hermetically seal the air intake and exhaust evacuation openings of the engine. Alternatively the intake and exhaust systems may be plugged on the locations at the choice of the manufacturer and to the satisfaction of the technical service and approval authority on a representative test vehicle.

- 4.2.3.3. The crankshaft may be rotated to optimise the position of the pistons, minimising pressure loss to the combustion chamber(s).
- 4.2.3.4. The crankcase shall be pressurised with compressed air to the maximum recorded peak pressure as monitored during the three test conditions specified in paragraph 4.1.2. and at least to a pressure of 50 kPa over ambient pressure or to a higher pressure at the choice of the manufacturer. The pressure in the crankcase system shall be measured at an appropriate location other than the opening to the crankcase system used to pressurise the crankcase. When present, the oil fill cap, drain plug, level check port and dipstick cap may be modified to facilitate the pressurisation and pressure measurement, however, all seals between the screw-thread, gaskets, O-rings and other (pressure) seals of the engine shall remain intact and representative for the engine type.
- 4.2.3.5. The compressed air source inducing the overpressure shall be closed and the pressure in the crankcase shall be monitored during 900 seconds. The test pass condition shall be: crankcase pressure ≥ 0.95 times the initial overpressure during the 900 seconds after closing the compressed air source.

ANNEX IV

Test type IV requirements: evaporative emissions

Appendix Number	Appendix title	Page #
1	Fuel tank permeability test procedure	.
2	Fuel system permeation test procedure	
3	SHED test procedure	
3.1	Preconditioning requirements for a hybrid application or an application equipped with a stop-start system before start of the SHED test	
4	Calibration of equipment for evaporative emission testing	

DRAFT

1. Introduction evaporative emissions

- 1.1. The test procedure in appendix 1 sets-out the permeability test procedure of a fuel tank and shall as well be used as preconditioning test cycle for fuel storage testing set-out in Annex VII of Regulation (EU) No [xxxx/2013].
- 1.2. The evaporative emission test procedures laid down in appendices 2 and 3 set-out methods for the determination of the loss of hydrocarbons by evaporation from the fuel systems of vehicles equipped with a propulsion that use volatile, liquid fuel. Appendix 4 sets-out the calibration procedure for evaporative emission test equipment.

2. General requirements.

- 2.1. The vehicle manufacturer shall prove to the technical service and to the satisfaction of the approval authority that the fuel tank and fuelling system are leak tight.
- 2.2. The fuelling system tightness shall comply with the requirements laid down in the Regulation on vehicle construction (EU) No [xxxx/2013].
- 2.3. All L-vehicle (sub-)categories equipped with a non-metallic fuel storage shall be tested according to the permeability test procedure laid down in appendix 1. At the request of the manufacturer the fuel permeation test set-out in appendix 2 or the SHED test set-out in appendix 3 may replace the evaporative part of the permeability test set-out in appendix 1.
- 2.4. L-vehicle (sub-) categories L3e, L4e, L5e-A, L6e-A and L7e-A shall be tested according to the SHED test procedure laid down in appendix 3.
- 2.5. The fuel permeation test procedure set-out in appendix 2 shall be subject to the general assessment in the environmental effect study set-out in paragraph 5(b) of Article 23 of Regulation (EU) No [xxx/2013]. This study shall confirm whether L-vehicle (sub-) categories L1e-A, L1e-B, L2e, L5e-B, L6e-B, L7e-B and L7e-C shall be tested either according to the permeation test procedure set-out in appendix 2 or according to the SHED test procedure set-out in appendix 3.
- 2.6. If an L1e-A, L1e-B, L2e, L5e-B, L6e-B, L7e-B and L7e-C vehicle will be subject to a SHED test procedure set-out in Annex VI(C) of Regulation (EU) No [xxx/2013] and in appendix 3, it shall be exempted from the fuel permeation test procedure set-out in appendix 2 and vice versa.

Appendix 1

Test type IV requirements; evaporative emissions, fuel tank permeability test procedure

1 Scope.

- 1.1. This requirement shall apply to all L-category vehicles equipped with a non-metallic fuel tank to store liquid, volatile fuel as is applicable for vehicles equipped with a positive ignition combustion engine.
- 1.2. Vehicles complying with the requirements set-out in appendix 2 or 3 or vehicles equipped with a compression ignition engine using low volatile fuel shall comply with the requirements of this appendix only as preconditioning procedure for fuel storage testing set-out in paragraphs 3.3. to 3.7.5.1. of Annex IX of Regulation (EU) No [xxxx/2013]. The fuel tanks on those vehicles are exempted from the evaporative requirements set-out in paragraphs 2.1.5, 2.1.6, 2.3. and 2.4.

2. Fuel tank permeability test.

2.1. Test method.

2.1.1. Test temperature

The fuel tank shall be tested at a temperature of $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$.

2.1.2. Test fuel

The test fuel to be used shall be the reference fuel set-out in appendix 2 of Annex I. If this test procedure is only used as preconditioning for subsequent fuel storage testing set-out in Annex VII of Regulation (EU) No [xxxx/2013] a commercial premium-grade fuel may be used at the choice of the manufacturer and to the satisfaction of the approval authority.

- 2.1.3. The tank is filled up to 50% of its total rated capacity with the test fuel and allowed to rest in the ambient air at a temperature of $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ until there is a constant weight loss. That period shall be at least four weeks (pre-storage period). The tank is emptied and then refilled to 50% of its rated capacity with test fuel.

- 2.1.4. The tank is stored under the stabilizing conditions at a temperature of $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ until its contents are at the test temperature. The tank is then sealed. The pressure rise in the tank during the test may be compensated.

- 2.1.5. The weight loss due to diffusion shall be measured during the eight-week test. During that eight-week test period a maximum quantity of 20 000 mg may escape from the fuel tank, on average, every 24 hours.

- 2.1.6. If the diffusion losses are greater, the fuel loss shall also be determined at a test temperature of $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$, all other conditions being maintained (pre-storage at $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$). The loss determined under those conditions shall not exceed 10 000 mg per 24 hours.

- 2.2. All fuel tanks that will undergo this test procedure as preconditioning for testing in accordance with paragraphs 3.3. to 3.7.5.1. of Annex VII of Regulation (EU) No [xxxx/2013], shall be duly identified.
- 2.3. The permeability evaporation test results shall not be averaged between the different tested fuel tanks, but the worst-case diffusion loss rate observed of any one of those fuel tanks shall be taken and compared against the maximum permitted loss rate set-out in paragraph 3.1.3 and, if applicable, in paragraph 3.1.4.
- 2.4. Fuel tank permeability test conducted with internal pressure compensation.

If the fuel tank permeability test is conducted with internal pressure compensation, which shall be noted in the test report, the fuel loss resulting from the pressure compensation shall be taken into account when the diffusion loss is calculated.

DRAFT

Appendix 2

Test type IV requirements; evaporative emissions, fuel system permeation test procedure

1 Scope and test limits.

- 1.1. As of the date of first application laid down in Annex IV of Regulation (EU) No [xxx/2013] , fuel system permeation shall be tested according to the test procedure below. This base requirement shall apply to all L-category vehicles equipped with a fuel tank to store liquid, high volatile fuel as is applicable for a vehicle equipped with a positive ignition combustion engine, according to Annex V (B) to Regulation (EU) No [xxx/2013] and pending the results of the environmental effect study laid down in Article 23 of Regulation (EU) No [xxx/2013] ,
- 1.2. For the purposes of the requirements of this Appendix the minimum fuel system components in the scope of this sub-appendix consist of a fuel storage tank and fuel line sub-assembly. Other components that make part of the fuel supply, metering and control system are not subject to the requirements from this Appendix.

2. **Description of the fuel tank permeation test**

2.1 Measure permeation emissions by weighing a sealed fuel tank before and after a temperature-controlled soak according to the following flow charts.

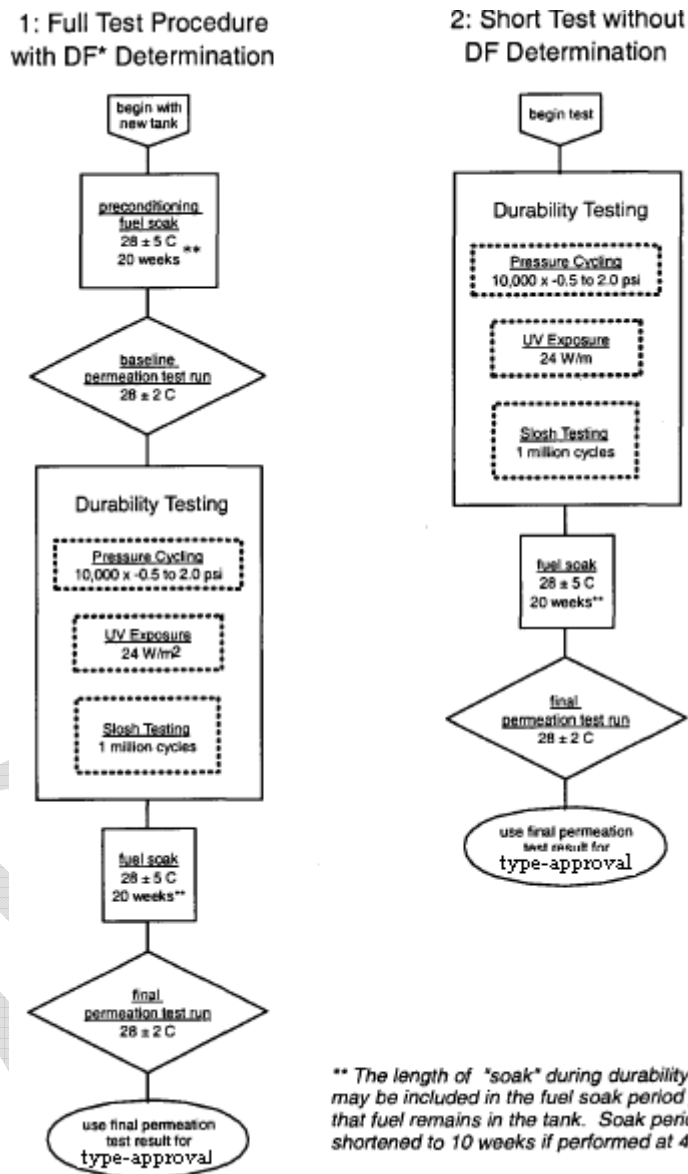


Figure Ap3-1: Fuel tank permeation full and short tests

3. **Preconditioning fuel soak for the fuel tank permeation test.**

To precondition the fuel tank in the fuel tank permeation test, the following five steps shall be followed:

3.1. The tank shall be filled with reference fuel (E5) as specified in Annex I, appendix 2 and sealed. The filled tank shall be soaked at an ambient temperature of 28 ± 5 °C for 20 weeks or at 43C ± 5°C during 10 weeks. Alternatively a shorter period of time at a higher temperature may be used as soak time if the manufacturer can prove to the

approval authority that the hydrocarbon permeation rate has stabilized.

- 3.2. The fuel tank's internal surface area shall be determined in square-meters accurate to at least three significant figures. The manufacturer may use less accurate estimates of the surface area if it is ensured that the surface area will not be overestimated.
- 3.3. The fuel tank shall be filled with the reference fuel (E5) to its nominal capacity.
- 3.4. The tank and fuel shall equilibrate to 28 ± 2 °C or at 43 ± 5 °C in case of the alternative short test.
- 3.5. The fuel tank shall be sealed using fuel caps and other fittings (excluding petcocks) that can be used to seal openings in a production fuel tank. In cases where openings are not normally sealed on the fuel tank (such as hose-connection fittings and vents in fuel caps), these openings may be sealed using non-permeable fittings such as metal or fluoropolymer plugs.

4. Fuel tank permeation test procedure

To run the test, the following steps shall be taken for a tank that was preconditioned as specified in paragraph 3 of this sub-appendix.

- 4.1. Weigh the sealed fuel tank and record the weight in mg. This measurement shall be taken within 8 hours of filling of the tank with test fuel.
- 4.2. The tank shall be placed within a ventilated, temperature-controlled room or enclosure.
- 4.3. The test room or enclosure shall be closed and sealed and the test time shall be recorded.
- 4.4. The test room or enclosure temperature shall be continuously maintained at 28 ± 2 °C for a timeframe of 14 days. This temperature shall be continuously monitored and recorded.

5. Fuel tank permeation test result calculation

- 5.1. At the end of the soak period, the sealed fuel tank shall be weighted and recorded in mg. Unless the same fuel is used in the preconditioning fuel soak and the permeation test run, weight measurements shall be recorded on five separate days per week of testing. The test is void if a linear plot of tank weight vs. test days for the full soak period for permeation testing yields a linear regression correlation coefficient $r^2 < 0.8$.
- 5.2. The weight of the filled fuel tank at the end of the test shall be subtracted from the weight of the filled fuel tank at the beginning of the test.
- 5.3. The difference in mass shall be divided by the internal surface area of the fuel tank.
- 5.4. The result of the calculation under paragraph 5.3. in mg/m^2 value shall then be divided by the number of test days to calculate the $\text{mg/m}^2/\text{day}$ emission rate and shall be rounded to the same number of decimal places as the emission standard laid down

in Annex VI (C2) to Regulation (EU) No [xxx/2013].

5.5. In cases where permeation rates during a soak period of 14 days are considered to be not long enough to be able to measure significant weight changes by the manufacturer, the soak period may be extended with a maximum of 14 additional days. In this case the test steps in paragraphs 4.5 to 4.8 to determine the weight change for the full 28 days shall be repeated.

5.6. Determination of the deterioration factor when applying the full permeation test procedure

The deterioration factor (DF) shall be determined from the following alternatives at the choice of the manufacturer:

5.6.1. the ratio between the final permeation and baseline test runs;

5.6.2. the fixed DF for THC laid down in Annex VII(B) to Regulation (EU) No [xxx/2013].

5.7. Determination of the final tank permeation test results:

5.7.1. Full test procedure

To determine the permeation test result the deterioration factor determined in paragraph 5.6. shall be multiplied with the measured permeation test result determined in paragraph 5.4. The product of multiplication shall be lower than or equal to the applicable permeation test limit set-out in Annex VI (C2) to Regulation (EU) No [xxx/2013].

5.7.2. Accelerated (short) test procedure

The measured permeation test result determined in paragraph 5.4 shall be lower than or equal to the applicable permeation test limit set-out in Annex VI (C2) to Regulation (EU) No [xxx/2013].

6. Fuel tank durability testing.

6.1. A separate durability demonstration for each substantially different combination of treatment approaches and tank materials shall be performed by taking the following steps:

6.1.1. Pressure cycling.

A pressure test shall be performed by sealing the tank and cycling it between 115.1 kPa absolute pressure(+2.0 psig) and 97.9 kPa absolute pressure (-0.5 psig) and back to 115.1 kPa absolute pressure(+2.0 psig) for 10 000 cycles at a rate 60 seconds per cycle.

6.1.2. UV exposure.

A sunlight-exposure test shall be performed by exposing the tank to an ultraviolet light of at least 24 W/m^2 ($0.40 \text{ W-hr/m}^2 / \text{min}$) on the tank surface for at least 450 hours. Alternatively, the fuel tank may be exposed to direct natural sunlight for an

equivalent period of time, as long as it is ensured that the fuel tank is exposed to at least 450 daylight hours.

6.1.3. Slosh testing.

A slosh test shall be performed by filling the tank to 40 percent of its capacity with the reference fuel E5 and rocking the fuel tank assembly at a rate of 15 cycles per minute until one million total cycles are reached. An angle deviation of $+15^{\circ}$ to -15° from level shall be used at an ambient temperature of $28^{\circ}\text{C} \pm 5^{\circ}\text{C}$.

6.2. Final fuel tank durability test results.

Following the durability testing, the fuel tank shall be soaked according to the requirements from chapter 3 to ensure that the permeation rate is stable. The period of slosh testing and the period of ultraviolet testing may be considered to be part of this soak, provided that the soak begins immediately after the slosh testing. To determine the final permeation rate, the fuel tank shall be drained and refilled with fresh test fuel (E5). The permeation test run laid down in paragraph 4 shall be repeated immediately after this soak period. The same test fuel shall be used for this permeation test run as for the permeation test run performed prior to the durability testing. The final test results shall be calculated according to paragraph 5.

6.3. The manufacturer may request to exclude any of the durability tests if it can be clearly demonstrated to the approval authorities that it does not affect the emissions from the fuel tank.

6.4. The length of "soak" during durability testing may be included in the fuel soak period provided that fuel remains in the tank. Soak periods may be shortened to 10 weeks if performed at $43\text{C} \pm 5^{\circ}\text{C}$

7. Fuel line assembly test requirements

7.1. Fuel line assembly permeation physical testing procedure

The manufacturer shall conduct a fuel line assembly test, including the fuel hose clamps and the material to which the fuel lines are connected on both sides, by performing a physical test according to the requirements from:

(a) paragraphs 6.2 to 6.4. The piping material to which the fuel lines are connected at both sides of the fuel line shall be plugged with impermeable material. The word "fuel tank" in paragraphs 6.2 to 6.4 shall be replaced with "fuel line assembly". The fuel hose clamps shall be tightened with the specified torque as used in series production;

(b) the manufacturer may use a proprietary test procedure if it can be demonstrated to the approval authority that the severity of this proprietary test is equivalent to test method (a).

7.2. Fuel line assembly permeation test limits in case of physical testing

The test limits for fuel tubing in Annex VI (C2) to Regulation (EU) No [xxx/2013] shall be met when executing on the test procedures laid down in paragraph 7.1.

7.3. Physical testing of fuel line assembly permeation is not required if:

- (a) the fuel lines meet the R11–A or R12 permeation specifications from SAE J30, or
- (b) non-metallic fuel lines meet the Category 1 specifications for permeation in SAE J2260.
- (c) the manufacturer can demonstrate to the approval authority that the tightness between the fuel tank and other fuel system components are leak tight by a robust design.

If the fuel hoses fitted on the vehicle meet all these three specifications the fuel tubing test limit requirements from Annex VI (C2) to Regulation (EU) No [xxx/2013] may be considered as fulfilled.

DRAFT

Appendix 3

Test type IV requirements; evaporative emissions, SHED¹⁸ test procedure

1 Scope

- 1.1 As of the application date laid down in Regulation (EU) No [xxx/2013] , Annex IV the evaporative emissions of subcategories L3e, L4e (only the base, original L3e vehicle of the motorcycle with side car), L5e-A, L6e-A and L7e-A vehicles shall be tested in the type-approval procedure with the following SHED test procedure.

2. Description of SHED test

The evaporative emission SHED test (Figure Ap4-1) consists of a conditioning phase and a test phase;

(a) conditioning phase:

- driving cycle;
- vehicle soak;

(b) test phase:

- diurnal (breathing loss) test;
- driving cycle;
- hot soak loss test.

Mass emissions of hydrocarbons from the tank breathing loss and the hot soak loss phases are summed to provide an overall result for the test.

¹⁸ SHED = Sealed Housing for Evaporation Determination.

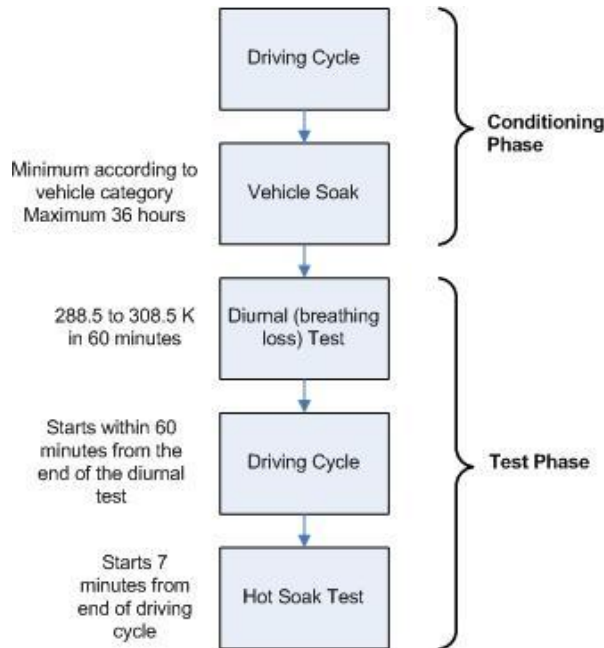


Figure Ap3-1: flow chart evaporative emission SHED test.

3. Test vehicles and test fuel

3.1. Test vehicles

The SHED test shall be performed at a minimum with one or more degreened vehicle(s) and one or more aged vehicle(s) or degreened vehicle(s) with a 'golden' carbon canister fitted, refer to paragraph 3.2.7. of Annex V.

The degreened test vehicle, which shall be representative of the vehicle type to be approved, shall be in good mechanical condition and, before the evaporative test, have been run in and driven at least 1000 km after first start on the production line. The evaporative emission control system shall be connected and functioning correctly over this period and the carbon canister subjected to normal use, neither undergoing abnormal purging nor abnormal loading.

The aged vehicle, which shall be representative of the vehicle type to be approved, may be selected from the test type V test fleet or alternatively the aged carbon canister and evaporative emission control valve from a test type V test fleet vehicle may be used and fitted to the degreened vehicle.

3.2. Test fuel

The appropriate test fuel shall be used, as defined in Appendix 2 to Annex I.

4. Chassis dynamometer and evaporative emissions enclosure

4.1. The chassis dynamometer shall meet the requirements of Annex I, Appendix 2.

4.2. Evaporative emission measurement enclosure (SHED).

The evaporative emission measurement enclosure shall be a gas-tight rectangular measuring chamber able to contain the vehicle under test. The vehicle shall be accessible from all sides when inside and the enclosure when sealed shall be gas tight. The inner surface of the enclosure shall be impermeable to hydrocarbons. At least one of the surfaces shall incorporate a flexible impermeable material or other device to allow the equilibration of pressure changes resulting from small changes in temperature. Wall design shall be such as to promote good dissipation of heat.

4.3. Analytical systems

4.3.1. Hydrocarbon analyzer

4.3.1.1. The atmosphere within the chamber is monitored using a hydrocarbon detector of the flame ionization detector (FID) type. Sample gas shall be drawn from the midpoint of one side wall or roof of the chamber and any bypass flow shall be returned to the enclosure, preferably to a point immediately downstream of the mixing fan.

4.3.1.2. The hydrocarbon analyzer shall have a response time to 90% of final reading of less than 1,5 seconds. Its stability shall be better than 2% of full scale at zero and at $80 \pm 20\%$ of full scale over a 15-minute period for all operational ranges.

4.3.1.3. The repeatability of the analyzer expressed as one standard deviation shall be better than 1% of full scale deflection at zero and at $80 \pm 20\%$ of full scale on all ranges used.

4.3.1.4. The operational ranges of the analyzer shall be chosen to give best resolution over the measurement, calibration and leak checking procedures.

4.3.2. Hydrocarbon analyzer data recording system.

4.3.2.1. The hydrocarbon analyzer shall be fitted with a device to record electrical signal output either by strip chart recorder or other data-processing system at a frequency of at least once per minute. The recording system shall have operating characteristics at least equivalent to the signal being recorded and shall provide a permanent record of results. The record shall show a positive indication of the beginning and end of the fuel tank heating and hot soak periods together with the time elapsed between start and completion of each test.

4.4. Fuel tank heating.

4.4.1. The fuel tank heating system shall consist of two separate heat sources with two temperature controllers. Typical heat sources may be electric heating strips. Other sources may be used at the request of the manufacturer. Temperature controllers may be manual, such as variable transformers, or they may be automated. Since vapour and fuel temperature are to be controlled separately, an automatic controller is recommended for the fuel. The heating system shall not cause hot-spots on the tank wetted surface which would cause local overheating of the fuel. Heating strips for the fuel should be located as low as practicable on the fuel tank and shall cover at least 10% of the wetted surface. The centre-line of the heating strips should be below 30% of the fuel depth as measured from the bottom of the fuel tank, and approximately

parallel to the fuel level in the tank. The centre line of the vapour heating strips, if used, shall be located at the approximate height of the centre of the vapour volume. The temperature controllers shall be capable of controlling the fuel and vapour temperatures to the heating function described in 5.3.1.6.

- 4.4.2. With temperature sensors position as in paragraph 4.5.2., the fuel heating device shall make it possible to evenly heat the fuel and fuel vapour in the tank in accordance with the heating function described in 5.3.1.6. The heating system shall be capable of controlling the fuel and vapour temperatures to ± 1.7 K of the required temperature during the tank heating process.
- 4.4.3. Notwithstanding the requirements of 4.4.2. if a manufacturer is unable to meet the heating requirement specified, for example due to use of thick-walled plastic fuel tanks, then the closest possible alternative heat slope shall be used. Prior to the commencement of any test, manufacturers shall submit engineering data to the technical service to support the use of an alternative heat slope.
- 4.5. Temperature recording.
- 4.5.1. The temperature in the chamber is recorded at two points by temperature sensors, which are connected so as to show a mean value. The measuring points are extended approximately 0.1 m into the enclosure from the vertical centre line of each side wall at a height of 0.9 ± 0.2 m.
- 4.5.2. The temperatures of the fuel and fuel vapour shall be recorded by means of sensors positioned in the fuel tank as described in paragraph 5.1.1. When sensors cannot be positioned as specified in paragraph 5.1.1, such as where a fuel tank with two ostensibly separate chambers is used, sensors shall be located at the approximate mid-volume of each fuel or vapour containing chamber. In this case, the average of these temperature readings shall constitute the fuel and vapour temperatures.
- 4.5.3. Temperatures shall, throughout the evaporative emission measurements, be recorded or entered into a data processing system at a frequency of at least once per minute.
- 4.5.4. The accuracy of the temperature recording system shall be within ± 1.7 K and the temperature shall be capable of being resolved to 0.5 K.
- 4.5.5. The recording or data processing system shall be capable of resolving time to ± 15 seconds.
- 4.6. Fans.
- 4.6.1. By the use of one or more fans or blowers with the SHED door(s) open it shall be possible to reduce the hydrocarbons concentration in the chamber to the ambient hydrocarbon level.
- 4.6.2. The chamber shall have one or more fans or blowers of likely capacity 0.1 to 0.5 m³s⁻¹ with which to thoroughly mix the atmosphere in the enclosure. It shall be possible to attain an even temperature and hydrocarbon concentration in the chamber during measurements. The vehicle in the enclosure shall not be subjected to a direct stream of air from the fans or blowers.

- 4.7. Gases
- 4.7.1. The following pure gases shall be available for calibration and operation:
- (a) purified synthetic air (purity: < 1 ppm C¹ equivalent < 1 ppm CO, < 400 ppm CO₂, 0.1 ppm NO); oxygen content between 18 and 21% by volume;
 - (b) hydrocarbon analyzer fuel gas ($40 \pm 2\%$ hydrogen, and balance helium with less than 1 ppm C¹ equivalent hydrocarbon, less than 400 ppm CO₂);
 - (c) propane (C₃H₈), 99,5% minimum purity.
- 4.7.2. Calibration and span gases shall be available containing mixtures of propane (C₃H₈) and purified synthetic air. The true concentrations of a calibration gas shall be within $\pm 2\%$ of the stated figures. The accuracy of the diluted gases obtained when using a gas divider shall be to within $\pm 2\%$ of the true value. The concentrations specified in Appendix 1 may also be obtained by the use of a gas divider using synthetic air as the diluting gas.
- 4.8. Additional equipment
- 4.8.1. The relative humidity in the test area shall be measurable to within $\pm 5\%$.
- 4.8.2. The pressure within the test area shall be measurable to within ± 0.1 kPa.
- 4.9. Alternative equipment
- 4.9.1. At the request of the manufacturer, the technical service, to the satisfaction of the approval authority, may authorize the use of alternative equipment provided that it can be demonstrated that such equipment gives equivalent results.
- 5. Test procedure**
- 5.1. Test preparation
- 5.1.1. The vehicle is mechanically prepared before the test as follows:
- (a) the exhaust system of the vehicle shall not exhibit any leaks;
 - (b) the vehicle may be steam cleaned before the test;
 - (c) the fuel tank of the vehicle shall be equipped with temperature sensors to enable the temperature of the fuel and fuel vapour to be measured in the fuel tank when filled to $50\% \pm 2\%$ of the tank's rated capacity. Sensors should be positioned as described in 4.5.2;
 - (d) additional fittings, adaptors or devices may optionally be fitted to allow a complete draining of the fuel tank. Alternatively, the fuel tank may be evacuated by means of a pump or siphon that prevents fuel spillage.
- 5.2. Conditioning Phase

- 5.2.1. The vehicle shall be taken into the test area where the ambient temperature is between 293 and 303 K (20° and 30°C).
- 5.2.2. The vehicle is placed on a chassis dynamometer and is driven through the test cycle specified in Annex VI (A) to Regulation (EU) No [xxx/2013] as appropriate for the classification of vehicle being tested. Exhaust emissions may be sampled during this operation but the results are not used for the purpose of exhaust emission type approval.
- 5.2.3. The vehicle is then parked in the test area for the minimum period stated in Table Ap3-1

Engine capacity	Minimum (hours)	Maximum (hours)
$\leq 180\text{cm}^3$	6	36
$180\text{ cm}^3 < \text{engine capacity} \leq 280\text{ cm}^3$	8	36
$> 280\text{cm}^3$	12	36

Table Ap3-1: minimum and maximum soak periods SHED test

- 5.3. Test phases
- 5.3.1 Tank breathing (diurnal) evaporative emission test.
- 5.3.1.1. The measuring chamber shall be vented/purged for several minutes immediately before the test until a stable background is obtainable. The chamber mixing fan(s) shall be switched on at this time also.
- 5.3.1.2. The hydrocarbon analyzer shall be zeroed and spanned immediately before the test
- 5.3.1.3. The fuel tank(s) shall be emptied by the means described in paragraph 5.1.1 and refilled with test fuel at a temperature of between 283 and 287 K (10° and 14°C) to $50 \pm 2\%$ of the tank's normal volumetric capacity.
- 5.3.1.4. The test vehicle shall be brought into the test enclosure with the engine switched off and shall be parked in an upright position. The fuel tank sensors and the fuel tank heating device, if necessary, shall be connected. Immediately begin recording the fuel temperature and the air temperature within the enclosure. If a venting/purging fan is still operating, it shall be switched off at this time.
- 5.3.1.5. The fuel and vapour may be artificially heated to the starting temperatures of 288.5 K (15.5°C) ± 1 K and 294.0 K (21.0°C) respectively.
- 5.3.1.6. As soon as the fuel temperature reaches 287.5 K (14.5°C) and the vapour temperature 292.5 K (19.5°C), the chamber shall be sealed so that it is gas-tight. As soon as the fuel reaches a temperature of 288.5 K (15.5°C) ± 1 K and the vapour 294.0 K

(21.0°C)¹⁹:

(a) the hydrocarbon concentration, barometric pressure and the temperature are measured to give the initial readings $C_{HC, i}$, P_i and T_i for the tank heat build test;

(b) a linear heat build of 13.8 or 20 ± 0.5 K over a period of 60 ± 2 minutes shall begin. The temperature of the fuel and fuel vapour during the heating shall conform to the function below to within ± 1.7 K, or the closest possible function as described in 4.4.3:

For exposed type fuel tanks:

Equations Ap3-1

$$T_f = 0.3333 \cdot t + 288.5$$

$$T_v = 0.3333 \cdot t + 294.0$$

For non-exposed type fuel tanks:

Equations Ap3-2

$$T_f = 0.2222 \cdot t + 288.5$$

$$T_v = 0.2222 \cdot t + 294.0$$

where:

T_f = required temperature of fuel (K),

T_v = required temperature of vapour (K),

t = time from start of the tank heat build in minutes.

- 5.3.1.7. The hydrocarbon analyzer is zeroed and spanned immediately before the end of the test.
- 5.3.1.8. If, over the 60 ± 2 minutes period of the test, the heating requirements specified in paragraph 5.3.1.6. has been achieved, the final hydrocarbon concentration in the enclosure is measured ($C_{HC, f}$). The time or elapsed time of this together with the final temperature and barometric pressure T_f and p_f is recorded.
- 5.3.1.9. The heat source is turned off and the enclosure door unsealed and opened. The heating device and temperature sensor are disconnected from the enclosure apparatus.

¹⁹ An initial vapour temperature up to 5 K above 294 K is permissible. In this circumstance vapour shall not be heated at the start of the diurnal test. When the fuel temperature has been raised to 5.5 K below the vapour temperature by following the T_f function, the remainder of the vapour heating profile shall be followed.

The vehicle is now removed from the enclosure with the engine switched off.

5.3.1.10. To prevent abnormal loading of the canister, fuel tank caps may be removed from the vehicle during the period between the end of the diurnal test phase and the start of the driving cycle. The driving cycle shall begin within 60 minutes of the completion of the breathing loss test.

5.3.2. Driving Cycle

5.3.2.1. Following the tank breathing losses test, the vehicle is pushed or otherwise manoeuvred onto the chassis dynamometer with the engine switched off. It is then driven through the driving cycle specified for the classification of vehicle on test. At the request of the manufacturer, exhaust emissions may be sampled during this operation, but the results are not used for the purpose of exhaust emission type approval.

5.3.3. Hot soak evaporative emissions test

The determination for evaporative emissions is concluded with the measurement of hydrocarbon emissions over a 60-minute hot soak period. The hot soak test shall begin within 7 minutes of the completion of the driving cycle specified in 5.3.2.1.

5.3.3.1. Before the completion of the test run the measuring chamber shall be purged for several minutes until a stable hydrocarbon background is obtained. The enclosure mixing fan(s) shall also be turned on at this time.

5.3.3.2. The hydrocarbon analyzer shall be zeroed and spanned immediately prior to the test.

5.3.3.3. The vehicle shall be pushed or otherwise moved into the measuring chamber with the engine switched off.

5.3.3.4. The enclosure doors are closed and sealed gas-tight within seven minutes of the end of the driving cycle.

5.3.3.5. The start of a 60 ± 0.5 minute hot soak period begins when the chamber is sealed. The hydrocarbon concentration, temperature and barometric pressure are measured to give the initial readings $C_{HC, i}$, P_i and T_i for the hot soak test. These figures are used in the evaporative emission calculation, shown in chapter 6.

5.3.3.6. The hydrocarbon analyzer shall be zeroed and spanned immediately before the end of the 60 ± 0.5 minute test period.

5.3.3.7. At the end of the 60 ± 0.5 minute test period measure the hydrocarbon concentration in the chamber. The temperature and the barometric pressure are also measured. These are the final readings $C_{HC, f}$, p_f and T_f for the hot soak test used for the calculation in chapter 6. This completes the evaporative emission test procedure.

5.4. Alternative test procedures

5.4.1. Notwithstanding the requirements of this annex, at the request of the manufacturer, with the agreement of the technical service and to the satisfaction of the approval

authority, alternative methods may be used to demonstrate compliance with the requirements of this annex. In such cases, the manufacturer shall satisfy the technical service that the results from the alternative test can be correlated with those resulting from the procedure described in this annex. This correlation shall be documented and added to the information folder.

6. Calculation of results

6.1. The evaporative emission tests described in chapter 5 allow the hydrocarbon emissions from the tank breathing and hot soak phases to be calculated. Evaporative losses from each of these phases is calculated using the initial and final hydrocarbon concentrations, temperatures and pressures in the enclosure, together with the net enclosure volume.

The formula below is used:

Equation Ap3-3:

$$M_{HC} = k.V.10^{-4} \cdot \left(\frac{C_{HC \cdot f} \cdot p_f}{T_f} - \frac{C_{HC \cdot i} \cdot p_i}{T_i} \right)$$

where:

M_{HC} = mass of hydrocarbon emitted over the test phase (grams),

C_{HC} = measured hydrocarbon concentration in the enclosure (ppm (volume) Ci equivalent),

V = net enclosure volume in cubic metres corrected for the volume of the vehicle. If the volume of the vehicle is not determined a volume of 0.14 m³ shall be subtracted.

T = ambient chamber temperature, K,

p = barometric pressure in kPa,

H/C = hydrogen to carbon ratio,

$k = 1.2 (12 + H/C)$;

where:

i is the initial reading,

f is the final reading,

H/C is taken to be 2.33 for tank breathing losses,

H/C is taken to be 2.20 for hot soak losses.

6.2. Overall results of test

The overall evaporative hydrocarbon mass emission for the vehicle is taken to be:

Equation Ap3-4

$$M_{\text{total}} = M_{\text{TH}} + M_{\text{HS}}$$

where:

M_{total} = overall evaporative mass emissions of the vehicle (grams),

M_{TH} = evaporative hydrocarbon mass emission for the tank heat build (grams),

M_{HS} = evaporative hydrocarbon mass emission for the hot soak (grams).

7. **Limit values.**

When tested according to this annex, overall evaporative hydrocarbon mass emission for the vehicle (M_{total}) shall be as specified in Regulation (EU) No [xxx/2013] , Annex VI (C).

8. **Further provisions**

At the request of the manufacturer, approval shall be granted without testing if a California Executive Order for the vehicle type for which application is made can be provided to the type approval authority.

9. **Extensions for evaporative emissions**

- 9.1. The type-approval shall be extended to vehicles equipped with a control system for evaporative emissions which meet the following conditions
 - 9.1.1. The basic principle of fuel/air metering (e.g. single point injection) is the same.
 - 9.1.2. The material of the fuel tank and liquid fuel hoses is identical.
 - 9.1.3. The worst-case vehicle with regard to the cross-section and approximate hose length shall be tested.
 - 9.1.4. The fuel tank volume is within a range of +/- 10%.
 - 9.1.5. The setting of the fuel tank relief valve is identical.
 - 9.1.6. The method of storage of the fuel vapour is identical (i.e. trap form and volume, storage medium, air cleaner (if used for evaporative emission control) etc.
 - 9.1.7. The method of purging of the stored vapour is identical (e.g. air flow, purge volume over the driving cycle).
 - 9.1.8. The method of sealing and venting of the fuel metering system is identical.
- 9.2. The type-approval shall be extended to vehicles with:

- 9.2.1 different engine capacity.
- 9.2.2. different engine powers
- 9.2.3 automatic and manual gearboxes
- 9.2.4 two and four wheel transmissions
- 9.2.5. different body styles
- 9.2.6. different wheel and tyre sizes

DRAFT

Sub appendix 3.1

Preconditioning requirements for a hybrid application or an application equipped with a stop-start system before start of the SHED test

1. Scope

- 1.1. The following preconditioning requirements before starting the SHED test shall only apply L-category vehicles equipped with a for hybrid propulsion.

2. Test methods

- 2.1. Before starting the SHED test procedure the test vehicle(s) shall be preconditioned as follows:

- 2.1.1. For OVC vehicles:

- 2.1.1.1. OVC vehicles without an operating mode switch: the procedure shall start with the discharge of the electrical energy/power storage device of the vehicle while driving (on the test track, on a chassis dynamometer, etc.):

(a) at a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up, or

(b) if a vehicle cannot reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run a lower steady speed where the fuel consuming engine just does not start up for a defined time/distance (to be specified between technical service and manufacturer), or

(c) with manufacturer's recommendation.

The fuel consuming engine shall be stopped within 10 seconds of it being automatically started.

- 2.1.1.2. OVC vehicles with an operating mode switch: the procedure shall start with the discharge of the electrical energy/power storage device of the vehicle while driving with the switch in pure electric position (on the test track, on a chassis dynamometer, etc.) at a steady speed of 70 per cent \pm 5 per cent from the maximum thirty minutes speed of the vehicle.

Stopping the discharge occurs:

(a) when the vehicle is not able to run at 65 per cent of the maximum thirty minutes speed, or

(b) when an indication to stop the vehicle is given to the driver by the standard on-board instrumentation, or

(c) after covering the distance of 100 km.

If the vehicle is not equipped with a pure electric mode, the electrical energy/power storage device discharge shall be conducted with the vehicle driving (on the test

track, on a chassis dynamometer, etc.):

(a) at a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up, or

(b) if a vehicle cannot reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run a lower steady speed where the fuel consuming engine does not start up for a defined time/distance (to be specified between technical service and manufacturer), or

(c) with manufacturer's recommendation.

The engine shall be stopped within 10 seconds of it being automatically started.

2.1.2. For NOVC vehicles:

2.1.2.1. NOVC vehicles without an operating mode switch: the procedure shall start with a preconditioning of at least two consecutive complete, applicable test type I driving cycles without soak.

2.1.2.2. NOVC vehicles with an operating mode switch: the procedure shall start with a preconditioning of at least two consecutive complete, applicable driving cycles without soak, performed with the vehicle running in hybrid mode. If several hybrid modes are available, the test shall be carried out in the mode which is automatically set after turn on of the ignition key (normal mode).

2.1.3. The preconditioning drive shall be carried out according to the Type I test cycle set-out in appendix 6 to Annex I.

2.1.3.1. For OVC vehicles: under the same conditions as specified by condition B of the Type I test set-out in appendix 11 to Annex I.

2.1.3.2. For NOVC vehicles: under the same conditions as in the Type I test.

Appendix 4

Test type IV calibration of equipment for evaporative emission testing

1. Calibration frequency and methods

1.1. All equipment shall be calibrated before its initial use and then calibrated as often as necessary and in any case in the month before type-approval testing. The calibration methods to be used are described in this Appendix.

2. Calibration of the enclosure.

2.1. Initial determination of enclosure internal volume.

2.1.1. Before its initial use, the internal volume of the chamber shall be determined as follows. The internal dimensions of the chamber are carefully measured, allowing for any irregularities such as bracing struts. The internal volume of the chamber is determined from these measurements.

2.1.2. The net internal volume is determined by subtracting 0.14 m^3 from the internal volume of the chamber. Alternatively the actual volume of the test vehicle may be used instead of the 0.14 m^3 .

2.1.3. The chamber shall be checked as in item 2.3. If the propane mass does not agree with the injected mass to within $\pm 2\%$ then corrective action is required.

2.2. Determination of chamber background emissions.

This operation determines that the chamber does not contain any materials that emit significant amounts of hydrocarbons. The check shall be carried out at the enclosure's introduction to service, after any operations in the enclosure which may affect background emissions and at a frequency of at least once per year.

2.2.1. Calibrate the analyzer (if required). The hydrocarbon analyzer shall be zeroed and spanned immediately before the test.

2.2.2. Purge the enclosure until a stable hydrocarbon reading is obtained. The mixing fan is turned on if not already on.

2.3. Seal the chamber and measure the background hydrocarbon concentration, temperature and barometric pressure. These are the initial readings C_{HCl} , p_i and T_i used in the enclosure background calculation.

2.2.4. The enclosure is allowed to stand undisturbed with the mixing fan on for a period of four hours.

2.2.5. The hydrocarbon analyzer shall be zeroed and spanned immediately before the end of the test.

2.2.6. At the end of this time use the same analyzer to measure the hydrocarbon concentration in the chamber. The temperature and the barometric pressure are also measured. These are the final readings C_{HCl} , P_f and T_f .

2.2.7. Calculate the change in mass of hydrocarbons in the enclosure over the time of the test according to paragraph 2.4. The background emission of the enclosure shall not exceed 0.4 g.

2.3. Calibration and hydrocarbon retention test of the chamber.

The calibration and hydrocarbon retention test in the chamber provides a check on the calculated volume in paragraph 2.1. and also measures any leak rate.

2.3.1. Purge the enclosure until a stable hydrocarbon concentration is reached. Turn on the mixing fan, if not already switched on. The hydrocarbon analyzer shall be calibrated (if necessary) then zeroed and spanned immediately before the test.

2.3.2. Seal the enclosure and measure the background concentration, temperature and barometric pressure. These are the initial readings C_{HCl} , p_i and T_i used in the enclosure calibration.

2.3.3. Inject a quantity of approximately 4 grams of propane into the enclosure. The mass of propane shall be measured to an accuracy and precision of $\pm 2\%$ of the measured value.

2.3.4. Allow the contents of the chamber to mix for five minutes. The hydrocarbon analyzer shall be zeroed and spanned immediately before the following test. Measure the hydrocarbon concentration, temperature and barometric pressure. These are the final readings C_{HCl} , p_f and T_f for the calibration of the enclosure.

2.3.5. Using the readings taken in paragraphs 2.3.2 and 2.3.4 and the formula in paragraph 2.4, calculate the mass of propane in the enclosure. This shall be within $\pm 2\%$ of the mass of propane measured in paragraph 2.3.3.

2.3.6. Allow the contents of the chamber to mix for a minimum of four hours. At the end of this period measure and record the final hydrocarbon concentration, temperature and barometric pressure. The hydrocarbon analyzer shall be zeroed and spanned immediately before the end of the test.

2.3.7. Calculate using the formula in 2.4, the hydrocarbon mass from the readings taken in paragraphs 2.3.6 and 2.3.2. The mass may not differ by more than 4% from the hydrocarbon mass given by paragraph 2.3.5.

2.4. Calculations.

The calculation of net hydrocarbon mass change within the enclosure is used to determine the chamber's hydrocarbon background and leak rate. Initial and final readings of hydrocarbon concentration, temperature and barometric pressure are used in the following formula to calculate the mass change.

Equation Ap3-5

$$M_{HC} = k.V.10^{-4} \cdot \left(\frac{C_{HC.f} \cdot P_f}{T_f} - \frac{C_{HC.i} \cdot P_i}{T_i} \right)$$

where:

M_{HC} = mass of hydrocarbon in grams,

C_{HC} =hydrocarbon concentration in the enclosure (ppm carbon (NB: ppm carbon = ppm propane x 3)),

V = net enclosure volume in cubic metres as measured in paragraph 2.1.1 of this appendix.

T = ambient temperature in the enclosure, K,

p = barometric pressure in kPa,

$k = 17.6$;

where:

i is the initial reading,

f is the final reading.

3. Checking of FID hydrocarbon analyser

3.1. Detector response optimization

The FID analyser shall be adjusted as specified by the instrument manufacturer. Propane in air should be used to optimize the response on the most common operating range.

3.2. Calibration of the HC analyzer.

The analyzer should be calibrated using propane in air and purified synthetic air. A calibration curve shall be established as described in paragraphs 4.1 to 4.5 of this Appendix.

3.3. Oxygen interference check and recommended limits.

The response factor (R_f) for a particular hydrocarbon species is the ratio of the FID C1 reading to the gas cylinder concentration, expressed as ppm C1.

The concentration of the test gas shall be at a level to give a response of approximately 80% of full scale deflection, for the operating range. The concentration shall be known, to an accuracy of $\pm 2\%$ in reference to a gravimetric standard expressed in volume. In addition the gas cylinder shall be preconditioned for 24 hours at a temperature between 293 K and 303 K (20° and 30°C).

Response factors should be determined when introducing an analyzer into service and thereafter at major service intervals. The reference gas to be used is propane with balance purified air which shall be taken to give a response factor of 1,00.

The test gas to be used for oxygen interference and the recommended response factor range are given below:

Propane and nitrogen $0.95 \leq R_f \leq 1,05$.

4. Calibration of the hydrocarbon analyser.

Each of the normally used operating ranges are calibrated by the following procedure:

- 4.1. Establish the calibration curve by at least five calibration points spaced as evenly as possible over the operating range. The nominal concentration of the calibration gas with the highest concentrations to be at least 80% of the full scale.
- 4.2. Calculate the calibration curve by the method of least squares. If the resulting polynomial degree is greater than 3, then the number of calibration points shall be at least the number of the polynomial degree plus 2.
- 4.3. The calibration curve shall not differ by more than 2% from the nominal value of each calibration gas.
- 4.4. Using the coefficients of the polynomial derived from paragraph 4.2, a table of indicated reading against true concentration shall be drawn up in steps of no greater than 1% of full scale. This is to be carried out for each analyzer range calibrated. The table shall also contain other relevant data:
 - (a) date of calibration;
 - (b) span and zero potentiometer readings (where applicable), nominal scale;
 - (c) reference data of each calibration gas used;
 - (d) the actual and indicated value of each calibration gas used together with the percentage differences.
- 4.5. If it can be shown to the satisfaction of the approval authority that alternative technology (e.g. computer, electronically controlled range switch) can give equivalent accuracy, then those alternatives may be used.

ANNEX V

Test type V requirements: durability of pollution control devices

Appendix Number	Appendix title	Page #
1	The Standard Road Cycle for L-Category Vehicles (SRC-LeCV)	.
2	The US EPA Approved Mileage Accumulation durability cycle	

DRAFT

1 General requirements

This Annex describes the Type V test procedures to verify the durability of pollution control devices of L-category vehicles.

- 1.1. The Type V test procedure shall include mileage accumulation procedures to age the test vehicle(s) in a defined and repeatable way and also includes the frequency of applied Type I emission verification test procedures conducted prior, during and after finishing of the mileage accumulation of the test vehicle(s).
- 1.2. The test vehicle(s)' powertrain and pollution control devices fitted on the test vehicle(s) shall be documented and listed by the manufacturer. The list shall include at a minimum such items as the specifications of the propulsion and its powertrain, where applicable, the exhaust oxygen sensor(s), catalytic converter(s), particulate filter(s) or other pollution control devices, intake and exhaust systems and any peripheral device(s) that may have an impact on the environmental performance of the approved vehicle. This documentation shall be added to the test report.
- 1.3. The manufacturer shall provide evidence of the possible impacts on Type V test results because of any modification to the emission abatement system configuration, to the pollution control device specifications or to other peripheral device(s) interacting with the pollution control devices, in production of the vehicle type after approval. This documentation and evidence shall be provided by the manufacturer to the approval authority upon request in order to prove that the durability performance of the vehicle type shall not be negatively affected by any change in vehicle production, by retrospective changes in the vehicle configuration, or by changes in the specifications of any pollution control device, or by changes in peripheral devices fitted on the approved vehicle type.
- 1.4. Category L4e motorcycles with side-car shall be exempted from Type V durability testing if the manufacturer can provide the evidence and documentation set-out in this Annex for the L3e two-wheel motorcycle on which the assembly of the L4e vehicle was based. In all other cases the requirements of this Annex shall also apply to category L4e motorcycles with side-car.

2 Specific requirements

- 2.1 Test vehicle(s) requirements
 - 2.1.1. The test vehicle(s) used for Type V durability testing and in particular the pollution control and peripheral devices that are relevant for the emission abatement system shall be representative for the vehicle type produced in series and placed on the market.
 - 2.1.2. The test vehicle(s) shall be in good mechanical order at the start of mileage accumulation and it shall not have more than 100 km accumulated after it was first started at the end of the production line. The propulsion and the pollution control devices shall not have been used since its manufacture, with the exception of quality control tests and accumulation of the first 100 km.

- 2.1.3. For all mileage accumulation, regardless of the selected durability test procedure by the manufacturer, all pollution control devices and systems, both including hardware, software and calibration, fitted on the test vehicle(s) shall be installed and operating for the entire mileage accumulation period.
- 2.1.4. The pollution control devices on the test vehicle(s) shall be permanently marked under surveillance of the technical service before start of mileage accumulation and be listed together with the vehicle identification number, the powertrain software and the calibration sets used of the test vehicle(s). Upon request of the approval authority the manufacturer shall make that list available.
- 2.1.5. Maintenance, adjustments and the use of the controls of the test vehicle(s) shall be those recommended by the manufacturer in the appropriate repair and maintenance information and in the user manual.
- 2.1.6. The durability test shall be conducted with a suitable commercially available fuel at the discretion of the manufacturer. If the test vehicle(s) is/are equipped with a two-stroke engine, lubricating oil shall be used in the proportion and of the grade recommended by the manufacturer in the user manual.
- 2.1.7. The test vehicle(s)' cooling system shall enable the vehicle to operate at temperatures similar to those obtained during normal road use conditions (oil, coolant, exhaust system, etc.).
- 2.1.8. If the durability test is completed on a test track or road, the test vehicle's reference mass shall be at least equal to that retained for Type I emission tests conducted on a chassis dynamometer.
- 2.1.9. If approved by the technical service and to the satisfaction of the approval authority the Type V test procedure may be carried out using a test vehicle, which has a different body style, gear box (automatic or manual) and size of the wheels or tyres, from those of the vehicle type for which the type-approval is sought.
- 2.1.10. Catalyst time-at-temperature data.
- 2.1.10.1. Catalyst temperature shall be measured during at least two full sub cycles of the mileage accumulation cycle on the test vehicle(s). The catalyst temperature shall be measured at the highest temperature location in the hottest catalyst on the vehicle. Alternatively, the temperature may be measured at another location providing that it is adjusted to represent the temperature measured at the hottest location using good engineering judgement to the satisfaction of the technical service and the approval authority.
- 2.1.10.2. Catalyst temperature shall be measured at a minimum rate of one hertz (one measurement per second). The measured catalyst temperature results shall be tabulated in a histogram with temperature groups no larger than 25 °C. That histogram shall be added to the test report.
- 2.2. In the Type V test procedure, mileage shall be accumulated by driving the test vehicle(s) either on a test track, on the road, or on a chassis dynamometer. The test

track or test road shall be selected at the discretion of the manufacturer.

- 2.2.1. Chassis dynamometer used for mileage accumulation.
 - 2.2.1.1. If test type V durability mileage accumulation is performed on a chassis dynamometer, this dynamometer shall enable the durability mileage accumulation cycle set-out in Appendix 1 or 2, as applicable, to be carried out.
 - 2.2.1.2. In particular, the chassis dynamometer shall be equipped with systems, equivalent as used in the Type I emission laboratory test set-out in Annex I, simulating the same inertia and resistance to progress. Emission analysis equipment is not required for mileage accumulation. The same inertia and flywheel settings and calibration procedures shall be used for the chassis dynamometer set-out in Annex I, used to accumulate mileage with the test vehicle(s).
 - 2.2.1.3. The test vehicle(s) may be moved to a different bench in order to conduct Type I emission verification tests. The mileage accumulated in the Type I emission verification tests may be added to the total accumulated mileage.
- 2.3. The Type I emission verification tests prior to start, during and after finishing durability mileage accumulation shall be conducted according to the test procedures regarding emissions after cold start set-out in Annex I. All Type I emission verification test results shall be listed and made available to the technical service and to the approval authority upon request. The Type I emission verification test results at start and finish of durability mileage accumulation shall be added to the test report. At least the first and the last Type I emission verification tests shall be conducted or witnessed by the technical service and reported to the approval authority. It shall be confirmed and stated in the test report if the technical service conducted or witnessed the Type I emission verification testing.
- 2.4. Type V test requirements for a L-category vehicle equipped with a hybrid propulsion
 - 2.4.1. For OVC vehicles:

It is allowed to charge the electrical energy/power storage device twice a day during mileage accumulation.

For OVC vehicles with an operating mode switch, mileage accumulation should be driven in the mode which is automatically set after turn on of the ignition key (normal mode).

During the mileage accumulation a change into another hybrid mode is allowed if necessary in order to continue the mileage accumulation after agreement of the technical service and to the satisfaction of the approval authority. This hybrid mode change shall be stated in the test report.

The measurements of emissions of pollutants shall be carried out under the same conditions as specified by condition B of the Type I test (paragraphs 3.1.3. and 3.2.3.).
 - 2.4.2. For NOVC vehicles:

For NOVC vehicles with an operating mode switch, mileage accumulation shall be driven in the mode which is automatically set after turn on of the ignition key (normal mode).

The measurements of emissions of pollutants shall be carried out in the same conditions as in the Type I test.

3. Test type V, durability test procedure specifications.

The specifications of the three durability test procedures set-out in Article 23 (3) of Regulation (EU) No [xxx/2013] are the following:

3.1. Actual durability testing with full mileage accumulation.

The durability test procedure with full mileage accumulation to age the test vehicle(s) shall refer to paragraph 3(a) of Article 23 of Regulation (EU) No [xxx/2013]. Full mileage accumulation shall mean to fully complete the assigned test distance laid down in part A of Annex VII of Regulation (EU) No [xxx/2013]. by repeating the driving manoeuvres laid down in Appendix 1 or, if applicable in Appendix 2.

3.1.1. The manufacturer shall provide evidence that the emission limits in the applicable Type I emission laboratory test cycle, set out in Annex VI (A) to Regulation (EU) No [xxx/2013], of the aged test vehicle(s) are not exceeded when starting mileage accumulation, during the mileage accumulation phase and after the full mileage accumulation has been finalised.

3.1.2. Multiple Type I emission tests shall be conducted during the full mileage accumulation phase with a frequency and amount of Type I test procedures at the choice of the manufacturer and to the satisfaction of technical service and approval authority. The Type I emission test results shall provide sufficient statistical relevance as to identify the deterioration trend, which shall be representative for the vehicle type placed on the market, refer to Figure 5-1.

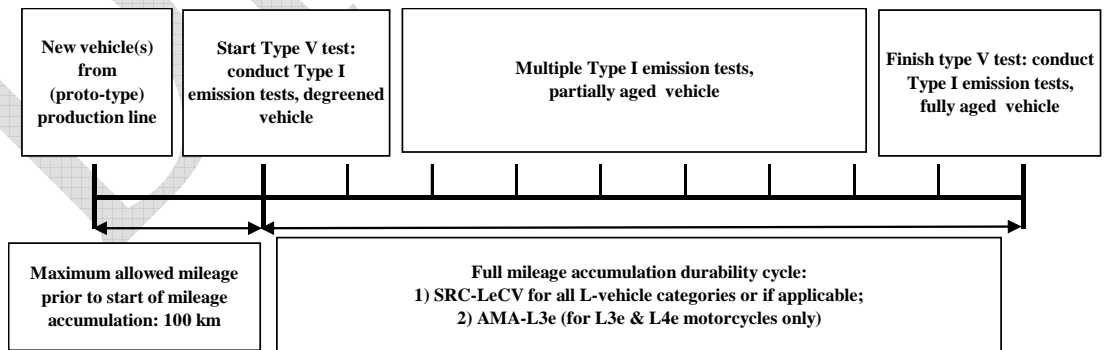


Figure 5-1: test type V, durability test procedure with full mileage accumulation.

3.2. Actual durability testing with partial mileage accumulation.

The durability test procedure of L-category vehicles with partial mileage accumulation shall refer to paragraph 3(b) of Article 23 of Regulation (EU) No [xxx/2013]. Partial mileage accumulation shall mean to complete a minimum of 50%

of the test distance specified in part A of Annex VII of Regulation (EU) No [xxx/2013]. and complying with the stop criteria set-out in paragraph 3.2.4.

- 3.2.1. The manufacturer shall provide evidence that the emission limits in the applicable Type I emission laboratory test cycle, set out in Annex VI (A) to Regulation (EU) No [xxx/2013] of the tested aged vehicle(s) are not exceeded at the start of mileage accumulation, during the mileage accumulation phase and after the partial mileage accumulation has been finalised.
- 3.2.2. Multiple Type I emission tests shall be conducted during the partial mileage accumulation phase with a frequency and amount of Type I test procedures at the choice of the manufacturer. The Type I emission test results shall provide sufficient statistical relevance as to identify the deterioration trend, which shall be representative for the vehicle type placed on the market, refer to Figure 5-2.

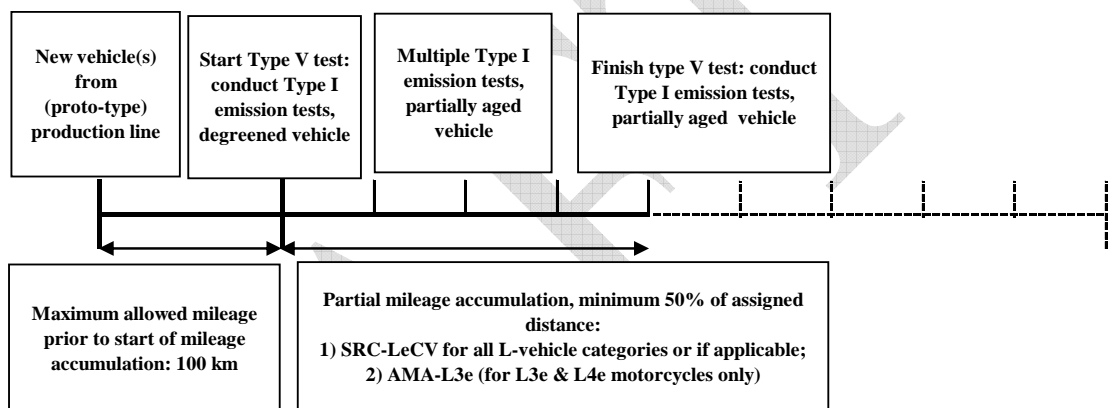


Figure 5-2: test type V, accelerated durability test procedure with partial mileage accumulation.

- 3.2.3. Stop criteria for the durability test procedure with partial mileage accumulation.
- Partial mileage accumulation may stop if the following criteria are met:
- 3.2.3.1. if a minimum of 50% of the applicable test distance laid down in part A of Annex VII of Regulation (EU) No [xxx/2013] has been accumulated and;
- 3.2.3.2. if all the Type I emission verification test results are below the emission limits laid down in Annex VI (A) to Regulation (EU) No [xxx/2013] at all times during the partial mileage accumulation phase or;
- 3.2.3.3. if the manufacturer cannot prove that the stop criteria set-out in paragraphs 3.2.4.1. and 3.2.4.2. are met the mileage accumulation shall continue to the point where those stop criteria are met or mileage accumulation shall continue up to the fully accumulated mileage set out in part A of Annex VII to Regulation (EU) No [xxx/2013].
- 3.2.4. Data processing and reporting for the durability test procedure with partial mileage accumulation.
- 3.2.4.1. The manufacturer shall use the arithmetic mean of the Type I emission test results at

each test interval, with a minimum of two emission tests per test interval. All arithmetic mean Type I emissions test results shall be plotted per emission constituent THC, CO, NO_x and if applicable NMHC and PM, against accumulation distance rounded to the nearest kilometre;

- 3.2.4.2. The best fit linear line (trend line: $y = ax+b$) shall be fitted and drawn through all these data points based on the method of least squares. This best fit straight trend line shall be extrapolated over the full durability mileage laid down in part A of Annex VII of Regulation (EU) No [xxx/2013]. At the request of the manufacturer the trend line may start as of 20% of the durability mileage laid down in part A of Annex VII of Regulation (EU) No [xxx/2013], in order to take into account possible run-in effects of the pollution control devices.
- 3.2.4.3. A minimum of four calculated arithmetic mean data points shall be used to draw each trend line, with the first at, or before, 20% of the laid down durability mileage in part A of Annex VII of Regulation (EU) No [xxx/2013] and the last one at the end of mileage accumulation; at least two other data points should be equally spaced between the first and final Type I test measurement distances.
- 3.2.4.4. The applicable emission limits set out in Annex VI (A) to Regulation (EU) No [xxx/2013] shall be plotted in the graphs per emission constituent laid down in paragraphs 3.2.5.2. and 3.2.5.3. The plotted trend line shall not exceed these applicable emission limits at any mileage data point. The graph per emission constituent THC, CO, NO_x and if applicable NMHC and PM plotted against accumulation distance shall be added to the test report. The list with all the Type I emission test results used to establish the best fit straight trend line shall be made available to the technical service upon request.

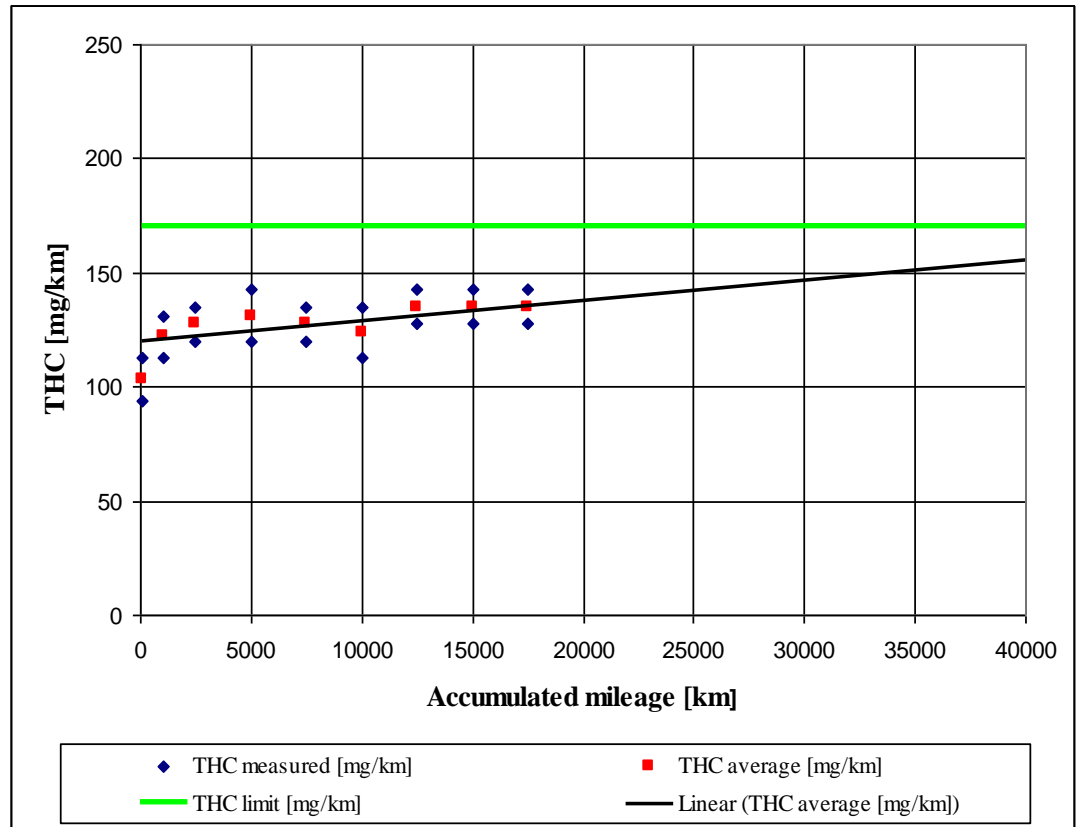


Figure A5-3: Theoretical example of the plotted Type I total hydrocarbon (THC) emission test results, the plotted Type I THC Euro 4 test limit (170 mg/km) and the best fit straight trend line of a Euro 4 motorcycle (L3e with $v_{max} > 130$ km/h), all versus accumulated mileage. Please note that the first data point starts at 100 km and not at 0 km.

3.2.4.5. Trend line parameters a , x and b of the best fit straight lines as well as the calculated pollutant value at the end mileage according to the vehicle category shall be stated in the test report. The graph for all emission constituents shall be plotted in the test report. In the test report it shall also be stated which measurements were taken by the technical service and which by the manufacturer respectively.

3.3. The mathematical durability procedure

L-category vehicles using the mathematical durability procedure shall refer to paragraph 3(c) of Article 23 of Regulation (EU) No [xxx/2013].P

3.3.1. The emission results of the vehicle that has accumulated more than 100 km after it was first started at the end of the production line, the applied deterioration factors set out in Annex VII (B) of Regulation (EU) No [xxx/2013], the product of the multiplication of both and the emission limit set-out in Annex VI of Regulation (EU) No [xxx/2013] shall be added to the test report.

3.4. Durability mileage accumulation cycles

One of the following two durability mileage accumulation test cycles shall be

conducted to age the test vehicle(s) until the assigned test distance laid down in part A of Annex VII of Regulation (EU) No [xxx/2013] is fully completed according to the full mileage accumulation test procedure set-out in paragraph 3.1. or partially completed according to the partial mileage accumulation test procedure in paragraph 3.2.:

3.4.1. The Standard Road Cycle (SRC-LeCV) for L-category vehicles.

The Standard Road Cycle (SRC-LeCV) custom tailored for L-category vehicles is the principle durability Type V test cycle composed of a set of four mileage accumulation durability cycles. One out of this set of four durability mileage accumulation cycles shall be used to accumulate mileage by the test vehicle(s) according to the technical details laid down in Appendix 1.

3.4.2. The US EPA Approved Mileage Accumulation cycle.

At the choice of the manufacturer the AMA durability mileage accumulation cycle may be conducted as alternative type V mileage accumulation cycle up to and including the dates set out in point 1.5.2. of Annex IV to Regulation (EU) No [xxx/2013]. The AMA durability mileage accumulation cycle shall be conducted according to the technical details laid down in Appendix 2.

3.5. Test type V durability verification testing using 'golden' pollution control devices

3.5.1. The pollutant control devices may be removed from the test vehicle(s) after:

3.5.1.2. full mileage accumulation according to the test procedure in paragraph 3.1. is completed or;

3.5.1.2. partial mileage accumulation according to the test procedure in paragraph 3.2. is completed.

3.5.2. At the choice of the manufacturer those 'golden' pollution control devices may repeatedly be used for durability performance verification and approval demonstration testing on the same vehicle type by fitting those 'golden' components on (a) representative parent vehicle(s) representing the propulsion family set-out in Annex X, later on in vehicle development.

3.5.3. The 'golden' pollution control devices shall be permanently marked and the marking number, the associated Type I emission test results and the specifications shall be made available to the type approval authority upon request.

3.5.4. In addition the manufacturer shall mark and store new, non-aged pollutant control devices with the same specifications as the ones from the 'golden' pollution control devices and make these available as a reference base to the approval authority on the same request when the 'golden' pollution control devices shall be made available.

3.5.5. The approval authority and technical service shall get access at any point of time in or after the approval process both to the 'golden' pollution control devices and 'new, non-aged' pollution control devices. The approval authority or technical service may request and witness a verification test by the manufacturer or may have the 'new,

non-aged' and 'golden' pollution control devices tested by an independent test laboratory in a non destructive way.

DRAFT

Appendix 1
The Standard Road Cycle for L-Category Vehicles (SRC-LeCV)

1. Introduction

- 1.1. The Standard Road Cycle for L-Category Vehicles (SRC-LeCV) is a kilometre accumulation cycle in order to age L-category vehicles and in particular their pollution control devices in a defined repeatable way. The test vehicle(s) may run the SRC-LeCV on the road, on a test track or on a kilometre accumulation chassis dynamometer.
- 1.2. The SRC-LeCV shall consist of 5 laps of a 6 km course. The length of the lap may be changed to accommodate the length of the kilometre accumulation test track or test road. The SRC-LeCV shall include 4 different vehicle speed profiles.
- 1.3. The manufacturer may request to alternatively perform the next higher numbered test cycle with the agreement of the approval authority if they feel it better represents the real-world use of the vehicle.

2. SRC-LeCV test requirements

- 2.1. If the SRC-LeCV is performed on a kilometre accumulation chassis dynamometer:
 - 2.1.1. in particular, the chassis dynamometer shall be equipped with systems, equivalent as used in Type I emission laboratory test set-out in Annex I of Regulation (EU) No [xxx/2013], simulating the same inertia and resistance to progress. Emission analysis equipment shall not be required for mileage accumulation. The same inertia and flywheel settings and calibration procedures shall be used for the chassis dynamometer used to accumulate mileage with the test vehicle(s) set-out in Annex I of Regulation (EU) No [xxx/2013];
 - 2.1.2. the test vehicle(s) may be moved to a different chassis dynamometer in order to conduct Type I emission verification tests. This dynamometer shall enable the SRC-LeCV to be carried out;
 - 2.1.3. the chassis dynamometer shall be configured such that when ¼ intervals of 6 km are passed the test rider or robot rider is indicated to the test rider or robot rider to specify when to proceed with the following sequence of actions;
 - 2.1.4. a timer displaying seconds shall be made available for execution of the idling periods;
 - 2.1.5. the distance travelled shall be calculated from the number rotations of the roller and the roller circumference.
- 2.2. If the SRC-LeCV is not performed on a kilometre accumulation chassis dynamometer:
 - 2.2.1. the test track or test road shall be selected at the discretion of the manufacturer to the satisfaction of the approval authority.
 - 2.2.2. the track or road selected should be shaped to not significantly hinder the proper execution of the test instructions.
 - 2.2.3. the route used shall form a loop to allow continuous execution.

- 2.2.4. track lengths which are multiples, half or quarter of this length shall be permitted. The length of lap may be changed to accommodate the length of the mileage accumulation track or road.
- 2.2.5. four points shall be marked or landmarks identified, on the track or road which equate to quarter intervals of the lap.
- 2.2.6. the distance accumulated shall be calculated from the number of cycles required to complete test distance. This calculation shall take into account the length of the road or track and chosen length. Alternatively an electronic means of accurately measuring the actual distance travelled may be used. The vehicles odometer shall not be used.
- 2.2.7. Examples of test track configurations:

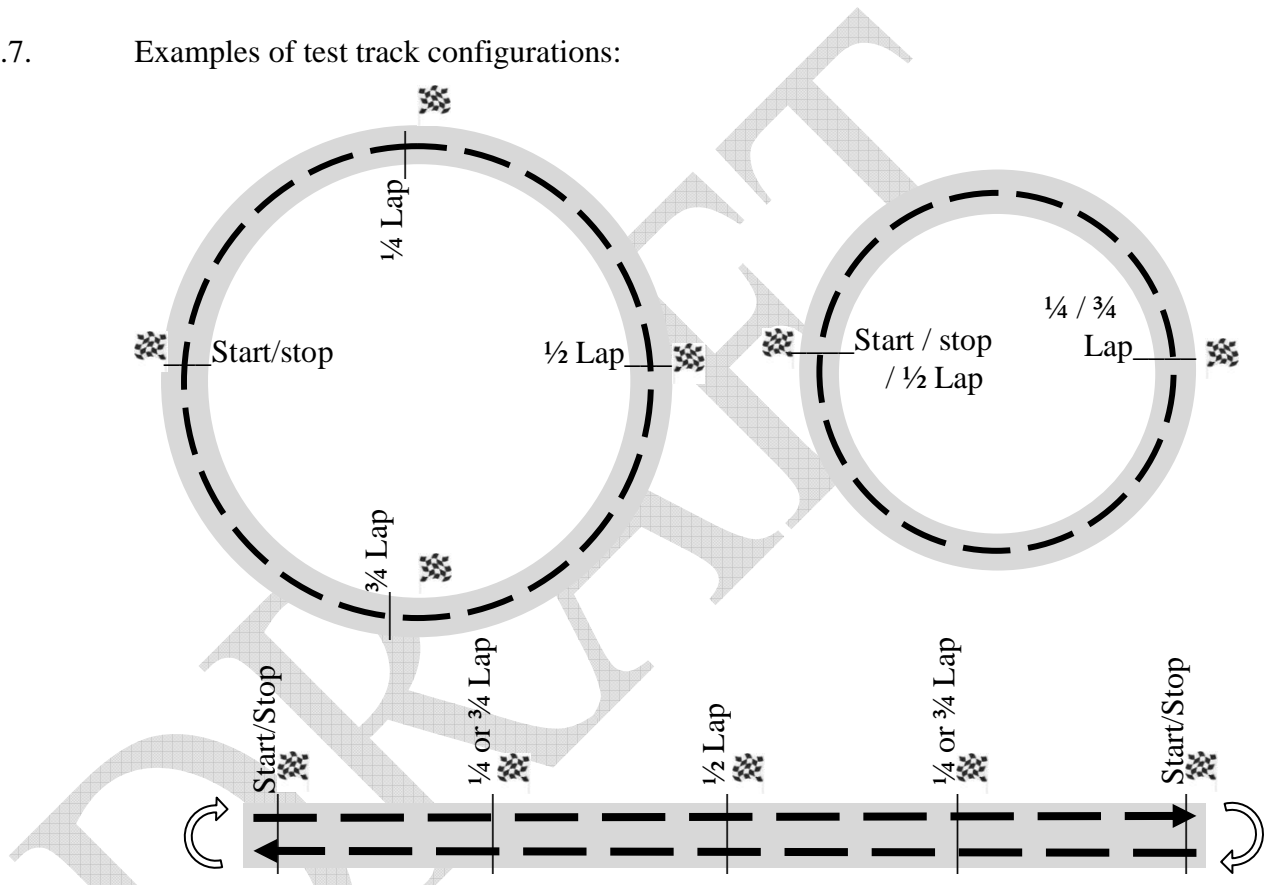


Figure Ap1-2.: Simplified graphic of possible test track configurations.

- 2.3. The total distance travelled shall be the applicable durability mileage set-out in part A of Annex VII to Regulation (EU) No [xxx/2013] plus one complete SRC-LeCV sub cycle (30km).
- 2.4. No stopping is permitted mid-cycle. Any stops, for Type I emission tests, maintenance, safety periods, refuelling, etc, shall be performed at the end of one complete SRC-LeCV sub cycle, the culmination of step 47 in table Ap1-2. If the vehicle travels to the testing area under its own power only moderate acceleration and decelerations shall be used and the vehicle shall in this case not be operated at full throttle.
- 2.5. The four cycles shall be selected based on the maximum design vehicle speed of the L-category vehicle and the engine capacity or in the case of pure electric or hybrid propulsions the maximum design speed of the vehicle and the net power.

2.6.

For the purpose of accumulating mileage in the SRC-LeCV the L-vehicle categories shall be grouped as follows:

Cycle	WMTC Class	Vehicle maximum design speed	Vehicle engine capacity (PI)	Net power (kW)
1	1	$v_{\max} \leq 50 \text{ km/h}$	$V_d \leq 50 \text{ cm}^3$	$\leq 6 \text{ kW}$
2		$50 \text{ km/h} < v_{\max} < 100 \text{ km/h}$	$50 \text{ cm}^3 < V_d < 150 \text{ cm}^3$	$< 14 \text{ kW}$
3	2	$100 \text{ km/h} \leq v_{\max} < 130 \text{ km/h}$	3. $V_d \geq 150 \text{ cm}^3$	4. $\geq 14 \text{ kW}$
5.	6.	7. $130 \text{ km/h} \leq v_{\max}$	8. -	9. -

Table Ap1-1: L-vehicle category groups for the SRC-LeCV.

where:

V_d = engine displacement volume in cm^3

v_{\max} = maximum design speed (velocity in km/h)

2.7. SRC-LeCV general driving instructions

2.7.1. Idle instructions

2.7.1.1. If not already stopped, the vehicle shall decelerate to a full stop and gear shall be shifted to neutral.

The throttle shall be fully released and ignition shall remain on. If a vehicle is equipped with a stop-start system or it concerns a hybrid electric vehicle switch-off the combustion engine. For a vehicle speed it shall be ensured that the combustion engine remains running in idle.

2.7.1.2. The vehicle shall not be prepared for the following action in the test cycle until the full required idle duration has passed.

2.7.2. Acceleration instructions:

2.7.2.1. accelerate to the target vehicle speed using the sub-action methodologies below.

2.7.2.1.1. moderate: normal medium part-load acceleration, up to approximately half throttle.

2.7.2.1.2. hard: high part-load acceleration up to full throttle.

2.7.2.2. if moderate acceleration is no longer able to provide a noticeable increase in actual vehicle speed to reach a target vehicle speed, then hard acceleration shall be used and ultimately full throttle.

2.7.3. Deceleration instructions:

2.7.3.1. decelerate from either the previous action or from the maximum vehicle speed attained in the previous action, whichever is lower.

- 2.7.3.2. if the next action sets the target vehicle speed to 0 km/h, the vehicle shall be stopped before proceeding to the following action.
- 2.7.3.4. moderate deceleration: normal let-off of the throttle. Brakes, gears and clutch are allowed to be used if required.
- 2.7.3.5. coast-through deceleration: Full let-off of the throttle, clutch disengaged and in-gear, no foot/handle control actuated, no brakes applied. If the target speed is 0 km/h (idle) and if the actual vehicle speed ≤ 5 km/h it is allowed to engage the clutch, to shift to neutral and to use the brakes in order to prevent engine stall and to entirely stop the vehicle. An up shift is not allowed during a coast-through deceleration. The rider may downshift to increase the braking effect of the engine. During gear changes, extra care shall be afforded to ensure that the gear change is performed promptly with minimum coasting in neutral gear, clutch and partial clutch use, i.e. < 2 s. The vehicle manufacturer may request to extend this time at the agreement of the approval authority if absolutely necessary.
- 2.7.3.6. coast-down deceleration: A deceleration shall be initiated by de-clutching (i.e. separating the drive from the wheels) without the use of brakes until the target vehicle speed is reached.
- 2.7.4. Cruise instruction:
- 2.7.4.1. if the following action is 'cruise' then the vehicle is permitted to be accelerated to attain the target vehicle speed.
- 2.7.4.2. the throttle shall continue to be operated as required to attain and remain at the target cruise vehicle speed.
- 2.7.5. A driving instruction should be performed in its entirety. Additional idling time, acceleration above and deceleration to below the target vehicle speed is permitted in order to ensure that the requirement of an action was performed.
- 2.7.6. Gear changes should be carried out according to the guidance laid down in paragraph 4.5.5 Annex I. Alternatively, guidance provided by the manufacturer to the consumer may be used if approved by the type approval authority.
- 2.7.7. Whenever the test vehicle(s) cannot achieve or reach the target vehicle speeds set out in applicable SRC-LeCV, the vehicle should be operated at wide open throttle and, if available or user selectable options, to attain the vehicle's maximum design speed.
- 2.8. SRC-LeCV test steps
- The SRC-LeCV test shall consist of the following steps:
- 2.8.1. the maximum design speed of the vehicle and either the engine capacity or net power as applicable shall be obtained;
- 2.8.2. the required SRC-LeCV shall be selected from table Ap1-1 and the required target vehicle speed and detailed driving instructions from table Ap1-3.
- 2.8.3. The column "decelerate by" shall indicate the delta vehicle speed to be subtracted from either the previously attained target vehicle speed or from the maximum design vehicle speed, whichever

lower.

Example lap 1:

Vehicle No 1: L1e-B low speed moped with maximum design vehicle speed of 25 km/h, subject to SRC-LeCV No 1

Vehicle No 2: L1e-B high speed moped with maximum design vehicle speed of 45 km/h, subject to SRC-LeCV No 1

Lap	Sub-lap	Action	Time (s)	To/at (Target vehicle speed in km/h)	By (Delta vehicle speed in km/h)	Vehicle No 1 (Actual vehicle speed in km/h)	Vehicle No 2 (Actual vehicle speed in km/h)	
1	1st 1/4							
		Stop & Idle	10					
		Accelerate		35		25	35	
			Cruise		35		25	35
	2nd 1/4							
		Decelerate				15	10	20
		Accelerate			35		25	35
			Cruise		35		25	35
	3rd 1/4							
		Decelerate				15	10	20
		Accelerate			45		25	45
			Cruise		45		25	45
4th 1/4								
	Decelerate				20	5	25	
	Accelerate			45		25	45	
		Cruise		45		25	45	

Table AP1-2: Example L1e-B low speed moped and L1e-B high speed moped, actual vs. target vehicle speeds.

2.8.4. A table of target vehicle speeds shall be prepared indicating the nominal target vehicle speeds set out in table Ap1-3 and the attainable target vehicle speeds of the vehicle in a format preferred by the manufacturer to the satisfaction of the approval authority.

2.8.9. In accordance with paragraph 2.2.5., quarter divisions of the lap length shall be marked

identified on the test track or road, or a system shall be used to indicate the distance being passed on the chassis dynamometer.

2.8.10. After each sub-lap is passed the required list of actions from table Ap1-3 shall be performed in order and in accordance with paragraph 2.7 regarding the general driving instructions to or at the next target vehicle speed.

2.8.11. The maximum attained vehicle speed may deviate from the maximum design vehicle speed depending on the type of acceleration required and track conditions. Therefore, during the test actual attained vehicle speeds should be monitored to see if the target vehicle speeds are being achieved as required. Special attention shall be paid to peak vehicle speeds and cruise vehicle speeds close to the maximum design vehicle speed and the subsequent vehicle speed differences in the decelerations.

2.8.12. Where a significant deviation is consistently found when performing multiple sub-cycles, the target vehicle speeds shall be adjusted in the table set-out in paragraph 2.8.4. The change only needs to be implemented when starting a sub-cycle, and does not need to be adjusted in real-time.

2.9. SRC-LeCV detailed test cycle description

2.9.1. Graphical overview of the SRC-LeCV

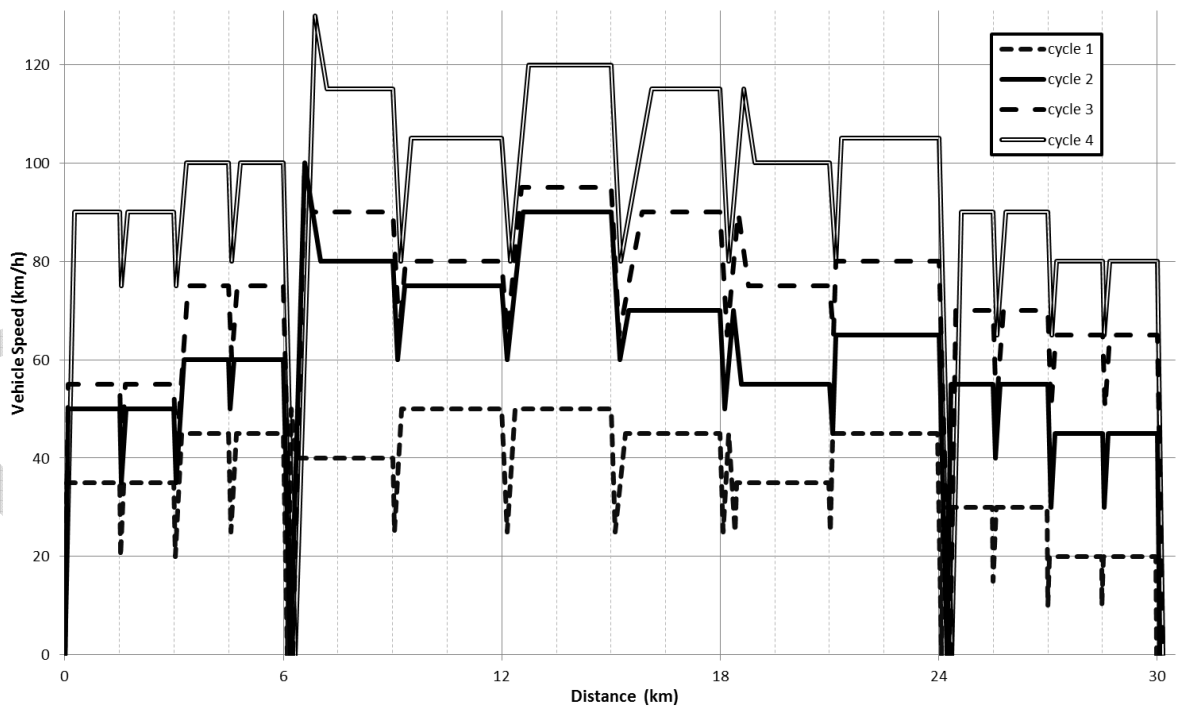


Figure Ap1-1: SRC-LeCV, example distance accumulation characteristics for all four cycles.

2.9.2. SRC-LeCV detailed cycle instructions

		Cycle:											
		1			2			3			4		
Lap	Sub-lap	Action	Sub-action	Time	To/at	By	To/at	By	To/at	By	To/at	By	
1	1 st 1/4			[s]	[km/h]								
		Stop & Idle		10									
		Accelerate	Hard		35		50		55		90		
			Cruise			35		50		55		90	
	2 nd 1/4		Decelerate	Moderate			15		15		15		15
			Accelerate	Moderate		35		50		55		90	
			Cruise			35		50		55		90	
	3 rd 1/4		Decelerate	Moderate			15		15		15		15
			Accelerate	Moderate		45		60		75		100	
			Cruise			45		60		75		100	
	4 th 1/4		Decelerate	Moderate			20		10		15		20
			Accelerate	Moderate		45		60		75		100	
		Cruise			45		60		75		100		
2	1 st 1/2	Decelerate	Coast-through		0		0		0		0		
		Stop & Idle		10									
		Accelerate	Hard		50		100		100		130		
		Decelerate	Coast-down			10		20		10		15	
		Optional acceleration	Hard		40		80		90		115		
		Cruise			40		80		90		115		
2 nd 1/2		Decelerate	Moderate			15		20		25		35	
		Accelerate	Moderate		50		75		80		105		
		Cruise			50		75		80		105		
3	1 st 1/2	Decelerate	Moderate			25		15		15		25	
		Accelerate	Moderate		50		90		95		120		
		Cruise			50		90		95		120		
	2 nd 1/2		Decelerate	Moderate			25		10		30		40
			Accelerate	Moderate		45		70		90		115	
			Cruise			45		70		90		115	

Table Ap1-3: description of the actions and sub actions for each cycle and sub-cycle.

- 3.0. Soak procedures in the SRC-LeCV
- 3.1. The SRC-LeCV soak procedure shall consist of the following steps:
- 3.1.1. a full SRC-LeCV sub-cycle (approximately 30 km distance) shall be finished;
- 3.1.2. a test type I emission test may be performed if deemed required for statistical relevance;
- 3.1.3. any required maintenance shall be undertaken and the test vehicle may be refuelled;
- 3.1.4. the test vehicle shall be set to idle with the combustion engine running for a minimum of one hour with no user input;
- 3.1.5. the propulsion of the test vehicle shall be turned off;
- 3.1.6. the test vehicle shall be cooled down and soaked under ambient conditions for a minimum of two hours (or four hours with a fan and lubrication oil temperature equal to ambient temperature);
- 3.1.7. the vehicle may be refuelled and mileage accumulation shall be resumed as required at lap 1, lap 1 of the SRC-LeCV sub cycle set-out in table Ap1-3.
- 3.1.8. the SRC-LeCV soak procedure shall not replace the regular soak time for Type I emission tests set out in Annex I. It is permissible to coordinate the SRC-LeCV soak procedure to be performed after each maintenance interval and/or after each emission laboratory test.
- 3.2. test type V soak procedure for actual durability testing with full mileage accumulation.
- 3.2.1. During the full mileage accumulation phase set-out in paragraph 3.1 of Annex V the test vehicle(s) shall undergo a minimum number of soak procedures set-out in paragraph 3.1.2. These soak procedures shall be evenly distributed over the accumulated mileage.
- 3.2.2. The amount of soak procedures during the full mileage accumulation phase shall be conducted according to the following table.

SRC-LeCV, cycle No	Amount of test type V soak procedures
1 & 2	3
3	4
4	6

Table Ap1-3: Amount of soak procedures dependent on the SRC-LeCV set-out in table Ap1-1

- 3.3. test type V soak procedure for actual durability testing with partial mileage accumulation.
- 3.3.1. During the partial mileage accumulation phase set-out in paragraph 3.2 of Annex V the vehicle(s) shall undergo four soak procedures set-out in paragraph 3.1. These soak procedures shall be evenly distributed over the accumulated mileage.

Appendix 2

The US EPA Approved Mileage Accumulation durability cycle (AMA-L3e, for L3e & L4e motorcycles only)

1. Introduction

- 1.1. The US EPA Approved Mileage Accumulation durability cycle (AMA-L3e) is a kilometre accumulation cycle in order to age test motorcycles (categories L3e and L4e only) and its pollution control devices in a repeatable way. The test motorcycle(s) may run the AMA-L3e cycle on a road, on a test track or on a kilometre accumulation chassis dynamometer.
- 1.2. The AMA-L3e cycle shall be completed by repeating the AMA-L3e sub cycle set-out in paragraph 2 until the applicable durability mileage set-out in part A of Annex VII to Regulation (EU) [xxx/2013] has been accumulated.
- 1.3. The AMA-L3e sub cycle shall be composed of 11 sub-sub cycles covering 6 kilometres each.

2. AMA-L3e cycle requirements


- 2.1. For the purpose of accumulating mileage in the AMA-L3e the categories L3e and L4e motorcycles shall be grouped as follows:

L3e motorcycle class	Engine capacity [cm ³]	V _{max} [km/h]
I	< 150	Not applicable
II	≥ 150	≤ 130
III	≥ 150	>130

Table Ap2-1: Grouping of categories L3e and L4e motorcycles.

- 2.2. If the AMA-L3e cycle is performed on a kilometre accumulation chassis dynamometer the distance travelled shall be calculated from the number rotations of the roller and the roller circumference.
- 2.3. One AMA-L3e sub cycle shall be performed as follows:

2.5.1.

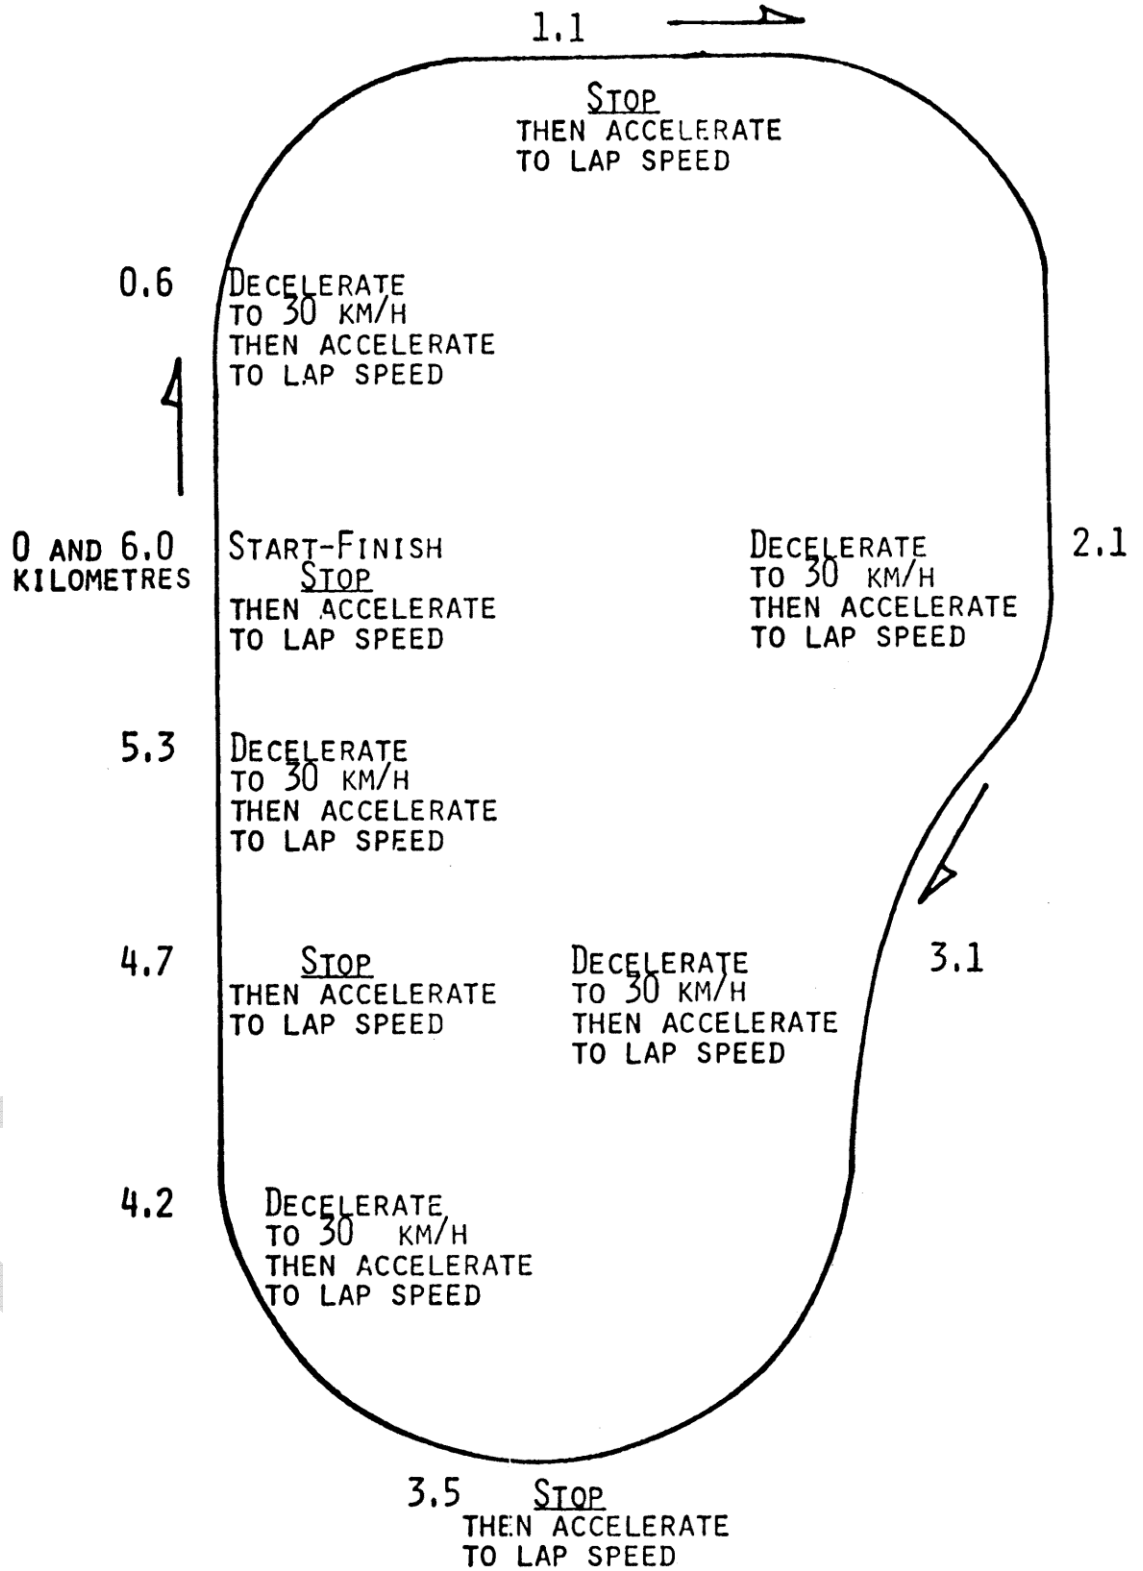

ALL STOPS ARE 15 SECONDS

Figure Ap2-1: Driving schedule AMA-L3e sub-sub cycle.

2.5.2.

The AMA-L3e sub cycle consisting of 11 sub-sub cycles shall be driven at the following sub-cycle vehicle speeds:

Sub-Sub cycle No	Motorcycle class I [km/h]	Motorcycle class II [km/h]	Motorcycle class III Option I [km/h]	Motorcycle class III Option II [km/h]
1	65	65	65	65
2	45	45	65	45
3	65	65	55	65
4	65	65	45	65
5	55	55	55	55
6	45	45	55	45
7	55	55	70	55
8	70	70	55	70
9	55	55	46	55
10	70	90	90	90
11	70	90	110	110

Table Ap2-2: Maximum vehicle speed in one AMA-L3e sub cycle.

- 2.5.3. Manufacturers may select one of two cycle vehicle speed options for class III motorcycle completing the entire procedure on their selected option.
- 2.5.4. During the first nine AMA-L3e sub-sub cycles, the L3e or L4e motorcycle is stopped four times with the engine idling each time for 15 seconds.
- 2.5.5. The AMA-L3e sub-sub cycle shall consist of five decelerations in each sub-sub cycle, dropping from cycle speed to 30 km/h. The L3e or L4e motorcycle shall then gradually be accelerated again until the cycle speed shown in Table AP2-2 is attained.
- 2.5.6. The 10th sub-sub cycle shall be carried out at a steady speed according to the L3e or L4e motorcycle class as referred in Table AP2-1.
- 2.5.7. The 11th sub-sub cycle shall begin with a maximum acceleration from stop point up to lap speed. At halfway, braking is employed normally until the L3e or L4e motorcycle comes to a stop. This shall be followed by an idle period of 15 seconds and a second maximum acceleration. This completes one AMA-L3e sub cycle.
- 2.5.8. The schedule shall then be restarted from the beginning of the AMA-L3e sub cycle.
- 2.5.9. At the manufacturer's request, and with the agreement of the approval authority, an L3e or L4e category motorcycle type may be placed in a higher class provided it is capable of complying with all aspects of the procedure for the higher class.
- 2.5.10. At the manufacturer's request, and with the agreement of the approval authority, should an L3e or L4e motorcycle be unable to attain the specified cycle speeds for that class, the L3e or L4e motorcycle type shall be placed in a lower class. If the vehicle is still unable to achieve the cycle speeds required at this lower class, it shall attain the highest possible speed during the test and the throttle shall be applied if necessary to attain that vehicle speed.

ANNEX VI

Test type VII requirements; measurement of CO₂ emissions, fuel consumption, electric energy consumption and electric range determination

Appendix Number	Appendix title	Page #
1	Method of measuring emissions of carbon dioxide and fuel consumption of vehicles powered by a combustion engine only	.
2	Method of measuring the electric energy consumption of vehicles powered by an electric powertrain only	
3	Method of measuring the emissions of carbon dioxide, the fuel consumption, the electric energy consumption and driving range of vehicles powered by a hybrid electric powertrain	
3A	Electrical energy/power storage device State Of Charge (SOC) profile for Externally chargeable Hybrid Electric Vehicle (OVC HEV) in a Type VII test.	
3B	Method for measuring the electricity balance of the battery of OVC and NOVC HEV	
3C	Method of measuring the electric range of vehicles powered by an electric powertrain only or by a hybrid electric powertrain and the OVC range of vehicles powered by a hybrid electric powertrain	

1. Scope

This Annex applies to the following tests of L-category vehicles equipped with associated powertrain configurations:

(a) the measurement of the emission of carbon dioxide (CO₂) and fuel consumption, and/or to the measurement of electric energy consumption and electric range of L-category vehicles powered by a combustion engine only or by a hybrid electric powertrain, and

(b) the measurement of electric energy consumption and electric range of categories L vehicles powered by an electric powertrain only.

2. Specification and tests

2.1. General

The components liable to affect CO₂ emissions and fuel consumption or the electric energy consumption shall be so designed, constructed and assembled as to enable the vehicle, in normal use, despite the vibrations to which it may be subjected, to comply with the provisions of this Annex.

2.2. Description of tests for vehicles powered by a combustion engine only

2.2.1. The emissions of CO₂ and fuel consumption shall be measured according to the test procedure described in Appendix 1. Vehicles which do not attain the acceleration and maximum speed values required in the test cycle shall be operated with the accelerator control fully depressed until they once again reach the required operating curve. Deviations from the test cycle shall be recorded in the test report.

2.2.2. For CO₂ emissions the results of the test shall be expressed in grams per kilometre (g/km) rounded to the nearest whole number.

2.2.3. Fuel consumption values shall be expressed in the case of petrol, LPG, ethanol (E85) and diesel) in litres per 100 km or in kg and m³ per 100 km in the case of hydrogen, NG/biomethane and H₂NG, and are calculated according to paragraph 1.4.3. of Appendix 1 by the carbon balance method using the measured emissions of CO₂ and the other carbon related emissions (CO and HC). The results shall be rounded to the first decimal place.

2.2.4. The appropriate reference fuels defined in appendix 2 to Annex I shall be used for testing.

For LPG, NG/Biomethane, H₂NG that reference fuel shall be used which is chosen by the manufacturer for the measurement of the propulsion performance according to Annex IX. The chosen fuel shall be specified in the test report defined in Regulation (EC) No [xxx/2013] on administrative requirements.

For the purpose of calculation referred in paragraph 2.2.3., the fuel consumption shall be expressed in appropriate units and the following fuel characteristics shall be used:

(a) density: measured on the test fuel according to ISO 3675 or an equivalent method. For petrol and diesel fuel the density measured at 15 °C and 101.3 kPa shall be used; for LPG, Natural Gas, H₂NG and hydrogen a reference density shall be used, as follows:

0.538 kg/litre for LPG;

0.654 kg/m³ for NG²⁰;

$$\frac{1,256 \cdot A + 136}{0,654 \cdot A}$$
 for H₂NG (with A being the quantity of NG/biomethane within the H₂NG mixture, expressed in per cent volume for H₂NG);

0.084 kg/m³ for hydrogen

(b) Hydrogen-carbon ratio: fixed values will be used which are:

C₁H_{1.89}O_{0.016} for petrol;

C₁H_{1.86}O_{0.005} for diesel;

C₁H_{2.525} for LPG (liquefied petroleum gas) ;

CH₄ for NG (natural gas) and biomethane;

C₁H_{2.74}O_{0.385} for ethanol (E85);

2.3. Description of tests for vehicles powered by an electric powertrain only

2.3.1. The technical service in charge of the tests shall conduct the measurement of the electric energy consumption according to the method and test cycle described in Appendix 2 to this Annex.

2.3.2. The technical service in charge of the tests shall conduct the measurement of the electric range of the vehicle according to the method described in Appendix 2.

The electric range measured by this method shall be the only one included in sales promotional material.

2.3.3. The result of the electric energy consumption shall be expressed in Watt hours per kilometre (Wh/km) and the range in km, both rounded to the nearest whole number.

2.4. Description of tests for vehicles powered by a hybrid electric powertrain

2.4.1. The technical service in charge of the tests shall conduct the measurement of the emissions of CO₂ and of the electric energy consumption according to the test procedure described in Appendix 3.

²⁰ Mean value of G20 and G25 reference fuels at 15 °C

- 2.4.2. The results of the test for CO₂ emissions shall be expressed in grams per kilometre (g/km) rounded to the nearest whole number.
- 2.4.3. The fuel consumption, expressed in litres per 100 km (in the case of petrol, LPG, ethanol (E85) and diesel) or in kg and m³ per 100 km (in the case of NG/biomethane, H₂NG and hydrogen) shall be calculated according to paragraph 1.4.3. of Appendix 1 by the carbon balance method using the measured emissions of CO₂ and the other carbon related emissions (CO and HC). The results shall be rounded to the first decimal place.
- 2.4.4. For the purpose of the calculation referred to in paragraph 2.4.3., the prescriptions and values of paragraph 2.2.4. shall apply.
- 2.4.5. If applicable, the result of the electric energy consumption shall be expressed in Watt hours per kilometre (Wh/km), rounded to the nearest whole number.
- 2.4.6. The technical service in charge of the tests shall conduct the measurement of the electric range of the vehicle according to the method described in Appendix 2 to this Annex. The result shall be expressed in km, rounded to the nearest whole number.
- The electric range measured by this method shall be the only one included in sales promotional material and which may be used for the calculations of Appendix 3.
- 2.5. Interpretation of test results
- 2.5.1. The CO₂ value or the value of electric energy consumption adopted as the type approval value shall be the value declared by the manufacturer if the value measured by the technical service does not exceed the declared value by more than 4 per cent. The measured value can be lower without any limitations.
- In the case of vehicles powered by a combustion engine only which are equipped with periodically regenerating systems as defined in paragraph 2.16., the results are multiplied by the factor K_i obtained from Appendix x before being compared to the declared value.
- 2.5.2. If the measured value of CO₂ or electric energy consumption exceeds the manufacturer's declared CO₂ or electric energy consumption value by more than 4 per cent, then another test shall be run on the same vehicle.
- When the average of the two test results does not exceed the manufacturer's declared value by more than 4 per cent, then the value declared by the manufacturer shall be taken as the type approval value.
- 2.5.3. If the average still exceeds the declared value by more than 4 per cent, a final test shall be run on the same vehicle. The average of the three test results shall be taken as the type approval value.
- 3. Modification and extension of approval of the approved type.**
- 3.1. Every modification of the approved type shall be notified to the approval authority

that approved the type. The approval authority may then either:

- 3.1.1. consider that the modifications made are unlikely to have an appreciable adverse effect on the values of CO₂ and fuel consumption or electric energy consumption and that, in this case, the original approval will be valid for the modified vehicle type, or
- 3.1.2. require a further test report from the technical service responsible for conducting the tests according to conditions in paragraph 4.
- 3.2. Confirmation or extension of approval, specifying the alterations, shall be communicated by the procedure specified in the Regulation (EU) No [xxx/2013] on administrative requirements.
- 3.3. The approval authority that grants the extension of the approval shall assign a series number for such an extension and inform thereof the other approval authorities by means of a communication form as laid down in Regulation (EU) No [xxx/2013] on administrative requirements.

4. Conditions of extension of the approval for vehicle type.

- 4.1. Vehicles powered by an internal combustion engine only, except vehicles equipped with a periodically regenerating emission control system.

The type approval obtained by the same manufacturer can be extended to vehicles from the same type or from a different type from the same manufacturer differing with regard to the following characteristics of Appendix 1 if the CO₂ emissions measured by the technical service do not exceed by more than 4 per cent the type approved value:

- 4.1.1. reference mass.
- 4.1.2. maximum authorized mass..
- 4.1.3. type of bodywork
- 4.1.4. overall gear ratios..
- 4.1.5. engine equipment and accessories.
- 4.1.6. engine revolutions per kilometer in highest gear with an accuracy of +/- 5%.
- 4.2. Vehicles powered by an internal combustion engine only and equipped with a periodically regenerating emission control system.

The type approval can be extended to vehicles from the same type or from a different type from the same manufacturer, differing with regard to the characteristics of Appendix 1, given in paragraphs 4.1.1. to 4.1.6. above, but not exceeding the family characteristics of Annex X, if the CO₂ emissions measured by the technical service do not exceed by more than 4 per cent the type approved value, and where the same K_i factor is applicable.

The type approval can be extended also to vehicles from the same type, but with a

different K_i factor, if the corrected CO₂ value measured by the technical service does not exceed by more than 4 per cent the type approved value.

4.3. Vehicles powered by an electric powertrain only

Extensions may be granted after agreement with the approval authority .

4.4. Vehicles powered by a hybrid electric powertrain.

The type approval can be extended to vehicles from the same type or from a different type differing with regard to the following characteristics of Appendix 3 if the CO₂ emissions and the electric energy consumption measured by the technical service do not exceed by more than 4 per cent the type approved value:

4.4.1. reference mass;

4.4.2. maximum authorized mass;

4.4.3. type of bodywork.

4.4.4. type and amount of propulsion batteries. In case of multiple batteries fitted to e.g. extend the range extrapolation of the measurement in the base configuration (taking into account the capacities and the way how the batteries are connected (in parallel, not in series)) shall be deemed sufficient.

4.4.5. With respect to a change in any other characteristic extensions may be granted after agreement with the approval authority.

5. Special provisions

In the future, vehicles with special energy efficient technologies may be offered which could be submitted to complementary testing programmes. These would be specified at a later stage which can be claimed by the manufacturer in order to demonstrate the advantages of the solution.

Appendix 1

Test type VI requirements; method of measuring emissions of carbon dioxide and fuel consumption of vehicles powered by a combustion engine only

1. **Specification of the test.**
 - 1.1. Emissions of carbon dioxide (CO₂) and fuel consumption of vehicles powered by a combustion engine only shall be determined according to the procedure for the Type I test defined in Annex I in force at the time of the approval of the vehicle.
 - 1.2. In addition to the CO₂ and fuel consumption results for the entire Type I test, emissions of carbon dioxide (CO₂) and fuel consumption shall also be determined separately for parts 1, 2 and 3, if applicable, by using the applicable Type I test procedure in force at the time of the approval of the vehicle.
 - 1.3. In addition to the conditions specified in Annex I in force at the time of the approval of the vehicle, the following conditions shall apply:
 - 1.3.1. Only the equipment necessary for the operation of the vehicle during the test shall be in use. If there is a manually controlled device for the engine intake air temperature, it shall be in the position prescribed by the manufacturer for the ambient temperature at which the test is performed. In general, the auxiliary devices required for the normal operation of the vehicle shall be in use.
 - 1.3.2. If the radiator fan is temperature controlled, it shall be in the condition of normal operation on the vehicle. The passenger compartment heating system, if applicable, shall be switched off, as shall any air conditioning system, but such systems compressor shall be functioning normally.
 - 1.3.3. If a super-charger is fitted, it shall be in the normal operating condition for the test conditions.
 - 1.3.4. All the lubricants shall be those recommended by the manufacturer of the vehicle and shall be specified in the test report.
 - 1.3.5. The widest tyre shall be chosen. If there are more than three tyre sizes, the widest minus one shall be chosen.. The pressures shall be indicated in the test report.
 - 1.4. Calculation of CO₂ and fuel consumption values.
 - 1.4.1. The mass emission of CO₂, expressed in g/km, shall be calculated from the measurement results using the provisions defined in paragraph 6 of Annex I, in force at the time of the approval of the vehicle.
 - 1.4.1.1. For this calculation the density of CO₂ shall be $Q_{CO_2} = 1.964$ g/litre.
 - 1.4.2. The fuel consumption values shall be calculated from the emissions of hydrocarbons, carbon monoxide, and carbon dioxide determined from the measurement results using the provisions defined in paragraph 6 of Annex I, in force at the time of the approval of the vehicle.

1.4.3. The fuel consumption (FC), expressed in litres per 100 km (in the case of petrol, LPG, ethanol (E85) and diesel) or in kg per 100 km (in the case of NG/biomethane, H₂NG and hydrogen) is calculated by means of the following formulae:

1.4.3.1. for vehicles with a positive ignition engine fuelled with petrol (E5):

Equation Ap1-1:

$$FC = (0.118/D) \cdot [(0.848 \cdot HC) + (0.429 \cdot CO) + (0.273 \cdot CO_2)];$$

1.4.3.2. for vehicles with a positive ignition engine fuelled with LPG:

Equation Ap1-2:

$$FC_{\text{norm}} = (0.1212 / 0.538) \cdot [(0.825 \cdot HC) + (0.429 \cdot CO) + (0.273 \cdot CO_2)].$$

If the composition of the fuel used for the test differs from the composition that is assumed for the calculation of the normalized consumption, on the manufacturer's request a correction factor *cf* may be applied, as follows:

Equation Ap1-3:

$$FC_{\text{norm}} = (0.1212 / 0.538) \cdot (cf) \cdot [(0.825 \cdot HC) + (0.429 \cdot CO) + (0.273 \cdot CO_2)].$$

The correction factor *cf*, which may be applied, is determined as follows:

Equation Ap1-4:

$$cf = 0.825 + 0.0693 \cdot n_{\text{actual}};$$

where:

n_{actual} = the actual H/C ratio of the fuel used;

1.4.3.3. for vehicles with a positive ignition engine fuelled with NG/biomethane:

Equation Ap1-5:

$$FC_{\text{norm}} = (0.1336 / 0.654) \cdot [(0.749 \cdot HC) + (0.429 \cdot CO) + (0.273 \cdot CO_2)] \text{ in m}^3;$$

1.4.3.4. for vehicles with a positive ignition engine fuelled by H₂NG:

Equation Ap1-6:

$$FC = \frac{910,4 \cdot A + 13.600}{44,655 \cdot A^2 + 667,08 \cdot A} \left(\frac{7,848 \cdot A}{9,104 \cdot A + 136} \cdot HC + 0,429 \cdot CO + 0,273 \cdot CO_2 \right) \text{ in m}^3;$$

1.4.3.5. for vehicles fuelled by gaseous hydrogen:

Equation Ap1-7:

$$FC = 0,024 \cdot \frac{V}{d} \cdot \left[\frac{1}{Z_2} \cdot \frac{p_2}{T_2} - \frac{1}{Z_1} \cdot \frac{p_1}{T_1} \right]$$

Under previous agreement with the type-approval authority, and for vehicles fuelled either by gaseous or liquid hydrogen, the manufacturer may choose as alternative to the method above, either the formula:

Equation Ap1-8:

$FC = 0,1 \cdot (0,1119 \cdot H_2O + H_2)$ or a method according to standard protocols such as SAE J2572.

1.4.3.6. for vehicles with a compression ignition engine fuelled with diesel (B5):

Equation Ap1-9:

$FC = (0,116/D) \cdot [(0,861 \cdot HC) + (0,429 \cdot CO) + (0,273 \cdot CO_2)]$;

1.4.3.7. for vehicles with a positive ignition engine fuelled with ethanol (E85):

Equation Ap1-10:

$FC = (0,1742/D) \cdot [(0,574 \cdot HC) + (0,429 \cdot CO) + (0,273 \cdot CO_2)]$.

1.4.4. In these formulae:

FC = the fuel consumption in litre per 100 km (in the case of petrol, ethanol, LPG, diesel or biodiesel) in m³ per 100 km (in the case of natural gas and H₂NG) or in kg per 100 km in the case of hydrogen.

HC = the measured emission of hydrocarbons in g/km

CO = the measured emission of carbon monoxide in g/km

CO₂ = the measured emission of carbon dioxide in g/km

H₂O = the measured emission of H₂O in g/km

H₂ = the measured emission of H₂ in g/km

A = quantity of NG/biomethane within the H₂NG mixture, expressed in per cent volume

D = the density of the test fuel.

In the case of gaseous fuels D is the density at 15°C and at 101.3 kPa ambient pressure:

d = the theoretical distance covered by a vehicle tested under the type 1 test in km.

p_1 = pressure in gaseous fuel tank before the operating cycle in Pa;

p_2 = pressure in gaseous fuel tank after the operating cycle in Pa;

T_1 = temperature in gaseous fuel tank before the operating cycle in K.

T_2 = temperature in gaseous fuel tank after the operating cycle in K.

Z_1 = compressibility factor of the gaseous fuel at p_1 and T_1

Z_2 = compressibility factor of the gaseous fuel at p_2 and T_2

V = inner volume of the gaseous fuel tank in m^3

The compressibility factor shall be obtained from the following table

T(k) \ p(bar)	5	100	200	300	400	500	600	700	800	900
33	0.8589	10.508	18.854	26.477	33.652	40.509	47.119	53.519	59.730	65.759
53	0.9651	0.9221	14.158	18.906	23.384	27.646	31.739	35.697	39.541	43.287
73	0.9888	0.9911	12.779	16.038	19.225	22.292	25.247	28.104	30.877	33.577
93	0.9970	10.422	12.334	14.696	17.107	19.472	21.771	24.003	26.172	28.286
113	10.004	10.659	12.131	13.951	15.860	17.764	19.633	21.458	23.239	24.978
133	10.019	10.757	11.990	13.471	15.039	16.623	18.190	19.730	21.238	22.714
153	10.026	10.788	11.868	13.123	14.453	15.804	17.150	18.479	19.785	21.067
173	10.029	10.785	11.757	12.851	14.006	15.183	16.361	17.528	18.679	19.811
193	10.030	10.765	11.653	12.628	13.651	14.693	15.739	16.779	17.807	18.820
213	10.028	10.705	11.468	12.276	13.111	13.962	14.817	15.669	16.515	17.352
233	10.035	10.712	11.475	12.282	13.118	13.968	14.823	15.675	16.521	17.358
248	10.034	10.687	11.413	12.173	12.956	13.752	14.552	15.350	16.143	16.929
263	10.033	10.663	11.355	12.073	12.811	13.559	14.311	15.062	15.808	16.548
278	10.032	10.640	11.300	11.982	12.679	13.385	14.094	14.803	15.508	16.207
293	10.031	10.617	11.249	11.897	12.558	13.227	13.899	14.570	15.237	15.900
308	10.030	10.595	11.201	11.819	12.448	13.083	13.721	14.358	14.992	15.623
323	10.029	10.574	11.156	11.747	12.347	12.952	13.559	14.165	14.769	15.370
338	10.028	10.554	11.113	11.680	12.253	12.830	13.410	13.988	14.565	15.138
353	10.027	10.535	11.073	11.617	12.166	12.718	13.272	13.826	14.377	14.926

Table Ap1-1: look-up table compressibility factor Z_x of the gaseous fuel

Appendix 2

Test type V requirements; method of measuring the electric energy consumption of a vehicle powered by an electric powertrain only

1. Test sequence

- 1.1. Electric energy consumption of pure electric vehicles shall be determined according to the procedure for the Type I test defined in Annex I in force at the time of the approval of the vehicle.

If the vehicle has several driving modes, which may be selected by the driver, the operator shall select the one to best match the target curve.

2. Test method

2.1. Principle

The test method described hereafter allows the electric energy consumption, expressed in Wh/km, to be measured:

2.2.

Parameter	Units	Accuracy	Resolution
Time	s	0.1 s	0.1 s
Distance	m	± 0.1 per cent	1 m
Temperature	°C	± 1 °C	1 °C
Speed	km/h	± 1 per cent	0.2 km/h
Mass	kg	± 0.5 per cent	1 kg
Energy	Wh	± 0.2 per cent	Class 0.2 s according to IEC ²¹ 687

Table Ap2-1:Parameters, units and accuracy of measurements

2.3. Test vehicle.

2.3.1. Condition of the vehicle

- 2.3.1.1. The vehicle tyres shall be inflated to the pressure specified by the vehicle manufacturer when the tyres are at the ambient temperature.

- 2.3.1.2. The viscosity of the oils for the mechanical moving parts shall conform to the specification of the vehicle manufacturer.

- 2.3.1.3. The lighting and light-signalling and auxiliary devices shall be off, except those

²¹ International Electro-technical Commission

required for testing and usual day-time operation of the vehicle.

2.3.1.4. All energy storage systems available for other than traction purposes (electric, hydraulic, pneumatic, etc.) shall be charged up to their maximum level specified by the manufacturer.

2.3.1.5. If the batteries are operated above the ambient temperature, the operator shall follow the procedure recommended by the vehicle manufacturer in order to keep the temperature of the battery in the normal operating range.

The manufacturer shall be in a position to attest that the thermal management system of the battery is neither disabled nor reduced.

2.3.1.6. The vehicle shall have undergone at least 300 km during the seven days before the test with those batteries that are installed in the test vehicle.

2.4. Operation mode

All the tests are conducted at a temperature of between 20 °C and 30 °C.

The test method includes the four following steps:

- (a) initial charge of the battery;
- (b) application twice of the applicable type I test cycle;
- (c) charging the battery;
- (d) calculation of the electric energy consumption.

Between the steps, if the vehicle shall move, it shall be pushed to the following test area (without regenerative recharging).

2.4.1. Initial charge of the battery

Charging the battery consists of the following procedures:

2.4.1.1. Discharge of the battery

The procedure starts with the discharge of the battery of the vehicle while driving (on the test track, on a chassis dynamometer, etc.) at a steady speed of 70 per cent \pm 5 per cent from the maximum thirty minutes speed of the vehicle.

Stopping the discharge shall occur:

- (a) when the vehicle is not able to run at 65 per cent of the maximum thirty minutes speed, or
- (b) when an indication to stop the vehicle is given to the driver by the standard onboard instrumentation, or
- (c) after covering the distance of 100 km.

2.4.1.2. Application of a normal overnight charge

The battery shall be charged according to the following procedure.

2.4.1.2.1. Normal overnight charge procedure

The charge shall be carried out:

(a) with the on-board charger if fitted;

(b) with an external charger recommended by the manufacturer, using the charging pattern prescribed for normal charging;

(c) in an ambient temperature comprised between 20 °C and 30 °C.

This procedure excludes all types of special charges that could be automatically or manually initiated like, for instance, the equalisation charges or the servicing charges.

The vehicle manufacturer shall declare that during the test, a special charge procedure has not occurred.

2.4.1.2.2. End of charge criteria

The end of charge criteria shall correspond to a charging time of 12 hours except if a clear indication is given to the driver by the standard instrumentation that the battery is not yet fully charged.

In this case,

Equation Ap2-1:

$$\text{the maximum time is} = \frac{3 \cdot \text{claimed battery capacity (Wh)}}{\text{mains power supply (W)}}$$

2.4.1.2.3. Fully charged battery

A fully charged battery shall mean the propulsion battery/ies having been charged according to the overnight charge procedure until the end of charge criteria.

2.4.2. Application of the type I test cycle and measurement of the distance

The end of charging time t_0 (plug off) shall be reported.

The chassis dynamometer shall be set with the method described in sub-appendix 1.

Starting within 4 hours from t_0 , the applicable type I test shall be run twice on a chassis dynamometer. At the end, the measure D_{test} of the covered distance in km is recorded.

2.4.3. Charge of the battery

The test vehicle shall be connected to the mains within the 30 minutes after the conclusion of the applicable type I test cycle, carried out twice.

The vehicle shall be charged according to normal overnight charge procedure set-out in paragraph 2.4.1.2.1.

The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy E delivered from the mains, as well as its duration.

Charging is to be stopped after 24 hours from the previous end of charging time (t_0).

Note:

In case of a mains power cut, the 24 hours period may be extended accordingly to the cut duration. Validity of the charge shall be discussed between the technical services of the approval laboratory and the vehicle's manufacturer to the satisfaction of the approval authority.

2.4.4. Electric energy consumption calculation

Energy E in Wh and charging time measurements are to be recorded in the test report.

The electric energy consumption c shall be defined by the formula:

Equation Ap2-2:

$$c = \frac{E}{D_{\text{test}}} \quad (\text{expressed in Wh/km and rounded to the nearest whole number})$$

where D_{test} is the distance covered during the test (km).

Appendix 3

Test type V requirements; method of measuring the emissions of carbon dioxide, the fuel consumption, the electric energy consumption and driving range of vehicles powered by a hybrid electric powertrain

1. Introduction

- 1.1. This appendix defines the specific provisions regarding type-approval of hybrid electric L-category vehicles (HEV) with regards to measuring the emissions of carbon dioxide, the fuel consumption, the electric energy consumption and driving range.
- 1.2. As a general principle for type VII tests, HEVs shall be tested according to the specified type I test cycles and requirements and in particular according to the provisions laid down in Appendix 11 of Annex I unless modified by this appendix.
- 1.3. OVC (Externally chargeable) HEVs shall be tested according to condition A and to condition B.

The test results under both conditions A and B and the weighted average set-out in paragraph 3 shall be reported in the test report.

1.4. Driving cycles and gear shift points

- 1.4.1. The applicable driving cycle set-out in Annex VI of Regulation (EU) No [xxx/2013] described and in Appendix 6 of Annex I of this Regulation applicable at the time of approval of the vehicle shall be used, including the prescribed gear shifting points laid down in paragraph 4.5.5. to Annex I.
- 1.4.4. For vehicle conditioning a combination of the driving cycles set-out in Appendix 6 of Annex I applicable at the time of approval of the vehicle shall be used as prescribed in this appendix.

2. Categories of hybrid electric vehicles (HEV)

Vehicle charging	Off-Vehicle Charging ²² (OVC)		Not Off-Vehicle Charging ²³ (NOVC)	
	Without	With	Without	With
Operating mode switch	Without	With	Without	With

Table Ap11-1.

3. OVC (externally chargeable) HEV without an operating mode switch

3.1. Two type I tests shall be performed under the following conditions:

a) condition A: test shall be carried out with a fully charged electrical energy/power storage device;

b) condition B: test shall be carried out with an electrical energy/power storage device

²² also known as 'externally chargeable'

²³ also known as 'not externally chargeable'

in minimum state of charge (maximum discharge of capacity).

The profile of the state of charge (SOC) of the electrical energy/power storage device during different stages of the test is set-out in sub-appendix 3A.

3.2. Condition A

3.2.1. The procedure shall start with the discharge of the electrical energy/power storage device as described in paragraph 3.2.1.1. below:

3.2.1.1. Discharge of the electrical energy/power storage device

The electrical energy/power storage device of the vehicle is discharged while driving (on the test track, on a chassis dynamometer, etc.):

- at a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up,

- or, if a vehicle can not reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run a lower steady speed where the fuel consuming engine just does not start up for a defined time/distance (to be specified between technical service and manufacturer to the satisfaction of the approval authority),

- or with manufacturer's recommendation.

The fuel consuming engine shall be stopped within ten seconds of it being automatically started.

3.2.2. Conditioning of the vehicle

3.2.2.1. The test vehicle shall be preconditioned by conducting the applicable Type I test cycle in combination with the applicable gear shifting prescriptions set-out in paragraph 4.5.5. of Annex I.

3.2.2.2. After this preconditioning, and before testing, the vehicle shall be kept in a room in which the temperature remains relatively constant between 293 and 303 K (20 °C and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within ± 2 K of the temperature of the room, and the electrical energy/power storage device is fully charged as a result of the charging prescribed in paragraph 3.2.2.4. below.

3.2.2.3. During soak, the electrical energy/power storage device shall be charged, using the normal overnight charging procedure as defined in paragraph 3.2.2.4. below.

3.2.2.4. Application of a normal overnight charge

The electrical energy/power storage device shall be charged according to the following procedure.

3.2.2.4.1. Normal overnight charge procedure

The charging shall be carried out:

(a) with the on board charger if fitted, or

(b) with an external charger recommended by the manufacturer using the charging pattern prescribed for normal charging;

(c) in an ambient temperature comprised between 20 °C and 30 °C. This procedure shall exclude all types of special charges that could be automatically or manually initiated like, for instance, the equalisation charges or the servicing charges. The manufacturer shall declare that during the test, a special charge procedure has not occurred.

3.2.2.4.2. End of charge criteria

The end of charge criteria shall correspond to a charging time of twelve hours, except if a clear indication is given to the driver by the standard instrumentation that the electrical energy/power storage device is not yet fully charged.

In this case,

Equation Ap3-1:

$$\text{the maximum time is} = \frac{3 \cdot \text{claimed battery capacity (Wh)}}{\text{mains power supply (W)}}$$

3.2.3. Test procedure

3.2.3.1. The vehicle shall be started up by the means provided for normal use to the driver. The first cycle starts on the initiation of the vehicle start-up procedure

3.2.3.2. The test procedures defined in either paragraph 3.2.3.2.1. or 3.2.3.2.2. may be used.

3.2.3.2.1. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and end on conclusion of the final idling period in the applicable type I driving cycle (end of sampling (ES)).

3.2.3.2.2. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and continue over a number of repeat test cycles. It shall end on conclusion of the applicable type I driving cycle during which the battery reached the minimum state of charge according to the criterion defined below (end of sampling (ES)).

3.2.3.2.2.1. The electricity balance Q [Ah] is measured over each combined cycle, using the procedure specified in sub-appendix 3B, and used to determine when the battery minimum state of charge has been reached.

3.2.3.2.2.2. The battery minimum state of charge is considered to have been reached in combined cycle N if the electricity balance Q measured during combined cycle N+1 is not more than a 3 per cent discharge, expressed as a percentage of the nominal capacity of the battery (in Ah) in its maximum state of charge, as declared by the manufacturer. At

the manufacturer's request additional test cycles may be run and their results included in the calculations in paragraphs 3.2.3.8. and 3.4. provided that the electricity balance for each additional test cycle shows less discharge of the battery than over the previous cycle.

- 3.2.3.2.2.3. In between each of the cycles a hot soak period of up to ten minutes is allowed. The powertrain shall be switched off during this period.
- 3.2.3.3. The vehicle shall be driven using the applicable type I driving cycle and gear shifting prescriptions laid down in Annex I.
- 3.2.3.4. The tailpipe emissions of the vehicle shall be analysed according to Annex I in force at the time of approval of the vehicle.
- 3.2.3.5. The CO₂ and fuel consumption results on the test cycle(s) for Condition A shall be recorded (respectively m₁ [g] and c₁ [l]). Parameters m₁ and c₁ shall be the sums of the results of the N combined cycles run.

Equation Ap3-2:

$$m_1 = \sum_1^N m_i$$

Equation Ap3-3:

$$c_1 = \sum_1^N c_i$$

- 3.2.4. Within the 30 minutes after the conclusion of the cycle, the electrical energy/power storage device shall be charged according to paragraph 3.2.2.4. The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy e₁ [Wh] delivered from the mains.
- 3.2.5. The electric energy consumption for condition A shall be e₁ [Wh].
- 3.3. Condition B
 - 3.3.1. Conditioning of the vehicle
 - 3.3.1.1. The electrical energy/power storage device of the vehicle shall be discharged according to paragraph 3.2.1.1. At the manufacturer's request, a conditioning according to paragraph 3.2.2.1. of this appendix may be carried out before electrical energy / power storage discharge.
 - 3.3.1.2. Before testing, the vehicle shall be kept in a room in which the temperature remains relatively constant between 293 and 303 K (20 °C and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within ± 2 K of the temperature of the room.
 - 3.3.2. Test procedure

- 3.3.2.1. The vehicle shall be started up by the means provided for normal use to the driver. The first cycle starts on the initiation of the vehicle start-up procedure.
- 3.3.2.2. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and end on conclusion of the final idling period in the applicable type I driving cycle (end of sampling (ES)).
- 3.3.2.3. The vehicle shall be driven using the applicable type I driving cycle and gear shifting prescriptions laid down in Annex I.
- 3.3.2.4. The tailpipe emissions of the vehicle shall be analysed according to Annex I in force at the time of approval of the vehicle.
- 3.3.2.5. The test results for Condition B shall be recorded (respectively m_2 [g] and c_2 [l]).
- 3.3.3. Within the thirty minutes after the conclusion of the cycle, the electrical energy/power storage device shall be charged according to paragraph 3.2.2.5.
- The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy e_2 [Wh] delivered from the mains.
- 3.3.4. The electrical energy/power storage device of the vehicle shall be discharged according to paragraph 3.2.1.1. of this appendix.
- 3.3.5. Within thirty minutes after the discharge, the electrical energy/power storage device shall be charged according to paragraph 3.2.2.5. of this appendix.
- The energy measurement equipment, placed between the mains socket and the vehicle charger, measures the charge energy e_3 [Wh] delivered from the mains.
- 3.3.6. The electric energy consumption e_4 [Wh] for condition B is:

Equation Ap3-4:

$$e_4 = e_2 - e_3$$

3.4. Test results

- 3.4.1. The values of CO₂ shall be:

Equation Ap3-5:

$$M_1 = m_1/D_{\text{test1}} \text{ and}$$

Equation Ap3-6:

$$M_2 = m_2/D_{\text{test2}} \text{ [g/km]}$$

where

D_{test1} and D_{test2} = the actual driven distances in the tests performed under conditions A (paragraph 3.2. of this appendix) and B (paragraph 3.3. of this appendix) respectively,

and

m_1 and m_2 = test results determined in paragraphs 3.2.3.8. and 3.3.2.5. of this appendix respectively.

3.4.2.1 In the case of testing according to paragraph 3.2.3.2.1:

The weighted values of CO₂ shall be calculated as below:

Equation Ap3-7:

$$M = (D_e \cdot M_1 + D_{av} \cdot M_2) / (D_e + D_{av})$$

where:

M = mass emission of CO₂ in grams per kilometre,

M₁ = mass emission of CO₂ in grams per kilometre with a fully charged electrical energy/power storage device,

M₂ = mass emission of CO₂ in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity),

D_e = vehicle electric range, according to the procedure described in sub-appendix 3C, where the manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric operating state,

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity < 150 cm³ ;
- 6 km for a L-category vehicle with an engine capacity ≥ 150 cm³ and v_{max} < 130 km/h;
- 10 km for a L-category vehicle with an engine capacity ≥ 150 cm³ and v_{max} ≥ 130 km/h

3.4.2.2. In the case of testing according to paragraph 3.2.3.2.2.:

Equation Ap3-8:

$$M = (D_{ovc} \cdot M_1 + D_{av} \cdot M_2) / (D_{ovc} + D_{av})$$

Where:

M = mass emission of CO₂ in grams per kilometre.

M₁ = mass emission of CO₂ in grams per kilometre with a fully charged electrical energy/power storage device.

M₂ = mass emission of CO₂ in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

D_{OVC} = OVC range according to the procedure described in sub-appendix 3C.

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity $< 150 \text{ cm}^3$;
- 6 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} < 130 \text{ km/h}$;
- 10 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} \geq 130 \text{ km/h}$.

3.4.3. The values of fuel consumption shall be:

Equation Ap3-9:

$$C_1 = 100 \cdot c_1 / D_{\text{test1}}$$

Equation Ap3-10:

$$C_2 = 100 \cdot c_2 / D_{\text{test2}} \text{ (l/100 km) for liquid fuels and (kg/100) km for gaseous fuel}$$

Where:

D_{test1} and D_{test2} = the actual driven distances in the tests performed under conditions A (paragraph 3.2. of this appendix) and B (paragraph 3.3. of this appendix) respectively, and

c_1 and c_2 = test results determined in paragraphs 3.2.3.8. and 3.3.2.5. respectively.

3.4.4. The weighted values of fuel consumption shall be calculated as below:

3.4.4.1. In the case of test procedure according to paragraph 3.2.3.2.1.:

Equation Ap3-11:

$$C = (D_e \cdot C_1 + D_{av} \cdot C_2) / (D_e + D_{av})$$

where:

C = fuel consumption in l/100 km.

C_1 = fuel consumption in l/100 km with a fully charged electrical energy/power storage device

C_2 = fuel consumption in l/100 km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity)

D_e = vehicle's electric range, according to the procedure described in sub-appendix 3C, where the manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric operating state.

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity $< 150 \text{ cm}^3$;
- 6 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} < 130 \text{ km/h}$;
- 10 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} \geq 130 \text{ km/h}$

3.4.4.2. In the case of testing according to paragraph 3.2.3.2.2.:

Equation Ap3-12:

$$C = (D_{ovc} \cdot C_1 + D_{av} \cdot C_2) / (D_{ovc} + D_{av})$$

Where:

C = fuel consumption in l/100 km.

C_1 = fuel consumption in l/100 km with a fully charged electrical energy/power storage device.

C_2 = fuel consumption in l/100 km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

D_{ovc} = OVC range according to the procedure described in sub-appendix 3C.

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity $< 150 \text{ cm}^3$;
- 6 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} < 130 \text{ km/h}$;
- 10 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} \geq 130 \text{ km/h}$

3.4.5. The values of electric energy consumption shall be

Equation Ap3-13:

$$E_1 = e_1 / D_{\text{test1}} \text{ and}$$

Equation Ap3-14

$$E_4 = e_4 / D_{\text{test2}} \text{ [Wh/km]}$$

with D_{test1} and D_{test2} the actual driven distances in the tests performed under conditions A (paragraph 3.2. of this appendix) and B (paragraph 3.3. of this appendix) respectively, and e_1 and e_4 determined in paragraphs 3.2.5. and 3.3.6. of this

appendix respectively.

3.4.6. The weighted values of electric energy consumption shall be calculated as below:

3.4.6.1. In the case of testing according to paragraph 3.2.3.2.1.:

Equation Ap3-15

$$E = (D_e \cdot E_1 + D_{av} \cdot E_4) / (D_e + D_{av})$$

where:

E = electric consumption Wh/km

E₁ = electric consumption Wh/km with a fully charged electrical energy/power storage device calculated.

E₄ = electric consumption Wh/km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

D_e = vehicle's electric range, according to the procedure described in sub-appendix 3C, where the manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric operating state.

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity < 150 cm³ ;
- 6 km for a L-category vehicle with an engine capacity ≥ 150 cm³ and v_{max} < 130 km/h;
- 10 km for a L-category vehicle with an engine capacity ≥ 150 cm³ and v_{max} ≥ 130 km/h.

3.4.6.2. In the case of testing according to paragraph 3.2.3.2.2.:

Equation Ap3-16:

$$E = (D_{ovc} \cdot E_1 + D_{av} \cdot E_4) / (D_{ovc} + D_{av})$$

where:

E = electric consumption Wh/km.

E₁ = electric consumption Wh/km with a fully charged electrical energy/power storage device calculated.

E₄ = electric consumption Wh/km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

D_{ovc} = OVC range according to the procedure described in sub-appendix 3C.

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity $< 150 \text{ cm}^3$;
- 6 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} < 130 \text{ km/h}$;
- 10 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} \geq 130 \text{ km/h}$.

4. Externally chargeable (OVC HEV) with an operating mode switch

4.1. Two tests shall be performed under the following conditions:

4.1.1. Condition A: test shall be carried out with a fully charged electrical energy/power storage device.

4.1.2. Condition B: test shall be carried out with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity)

4.1.3. The operating mode switch shall be positioned according to Annex I, Appendix 11, paragraph 3.2.1.3., Table Ap11-2

4.2. Condition A.

4.2.1. If the electric range of the vehicle, as measured in accordance with sub appendix 3C, is higher than 1 complete cycle, on the request of the manufacturer, the Type I test for electric energy measurement may be carried out in pure electric mode, after agreement of the technical service and to the satisfaction of the approval authority. In this case, the values of M_1 and C_1 in paragraph 4.4. are equal to 0.

4.2.2. The procedure shall start with the discharge of the electrical energy/power storage device of the vehicle as described in paragraph 4.2.2.1. below.

4.2.2.1. The electrical energy/power storage device of the vehicle is discharged while driving with the switch in pure electric position (on the test track, on a chassis dynamometer, etc.) at a steady speed of 70 per cent \pm 5 per cent of the maximum design vehicle speed of the vehicle in pure electric mode, which is to be determined according to the test procedure for pure electric vehicles defined in appendix 2.

Stopping the discharge occurs:

- when the vehicle is not able to run at 65 per cent of the maximum thirty minutes speed; or
- when an indication to stop the vehicle is given to the driver by the standard onboard instrumentation, or
- after covering a distance of 100 km.

If the vehicle is not equipped with a pure electric mode, the electrical energy/power

storage device discharge shall be achieved by driving the vehicle (on the test track, on a chassis dynamometer, etc.):

- at a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up,
- or if a vehicle can not reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run a lower steady speed where the fuel consuming engine just does not start up for a defined time/distance (to be specified between technical service and manufacturer to the satisfaction of the approval authority),
- or with manufacturer's recommendation.

The fuel-consuming engine shall be stopped within ten seconds of it being automatically started.

4.2.3. Conditioning of the vehicle:

4.2.3.1. The test vehicle shall be preconditioned by conducting the applicable Type I test cycle in combination with the applicable gear shifting prescriptions set-out in paragraph 4.5.5. of Annex I.

4.2.3.2. After this preconditioning, and before testing, the vehicle shall be kept in a room in which the temperature remains relatively constant between 293 and 303 K (20 °C and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within ± 2 K of the temperature of the room, and the electrical energy/power storage device is fully charged as a result of the charging prescribed in paragraph 4.2.3.3. below.

4.2.3.3. During soak, the electrical energy/power storage device shall be charged, using the normal overnight charging procedure as defined in paragraph 3.2.2.4.

4.2.4. Test procedure.

4.2.4.1. The vehicle shall be started up by the means provided for normal use to the driver. The first cycle starts on the initiation of the vehicle start-up procedure.

4.2.4.2. The test procedures defined in either paragraph 4.2.4.2.1. or 4.2.4.2.2. may be used.

4.2.4.2.1. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and end on conclusion of the final idling period in the applicable type I driving cycle (end of sampling (ES)).

4.2.4.2.2. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and continue over a number of repeat test cycles. It shall end on conclusion of the applicable type I driving cycle during which the battery reached the minimum state of charge according to the criterion defined below (end of sampling (ES)).

4.2.4.2.2.1. The electricity balance Q [Ah] is measured over each combined cycle, using the procedure specified in sub appendix 3B, and used to determine when the battery minimum state of charge has been reached.

- 4.2.4.2.2.2. The battery minimum state of charge is considered to have been reached in combined cycle N if the electricity balance measured during combined cycle N+1 is not more than a 3 per cent discharge, expressed as a percentage of the nominal capacity of the battery (in Ah) in its maximum state of charge, as declared by the manufacturer. At the manufacturer's request additional test cycles may be run and their results included in the calculations in paragraphs 4.2.4.5. and 4.4. provided that the electricity balance for each additional test cycle shows less discharge of the battery than over the previous cycle.
- 4.2.4.2.2.3. In between each of the cycles a hot soak period of up to ten minutes is allowed. The powertrain shall be switched off during this period.
- 4.2.4.3. The vehicle shall be driven using the applicable driving cycle and gear shifting prescriptions as defined in Annex I.
- 4.2.4.4. The exhaust gases shall be analysed according to Annex I in force at the time of approval of the vehicle.
- 4.2.4.5. The CO₂ and fuel consumption results on the test cycle for Condition A shall be recorded (respectively m₁ [g] and c₁ [l]). In the case of testing according to paragraph 4.2.4.2.1., m₁ and c₁ are simply the results of the single combined cycle run. In the case of testing according to paragraph 4.2.4.2.2., m₁ and c₁ are the sums of the results of the N combined cycles run:

Equation Ap3-17:

$$m_1 = \sum_1^N m_i$$

Equation Ap3-18:

$$c_1 = \sum_1^N c_i$$

- 4.2.5. Within the thirty minutes after the conclusion of the cycle, the electrical energy/power storage device shall be charged according to paragraph 3.2.2.5.
- The energy measurement equipment, placed between the mains socket and the vehicle charger, shall measure the charge energy e₁ [Wh] delivered from the mains.
- 4.2.6. The electric energy consumption for condition A shall be e₁ [Wh].
- 4.3. Condition B
- 4.3.1. Conditioning of the vehicle
- 4.3.1.1. The electrical energy/power storage device of the vehicle shall be discharged according to paragraph 4.2.2.1.

At the manufacturer's request, a conditioning according to paragraph 4.2.3.1. may be

carried out before electrical energy / power storage discharge.

4.3.1.2. Before testing, the vehicle shall be kept in a room in which the temperature shall remain relatively constant between 293 and 303 K (20 and 30 °C). This conditioning shall be carried out for at least six hours and continue until the engine oil temperature and coolant, if any, are within ± 2 K of the temperature of the room.

4.3.2. Test procedure

4.3.2.1. The vehicle shall be started up by the means provided for normal use to the driver. The first cycle starts on the initiation of the vehicle start-up procedure.

4.3.2.2. Sampling shall begin (BS) before or at the initiation of the vehicle start up procedure and end on conclusion of the final idling period in the applicable type I driving cycle (end of sampling (ES)).

4.3.2.3. The vehicle shall be driven using the applicable driving cycle and gear shifting prescriptions as defined in Annex I.

4.3.2.4. The exhaust gases shall be analysed according Annex I in force at the time of approval of the vehicle.

4.3.2.5. The CO₂ and fuel consumption results on the test cycle(s) for Condition B shall be recorded (respectively m_2 [g] and c_2 [l]).

4.3.3. Within the thirty minutes after the conclusion of the cycle, the electrical energy/power storage device shall be charged according to paragraph 3.2.2.5.

The energy measurement equipment, placed between the mains socket and the vehicle charger, shall measure the charge energy e_2 [Wh] delivered from the mains.

4.3.4. The electrical energy/power storage device of the vehicle shall be discharged in accordance with paragraph 4.2.2.1.

4.3.5. Within thirty minutes after the discharge, the electrical energy/power storage device shall be charged according to paragraph 3.2.2.5. of this appendix. The energy measurement equipment, placed between the mains socket and the vehicle charger, shall measure the charge energy e_3 [Wh] delivered from the mains.

4.3.6. The electric energy consumption e_4 [Wh] for condition B shall be:

Equation Ap3-19:

$$e_4 = e_2 - e_3.$$

4.4. Test results

4.4.1. The values of CO₂ shall be:

Equation Ap3-20:

$M_1 = m_1/D_{\text{test1}}$ (g/km) and

Equation Ap3-17:

$M_2 = m_2/D_{\text{test2}}$ (g/km)

Where

D_{test1} and D_{test2} = the actual driven distances in the tests performed under conditions A (paragraph 4.2. of this appendix) and B (paragraph 4.3. of this appendix) respectively, and

m_1 and m_2 = test results determined in paragraphs 4.2.4.5. and 4.3.2.5. of this appendix respectively.

4.4.2. The weighted values of CO₂ shall be calculated as below:

4.4.2.1. In the case of testing according to paragraph 4.2.4.2.1.:

Equation Ap3-21:

$M = (D_e \cdot M_1 + D_{\text{av}} \cdot M_2) / (D_e + D_{\text{av}})$

where:

M = mass emission of CO₂ in grams per kilometre.

M_1 = mass emission of CO₂ in grams per kilometre with a fully charged electrical energy/power storage device.

M_2 = mass emission of CO₂ in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

D_e = vehicle's electric range, according to the procedure described in sub appendix 3C, where the manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric operating state.

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity < 150 cm³ ;
- 6 km for a L-category vehicle with an engine capacity ≥ 150 cm³ and $v_{\text{max}} < 130$ km/h;
- 10 km for a L-category vehicle with an engine capacity ≥ 150 cm³ and $v_{\text{max}} \geq 130$ km/h.

4.4.2.2. In the case of testing according to paragraph 4.2.4.2.2.:

Equation Ap3-22:

$$M = (D_{\text{ovc}} \cdot M_1 + D_{\text{av}} \cdot M_2) / (D_{\text{ovc}} + D_{\text{av}})$$

Where

M = mass emission of CO₂ in grams per kilometre.

M_1 = mass emission of CO₂ in grams per kilometre with a fully charged electrical energy/power storage device.

M_2 = mass emission of CO₂ in grams per kilometre with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

D_{ovc} = OVC range according to the procedure described in sub appendix 3C.

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity < 150 cm³ ;
- 6 km for a L-category vehicle with an engine capacity ≥ 150 cm³ and $v_{\text{max}} < 130$ km/h;
- 10 km for a L-category vehicle with an engine capacity ≥ 150 cm³ and $v_{\text{max}} \geq 130$ km/h.

4.4.3. The values of fuel consumption shall be:

Equation Ap3-23:

$$C_1 = 100 \cdot c_1 / D_{\text{test1}} \text{ and}$$

Equation Ap3-24:

$$C_2 = 100 \cdot c_2 / D_{\text{test2}} \text{ (l/100 km)}$$

Where:

D_{test1} and D_{test2} = the actual driven distances in the tests performed under conditions A (paragraph 4.2. of this appendix) and B (paragraph 4.3. of this appendix) respectively.

c_1 and c_2 = test results determined in paragraphs 4.2.4.5. and 4.3.2.5. of this appendix respectively.

4.4.4. The weighted values of fuel consumption shall be calculated as below:

4.4.4.1. In the case of testing according to paragraph 4.2.4.2.1.:

Equation Ap3-25:

$$C = (D_e \cdot C_1 + D_{\text{av}} \cdot C_2) / (D_e + D_{\text{av}})$$

where:

C = fuel consumption in l/100 km.

C_1 = fuel consumption in l/100 km with a fully charged electrical energy/power storage device.

C_2 = fuel consumption in l/100 km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

D_e = vehicle's electric range, according to the procedure described in sub appendix 3C, where the manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric operating state.

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity $< 150 \text{ cm}^3$;
- 6 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} < 130 \text{ km/h}$;
- 10 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} \geq 130 \text{ km/h}$.

4.4.4.2. In the case of testing according to paragraph 4.2.4.2.2.:

Equation Ap3-26:

$$C = (D_{ovc} \cdot C_1 + D_{av} \cdot C_2) / (D_{ovc} + D_{av})$$

where:

C = fuel consumption in l/100 km.

C_1 = fuel consumption in l/100 km with a fully charged electrical energy/power storage device.

C_2 = fuel consumption in l/100 km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

D_{ovc} = OVC range according to the procedure described in sub appendix 3C.

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity $< 150 \text{ cm}^3$;
- 6 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} < 130 \text{ km/h}$;
- 10 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\max} \geq 130 \text{ km/h}$.

4.4.5. The values of electric energy consumption shall be:

Equation Ap3-27:

$$E_1 = e_1/D_{\text{test1}} \text{ and}$$

Equation Ap3-28:

$$E_4 = e_4/D_{\text{test2}} \text{ [Wh/km]}$$

Where:

D_{test1} and D_{test2} = the actual driven distances in the tests performed under conditions A (paragraph 4.2. of this appendix) and B (paragraph 4.3. of this appendix) respectively, and

e_1 and e_4 = test results determined in paragraphs 4.2.6. and 4.3.6. respectively.

4.4.6. The weighted values of electric energy consumption shall be calculated as below:

4.4.6.1. In the case of testing according to paragraph 4.2.4.2.1.:

Equation Ap3-29:

$$E = (D_e \cdot E_1 + D_{\text{av}} \cdot E_4) / (D_e + D_{\text{av}})$$

where:

E = electric consumption Wh/km.

E_1 = electric consumption Wh/km with a fully charged electrical energy/power storage device calculated.

E_4 = electric consumption Wh/km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

D_e = vehicle's electric range, according to the procedure described in sub appendix 3C, where the manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric operating state.

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity $< 150 \text{ cm}^3$;
- 6 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\text{max}} < 130 \text{ km/h}$;
- 10 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\text{max}} \geq 130 \text{ km/h}$.

4.4.6.2. In the case of testing according to paragraph 4.2.4.2.2.:

Equation Ap3-30:

$$E = (D_{\text{ovc}} \cdot E_1 + D_{\text{av}} \cdot E_4) / (D_{\text{ovc}} + D_{\text{av}})$$

where:

E = electric consumption Wh/km.

E_1 = electric consumption Wh/km with a fully charged electrical energy/ power storage device calculated.

E_4 = electric consumption Wh/km with an electrical energy/power storage device in minimum state of charge (maximum discharge of capacity).

D_{ovc} = OVC range according to the procedure described in sub appendix 3C.

D_{av} = average distance between two battery recharges, D_{av} =:

- 4 km for a L-category vehicle with an engine capacity $< 150 \text{ cm}^3$;
- 6 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\text{max}} < 130 \text{ km/h}$;
- 10 km for a L-category vehicle with an engine capacity $\geq 150 \text{ cm}^3$ and $v_{\text{max}} \geq 130 \text{ km/h}$.

5. Not externally chargeable hybrid electric vehicle (NOVC HEV) without an operating mode switch

5.1. The test vehicle shall be preconditioned by conducting the applicable Type I test cycle in combination with the applicable gear shifting prescriptions set-out in paragraph 4.5.5. of Annex I.

5.1.1. Emissions of carbon dioxide (CO_2) and fuel consumption shall be determined separately for parts 1, 2 and 3, if applicable of the applicable driving cycle set-out in Annex I.

5.2. For preconditioning, at least 2 consecutive complete driving cycles shall be carried out without intermediate soak, using the applicable driving cycle and gear shifting prescriptions as defined in 4.5.5. of Annex I.

5.3. Test results

5.3.1. The test results (fuel consumption C (l/100 km for liquid fuels or kg/100 km for gaseous fuels) and CO_2 -emission M (g/km)) of this test shall be corrected in function of the energy balance ΔE_{batt} of the vehicle's battery.

The corrected values C_0 (l/100 km or kg/100 km) and M_0 (g/km) shall correspond to a zero energy balance ($\Delta E_{\text{batt}} = 0$), and shall be calculated using a correction coefficient determined by the manufacturer as defined below.

In case of other storage systems than an electric battery, ΔE_{batt} shall be representing $\Delta E_{\text{storage}}$, the energy balance of the electric energy storage device.

5.3.1.1. The electricity balance Q [Ah], measured using the procedure specified in sub appendix 3B to this appendix, shall be used as a measure of the difference in the vehicle battery's energy content at the end of the cycle compared to the beginning of the cycle. The electricity balance is to be determined separately for the individual parts 1, 2 and 3, if applicable of the type I test cycle set-out in Annex I.

5.3.2. Under the conditions below, it is allowed to take the uncorrected measured values C and M as the test results:

1) in case the manufacturer can demonstrate to the satisfaction of the approval authority that there is no relation between the energy balance and fuel consumption,

2) in case that ΔE_{batt} always corresponds to a battery charging,

3) in case that ΔE_{batt} always corresponds to a battery discharging and ΔE_{batt} is within 1 per cent of the energy content of the consumed fuel (consumed fuel meaning the total fuel consumption over 1 cycle).

The change in battery energy content ΔE_{batt} shall be calculated from the measured electricity balance Q as follows:

Equation Ap3-31:

$$\Delta E_{\text{batt}} = \Delta \text{SOC}(\%) \cdot E_{\text{TEbatt}} \cong 0.0036 \cdot |\Delta \text{Ah}| \cdot V_{\text{batt}} = 0.0036 \cdot Q \cdot V_{\text{batt}} \text{ (MJ)}$$

Where:

E_{TEbatt} = the total energy storage capacity of the battery [MJ] and

V_{batt} = the nominal battery voltage [V].

5.3.3. Fuel consumption correction coefficient (K_{fuel}) defined by the manufacturer.

5.3.3.1. The fuel consumption correction coefficient (K_{fuel}) shall be determined from a set of n measurements. This set should contain at least one measurement with $Q_i < 0$ and at least one with $Q_j > 0$.

If the latter condition can not be realised on the applicable test type I driving cycle used in this test, then it is up to the technical service to judge the statistical significance of the extrapolation necessary to determine the fuel consumption value at $\Delta E_{\text{batt}} = 0$ to the satisfaction of the approval authority.

5.3.3.2. The fuel consumption correction coefficient (K_{fuel}) shall be defined as:

Equation Ap3-32:

$$K_{\text{fuel}} = (n \cdot \sum Q_i C_i - \sum Q_i \cdot \sum C_i) / (n \cdot \sum Q_i^2 - (\sum Q_i)^2) \quad (l/100 \text{ km/Ah})$$

where:

C_i = fuel consumption measured during i -th manufacturer's test (l/100 km or

kg/100km)

Q_i = electricity balance measured during i-th manufacturer's test (Ah)

n = number of data

The fuel consumption correction coefficient shall be rounded to four significant figures (e.g. 0.xxxx or xx.xx). The statistical significance of the fuel consumption correction coefficient is to be judged by the technical service to the satisfaction of the approval authority.

5.3.3.3 Separate fuel consumption correction coefficients shall be determined for the fuel consumption values measured over the parts 1, 2 and 3, if applicable of the Type I test cycle set-out in Annex I.

5.3.4. Fuel consumption at zero battery energy balance (C_0)

5.3.4.1. The fuel consumption C_0 at $\Delta E_{\text{batt}} = 0$ is determined by the following equation:

Equation Ap3-33

$$C_0 = C - K_{\text{fuel}} \cdot Q \text{ (l/100 km or kg/100km)}$$

where:

C = fuel consumption measured during test (l/100 km for liquid fuels and kg/100 km for gaseous fuels)

Q = electricity balance measured during test (Ah)

5.3.4.2. Fuel consumption at zero battery energy balance shall be determined separately for the fuel consumption values measured over parts 1, 2 or 3, if applicable of the Type I test cycle set-out in Annex I.

5.3.5. CO₂-emission correction coefficient (K_{CO_2}) defined by the manufacturer

5.3.5.1. The CO₂-emission correction coefficient (K_{CO_2}) shall be determined as follows from a set of n measurements. This set should contain at least one measurement with $Q_i < 0$ and at least one with $Q_j > 0$.

If the latter condition cannot be realised on the driving cycle used in this test, then it is up to the technical service and to the satisfaction of the approval authority to judge the statistical significance of the extrapolation necessary to determine the CO₂-emission value at $\Delta E_{\text{batt}} = 0$.

5.3.5.2. The CO₂-emission correction coefficient (K_{CO_2}) is defined as:

Equation Ap3-34:

$$K_{\text{CO}_2} = (n \cdot \sum Q_i M_i - \sum Q_i \cdot \sum M_i) / (n \cdot \sum Q_i^2 - (\sum Q_i)^2) \quad (\text{g/km/Ah})$$

where:

M_i = CO₂-emission measured during i-th manufacturer's test (g/km)

Q_i = electricity balance during i-th manufacturer's test (Ah)

n = number of data

The CO₂-emission correction coefficient shall be rounded to four significant figures (e.g. 0.xxxx or xx.xx). The statistical significance of the CO₂-emission correction coefficient is to be judged by the technical service and to the satisfaction of the approval authority.

5.3.5.3. Separate CO₂-emission correction coefficients shall be determined for the fuel consumption values measured over parts 1, 2 and 3, if applicable of the type driving cycle set-out in Annex I..

5.3.6. CO₂-emission at zero battery energy balance (M_0)

5.3.6.1. The CO₂-emission M_0 at $\Delta E_{\text{batt}} = 0$ is determined by the following equation:

Equation Ap3-35:

$$M_0 = M - K_{\text{CO}_2} \cdot Q \text{ (g/km)}$$

where:

C = fuel consumption measured during test (l/100 km for liquid fuels and kg/100 km for gaseous fuels)

Q = electricity balance measured during test (Ah)

5.3.6.2. CO₂-emission at zero battery energy balance shall be determined separately for the CO₂-emission values measured over part 1, 2 and 3, if applicable of the Type I test cycle set-out in Annex I.

6. Not Externally Chargeable (not OVC HEV) with an operating mode switch

6.1. These vehicles shall be tested in hybrid mode according to appendix 1, using the applicable driving cycle and gear shifting prescriptions as defined in paragraph 4.5.5. of Annex I. If several hybrid modes are available, the test shall be carried out in the mode that is automatically set after turn on of the ignition key (normal mode).

6.1.1. Emissions of carbon dioxide (CO₂) and fuel consumption shall be determined separately for parts 1, 2 and 3 of the Type I test cycle set-out in Annex I.

6.2. For preconditioning, at least 2 consecutive complete driving cycles shall be carried out without intermediate soak, using the applicable Type I test cycle and gear shifting prescriptions set-out in Annex I.

6.3. Test results

6.3.1. The fuel consumption C [l/100 km] and CO₂-emission M [g/km]) results of this test shall be corrected in function of the energy balance ΔE_{batt} of the vehicle's battery.

The corrected values (C_0 [l/100 km for liquid fuels or kg/100 km for gaseous fuels] and M_0 [g/km]) shall correspond to a zero energy balance ($\Delta E_{\text{batt}} = 0$), and are to be calculated using a correction coefficient determined by the manufacturer as defined in 6.3.3 and 6.3.5.

In case of other storage systems than an electric battery, ΔE_{batt} shall be representing $\Delta E_{\text{storage}}$, the energy balance of the electric energy storage device.

6.3.1.1. The electricity balance Q [Ah], measured using the procedure specified in sub appendix 3B, is used as a measure of the difference in the vehicle battery's energy content at the end of the cycle compared to the beginning of the cycle. The electricity balance is to be determined separately for parts 1, 2 and 3 of the Type I test cycle set-out in Annex I.

6.3.2. Under the conditions below, it is allowed to take the uncorrected measured values C and M as the test results:

1) in case the manufacturer can prove that there is no relation between the energy balance and fuel consumption,

2) in case that ΔE_{batt} always corresponds to a battery charging,

3) in case that ΔE_{batt} always corresponds to a battery discharging and ΔE_{batt} is within 1 per cent of the energy content of the consumed fuel (consumed fuel meaning the total fuel consumption over 1 cycle).

The change in battery energy content ΔE_{batt} can be calculated from the measured electricity balance Q as follows:

Equation AP-36

$$\Delta E_{\text{batt}} = \Delta \text{SOC}(\%) \cdot E_{\text{TEbatt}} \cong 0.0036 \cdot |\Delta \text{Ah}| \cdot V_{\text{batt}} = 0.0036 \cdot Q \cdot V_{\text{batt}} \text{ (MJ)}$$

Where:

E_{TEbatt} = the total energy storage capacity of the battery (MJ) and

V_{batt} the nominal battery voltage(V).

6.3.3. Fuel consumption correction coefficient (K_{fuel}) defined by the manufacturer.

6.3.3.1. The fuel consumption correction coefficient (K_{fuel}) shall be determined from a set of n measurements. This set should contain at least one measurement with $Q_i < 0$ and at least one with $Q_j > 0$.

If the latter condition can not be realised on the driving cycle used in this test, then it is up to the technical service and to the satisfaction of the approval authority to judge the statistical significance of the extrapolation necessary to determine the fuel

consumption value at $\Delta E_{\text{batt}} = 0$.

6.3.3.2. The fuel consumption correction coefficient (K_{fuel}) shall be defined as:

Equation Ap-37

$$K_{\text{fuel}} = (n \cdot \sum Q_i C_i - \sum Q_i \cdot \sum C_i) / (n \cdot \sum Q_i^2 - \sum Q_i^2) \text{ in (l/100 km/Ah)}$$

where:

C_i = fuel consumption measured during i-th manufacturer's test (l/100 km for liquid fuels and kg/100 km for gaseous fuels)

Q_i = electricity balance measured during i-th manufacturer's test (Ah)

n = number of data

The fuel consumption correction coefficient shall be rounded to four significant figures (e.g. 0.xxxx or xx.xx). The statistical significance of the fuel consumption correction coefficient is to be judged by the technical service to the satisfaction of the approval authority.

6.3.3.3. Separate fuel consumption correction coefficients shall be determined for the fuel consumption values measured over parts 1, 2 and 3, if applicable for the Type I test cycle set-out in Annex I.

6.3.4. Fuel consumption at zero battery energy balance (C_0)

6.3.4.1. The fuel consumption C_0 at $\Delta E_{\text{batt}} = 0$ is determined by the following equation:

Equation AP-38:

$$C_0 = C - K_{\text{fuel}} \cdot Q \text{ in (l/100 km for liquid fuels and kg/100 km for gaseous fuels)}$$

where:

C = fuel consumption measured during test in (l/100 km or kg/100 km)

Q = electricity balance measured during test (Ah)

6.3.4.2. Fuel consumption at zero battery energy balance shall be determined separately for the fuel consumption values measured over parts 1, 2 and 3, if applicable for the Type I test cycle set-out in Annex I.

6.3.5. CO_2 -emission correction coefficient (K_{CO_2}) defined by the manufacturer

6.3.5.1. The CO_2 -emission correction coefficient (K_{CO_2}) shall be determined as follows from a set of n measurements. This set should contain at least one measurement with $Q_i < 0$ and at least one with $Q_j > 0$.

If the latter condition can not be realised on the Type I test cycle used in this test, then it is up to the technical service and to the satisfaction of the approval authority to

judge the statistical significance of the extrapolation necessary to determine the CO₂-emission value at $\Delta E_{\text{batt}} = 0$.

6.3.5.2. The CO₂-emission correction coefficient (K_{CO_2}) shall be defined as:

Equation AP-39:

$$K_{\text{CO}_2} = (n \cdot \sum Q_i M_i - \sum Q_i \cdot \sum M_i) / (n \cdot \sum Q_i^2 - (\sum Q_i)^2) \text{ in (g/km/Ah)}$$

where:

M_i = CO₂-emission measured during i-th manufacturer's test (g/km).

Q_i = electricity balance during i-th manufacturer's test (Ah).

N = number of data

The CO₂-emission correction coefficient shall be rounded to four significant figures (e.g. 0.xxxx or xx.xx). The statistical significance of the CO₂-emission correction coefficient is to be judged by the technical service to the satisfaction of the approval authority.

6.3.5.3. Separate CO₂-emission correction coefficients shall be determined for the fuel consumption values measured over

6.3.6. CO₂-emission at zero battery energy balance (M_0).

6.3.6.1. The CO₂-emission M_0 at $\Delta E_{\text{batt}} = 0$ is determined by the following equation:

Equation AP-40

$$M_0 = M - K_{\text{CO}_2} \cdot Q \text{ in (g/km)}$$

where:

C : fuel consumption measured during test (l/100 km)

Q : electricity balance measured during test (Ah)

6.3.6.2. CO₂-emission at zero battery energy balance shall be determined separately for the CO₂-emission values measured over parts 1, 2 and 3, if applicable for the Type I test cycle set-out in Annex I.

Sub-appendix 3(A)

Electrical energy/power storage device State Of Charge (SOC) profile for OVC HEV Type VII Test

1. State Of Charge (SOC) profile for OVC HEV Type VII test

The SOC profiles for OVC-HEVs tested under conditions A and B of the test type VII shall be:

1.1 Condition A:

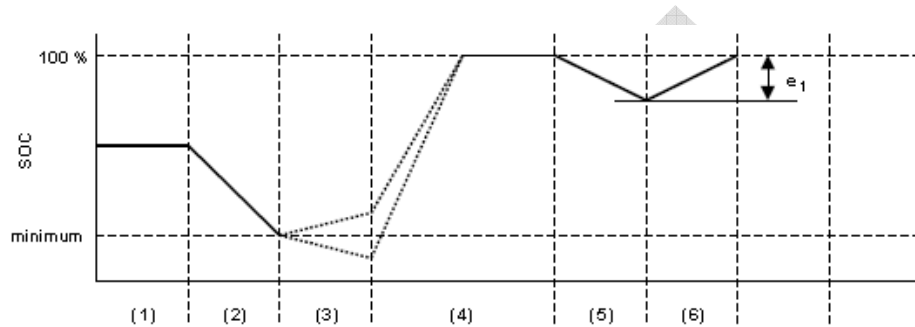


Figure Ap3A-1: Condition A of the Type VII test

- (1) initial state of charge of the electrical energy/power storage device;
- (2) discharge according to paragraph 3.2.1. or 4.2.2. of appendix 3;
- (3) vehicle conditioning according to paragraph 3.2.2. or 4.2.3. of appendix 3;
- (4) charge during soak according to paragraph 3.2.2.3. and 3.2.2.4. or 4.2.3.2. and 4.2.3.3. of appendix 3;
- (5) test according to paragraph 3.2.3. or 4.2.4. of appendix 3;
- (6) charging according to paragraph 3.2.4. or 4.2.5. of appendix 3.

1.2 Condition B:

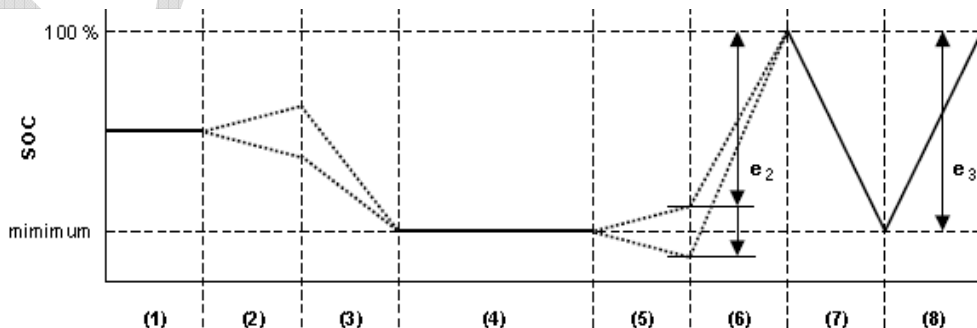


Figure Ap3A-2: Condition B of the Type VII test

- (1) initial state of charge;

- (2) vehicle conditioning according to paragraph 3.3.1.1. or 4.3.1.1. (optional) of appendix 3;
- (3) discharge according to paragraph 3.3.1.1. or 4.3.1.1. of appendix 3;
- (4) soak according to paragraph 3.3.1.2. or 4.3.1.2. of appendix 3;
- (5) test according to paragraph 3.3.2. or 4.3.2. of appendix 3;
- (6) charging according to paragraph 3.3.3. or 4.3.3. of appendix 3;
- (7) discharging according to paragraph 3.3.4. or 4.3.4. of appendix 3;
- (8) charging according to paragraph 3.3.5. or 4.3.5. of appendix 3;

DRAFT

Sub-appendix 3(B)

Method for measuring the electricity balance of the battery of OVC and NOVC HEV

1. Introduction

1.1. The purpose of this sub-appendix is to define the method and required instrumentation for measuring the electricity balance of Off Vehicle Charging Hybrid Electric Vehicles (OVC HEV) and Not Off Vehicle Charging Hybrid Electric Vehicles (NOVC HEV). Measurement of the electricity balance is necessary:

(a) to determine when the minimum state of charge of the battery has been reached during the test procedure defined in paragraphs 3.3. and 4.3. of appendix 3 and

(b) to correct the measured fuel consumption and CO₂-emissions for the change in battery energy content occurring during the test, using the method defined in paragraphs 5.3.1.1. and 6.3.1.1. of appendix 3.

1.2. The method described in this sub-appendix shall be used by the manufacturer for the measurements that are performed to determine the correction factors K_{fuel} and K_{CO_2} , as defined in paragraphs 5.3.3.2., 5.3.5.2., 6.3.3.2., and 6.3.5.2. of appendix 3.

The technical service shall check whether these measurements have been performed in accordance with the procedure described in this sub-appendix.

1.3. The method described in this sub-appendix shall be used by the technical service for the measurement of the electricity balance Q , as defined in the relevant paragraphs of appendix 3.

2. Measurement equipment and instrumentation.

2.1. During the tests as described in paragraphs 3., 4., 5. and 6 of appendix 3, the battery current shall be measured using a current transducer of the clamp-on type or the closed type. The current transducer (i.e. the current sensor without data acquisition equipment) shall have a minimum accuracy of 0.5 per cent of the measured value or 0.1 per cent of the maximum value of the scale.

Original Equipment Manufacturer (OEM) diagnostic testers are not to be used for the purpose of this test.

2.1.1. The current transducer shall be fitted on one of the wires directly connected to the battery. In order to easily measure battery current using external measuring equipment, manufacturers shall integrate appropriate, safe and accessible connection points in the vehicle. If that is not feasible, the manufacturer is obliged to support the technical service by providing the means to connect a current transducer to the wires connected to the battery in the above described manner.

2.1.2. The output of the current transducer shall be sampled with a minimum sample frequency of 5 Hz. The measured current shall be integrated over time, yielding the measured value of Q , expressed in Ampere hours (Ah).

- 2.1.3. The temperature at the location of the sensor shall be measured and sampled with the same sample frequency as the current, so that this value can be used for possible compensation of the drift of current transducers and, if applicable, the voltage transducer used to convert the output of the current transducer.
- 2.2. A list of the instrumentation (manufacturer, model no., serial no.) used by the manufacturer for determining the correction factors K_{fuel} and K_{CO_2} set-out in appendix 3 and the last calibration dates of the instruments, where applicable, should be provided to the technical service.
3. Measurement procedure
- 3.1. Measurement of the battery current shall start at the same time as the test starts and shall end immediately after the vehicle has driven the complete driving cycle.
- 3.2. Separate values of Q shall be logged over the parts (cold/warm or phase 1 and if applicable phases 2 and 3) of the Type 1 test cycle.

Sub-appendix 3(C)

Method of measuring the electric range of vehicles powered by an electric powertrain only or by a hybrid electric powertrain and the OVC range of vehicles powered by a hybrid electric powertrain

1. Measurement of the electric range.

The test method described hereafter shall permit to measure the electric range, expressed in km, of vehicles powered by an electric power train only or the electric range and OVC range of vehicles powered by a hybrid electric powertrain with off-vehicle charging (OVC HEV) as defined in appendix 3.

2. Parameters, units and accuracy of measurements.

Parameters, units and accuracy of measurements shall be as follows:

Parameter	Unit	Accuracy	Resolution
Time	s	± 0.1 s	0.1 s
Distance	m	± 0.1 per cent	1 m
Temperature	$^{\circ}\text{C}$	$\pm 1^{\circ}\text{C}$	1°C
Speed	km/h	± 1 per cent	0.2 km/h
Mass	kg	± 0.5 per cent	1 kg

Table Ap3C-1: Parameters, units and accuracy of measurements

Parameters, units and accuracy of measurements

3. Test conditions.

3.1. Condition of the vehicle

- 3.1.1. The vehicle tyres shall be inflated to the pressure specified by the vehicle manufacturer when the tyres are at the ambient temperature.
- 3.1.2. The viscosity of the oils for the mechanical moving parts shall conform to the specifications of the vehicle manufacturer.
- 3.1.3. The lighting and light-signalling and auxiliary devices shall be off, except those required for testing and usual daytime operation of the vehicle.
- 3.1.4. All energy storage systems available for other than traction purposes (electric, hydraulic, pneumatic, etc.) shall be charged up to their maximum level specified by the manufacturer.
- 3.1.5. If the batteries are operated above the ambient temperature, the operator shall follow the procedure recommended by the vehicle manufacturer in order to keep the temperature of the battery in the normal operating range. The manufacturer shall be in

a position to attest that the thermal management system of the battery is neither disabled nor reduced.

3.1.6. The vehicle shall have undergone at least 300 km during the seven days before the test with those batteries that are installed in the test vehicle.

3.2. Climatic conditions

For testing performed outdoors, the ambient temperature shall be between 5 °C and 32 °C.

The indoors testing shall be performed at a temperature between 20 °C and 30 °C.

4. Operation modes

The test method includes the following steps:

- (a) initial charge of the battery;
- (b) application of the cycle and measurement of the electric range.

Between the steps, if the vehicle shall move, it is pushed to the following test area (without regenerative recharging).

4.1. Initial charge of the battery.

Charging the battery consists of the following procedures:

4.1.1. The 'initial charge' of the battery shall apply to the first charge of the battery, at the reception of the vehicle. In case of several combined tests or measurements, carried out consecutively, the first charge carried out shall be an 'initial charge' of the battery and the following charge may be done in accordance with the 'normal overnight charge' procedure set-out in 3.2.2.5. of appendix 3.

4.1.2. Discharge of the battery

4.1.2.1. For pure electric vehicles:

4.1.2.1.1. The procedure starts with the discharge of the battery of the vehicle while driving (on the test track, on a chassis dynamometer, etc.) at a steady speed of 70 per cent \pm 5 per cent from the maximum thirty minutes speed of the vehicle.

4.1.2.1.2. Stopping the discharge shall occur:

- (a) when the vehicle is not able to run at 65 per cent of the maximum thirty minutes speed;
- (b) or when an indication to stop the vehicle is given to the driver by the standard on-board instrumentation, or
- (c) after covering the distance of 100 km.

- 4.1.2.2. For externally chargeable hybrid electric vehicle (OVC HEV) without an operating mode switch as defined in appendix 3:
- 4.1.2.2.1. The manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric operating state.
- 4.1.2.2.2. The procedure shall start with the discharge of the electrical energy/power storage device of the vehicle while driving (on the test track, on a chassis dynamometer, etc.):
- at a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up,
 - or, if a vehicle can not reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run at a lower steady speed where the fuel consuming engine just does not start up for a defined time/distance (to be specified between technical service and manufacturer to the satisfaction of the approval authority),
 - or with manufacturer's recommendation.
- The fuel consuming engine shall be stopped within 10 seconds of it being automatically started.
- 4.1.2.3. For externally chargeable hybrid electric vehicle (OVC HEV) with an operating mode switch as defined in appendix 3:
- 4.1.2.3.1. If there is not a pure electric position of the mode switch, the manufacturer shall provide the means for performing the measurement with the vehicle running in pure electric operating state.
- 4.1.2.3.2. The procedure shall start with the discharge of the electrical energy/power storage device of the vehicle while driving with the switch in pure electric position (on the test track, on a chassis dynamometer, etc.) at a steady speed of 70 per cent \pm 5 per cent of the maximum thirty minutes speed of the vehicle.
- 4.1.2.3.3. Stopping the discharge occurs:
- when the vehicle is not able to run at 65 percent of the maximum thirty minutes speed; or
 - when an indication to stop the vehicle is given to the driver by the standard onboard instrumentation, or
 - after covering the distance of 100 km.
- 4.1.2.3.4. If the vehicle is not equipped with a pure electric operating state, the electrical energy/power storage device discharge shall be achieved by driving the vehicle (on the test track, on a chassis dynamometer, etc.):
- at a steady speed of 50 km/h until the fuel consuming engine of the HEV starts up,

or

- if a vehicle can not reach a steady speed of 50 km/h without starting up the fuel consuming engine, the speed shall be reduced until the vehicle can run a lower steady speed where the fuel consuming engine just does not start up for a defined time/distance (to be specified between technical service and manufacturer to the satisfaction of the approval authority), or

- with manufacturer's recommendation.

The fuel consuming engine shall be stopped within 10 seconds of it being automatically started.

4.1.3. Application of a normal overnight charge

For a pure electric vehicle, the battery shall be charged according to the normal overnight charge procedure, as defined in paragraph 2.4.1.2. of appendix 2, for a period not exceeding twelve hours.

For an OVC HEV, the battery shall be charged according to the normal overnight charge procedure as described in paragraph 3.2.2.5. of appendix 3.

4.2. Application of the cycle and measurement of the range

4.2.1. For pure electric vehicle:

4.2.1.1. The test sequence as defined in paragraph 1.1. of appendix 2 is applied on a chassis dynamometer adjusted as described in Annex I, until the end of the test criteria shall be reached.

4.2.1.2. The end of the test criteria shall be reached when the vehicle is not able to meet the target curve up to 50 km/h, or when an indication from the standard on-board instrumentation is given to the driver to stop the vehicle.

Then the vehicle shall be slowed down to 5 km/h by releasing the accelerator pedal, without touching the brake pedal and then stopped by braking.

4.2.1.3. At a speed over 50 km/h, when the vehicle does not reach the required acceleration or speed of the test cycle, the accelerator pedal shall remain fully depressed respectively the accelerator handle shall be turned fully against its stop until the reference curve has been reached again.

4.2.1.4. To respect human needs, up to three interruptions are permitted between test sequences, of no more than 15 minutes in total.

4.2.1.5. At the end, the measure D_e of the covered distance in km is the electric range of the electric vehicle. It shall be rounded to the nearest whole number

4.2.2. For hybrid electric vehicle

4.2.2.1.1. The applicable type I test cycle accompanying gear shift prescription, as defined in paragraph 4.5.5. of Annex I, is applied on a chassis dynamometer adjusted as

described in Annex I, until the end of the test criteria shall be reached.

- 4.2.2.1.2. To measure the electric range the end of the test criteria shall be reached when the vehicle is not able to meet the target curve up to 50 km/h, or when an indication from the standard on-board instrumentation is given to the driver to stop the vehicle or when the battery has reached its minimum state of charge. Then the vehicle shall be slowed down to 5 km/h by releasing the accelerator pedal, without touching the brake pedal and then stopped by braking.
- 4.2.2.1.3. At a speed over 50 km/h, when the vehicle does not reach the required acceleration or speed of the test cycle, the accelerator pedal shall remain fully depressed until the reference curve has been reached again.
- 4.2.2.1.4. To respect human needs, up to three interruptions are permitted between test sequences, of no more than 15 minutes in total.
- 4.2.2.1.5. At the end, the measure D_e of the distance covered using the electrical motor only in km is the electric range of the hybrid electric vehicle. It shall be rounded to the nearest whole number. Where the vehicle operates both in electric and hybrid modes during the test, the periods of electric only operation will be determined by measuring current to the injectors or ignition.
- 4.2.2.2. To determine the OVC range of a hybrid electric vehicle
 - 4.2.2.2.1. The applicable Type I test cycle and accompanying gear shift prescription, as defined in paragraph 4.4.5. of Annex I, is applied on a chassis dynamometer adjusted as described in Annex I, until the end of the test criteria shall be reached.
 - 4.2.2.2.2. To measure the OVC range D_{OVC} the end of the test criteria shall be reached when the battery has reached its minimum state of charge according to the criteria defined in appendix 3, paragraphs 3.2.3.2.2. or 4.2.4.2.2. Driving shall be continued until the final idling period in the Type I test cycle is reached.
 - 4.2.2.2.3. To respect human needs, up to three interruptions are permitted between test sequences, of no more than fifteen minutes in total.
 - 4.2.2.2.4. At the end, the total distance driven in km, rounded to the nearest whole number, shall be the OVC range of the hybrid electric vehicle.
- 4.2.2.3. At a speed over 50 km/h, when the vehicle does not reach the required acceleration or speed of the test cycle, the accelerator pedal shall remain fully depressed respectively the accelerator handle shall be turned fully against its stop until the reference curve has been reached again.
- 4.2.2.4. To respect human needs, up to three interruptions are permitted between test sequences, of no more than 15 minutes in total.
- 4.2.2.5. At the end, the measure D_{OVC} of the covered distance in km is the electric range of the hybrid electric vehicle. It shall be rounded to the nearest whole number.

ANNEX VII

Test type VIII requirements: environmental diagnostic (OBD) tests

1. Introduction

- 1.1. This Annex describes the test procedure according to test type VIII, environmental diagnostic (OBD) tests. The procedure describes methods for checking the function of the on-board diagnostic (OBD) system installed on the vehicle by failure simulation of emission relevant components in the powertrain management system and in the emission control system.
- 1.2. The manufacturer shall make available the defective components and/or electrical devices which would be used to simulate failures. When measured over the appropriate Test type I cycle, such defective components or devices shall not cause the vehicle emissions to exceed the OBD thresholds set-out in Annex VI(B) to Regulation (EU) No [xxx/2013] by more than 20 per cent.
- 1.3. When the vehicle is tested with the defective component or device fitted, the OBD system is approved if the Malfunction Indicator (MI) is activated. The OBD system is also approved if the MI is activated below the OBD threshold limits.

2. OBD stage I and stage II

2.1. OBD stage I

The test procedures of this Annex shall be mandatory for L-category vehicles equipped with a OBD stage I system set-out in Article 19 and Annex IV of Regulation (EU) No [xxx/2013]. This obligation concerns compliance with all subsequent paragraphs with the exception of the paragraphs specifying OBD stage II requirements laid down in paragraph 2.2.

2.2. OBD stage II

- 2.2.1. An L-category vehicle may be equipped with an OBD stage II system at the choice of the manufacturer.
- 2.2.2. If fitted with an OBD stage II system the test procedures of this Annex may be used by the manufacturer to demonstrate voluntary compliance with OBD II requirements. This concerns in particular the applicable paragraphs listed in table 7-1

Topic	Paragraph(s)
Catalytic converter monitoring	7.3.1.1., 7.3.2.1.
EGR system monitoring	7.3.3.
Misfire detection	7.3.1.2.
NOx after-treatment system monitoring	7.4.3.
Oxygen sensor deterioration	7.3.1.3.

Particulate filter	7.3.2.2.
Particulate matter (PM) monitoring	7.4.4.

Table 7-1: OBD stage II functions and associated requirements in paragraphs of this Annex and its appendix 1.

3. Description of tests

- 3.1. The environmental on-board diagnostic verification and demonstration tests shall be carried out on the test vehicle(s) or on a test vehicle equipped with the golden emission components used for durability tests, given in Annex V and using the test procedures set-out in this Annex and in Annex I. Environmental on-board diagnostic tests are to be finally verified and reported at the conclusion of the Type V durability testing.
- 3.2. The OBD system shall indicate the failure of an emission-related component or system when that failure results in emissions exceeding the threshold limits given in Annex VI (B) to Regulation (EU) No [xxx/2013] or any powertrain fault that triggers an operation mode that significantly reduces torque in comparison to normal operation.
- 3.3. The test type I data in the information document set-out in I to Regulation (EU) No [xxx/2013] shall be provided as reference, including the used dynamometer settings and applicable emission laboratory test cycle.
- 3.4. The list with PCU / ECU malfunctions shall be provided pursuant to Article 19(5b) of Regulation (EU) No [xxx/2013] and chapter I (C.11) of Annex I (administrative requirements regarding functional OBD with the test requirements set-out in Annex XII of Regulation (EU) No [xxx/2013]. Additional columns shall be added to the list referred to in paragraph 7.1. of Regulation (EU) No [xxx/2013]:
 - 3.4.1. For each malfunction that leads to exceeding the OBD emission thresholds set-out in Annex VI(B) of Regulation (EU) No [xxx/2013] in both non-defaulted driving mode (back-up mode de-activated)) and defaulted driving mode (back-up mode activated)); the emission laboratory test results shall be reported in those additional columns of that list in the format of the information document set-out in paragraph 7 of Annex I of Regulation (EU) No [xxx/2013]
 - 3.4.2. Short description of simulation method of emission relevant malfunction set-out in paragraphs 1 and 2.1.

3. Onboard diagnostic environmental test procedure

- 3.1. The testing of OBD systems consists of the following phases:
 - 3.1.1. Simulation of malfunction of a component of the powertrain management or emission control system,

- 3.1.2. Preconditioning of the vehicle with a simulated malfunction that will lead to exceeding of the OBD thresholds laid down in Annex VI (B) of Regulation over preconditioning specified in paragraph 5.2.4. of Annex I.
- 3.1.3. Driving the vehicle with a simulated malfunction over the applicable Type I Test cycle and measuring the emissions of the vehicle,
 - 3.1.3.1. For OVC vehicles, the measurements of emissions of pollutants shall be carried out under the same conditions as specified for condition B of the Type I test (paragraphs 3.1.3. and 3.2.3.).
 - 3.1.3.2. For NOVC vehicles, the measurements of emissions of pollutants shall be carried out under the same conditions as in the Type I test.
- 3.1.4. Determining whether the OBD system reacts to the simulated malfunction and indicates malfunction in an appropriate manner to the vehicle driver.
- 3.2. Alternatively, at the request of the manufacturer, malfunction of one or more components may be electronically simulated according to the requirements of paragraph 7. below.
- 3.3. Manufacturers may request that monitoring take place outside the Type I test cycle if it can be demonstrated to the authority that monitoring during conditions encountered during the Type I Test cycle would impose restrictive monitoring conditions when the vehicle is used in service.
- 3.4. For all demonstration testing, the MIL shall be illuminated before the end of the test cycle.
4. Test vehicle and fuel
 - 4.1. Vehicle

The test vehicle(s) shall meet the requirements of paragraph 2 of Annex V.
 - 4.2. The manufacturer shall set the system or component for which detection is to be demonstrated at or beyond the criteria limit prior to operating the vehicle over the emissions test cycle appropriate for the classification of the L-category vehicle. The L-category vehicle shall then be operated over the appropriate type I test cycle according to vehicle classification in Annex I of Regulation (EU) No [xxx/2013], to determine correct functionality of the diagnostic system.
 - 4.3. Test fuel

The appropriate reference fuel as described in appendix 2 to Annex I shall be used for testing. The fuel type for each failure mode to be tested may be selected by the approval authority from the reference fuels described appendix 2 to Annex I in the case of the testing of a mono-fuelled gas vehicle and in the case of the testing of a bi-fuelled gas vehicle. The selected fuel type shall not be changed during any of the test phases (described in paragraph 3. of this annex). In the case of the use of LPG or NG/biomethane as a fuel it is permissible that the engine is started on petrol and

switched to LPG or NG/biomethane after a pre-determined period of time which is controlled automatically and not under the control of the driver.

5. Test temperature and pressure

5.1. The test temperature and ambient pressure shall meet the requirements of the Type I Test as described in Annex I.

6. Test equipment

6.1. Chassis dynamometer

The chassis dynamometer shall meet the requirements set-out in Annex I.

7. OBD test procedures

7.1. The operating test cycle on the chassis dynamometer shall meet the requirements of Annex I.

7.2. Vehicle preconditioning

7.2.1. According to the propulsion type and after introduction of one of the failure modes given in paragraph 7.3., the vehicle shall be preconditioned by driving at least two consecutive appropriate Type I tests. For compression-ignition engined vehicles an additional preconditioning of two appropriate Type I tests cycles is permitted.

7.2.2. At the request of the manufacturer, alternative preconditioning methods may be used.

7.3. Failure modes to be tested

7.3.1. Positive-ignition propelled vehicles:

7.3.1.1. Replacement of the catalyst with a deteriorated or defective catalyst or electronic simulation of such a failure.

7.3.1.2. Engine misfire conditions according to the conditions for misfire monitoring given in paragraph 3.3.3.2. of Annex X of Regulation (EU) No [xxx/2013] on vehicle construction.

7.3.1.3. Replacement of the oxygen sensor with a deteriorated or defective oxygen sensor or electronic simulation of such a failure.

7.3.1.4. Electrical disconnection of any other emission-related component connected to a powertrain management computer (if active on the selected fuel type).

7.3.1.5. Electrical disconnection of the electronic evaporative purge control device (if equipped and if active on the selected fuel type). For this specific failure mode, the Type I Test need not be performed.

7.3.2. Compression-ignition engined vehicles:

7.3.2.1. Where fitted, replacement of the catalyst with a deteriorated or defective catalyst or

electronic simulation of such a failure.

7.3.2.2. Where fitted, total removal of the particulate trap or, where sensors are an integral part of the trap, a defective trap assembly.

7.3.2.3. Electrical disconnection of any fuelling system electronic fuel quantity and timing actuator.

7.3.2.4. Electrical disconnection of any other emission-related or functional safety relevant component connected to a power-train management computer.

7.3.2.5. In meeting the requirements of paragraphs 7.3.2.3. and 7.3.2.4., and with the agreement of the approval authority, the manufacturer shall take appropriate steps to demonstrate that the OBD system will indicate a fault when disconnection occurs.

7.3.3. Where fitted, the manufacturer shall demonstrate that malfunctions of the EGR flow and cooler are detected by the OBD system during its approval test.

7.3.4. Any powertrain malfunction that triggers any operating mode which significantly reduces engine torque. A significant torque reduction shall mean a reduction of more than or equal to 10% of torque in normal operation.

7.4. OBD system tests

7.4.1. Vehicles fitted with positive-ignition engines:

7.4.1.1. After vehicle preconditioning according to paragraph 7.2., the test vehicle is driven over the appropriate Type I Test.

The MI shall activate before the end of this test under any of the conditions given in paragraphs 7.4.1.2. to 7.4.1.6. The approval authority may substitute those conditions with others in accordance with paragraph 7.4.1.6. However, the total number of failures simulated shall not exceed four (4) for the purpose of type approval.

In the case of testing a bi-fuel gas vehicle, both fuel types shall be used within the maximum of four (4) simulated failures at the discretion of the approval authority.

7.4.1.2. Replacement of a catalyst with a deteriorated or defective catalyst or electronic simulation of a deteriorated or defective catalyst that results in emissions exceeding the THC OBD threshold, or if applicable the NMHC OBD threshold, given in Annex VI (B) of Regulation (EU) No [xxx/2013].

7.4.1.3. An induced misfire condition according to the conditions for misfire monitoring given in paragraph 3.3.3.2. of Annex 11 that results in emissions exceeding any of the OBD thresholds given in Annex VI (B) of Regulation (EU) No [xxx/2013].

7.4.1.4. Replacement of an oxygen sensor with a deteriorated or defective oxygen sensor or electronic simulation of a deteriorated or defective oxygen sensor that results in emissions exceeding any of OBD thresholds given in Annex VI (B) of Regulation (EU) No [xxx/2013].

- 7.4.1.5. Electrical disconnection of the electronic evaporative purge control device (if equipped and if active on the selected fuel type).
- 7.4.1.6. Electrical disconnection of any other emission-related power-train component connected to a computer that results in emissions exceeding any of the OBD thresholds given in Annex VI (B) of Regulation (EU) No [xxx/2013] or triggers an operation mode with a significant reduced torque in comparison to normal operation.
- 7.4.2. Vehicles fitted with compression-ignition engines:
- 7.4.2.1. After vehicle preconditioning according to paragraph 7.2., the test vehicle is driven over a Type I Test.
- The MI shall activate before the end of this test under any of the conditions given in paragraphs 7.4.2.2. to 7.4.2.5. The approval authority may substitute those conditions by others in accordance with paragraph 7.4.2.5. However, the total number of failures simulated shall not exceed four for the purposes of type approval.
- 7.4.2.2. Where fitted, replacement of a catalyst with a deteriorated or defective catalyst or electronic simulation of a deteriorated or defective catalyst that results in emissions exceeding any of the OBD thresholds given in Annex VI (B) of Regulation (EU) No [xxx/2013].
- 7.4.2.3. Where fitted, total removal of the particulate trap or replacement of the particulate trap with a defective particulate trap meeting the conditions of paragraph 7.4.2.2. above that results in emissions exceeding any of the OBD thresholds given in Annex VI (B) of Regulation (EU) No [xxx/2013].
- 7.4.2.4. With reference to paragraph 7.3.2.5., disconnection of any fuelling system electronic fuel quantity and timing actuator that results in emissions exceeding any of the OBD threshold given in Annex VI (B) of Regulation (EU) No [xxx/2013].
- 7.4.2.5. With reference to paragraph 7.3.2.5., disconnection of any other powertrain component connected to a computer that results in emissions exceeding any of the OBD thresholds given in Annex VI (B) of Regulation (EU) No [xxx/2013] or that triggers an operation mode with a significant reduced torque in comparison to normal operation.
- 7.4.3. Where fitted, replacement of the NO_x after-treatment system with a deteriorated or defective NO_x after-treatment system or electronic simulation of such a failure.
- 7.4.4. Where fitted, replacement of the particulate matter (PM) monitoring system with a deteriorated or Particulate matter (PM) monitoring system or electronic simulation of such a failure.

ANNEX VIII

Test type IX requirements: permissible sound level test procedures

Appendix Number	Appendix title	Page #
1	Sound requirements for powered cycles and two-wheel mopeds (category L1e)	
2	Sound requirements for motorcycles (categories L3e and L4e)	
3	Sound requirements for three-wheel mopeds, tricycles and quadricycles (categories L2e, L5e, L6e and L7e)	
4	Test track specifications	

DRAFT

1. Introduction

This Annex defines the specific provisions regarding permissible sound level test procedures for L-category vehicles.

2. Test procedure, measurements and results

2.1. L-category vehicles shall comply with the appropriate test requirements from the Appendixes to this Annex set-out in Annex VII to Regulation (EU) No [xxx/2013].

2.2. When the EU has acceded to:

UNECE regulation No 9, Rev. x: Uniform provisions concerning the approval of three-wheel vehicles or quadricycles with regards to noise;

UNECE regulation No 41, Rev. 4: Uniform provisions concerning the approval of motorcycles with regards to noise;

UNECE regulation No 63, Rev. 4: Uniform provisions concerning the approval of motorcycles with regards to noise;

UNECE regulation No. 92, Rev. x: Uniform provisions the approval of non-original replacement exhaust silencing systems (RESS) for motorcycles, mopeds and three-wheeled vehicles;

the accession referred to above will render the corresponding provisions of this Annex obsolete. From the accession onwards for the applicable sub-category vehicles listed below shall from then on comply with the requirements from the corresponding UNECE Regulation, including equivalent sound limits:

Vehicle (sub-)category	Vehicle category name	Applicable test procedure
L1e-A	Powered cycle	UNECE regulation No 63
L1e-B	Two-wheel moped $v_{\max} \leq 25$ km/h	
	Two-wheel moped $v_{\max} \leq 45$ km/h	
L2e	Three-wheel moped	UNECE regulation No 9
L3e	Two-wheel motorcycle Engine capacity ≤ 80 cm ³	UNECE regulation No 41
	Two-wheel motorcycle 80 cm ³ < Engine capacity \leq 175 cm ³	
	Two-wheel motorcycle Engine capacity > 175 cm ³	
L4e	Two-wheel motorcycle with side-car	UNECE regulation No 9
L5e-A	Tricycle	
L5e-B	Commercial tricycle	
L6e-A	Light quad	UNECE regulation No 63

L6e-B	Light mini-car	UNECE regulation No 9
L7e-A	On-road quad	
L7e-B	All terrain vehicles	
L7e-C	Heavy mini-car	

Table 8-1: L-category vehicle subcategories and the applicable UNECE Regulations regarding sound requirements

3. Test vehicle

- 3.1. The test vehicle(s) used for Type VIII sound tests and in particular the sound abatement system and components shall be representative for the vehicle type produced in series and placed on the market.
- 3.2. For vehicles propelled with compressed air the sound measurements shall be done at highest nominal storage pressure of the compressed air + 0 / -15 %.

DRAFT

Appendix 1
Requirements for powered cycles and two-wheel mopeds (category L1e)

1. Definitions

For the purposes of this Appendix:

- 1.1. 'type of powered cycle or two-wheel moped as regards its sound level and exhaust system' means L1e vehicles which do not differ in such essential respects as the following:
 - 1.1.1. type of engine (two or four-stroke, reciprocating piston engine or rotary-piston engine, number and capacity of cylinders, number and type of carburettors or injection systems, arrangement of valves, maximum net power and corresponding speed). The cubic capacity of rotary-piston engines is deemed to be double of the volume of the chamber;
 - 1.1.2. transmission system, in particular the number and ratios of the gears;
 - 1.1.3. number, type and arrangement of exhaust systems;
- 1.2. 'exhaust system' or 'silencer' means a complete set of components necessary to limit the noise caused by a moped engine and its exhaust;
 - 1.2.1. 'original exhaust system or silencer' means a system of the type fitted to the vehicle at the time of type-approval or extension of type-approval. It may be the one first fitted or a replacement;
 - 1.2.2. 'non-original exhaust system or silencer' means a system of a type other than that fitted to the vehicle at the time of type-approval or extension of type-approval. It may be used only as a replacement exhaust system or silencer;
- 1.3. 'exhaust systems of differing types' means systems which are fundamentally different in one of the following ways:
 - 1.3.1. systems comprising components bearing different factory or trade marks;
 - 1.3.2. systems comprising any component made of materials of different characteristics or comprising components which are of a different shape or size;
 - 1.3.3. systems in which the operating principles of at least one component are different;
 - 1.3.4. systems comprising components in different combinations;
- 1.4. 'component of an exhaust system' means one of the individual components which together form the exhaust system (such as exhaust pipe work, the silencer proper) and the intake system (air filter) if any.

If the engine has to be equipped with an intake system (air filter and/ or intake noise absorber) in order to comply with the maximum permissible sound levels, the filter and/or the absorber shall be treated as components having the same importance as the exhaust system.

2. Component type-approval in respect of the sound level and original exhaust system, as a separate technical unit, of a type of two-wheel moped.

2.1. Noise of the two-wheel moped in motion (measuring conditions and method for testing of the vehicle during component type-approval).

2.1.1. Sound limits: refer to Annex VII of Regulation (EU) No [xxx/2013].

2.1.2. Measuring instruments

2.1.2.1. Acoustic measurements

The apparatus used for measuring the sound-level shall be a precision sound-level meter of the type described in International Electrotechnical Commission (IEC) publication 179 'Precision sound-level meters', second edition. Measurements shall be carried out using the 'fast' response and the 'A' weighting also described in that publication.

At the beginning and end of each series of measurements the sound-level meter shall be calibrated in accordance with the manufacturer's instructions, using an appropriate sound source (e.g. piston phone).

2.1.2.2. Speed measurements

Engine speed and moped speed on the test track shall be determined to within $\pm 3\%$.

2.1.3. Conditions of measurement

2.1.3.1. Condition of the moped

The combined weight of the rider and the test equipment used on the moped shall be no more than 90 kg and no less than 70 kg. If necessary, weights shall be added to the moped to bring the combined weight up to at least 70 kg.

During the measurements the moped shall be in running order (including coolant, oils, fuel, tools, spare wheel and rider).

Before the measurements are made the moped shall be brought to the normal operating temperature.

If the moped is fitted with fans with an automatic actuating mechanism, this system shall not be interfered with during the sound measurements. For mopeds having more than one driven wheel, only the drive provided for normal road operation may be used. Where a moped is fitted with a sidecar, this shall be removed for the purposes of the test.

2.1.3.2. Test site

The test site shall consist of a central acceleration section surrounded by a substantially flat test area. The acceleration section shall be flat; its surface shall be dry and such that surface noise remains low.

On the test site the variations in the free sound field between the sound source at the centre of the acceleration section and the microphone shall not exceed 1 dB. This condition will be deemed to be met if there are no large objects which reflect sound, such as fences, rocks, bridges or buildings, within 50 m of the centre of the acceleration section. The road surface covering of the test track shall conform to the requirements of Appendix 7.

The microphone shall not be obstructed in any way which could affect the sound field, and no person may stand between the microphone and the sound source. The observer carrying out the measurements shall so position himself as not to affect the readings of the measuring instrument.

2.1.3.3. Miscellaneous

Measurements shall not be made in poor atmospheric conditions. It shall be ensured that the results are not affected by gusts of wind.

For measurements, the A-weighted sound level of sound sources other than those of the vehicle to be tested and of wind effects shall be at least 10 dB(A) below the sound level produced by the vehicle. A suitable windscreen may be fitted to the microphone provided that account shall be taken of its effect on the sensitivity and directional characteristics of the microphone.

If the difference between the ambient noise and the measured noise is between 10 and 16 dB(A), in order to calculate the test results the appropriate correction shall be subtracted from the readings on the sound-level meter, as in the following graph:

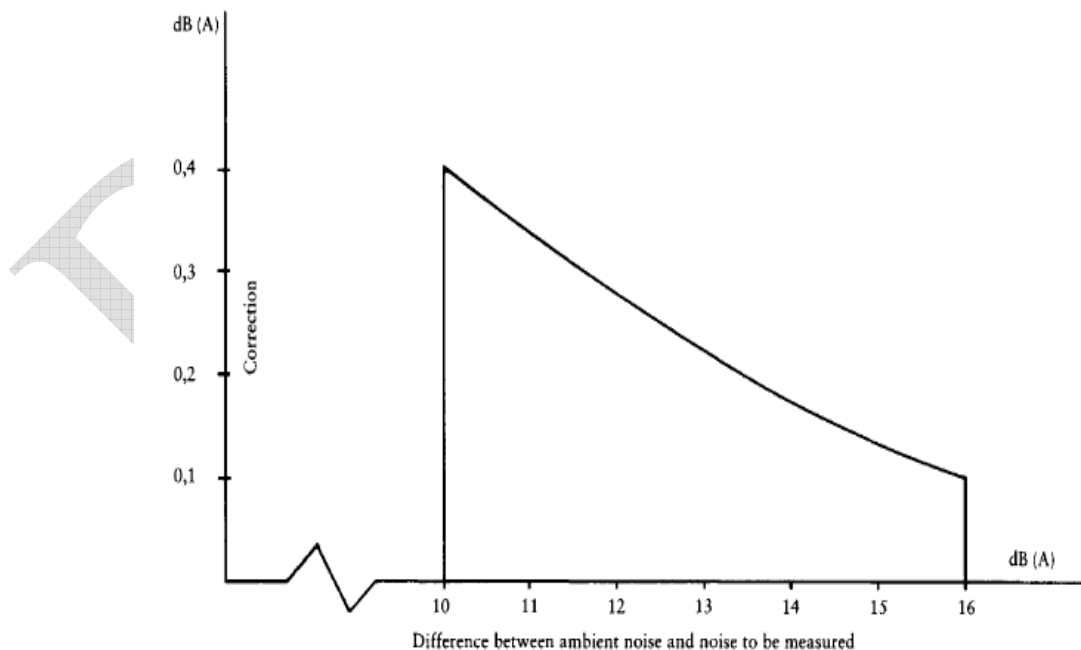


Figure Ap8.1-1: Difference between ambient noise and noise to be measured

2.1.4. Method of measurement

2.1.4.1. Nature and number of measurements

The maximum sound level expressed in A-weighted decibels (dB(A)) shall be measured as the moped travels between lines AA' and BB' (Figure Ap8-2). The measurement will be invalid if an abnormal discrepancy between the peak value and the general sound level is recorded. At least two measurements shall be taken on each side of the moped.

2.1.4.2. Positioning of the microphone

The microphone shall be located $7.5 \text{ m} \pm 0.2 \text{ m}$ from the reference line CC' (Figure 8-2) of the track and $1,2 \text{ m} \pm 0.1 \text{ m}$ above ground level.

2.1.4.3. Conditions of operation

The moped shall approach line AA' at an initial steady speed as specified in 2.1.4.3.1 or 2.1.4.3.2. When the front of the moped reaches line AA' the throttle shall be fully opened as quickly as practically possible and kept in that position until the rear of the moped reaches line BB'; the throttle shall then be returned as quickly as possible to the idle position.

For all measurements the moped shall be ridden in a straight line over the acceleration section keeping the median longitudinal plane of the moped as close as possible to line CC'.

2.1.4.3.1. Approach speed

The moped shall approach line AA' at a steady speed of 30 km/h or at its top speed if this is less than 30 km/h.

2.1.4.3.2. Selection of gear ratio

If the moped is fitted with a manual-shift gearbox the highest gear which allows it to cross line AA' at least half the full-power engine speed shall be selected.

If the moped has an automatic transmission, it shall be ridden at the speeds indicated in 2.1.4.3.1.

2.1.5. Results (test report)

2.1.5.1. the test report drawn up for the purpose of issuing the document referred to in Annex VIII of Regulation (EU) No [xxx/2013] shall indicate any circumstances and influences affecting the results of the measurements.

2.1.5.2. The values taken shall be rounded off to the nearest decibel.

If the figure following the decimal point is between 0 and 4, the total is rounded down and if between 5 and 9, it is rounded up.

Only those measurements whose variation in two consecutive tests on the same side of the moped is less than or equal to 2.0 dB(A) may be used for the purpose of issuing the document referred to in Annex VIII of Regulation (EU) No [xxx/2013].

- 2.1.5.3. To take account of inaccuracies in the measurements, the result of each measurement shall be arrived at by deducting 1.0 dB(A) from the value obtained in accordance with 2.1.5.2.
- 2.1.5.4. If the average of the four results of the measurements does not exceed the maximum permissible level for the category to which the moped being tested belongs, the limits laid down in 2.1.1 will be deemed as being complied with.

This average value will constitute the result of the test.

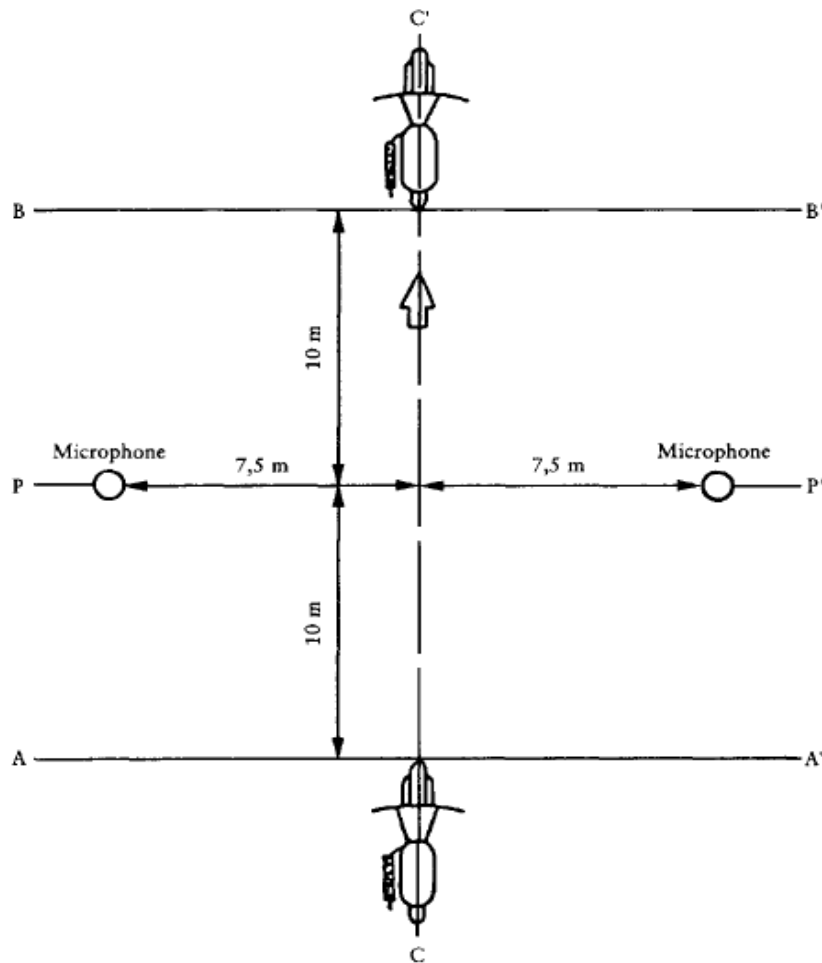


Figure Ap8.1-2: Test for vehicle in motion

Test for stationary vehicle

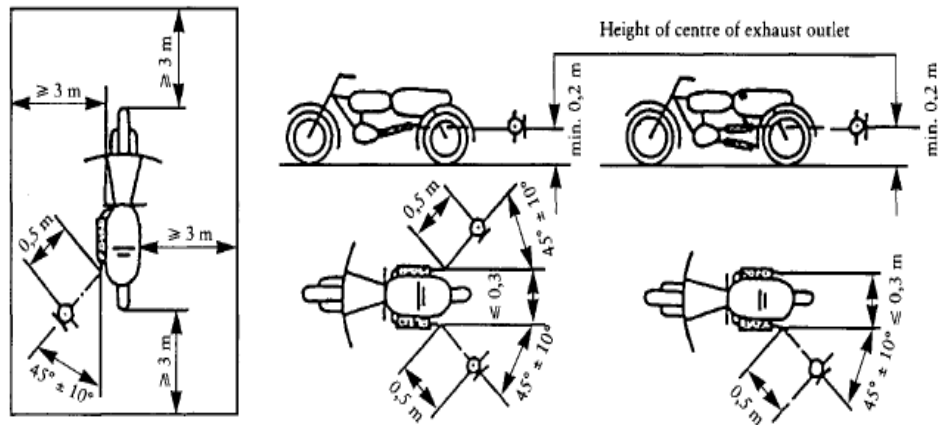


Figure Ap8.1-3: Test for stationary vehicle

2.2. Noise from stationary moped (measuring conditions and method for testing of the vehicle in use)

2.2.1. Sound-pressure level in the immediate vicinity of the moped

In order to facilitate subsequent noise tests on mopeds in use, the sound-pressure level shall also be measured in the immediate vicinity of the exhaust-system outlet (silencer) in accordance with the following requirements, the result of the measurement being entered in the test report drawn up for the purpose of issuing the document referred to in Annex VIII of Regulation (EU) No [xxx/2013]

2.2.2. Measuring instruments

A precision sound-level meter as defined in 2.1.2.1 shall be used.

2.2.3. Conditions of measurement

2.2.3.1. Condition of the moped

Before the measurements are made the moped engine shall be brought to the normal operating temperature. If the moped is fitted with fans with an automatic actuating mechanism, this system shall not be interfered with during the sound measurements.

During the measurements the gearbox shall be in neutral gear. If it is impossible to disconnect the transmission, the driving wheel of the moped shall be allowed to rotate freely, for example by placing the vehicle on its centre stand.

2.2.3.2. Test site (Figure Ap8.1-2)

Any area in which there are no significant acoustic disturbances may be used as a test site. Flat surfaces which are covered with concrete, asphalt or some other hard material and are highly reflective are suitable; surfaces consisting of earth which has been tamped down shall not be used. The test site shall be in the form of a rectangle whose

sides are at least 3 m from the outer edge of the moped (handlebars excluded). There shall be no significant obstacles, e.g. no persons other than the rider and the observer may stand within this rectangle.

The moped shall be positioned within the said rectangle so that the microphone used for measurement is at least 1 m from any kerb.

2.2.3.3. Miscellaneous

Readings of the measuring instrument caused by ambient noise and wind effects shall be at least 10.0 dB(A) lower than the sound levels to be measured. A suitable windshield may be fitted to the microphone provided that account shall be taken of its effect on the sensitivity of the microphone.

2.2.4. Method of measurement

2.2.4.1. Nature and number of measurements

The maximum sound level expressed in A-weighted decibels (dB(A)) shall be measured during the period of operation laid down in 2.2.4.3.

At least three measurements shall be taken at each measuring point.

2.2.4.2. Positioning of the microphone (Figure Ap8.1-3)

The microphone shall be positioned level with the exhaust outlet or 0.2 m above the surface of the track, whichever is the higher. The microphone diaphragm shall face towards the exhaust outlet at a distance of 0.5 m from it. The axis of maximum sensitivity of the microphone shall be parallel to the surface of the track at an angle of $45^\circ \pm 10^\circ$ to the vertical plane of the direction of the exhaust emissions.

In relation to this vertical plane, the microphone shall be located on the side which gives the maximum possible distance between the microphone and the outline of the moped (handlebars excluded).

If the exhaust system has more than one outlet at centres less than 0.3 m apart, the microphone shall be faced towards the outlet which is nearest the moped (handlebars excluded) or towards the outlet which is highest above the surface of the track. If the centres of the outlets are more than 0.3 m apart, separate measurements shall be taken for each of them, the highest figure recorded being taken as the test value.

2.2.4.3. Operating conditions

The engine speed shall be held steady at one of the following values:

$((S)/(2))$ if S is more than 5000 rpm,

$((3S)/(4))$ if S is not more than 5000 rpm,

where 'S' is the engine speed at which maximum power is developed.

When a constant engine speed shall be reached, the throttle shall be returned swiftly to the idle position. The sound level shall be measured during an operating cycle

consisting of a brief period of constant engine speed and throughout the deceleration period, the maximum sound-level meter reading being taken as the test value.

2.2.5. Results (test report)

2.2.5.1. The test report drawn up for the purpose of issuing the document referred to in Annex VIII of Regulation (EU) No [xxx/2013] shall indicate all relevant data and particularly those used in measuring the noise of the stationary moped.

2.2.5.2. Values, rounded off to the nearest decibel, shall be read off the measuring instrument.

Only those measurements which vary by no more than 2.0 dB(A) in three consecutive tests will be used.

2.2.5.3. The highest of the three measurements constitutes the test result.

2.3. Original exhaust system (silencer)

2.3.1. Requirements for silencers containing absorbent fibrous materials

2.3.1.1. Absorbent fibrous material shall be asbestos-free and may be used in the construction of silencers only if it is securely held in place throughout the service life of the silencer and it meets the requirements of any one of sections 2.3.1.2, 2.3.1.3 or 2.3.1.4.

2.3.1.2. After removal of the fibrous material, the sound level shall comply with the requirements of 2.1.1.

2.3.1.3. The absorbent fibrous material may not be placed in those parts of the silencer through which the exhaust gases pass and shall comply with the following requirements:

2.3.1.3.1. The material shall be heated at a temperature of $650\text{ C} \pm 5\text{ }^{\circ}\text{C}$ for four hours in a furnace without reduction in average length, diameter or bulk density of the fibre;

2.3.1.3.2. After heating at $650\text{ C} \pm 5^{\circ}\text{C}$ for one hour in a furnace, at least 98% of the material shall be retained in a sieve of nominal mesh size 250 μm complying with ISO standard 3310/1 when tested in accordance with ISO standard 2599;

2.3.1.3.3. – The loss in weight of the material shall not exceed 10.5% after soaking for 24 hours at $90\text{ C} \pm 5^{\circ}\text{C}$ in a synthetic condensate of the following composition:

– 1 N hydrobromic acid (HBr): 10ml

– 1 N sulphuric acid (H_2SO_4): 10ml

– Distilled water to make up to 1000ml.

– *Note:* The material shall be washed in distilled water and dried for one hour at $105\text{ }^{\circ}\text{C}$ before weighing.

2.3.1.4. Before the system is tested in accordance with 2.1, it shall be put into normal working order by one of the following methods:

2.3.1.4.1. Conditioning by continuous road operation;

- 2.3.1.4.1.1. The minimum distance to be travelled during conditioning shall be 2000 km.
- 2.3.1.4.1.2. 50% \pm 10% of this conditioning cycle shall consist of town driving and the remainder of long-distance runs; the continuous road cycle may be replaced by a corresponding test-track programme.
- 2.3.1.4.1.3. The two speed regimes shall be alternated at least six times.
- 2.3.1.4.1.4. The complete test programme shall include at least 10 breaks lasting at least three hours in order to reproduce the effects of cooling and condensation.
- 2.3.1.4.2. Conditioning by pulsation
- 2.3.1.4.2.1. The exhaust system or components thereof shall be fitted to the moped or to the engine.
- In the former case, the moped shall be mounted on a roller dynamometer. In the second case, the engine shall be mounted on a test bench. The test apparatus, as shown in detail in Figure Ap8.1-4, is fitted at the outlet of the exhaust system. Any other apparatus giving equivalent results is acceptable.
- 2.3.1.4.2.2. The test equipment shall be adjusted so that the flow of exhaust gases is alternately interrupted and restored 2500 times by a rapid-action valve.
- 2.3.1.4.2.3. The valve shall open when the exhaust gas back-pressure, measured at least 100 mm downstream of the intake flange, reaches a value of between 0.35 and 0.40 bar. Should such a figure be unattainable because of the engine characteristics, the valve shall open when the gas back-pressure reaches a level equivalent to 90% of the maximum that can be measured before the engine stops. It shall close when this pressure differs by no more than 10% from its stabilized value with the valve open.
- 2.3.1.4.2.4. The time-lapse relay shall be set for the duration of the exhaust gases calculated on the basis of the requirements of 2.3.1.4.2.3.
- 2.3.1.4.2.5. Engine speed shall be 75% of the speed (S) at which the engine develops maximum power.
- 2.3.1.4.2.6. The power indicated by the dynamometer shall be 50% of the full-throttle power measured at 75% of engine speed (S).
- 2.3.1.4.2.7. Any drainage holes shall be closed off during the test.
- 2.3.1.4.2.8. The entire test shall be completed within 48 hours. If necessary, a cooling period shall be allowed after each hour.
- 2.3.1.4.3. Conditioning on a test bench
- 2.3.1.4.3.1. The exhaust system shall be fitted to an engine representative of the type fitted to the moped for which the system is designed, and mounted on a test bench.
- 2.3.1.4.3.2. Conditioning consists of three test-bench cycles.
- 2.3.1.4.3.3. Each test-bench cycle shall be followed by a break of at least 6 hours in order to

reproduce the effects of cooling and condensation.


2.3.1.4.3.4. Each test-bench cycle consists of six phases. The engine conditions and duration are as follows for each phase:

Phase	Conditions	Duration of phase (minutes)
1	Idling	6
2	25% load at 75% S	40
3	50% load at 75% S	40
4	100% load at 75% S	30
5	50% load at 100% S	12
6	25% load at 100% S	22
Total time:		2 hrs 30mins

Table Ap8.1-1: test bench test cycle phases.

2.3.1.4.3.5. During this conditioning procedure, at the request of the manufacturer, the engine and the silencer may be cooled in order that the temperature recorded at a point not more than 100 mm from the exhaust gas outlet does not exceed that measured when the moped is running at 75% S in top gear. The engine and/or moped speeds shall be determined with an accuracy of $\pm 3\%$.

Test apparatus for conditioning by pulsation

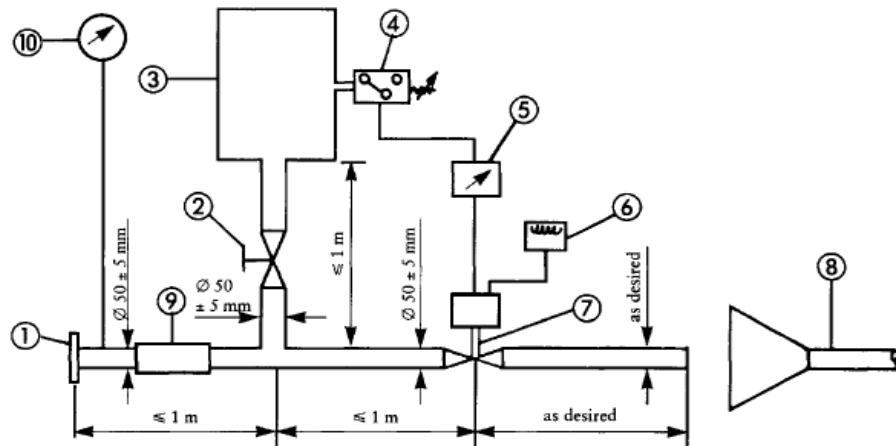

- ① Inlet flange or sleeve for connection to the rear of the test exhaust system.
- ② Hand-operated regulating valve.
- ③ Compensating reservoir with a maximum capacity of 40 litres and a filling time of not less than 1 second.
- ④ Pressure switch with an operating range of 0,05 to 2,5 bar.
- ⑤ Time delay switch.
- ⑥ Pulse counter.
- ⑦ Quick-acting valve, such as exhaust brake valve 60 mm in diameter, operated by a pneumatic cylinder with an output of 120 N at 4 bar. The response time, for opening and closing, must not exceed 0,5 s.
- ⑧ Exhaust gas evaluation.
- ⑨ Flexible hose.
- ⑩ Pressure gauge.

Figure Ap8.1-4: Test apparatus for conditioning by pulsation

2.3.2. Diagram and markings

2.3.2.1. A diagram and a cross-sectional drawing indicating the dimensions of the exhaust system(s) shall be annexed to the information document referred to in Annex I of Regulation (EU) No [xxx/2013]

2.3.2.2. All original silencers shall bear at least the following identifications:

- the ‘e’ mark followed by the identification of the country which granted the type-approval,
- the vehicle manufacturer's name or trade mark,
- the make and identifying part number in compliance with Annex II of Regulation (EU) No [xxx/2013].

This reference shall be legible and indelible and also visible, in the position at which it is to be fitted.

2.3.2.3. Any packing of original replacement silencer systems shall be marked legibly with the words ‘original part’ and the make and type references integrated together with the ‘e’ mark together with the reference of the country of origin.

2.3.3. Intake silencer

If the engine intake has to be fitted with an air filter and/or intake silencer in order to comply with the permissible sound level, the filter and/or silencer shall be regarded as part of the silencer and the requirements of 2.3 will also apply to them.

3. Component type-approval of a non-original exhaust system or components thereof, as a separate technical unit, for two-wheel mopeds

This point applies to the component type-approval, as separate technical units, of exhaust systems or components thereof intended to be fitted to one or more particular types of moped as non-original replacement parts.

3.1. Definition

3.1.1. ‘Non-original replacement exhaust system or components thereof means any exhaust system component as defined point 1.2 intended to be fitted to a moped to replace that of the type fitted to the moped when the information document provided for in Annex I of Regulation (EU) No [xxx/2013] was issued.

3.2. Application for component type-approval

3.2.1. Applications for component type-approval for replacement exhaust systems or components thereof as separate technical units shall be submitted by the manufacturer of the system or by his authorized representative.

- 3.2.2. For each type of replacement exhaust system or components thereof for which approval is requested, the component type-approval application shall be accompanied by the following documents in triplicate, and by the following particulars:
- 3.2.2.1. description, in respect of the characteristics referred to in 1.1, of the type(s) of moped for which the system(s) or component(s) is/ are intended;
- the numbers and/or symbols specific to the type of engine and moped shall be given;
- 3.2.2.2. description of the replacement exhaust system stating the relative position of each of its components, together with the fitting instructions;
- 3.2.2.3. drawings of each component to facilitate location and identification, and statement of materials used. These drawings shall also indicate the intended location of the mandatory component type-approval number.
- 3.2.3. The applicant shall submit, at the request of the technical service:
- 3.2.3.1. two samples of the system for which component type-approval is requested;
- 3.2.3.2. an exhaust system conforming to that originally fitted to the moped when the information document provided for in Annex I of Regulation (EU) No [xxx/2013] was issued;
- 3.2.3.3. a moped representative of the type to which the replacement exhaust system is to be fitted, supplied in such a condition that, when fitted with a silencer of the same type as was originally fitted, it meets the requirements of either of the following two sections:
- 3.2.3.3.1. if the moped referred to in 3.2.3.3 is of a type which has been granted type-approval pursuant to the provisions of this Appendix:
- 3.2.3.3.1.1. during the test in motion, it does not exceed by more than 1.0 dB(A) the applicable limit value laid down in 2.1.1;
- 3.2.3.3.1.2. during the stationary test, it does not exceed by more than 3.0 dB(A) the value recorded when the moped was granted type-approval and indicated on the manufacturer's data plate;
- 3.2.3.3.2. if the moped referred to in 3.2.3.3 is not of a type which has been granted type-approval in accordance with the requirements of this Chapter, it does not exceed by more than 1.0 dB(A) the limit value applicable to that type of moped when it was first put into service;
- 3.2.3.4. a separate engine identical to that fitted to the moped referred to above, where the competent authorities deem necessary.
- 3.3. Specifications
- 3.3.1. General specifications
- The design, construction and mounting of the silencer shall be such that:

- 3.3.1.1. the moped complies with the requirements of the Appendix under normal conditions of use, and in particular regardless of any vibrations to which it may be subjected;
- 3.3.1.2. it displays reasonable resistance to the corrosion phenomena to which it is exposed, with due regard to the normal conditions of use of the moped;
- 3.3.1.3. the ground clearance available under the silencer originally fitted, and the angle at which the moped can lean over, are not reduced;
- 3.3.1.4. the surface does not reach unduly high temperatures;
- 3.3.1.5. its outline has no projections or sharp edges;
- 3.3.1.6. shock absorbers and suspension have adequate clearance;
- 3.3.1.7. adequate safety clearance is provided for pipes;
- 3.3.1.8. it is impact-resistant in a way that is compatible with clearly defined maintenance and installation requirements.
- 3.3.2. Specifications for sound levels
 - 3.3.2.1. The acoustic efficiency of the replacement exhaust systems or components thereof shall be tested using the methods described in 2.1.2, 2.1.3, 2.1.4 and 2.1.5. With a replacement exhaust system or component thereof fitted to the moped referred to in 3.2.3.3, the sound-level values obtained shall meet the following conditions:
 - 3.3.2.1.1. they shall not exceed the values measured, in accordance with 3.2.3.3, using the same moped fitted with the original equipment silencer both during the test in motion and during the stationary test.
- 3.3.3. Testing of moped performance
 - 3.3.3.1. The replacement silencer shall be such as to ensure that the moped's performance is comparable to that achieved with the original silencer or component thereof.
 - 3.3.3.2. The replacement silencer shall be compared with an originally-fitted silencer, also in new condition, fitted in turn to the moped referred to in 3.2.3.3.
 - 3.3.3.3. This test is carried out by measuring the engine power curve. The net maximum power and the top speed measured with the replacement silencer shall not deviate from the net maximum power and top speed measured under the same conditions with the original equipment silencer by more than $\pm 5\%$.
- 3.3.4. Additional provisions relating to silencers as separate technical units containing fibrous material.

Fibrous material may not be used in the construction of such silencers unless the requirements set out in section 2.3.1 of this Annex are met.
- 3.3.5. Evaluation of the emission of pollutants of vehicles equipped with replacement silencer system

The vehicle referred to in section 3.2.3.3, equipped with a silencer of the type for which approval is requested, shall undergo the applicable environmental tests according to the type-approval of the vehicle.

The requirements regarding environmental performance shall be deemed to be fulfilled if the results meet the limit values according to the type-approval of the vehicle set-out in Regulation (EU) No [xxx/2013].

3.3.6. Marking of non-original exhaust system or components thereof shall comply with the provisions of Annex II of Regulation (EU) No [xxx/2013]

3.4. Component type-approval

3.4.1. Upon completion of the tests laid down in this Appendix, the approval authority will issue a certificate corresponding to the model shown in Annex VI of Regulation (EU) No [xxx/2013]. The component type-approval number shall be preceded by a rectangle surrounding the letter 'e' followed by the distinguishing number or letters of the Member State which issued or refused the component type-approval. The exhaust system which is granted component type-approval is deemed to conform to the provisions of Annexes I and V.

DRAFT

Appendix 2
Sound requirements for motorcycles (categories L3e and L4e)

1. Definitions

For the purposes of this Appendix:

- 1.1. 'type of motorcycle as regards its sound level and exhaust system' means motorcycles which do not differ in such essential respects as the following:
 - 1.1.1. type of engine (two or four-stroke, reciprocating piston engine or rotary-piston engine, number and capacity of cylinders, number and type of carburettors or injection systems, arrangement of valves, net maximum power and corresponding speed). The cubic capacity of rotary-piston engines is deemed to be double the volume of the chamber;
 - 1.1.2. transmission system, in particular the number and ratios of the gears;
 - 1.1.3. number, type and arrangement of exhaust systems;
- 1.2. 'exhaust system' or 'silencer' means a complete set of components necessary to limit the noise caused by a motorcycle engine and its exhaust;
 - 1.2.1. 'original exhaust system or silencer' means a system of the type fitted to the vehicle at the time of type-approval or extension of type-approval. It may be the one first fitted or a replacement;
 - 1.2.2. 'non-original exhaust system or silencer' means a system of a type other than that fitted to the vehicle at the time of type-approval or extension of type-approval. It may be used only as a replacement exhaust system or silencer;
- 1.3. 'exhaust systems of differing types' means systems which are fundamentally different in one of the following ways:
 - 1.3.1. systems comprising components bearing different factory or trade marks;
 - 1.3.2. systems comprising any component made of materials of different characteristics or comprising components which are of a different shape or size;
 - 1.3.3. systems in which the operating principles of at least one component are different;
 - 1.3.4. systems comprising components in different combinations;
- 1.4. 'component of an exhaust system' means one of the individual components which together form the exhaust system (such as exhaust pipe work, the silencer proper) and the intake system (air filter) if any.

If the engine has to be equipped with an intake system (air filter and/or intake noise absorber) in order to comply with the maximum permissible sound levels, the filter and/or the absorber shall be treated as components having the same importance as the exhaust system.

2. Component type-approval in respect of the sound level and original exhaust system. As a separate technical unit, of a type of motorcycle.

2.1. Noise of the motorcycle in motion (measuring conditions and method for testing of the vehicle during component type-approval)

2.1.1. Limits: refer to Annex VII of Regulation (EU) No [xxx/2013].

2.1.2. Measuring instruments

2.1.2.1. Acoustic measurements

The apparatus used for measuring the sound level shall be a precision sound-level meter of the type described in International Electrotechnical Commission (IEC) publication 179 'Precision sound-level meters', second edition. Measurements shall be carried out using the 'fast' response and the 'A' weighting also described in that publication.

At the beginning and end of each series of measurements the sound-level meter shall be calibrated in accordance with the manufacturer's instructions, using an appropriate sound source (e.g. piston phone).

2.1.2.2. Speed measurements

Engine speed and motorcycle speed on the test track shall be determined to within $\pm 3\%$.

2.1.3. Conditions of measurement

2.1.3.1. Condition of the motorcycle

During the measurements the motorcycle shall be in running order.

Before the measurements are made the motorcycle shall be brought to the normal operating temperature. If the motorcycle is fitted with fans with an automatic actuating mechanism, this system shall not be interfered with during the sound measurements. For motorcycles having more than one driven wheel, only the drive provided for normal road operation may be used. Where a motorcycle is fitted with a sidecar, this shall be removed for the purposes of the test.

2.1.3.2. Test site

The test site shall consist of a central acceleration section surrounded by a substantially flat test area. The acceleration section shall be flat; its surface shall be dry and such that surface noise remains low.

On the test site the variations in the free sound field between the sound source at the centre of the acceleration section and the microphone shall not exceed 1.0 dB. This condition will be deemed to be met if there are no large objects which reflect sound, such as fences, rocks, bridges or buildings, within 50 m of the centre of the acceleration section. The road surface covering of the test site shall conform to the requirements of Appendix 4.

The microphone shall not be obstructed in any way which could affect the sound field, and no person may stand between the microphone and the sound source. The observer carrying out the measurements shall so position himself as not to affect the readings of the measuring instrument.

2.1.3.3. Miscellaneous

Measurements shall not be made in poor atmospheric conditions. It shall be ensured that the results are not affected by gusts of wind.

For measurements, the A-weighted sound level of sound sources other than those of the vehicle to be tested and of wind effects shall be at least 10.0 dB(A) below the sound level produced by the vehicle. A suitable windscreen may be fitted to the microphone provided that account shall be taken of its effect on the sensitivity and directional characteristics of the microphone.

If the difference between the ambient noise and the measured noise is between 10.0 and 16.0 dB(A), in order to calculate the test results the appropriate correction shall be subtracted from the readings on the sound-level meter, as in the following graph:

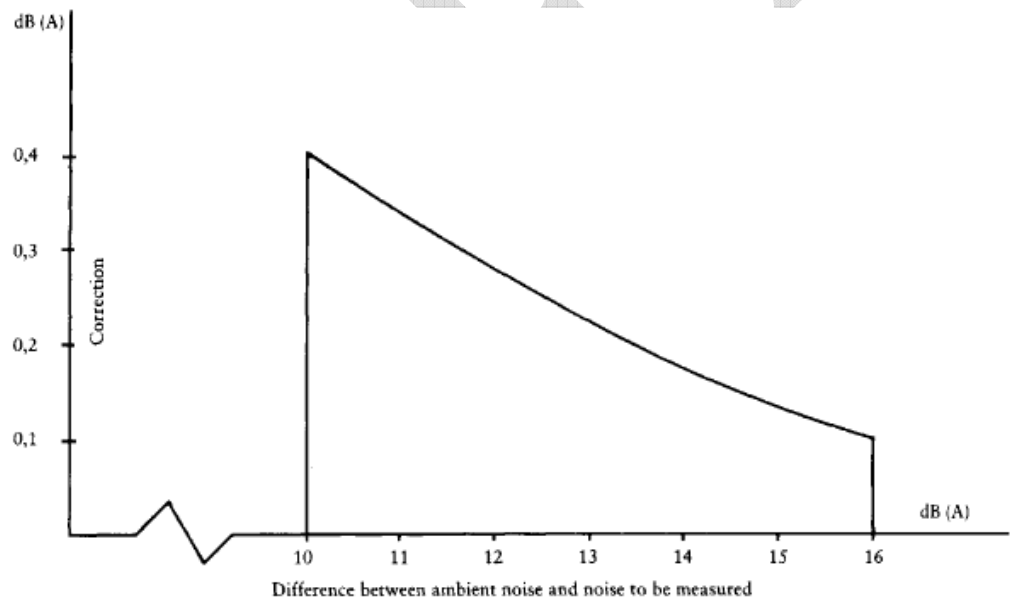


Figure Ap8.2.-1: difference between ambient noise and noise to be measured

2.1.4. Method of measurement

2.1.4.1. Nature and number of measurements

The maximum sound level expressed in A-weighted decibels (dB(A)) shall be measured as the motorcycle travels between lines AA' and BB' (Figure Ap8.2-2). The measurement will be invalid if an abnormal discrepancy between the peak value and the general sound level is recorded.

At least two measurements shall be taken on each side of the motorcycle.

2.1.4.2. Positioning of the microphone

The microphone shall be located $7.5 \text{ m} \pm 0.2 \text{ m}$ from the reference line CC' (Figure 8.2-2) of the track and $1.2 \text{ m} \pm 0.1 \text{ m}$ above ground level.

2.1.4.3. Conditions of operation

The motorcycle shall approach line AA' at an initial steady speed as specified in 2.1.4.3.1 and 2.1.4.3.2. When the front of the motorcycle reaches line AA' the throttle shall be fully opened as quickly as practically possible and kept in that position until the rear of the motorcycle reaches line BB'; the throttle shall then be returned as quickly as possible to the idle position.

For all measurements the motorcycle shall be ridden in a straight line over the acceleration section keeping the longitudinal median plane of the motorcycle as close as possible to line CC'.

2.1.4.3.1. Motorcycles with non-automatic gearboxes

2.1.4.3.1.1. Approach speed

The motorcycle shall approach line AA' at a steady speed

- 50 km/h, or
- corresponding to an engine speed equal to 75% of the engine speed at which maximum net power is developed.

The lower of these speeds shall be selected.

2.1.4.3.1.2. Selection of gear ratio

2.1.4.3.1.2. Motorcycles fitted with a gearbox having a maximum of four ratios, whatever the cylinder capacity of their engines, shall be tested only in second gear.

- 1.

2.1.4.3.1.2. Motorcycles fitted with engines having a cylinder capacity not exceeding 175 cm^3 and a gearbox with five ratios or more shall be tested only in third gear.

- 2.

2.1.4.3.1.2. Motorcycles fitted with engines having a cylinder capacity of more than 175 cm^3 and a gearbox with five ratios or more shall be tested once in second gear and once in third gear. The result used shall be the average of the two tests.

- 3.

2.1.4.3.1.2. If, during the test carried out in second gear (see 2.1.4.3.1.2.1 and 2.1.4.3.1.2.3), the engine speed on the approach to the line marking the end of the test track exceeds 100% of the engine speed at which maximum net power is developed, the test shall be carried out in third gear and the sound level measured shall be the only one recorded as the test result.

- 4.

2.1.4.3.2. Motorcycles with automatic gearboxes

2.1.4.3.2.1. Motorcycles without a manual selector

2.1.4.3.2.1. Approach speed

- 1.

The motorcycle shall approach line AA' at steady speeds of 30, 40 and 50 km/h or 75% of the maximum road speed if that value is lower. The condition giving the highest sound level is chosen.

2.1.4.3.2.2. Motorcycles equipped with a manual selector with X forward drive positions

2.1.4.3.2.2. Approach speed

1.

The motorcycle shall approach line AA' at a steady speed of:

- less than 50 km/h, the engine rotation speed being equal to 75% of the engine speed at which maximum net power is developed, or
- 50 km/h, the engine rotation speed being less than 75% of the engine speed at which maximum net power is developed.

If, in the test at a steady speed of 50 km/h, the gears change down to first, the approach speed of the motorcycle may be increased to a maximum of 60 km/h to avoid the change down

2.1.4.3.2.2. Position of the manual selector

2.

If the motorcycle is equipped with a manual selector with X forward drive positions, the test shall be carried out with the selector in the highest position; the voluntary device for changing down (e.g. kick down) shall not be used. If an automatic change down takes place after line AA', the test shall be begun again using the second-highest position or the third-highest position if necessary, in order to find the highest position of the selector at which the test can be performed without an automatic change down (without using the kick down).

2.1.4.4. In case of a hybrid L-category vehicle the tests have to be performed two times:

- (a) condition A: batteries shall be at their maximum state of charge; if more than one 'hybrid mode' is available, the most electric hybrid mode shall be selected for the test;
- (b) condition B: batteries shall be at their minimum state of charge; if more than one 'hybrid mode' is available, the most fuel consuming hybrid mode shall be selected for the test.

2.1.5. Results (test report)

2.1.5.1. The test report drawn up for the purpose of issuing the information document referred to Annex I of Regulation (EU) No [xxx/2013] shall indicate any circumstances and influences affecting the results of the measurements.

2.1.5.2. Readings taken shall be rounded off to the nearest decibel.

If the figure following the decimal point is between 0 and 4, the total is rounded down and if between 5 and 9, it is rounded up.

Only those measurements whose variation in two consecutive tests on the same side of the motorcycle is less than or equal to 2.0 dB(A) may be used for the purpose of

issuing the information document referred to in Annex I of Regulation (EU) No [xxx/2013].

2.1.5.3. To take account of inaccuracies in the measurements, the result of each measurement shall be arrived at by deducting 1.0 dB(A) from the value obtained in accordance with 2.1.5.2.

2.1.5.4. If the average of the four results of the measurements does not exceed the maximum permissible level for the category to which the vehicle being tested belongs, the limit laid down in Annex VII of Regulation (EU) No [xxx/2013] will be deemed as being complied with. This average value will constitute the result of the test.

2.1.5.5. If the average of four results of condition A and if the average of four results of condition B do not exceed the maximum permissible level for the category to which the hybrid electric vehicle being tested belongs, the limits laid down in Annex VII of Regulation (EU) No [xxx/2013] shall be deemed as being complied with.

The highest average value shall constitute the result of the test.

2.2. Noise from stationary motorcycle (measuring conditions and method for testing of the vehicle in use)

2.2.1. Sound-pressure level in the immediate vicinity of the motorcycle

In order to facilitate subsequent noise tests on motorcycles in use, the sound-pressure level shall also be measured in the immediate vicinity of the exhaust-system outlet in accordance with the following requirements, the result of the measurement being entered in the test report drawn up for the purpose of issuing the information document referred to in Annex I of Regulation (EU) No [xxx/2013].

2.2.2. Measuring instruments

A precision sound-level meter as defined in 2.1.2.1 shall be used.

2.2.3. Conditions of measurement

2.2.3.1. Condition of the motorcycle

Before the measurements are made the motorcycle engine shall be brought to the normal operating temperature. If the motorcycle is fitted with fans with an automatic actuating mechanism, this system shall not be interfered with during the sound measurements.

During the measurements the gearbox shall be in neutral gear. If it is impossible to disconnect the transmission, the driving wheel of the motorcycle shall be allowed to rotate freely, for example by placing the vehicle on its centre stand.

2.2.3.2. Test site (Figure Ap8.2-3)

Any area in which there are no significant acoustic disturbances may be used as a test site. Flat surfaces which are covered with concrete, asphalt or some other hard material and are highly reflective are suitable; surfaces consisting of earth which has been

tamped down shall not be used. The test site shall be in the form of a rectangle whose sides are at least 3 m from the outer edge of the motorcycle (handlebars excluded). There shall be no significant obstacles, e.g. no persons other than the rider and the observer may stand within this rectangle.

The motorcycle shall be positioned within the said rectangle so that the microphone used for measurement is at least 1 m from any kerb.

2.2.3.3. Miscellaneous

Readings of the measuring instrument caused by ambient noise and wind effects shall be at least 10.0 dB(A) lower than the sound levels to be measured. A suitable windshield may be fitted to the microphone provided that account shall be taken of its effect on the sensitivity of the microphone.

2.2.4. Method of measurement

2.2.4.1. Nature and number of measurements

The maximum sound level expressed in A-weighted decibels (dB(A)) shall be measured during the period of operation laid down in 2.2.4.3.

At least three measurements shall be taken at each measuring point.

2.2.4.2. Positioning of the microphone (Figure Ap8.2-3)

The microphone shall be positioned level with the exhaust outlet or 0.2 m above the surface of the track, whichever is the highest. The microphone diaphragm shall face towards the exhaust outlet at a distance of 0.5 m from it. The axis of maximum sensitivity of the microphone shall be parallel to the surface of the track at an angle of $45 \pm 10^\circ$ to the vertical plane of the direction of the exhaust emissions.

In relation to this vertical plane, the microphone shall be located on the side which gives the maximum possible distance between the microphone and the outline of the motorcycle (handlebars excluded).

If the exhaust system has more than one outlet at centres less than 0.3 m apart, the microphone shall be faced towards the outlet which is nearest the motorcycle (handlebars excluded) or towards the outlet which is highest above the surface of the track. If the centres of the outlets are more than 0.3 m apart, separate measurements shall be taken for each of them, the highest figure recorded being taken as the test value.

2.2.4.3. Operating conditions

The engine speed shall be held steady at one of the following values:

- $((S)/2)$ if S is more than 5000 rpm,
- $((3S)/4)$, if S is not more than 5000 rpm.

where S is the engine speed at which the maximum net power is developed.

When a constant engine speed shall be reached, the throttle shall be returned swiftly to the idle position. The sound level shall be measured during an operating cycle consisting of a brief period of constant engine speed and throughout the deceleration period, the maximum sound-level meter reading being taken as the test value.

2.2.5. Results (test report)

2.2.5.1. The test report drawn up for the purpose of issuing the information document referred to in Annex I of Regulation (EU) No [xxx/2013] shall indicate all relevant data and particularly those used in measuring the noise of the stationary motorcycle.

2.2.5.2. Values, rounded off to the nearest decibel, shall be read off the measuring instrument.

If the figure following the decimal point is between 0 and 4, the total is rounded down and if between 5 and 9, it is rounded up.

Only those measurements which vary by no more than 2.0 dB(A) in three consecutive tests will be used.

2.2.5.3. The highest of the three measurements will constitute the test result.

Test for vehicle in motion

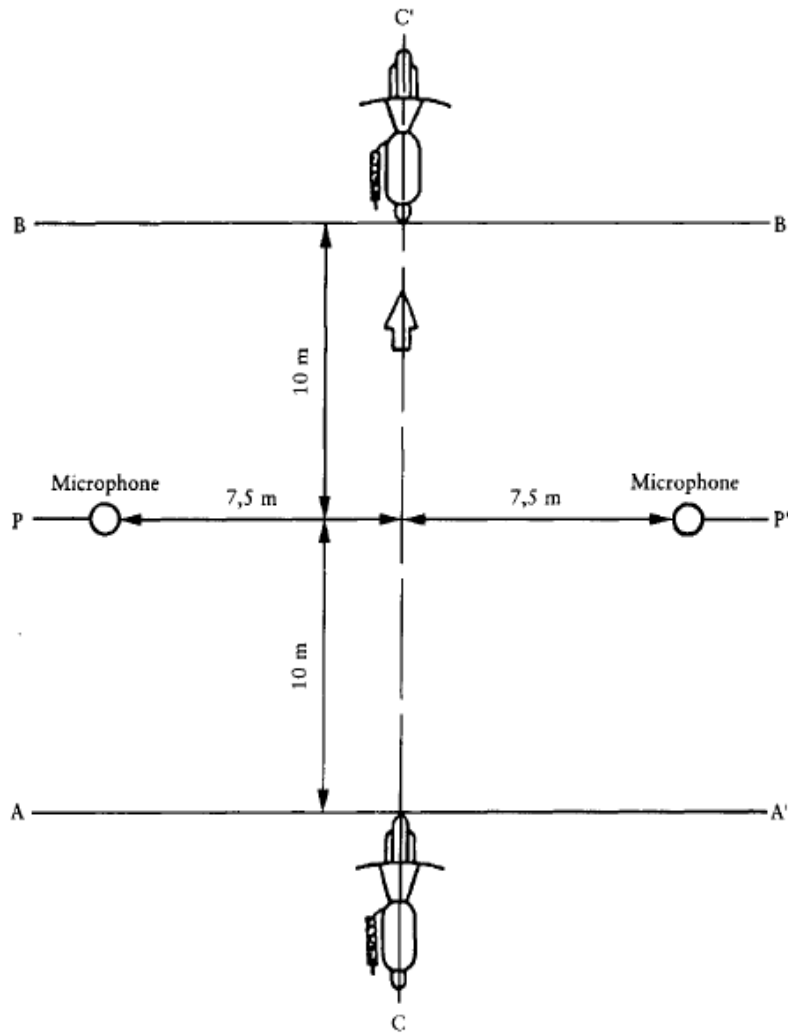


Figure Ap8.2-2: Test for vehicle in motion

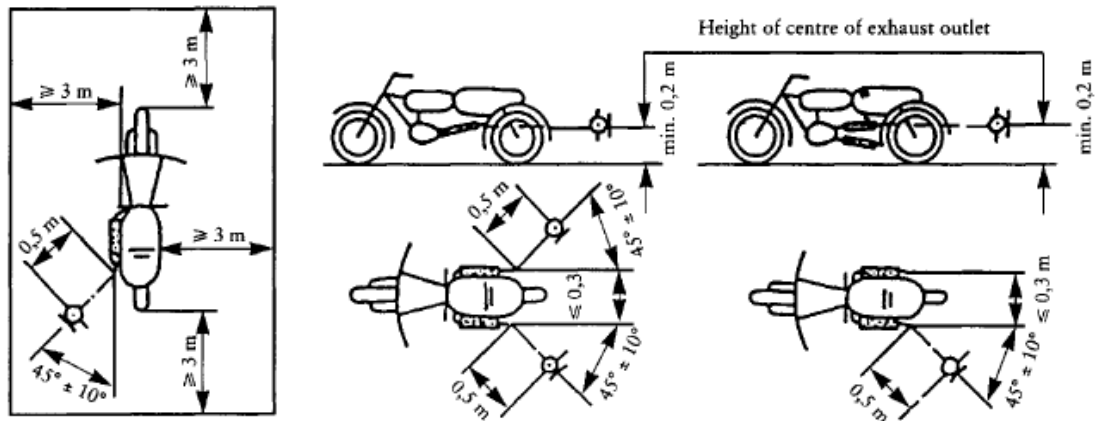


Figure Ap8.2-3: Test for stationary vehicle

- 2.3. Original exhaust system (silencer)
- 2.3.1. Requirements for silencers containing absorbent fibrous materials
- 2.3.1.1. Absorbent fibrous material shall be asbestos-free and may be used in the construction of silencers only if it is securely held in place throughout the service life of the silencer and it meets the requirements of any one of 2.3.1.2, 2.3.1.3 or 2.3.1.4.
- 2.3.1.2. After removal of the fibrous material, the sound level shall comply with the requirements of 2.1.1.
- 2.3.1.3. The absorbent fibrous material may not be placed in those parts of the silencer through which the exhaust gases pass and shall comply with the following requirements:
- 2.3.1.3.1. the material shall be heated at a temperature of $650\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ for four hours in a furnace without reduction in average length, diameter or bulk density of the fibre;
- 2.3.1.3.2. after heating at $650\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ for one hour in a furnace, at least 98% of the material shall be retained in a sieve of nominal mesh size $250\text{ }\mu\text{m}$ complying with ISO standard 3310/1 when tested in accordance with ISO standard 2599;
- 2.3.1.3.3. the loss in weight of the material shall not exceed 10.5% after soaking for 24 hours at $90\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ in a synthetic condensate of the following composition:
- 1 N hydrobromic acid (HBr): 10 ml
 - 1 N sulphuric acid (H₂SO₄): 10 ml
 - Distilled water to make up to 1000 ml.

Note:

The material shall be washed in distilled water and dried for one hour at $105\text{ }^{\circ}\text{C}$ before weighing.

- 2.3.1.4. Before the system is tested in accordance with 2.1, it shall be put into normal working order by one of the following methods:
- 2.3.1.4.1. Conditioning by continuous road operation
- 2.3.1.4.1.1. The table shows the minimum distance to be travelled for each category of motorcycle during conditioning:

L3e / L4e category vehicle (motorcycle) by engine capacity (cm ³)	Distance (km)
1. ≤ 80	4000
2. $> 80 \leq 175$	6000
3. > 175	8000

Table Ap8.2-1: minimum distance to be travelled during conditioning

- 2.3.1.4.1.2 50% ± 10% of this conditioning cycle shall consist of town driving and the remainder of long-distance runs at high speed; the continuous road cycle may be replaced by a corresponding test-track programme.
- 2.3.1.4.1.3. The two speed regimes shall be alternated at least six times.
- 2.3.1.4.1.4. The complete test programme shall include at least 10 breaks lasting at least three hours in order to reproduce the effects of cooling and condensation.
- 2.3.1.4.2. Conditioning by pulsation
- 2.3.1.4.2.1. The exhaust system or components thereof shall be fitted to the motorcycle or to the engine.
- In the former case, the motorcycle shall be mounted on a roller dynamometer. In the second case, the engine shall be mounted on a test bench.
- The test apparatus, as shown in detail in Figure Ap8.2-4, is fitted at the outlet of the exhaust system. Any other apparatus giving equivalent results is acceptable.
- 2.3.1.4.2.2. The test equipment shall be adjusted so that the flow of exhaust gases is alternately interrupted and restored 2500 times by a rapid-action valve.
- 2.3.1.4.2.3 The valve shall open when the exhaust gas back-pressure, measured at least 100 mm downstream of the intake flange, reaches a value of between 0.35 and 0.40 bar. Should such a figure be unattainable because of the engine characteristics, the valve shall open when the gas back-pressure reaches a level equivalent to 90% of the maximum that can be measured before the engine stops. It shall close when this pressure differs by no more than 10% from its stabilised value with the valve open.
- 2.3.1.4.2.4. The time-lapse relay shall be set for the duration of exhaust gases calculated on the basis of the requirements of 2.3.1.4.2.3.
- 2.3.1.4.2.5. Engine speed shall be 75% of the speed (S) at which the engine develops maximum power.
- 2.3.1.4.2.6. The power indicated by the dynamometer shall be 50% of the full-throttle power measured at 75% of engine speed (S).
- 2.3.1.4.2.7. Any drainage holes shall be closed off during the test.
- 2.3.1.4.2.8. The entire test shall be completed within 48 hours. If necessary, a cooling period shall be allowed after each hour.
- 2.3.1.4.3. Conditioning on a test bench
- 2.3.1.4.3.1. The exhaust system shall be fitted to an engine, representative of the type fitted to the motorcycle for which the system is designed, and mounted on a test bench.
- 2.3.1.4.3.2. Conditioning consists of the specified number of test bench cycles for the category of motorcycle for which the exhaust system was designed. The table shows the number of cycles for each category of motorcycle.

Category of motorcycle by cylinder capacity (cm ³)	Number of cycles
1. ≤ 80	6
2. > 80 ≤ 175	9
3. > 175	12


Table Ap8.2-2: Number of test bench cycles for conditioning

- 2.3.1.4.3.3. Each test bench cycle shall be followed by a break of at least 6 hours in order to reproduce the effects of cooling and condensation.
- 2.3.1.4.3.4. Each test-bench cycle consists of six phases. The engine conditions and duration are as follows for each phase:

Phase	Conditions	Duration of phase (minutes)	
		Engines of less than 175 cm ³	Engines of 175 cm ³ or more
1	Idling	6	6
2	25% load at 75% S	40	50
3	50% load at 75% S	40	50
4	100% load at 75% S	30	10
5	50% load at 100% S	12	12
6	25% load at 100% S	22	22
Total time:		2 hours 30	2 hours 30

Table Ap8.2-3: test cycle phases for bench testing.

- 2.3.1.4.3.5. During this conditioning procedure, at the request of the manufacturer, the engine and the silencer may be cooled in order that the temperature recorded at a point not more than 100 mm from the exhaust gas outlet does not exceed that measured when the motorcycle is running at 110 km/h or 75% S in top gear. The engine and/or motorcycle speeds shall be determined with an accuracy of ± 3%.

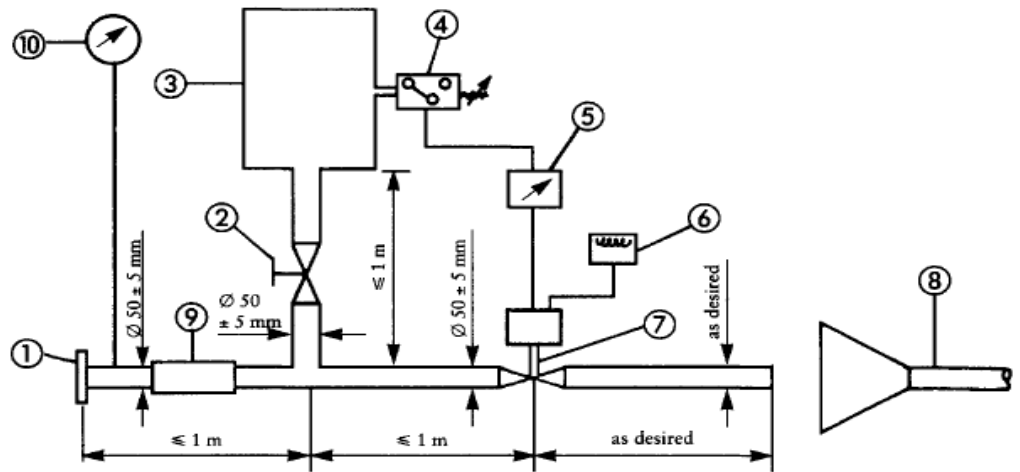

- ① Inlet flange or sleeve for connection to the rear of the test exhaust system.
- ② Hand-operated regulating valve.
- ③ Compensating reservoir with a maximum capacity of 40 l and a filling time of not less than 1 second.
- ④ Pressure switch with an operating range of 0,05 to 2,5 bar.
- ⑤ Time delay switch.
- ⑥ Pulse counter.
- ⑦ Quick-acting valve, such as exhaust brake valve 60 mm in diameter, operated by a pneumatic cylinder with an output of 120 N at 4 bar. The response time, for opening and closing, must not exceed 0,5 seconds.
- ⑧ Exhaust gas evaluation.
- ⑨ Flexible hose.
- ⑩ Pressure gauge.

Figure Ap8.2-4: Test apparatus for conditioning by pulsation

2.3.2. Diagram and markings

2.3.2.1. A diagram and a cross-sectional drawing indicating the dimensions of the exhaust system shall be annexed to the information document referred to in Annex I of Regulation (EU) No [xxx/2013].

2.3.2.2. All original silencers shall bear at least the following identifications:

- the ‘e’ mark followed by the identification of the country which granted the type-approval,
- the vehicle manufacturer's name or trade mark,
- the make and identifying part number.

This reference shall be legible and indelible and also visible, in the position at which it is to be fitted.

2.3.2.3. Any packing of original replacement silencer systems shall be marked legibly with the words ‘original part’ and the make and type references integrated together with the ‘e’ mark and also the reference of the country of origin.

2.3.3. Intake silencer

If the engine intake has to be fitted with an air filter and/or intake silencer in order to

comply with the permissible sound level, the filter and/or silencer shall be regarded as part of the silencer and the requirements of 2.3 also apply to them.

3. Component type-approval of a non-original exhaust system or components thereof, as technical units, for motorcycles.

This section applies to the component type-approval, as technical units of exhaust systems or components thereof intended to be fitted to one or more particular types of motorcycle as non-original replacement parts.

3.1. Definition

3.1.1. 'Non-original replacement exhaust system or components thereof' means any exhaust system component as defined in 1.2 intended to be fitted to a motorcycle to replace that of the type fitted to the motorcycle when the information document provided for in Annex I of Regulation (EU) No [xxx/2013 was issued.

3.2. Application for component type-approval

3.2.1. Applications for component type-approval for replacement exhaust systems or components thereof as separate technical units shall be submitted by the manufacturer of the system or by his authorized representative.

3.2.2. For each type of replacement exhaust system or components thereof for which approval is requested, the component type-approval application shall be accompanied by the following documents in triplicate, and by the following particulars:

3.2.2.1. description, in respect of the characteristics referred to in section 1.1 of this Appendix, of the type(s) of motorcycle for which the system(s) or component(s) is/are intended;

the numbers and/or symbols specific to the type of engine and motorcycle shall be given;

3.2.2.2. description of the replacement exhaust system stating the relative position of each of its components, together with the fitting instructions;

3.2.2.3. drawings of each component to facilitate location and identification, and statement of materials used. These drawings shall also indicate the intended location of the mandatory component type-approval number.

3.2.3. The applicant shall submit, at the request of the technical service:

3.2.3.1. two samples of the system for which component type-approval is requested;

3.2.3.2. an exhaust system conforming to that originally fitted to the motorcycle when the document provided for in Annex I of Regulation (EU) No [xxx/2013 was issued;

3.2.3.3. a motorcycle representative of the type to which the replacement exhaust system is to be fitted, supplied in such a condition that, when fitted with a silencer of the same type as was originally fitted, it meets the requirements of either of the following two sections:

- 3.2.3.3.1. If the motorcycle referred to in 3.2.3.3 is of a type which has been granted type-approval pursuant to the provisions of this appendix:
- during the test in motion, it does not exceed by more than 1.0 dB(A) the limit value laid down in 2.1.1;
 - during the stationary test, it does not exceed by more than 3.0 dB(A) the value recorded when the motorcycle was granted type-approval and indicated on the manufacturer's data plate.
- 3.2.3.3.2. If the motorcycle referred to in 3.2.3.3 is not of a type which has been granted type-approval pursuant to the provisions of this Regulation, it does not exceed by more than 1.0 dB(A) the limit value applicable to that type of motorcycle when it was first put into service;
- 3.2.3.4. a separate engine identical to that fitted to the motorcycle referred to above, where the approval authorities deem necessary.
- 3.3. Markings and inscriptions
- 3.3.1. Non-original exhaust systems or components thereof shall be marked in accordance with the requirements of Annex II of Regulation (EU) No [xxx/2013]
- 3.4. Component type-approval
- 3.4.1. Upon completion of the tests laid down in this Appendix, the approval authority will issue a certificate corresponding to the model shown in Annex VI of Regulation (EU) No [xxx/2013]. The component type-approval number shall be preceded by a rectangle surrounding the letter 'e' followed by the distinguishing number or letters of the Member State which issued or refused the component type-approval. The exhaust system which is granted component type-approval is deemed to conform to the provisions of Annexes I and V.
- 3.5. Specifications
- 3.5.1. General specifications.
- The design, construction and mounting of the silencer shall be such that:
- 3.5.1.1. the motorcycle complies with the requirements of this Appendix under normal conditions of use, and in particular regardless of any vibrations to which it may be subjected;
- 3.5.1.2. it displays reasonable resistance to the corrosion phenomena to which it is exposed, with due regard to the normal conditions of use of the motorcycle;
- 3.5.1.3. the ground clearance available under the silencer originally fitted, and the angle at which the motorcycle can lean over, are not reduced;
- 3.5.1.4. the surface does not reach unduly high temperatures;
- 3.5.1.5. its outline has no projections or sharp edges;

- 3.5.1.6. shock absorbers and suspension have adequate clearance;
- 3.5.1.7. adequate safety clearance is provided for pipes;
- 3.5.1.8. it is impact-resistant in a way that is compatible with clearly-defined maintenance and installation requirements.
- 3.5.2. Specifications for sound levels
- 3.5.2.1. The acoustic efficiency of the replacement exhaust systems or components thereof shall be tested using the methods described in 2.1.2, 2.1.3, 2.1.4 and 2.1.5.
- With a replacement exhaust system or component thereof fitted to the motorcycle referred to in 3.2.3.3, the sound-level values obtained shall meet the following conditions:
- 3.5.2.1.1. they shall not exceed the values measured, in accordance with 3.2.3.3, using the same motorcycle fitted with the original equipment silencer both during the test in motion and during the stationary test.
- 3.5.3. Testing of motorcycle performance
- 3.5.3.1. The replacement silencer shall be such as to ensure that the motorcycle's performance is comparable to that achieved with the original silencer or component thereof.
- 3.5.3.2. The replacement silencer shall be compared with an originally-fitted silencer, also in new condition, fitted in turn to the motorcycle referred to in 3.2.3.3.
- 3.5.3.3. This test is carried out by measuring the engine power curve. The net maximum power and the top speed measured with the replacement silencer shall not deviate from the net maximum power and top speed measured under the same conditions with the original equipment silencer by more than $\pm 5\%$.
- 3.5.4. Additional provisions relating to silencers as separate technical units containing fibrous material.
- Fibrous material may not be used in the construction of such silencers unless the requirements set out in 2.3.1 are met.
- 3.5.5. Evaluation of the emission of pollutants of vehicles equipped with replacement silencer system
- The vehicle referred to in section 3.2.3.3, equipped with a silencer of the type for which approval is requested, shall undergo a Type I, II and V test under the conditions described in the corresponding Annexes I, II and V according to the type-approval of the vehicle.
- The requirements regarding emissions shall be deemed to be fulfilled if the results meet the limit values according to the type-approval of the vehicle.

Appendix 3
Sound requirements for three-wheel mopeds, tricycles and quadricycles (categories L2e, L5e, L6e and L7e)

1. Definitions

For the purposes of this Appendix:

- 1.1. 'type of three-wheel moped, tricycle or quadricycle as regards its sound level and exhaust system' means three-wheel mopeds and tricycles which do not differ in such essential respects as the following:
 - 1.1.1. bodywork shape or materials (in particular the engine compartment and its soundproofing);
 - 1.1.2. vehicle length and width;
 - 1.1.3. type of engine (spark ignition or compression ignition, two- or four-stroke, reciprocating piston or rotary piston, number and capacity of cylinders, number and type of carburettors or injection systems, arrangement of valves, net maximum power and corresponding speed); The cubic capacity of rotary-piston engines is deemed to be double the swept volume;
 - 1.1.4. transmission system, in particular the number and ratios of the gears;
 - 1.1.5. number, type and arrangement of exhaust systems;
- 1.2. 'exhaust system' or 'silencer' means a complete set of components necessary to limit the noise caused by the engine and exhaust of a three-wheel moped, tricycle or quadricycle;
 - 1.2.1. 'original exhaust system or silencer' means a system of the type fitted to the vehicle at the time of type-approval or extension of type-approval. It may be the one first fitted or a replacement;
 - 1.2.2. 'non-original exhaust system or silencer' means a system of a type other than that fitted to the vehicle at the time of type-approval or extension of type-approval. It may be used only as a replacement exhaust system or silencer;
- 1.3. 'exhaust systems of differing types' means systems which are fundamentally different in one of the following ways:
 - 1.3.1. systems comprising components bearing different factory or trade marks;
 - 1.3.2. systems comprising any component made of materials of different characteristics or comprising components which are of a different shape or size;
 - 1.3.3. systems in which the operating principles of at least one component are different;
 - 1.3.4. systems comprising components in different combinations;

- 1.4. 'component of an exhaust system' means one of the individual components which together form the exhaust system (such as exhaust pipe work, the silencer proper) and the intake system (air filter) if any.

If the engine has to be equipped with an intake system (air filter and/or intake noise absorber) in order to comply with maximum permissible sound levels, the filter and/or the absorber must be treated as a component having the same importance as the exhaust system.

2. Component type-approval in respect of the sound level and original exhaust system, as a separate technical unit, of a type of three-wheel moped or tricycle.

- 2.1. Noise of the three-wheel moped, tricycle or quadricycle (measuring conditions and method for testing of the vehicle during component type-approval).

2.1.1. The vehicle, its engine and its exhaust system shall be designed, constructed and assembled so that the vehicle complies with the requirements of this Appendix under normal conditions of use, regardless of any vibrations to which they may be subjected.

2.1.2. The exhaust system shall be designed, constructed and mounted to resist the corrosion phenomena to which it is exposed.

2.2. Specifications for sound levels

2.2.1. Limits: refer to Annex VII of Regulation (EU) No [xxx/2013].

2.2.2. Measuring instruments

2.2.2.1. The apparatus used for measuring the sound level shall be a precision sound-level meter of the type described in International Electrotechnical Commission (IEC) publication No 179 'Precision sound-level meters', second edition. Measurements shall be carried out using the 'fast' response of the sound-level meter and the 'A' weighting also described in that publication.

At the beginning and end of each series of measurements the sound-level meter shall be calibrated in accordance with the manufacturer's instructions, using an appropriate sound source (e.g. a piston phone).

2.2.2.2. Speed measurements.

Engine speed and vehicle speed on the test track shall be determined to within $\pm 3\%$.

2.2.3. Conditions of measurement

2.2.3.1. Condition of the vehicle

During the measurements, the vehicle shall be in the running order (including coolant, oils, fuel, tools, spare wheel and rider). Before the measurements are made the vehicle shall be brought to the normal operating temperature.

2.2.3.1.1. The measurements shall be made with the vehicles unladen and without trailer or

semitrailer.

2.2.3.2. Test site.

The test site shall consist of a central acceleration section surrounded by a substantially flat test area. The acceleration section shall be flat; its surface shall be dry and such that surface noise remains low.

On the test site the variations in the free sound field between the sound source at the centre of the acceleration section and the microphone shall not exceed ± 1.0 dB(A). This condition will be deemed to be met if there are no large objects which reflect sound, such as fences, rocks, bridges or buildings, within 50 m of the centre of the acceleration section. The road surface covering of the test track shall conform to the requirements of appendix 4.

The microphone shall not be obstructed in any way which could affect the sound field, and no person may stand between the microphone and the sound source. The observer carrying out the measurements shall so position himself as not to affect the readings of the measuring instrument.

2.2.3.3. Miscellaneous

Measurements shall not be made in poor atmospheric conditions. It shall be ensured that the results are not affected by gusts of wind.

For measurements, the A-weighted sound level of sound sources other than those of the vehicle to be tested and of wind effects shall be at least 10.0 dB(A) below the sound level produced by the vehicle. A suitable windscreen may be fitted to the microphone provided that account shall be taken of its effect on the sensitivity and directional characteristics of the microphone.

If the difference between the ambient noise and the measured noise is between 10.0 and 16.0 dB(A), in order to calculate the test results the appropriate correction shall be subtracted from the readings on the sound-level meter, as in the following graph:

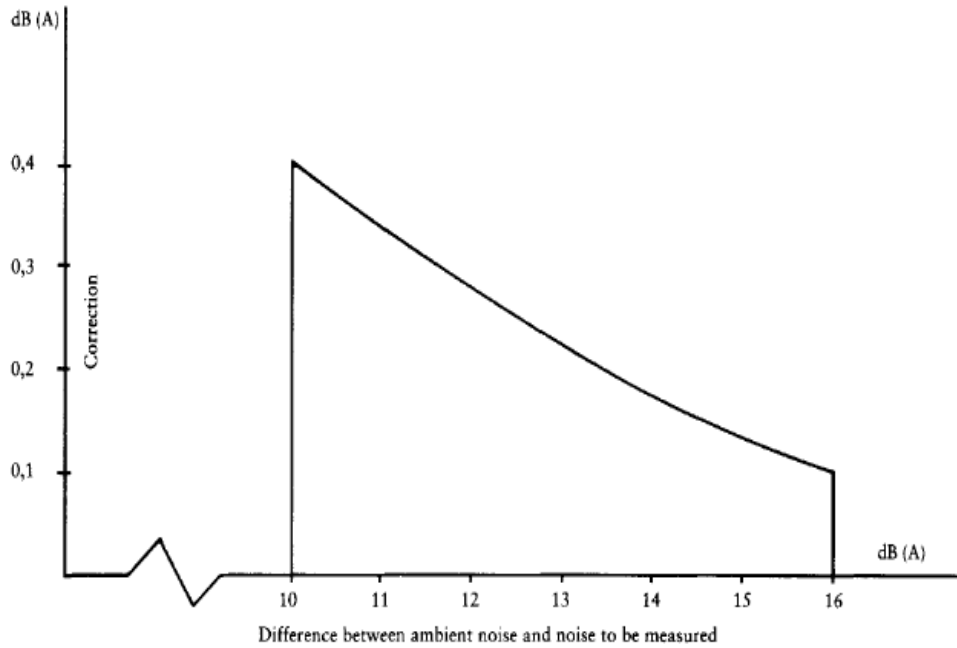


Figure Ap8.3-1: difference between ambient noise to be measured.

2.2.4. Method of measurement

2.2.4.1. Nature and number of measurements

The maximum sound level expressed in A-weighted decibels (dB(A)) shall be measured as the vehicle travels between lines AA' and BB' (Figure 8-10). The measurement will be invalid if an abnormal discrepancy between the peak value and the general sound level is recorded.

At least two measurements shall be taken on each side of the vehicle.

2.2.4.2. Positioning of the microphone

The microphone shall be located $7.5 \text{ m} \pm 0.2 \text{ m}$ from the reference line CC' (Figure 8.3-2) of the track and $1.2 \text{ m} \pm 0.1 \text{ m}$ above ground level.

2.2.4.3. Conditions of operation

The vehicle shall approach line AA' at an initial steady speed as specified in 2.2.4.4. When the front of the vehicle reaches line AA' the throttle shall be fully opened as quickly as practically possible and kept in that position until the rear of the vehicle reaches line BB'; the throttle shall then be returned as quickly as possible to the idle position.

For all measurements the vehicle shall be ridden in a straight line over the acceleration section keeping the median longitudinal plane of the vehicle as close as possible to line CC'.

2.2.4.3.1. In the case of articulated vehicles consisting of two inseparable components and

regarded as constituting one single vehicle, the semitrailer shall not be taken into account with regard to crossing line BB'.

2.2.4.4. Determining the steady speed to be adopted

2.2.4.4.1. Vehicle without gearbox

The vehicle shall approach line AA' at a steady speed corresponding either to a speed of rotation of the engine equal to three-quarters of that at which the engine develops its maximum power or to three-quarters of the maximum speed of rotation of the engine permitted by the governor, or of 50 km/h, whichever is the slowest.

2.2.4.4.2. Vehicle with manual gearbox

If the vehicle is fitted with a gearbox with two, three or four ratios, second gear shall be used. If the gearbox has more than four ratios, third gear shall be used. If the engine then reaches a speed of rotation beyond its maximum power rating, instead of second or third gear the next higher gear to allow line BB' on the test track to be reached without exceeding this rating shall be engaged. Overdrive shall not be selected. If the vehicle has a dual-ratio final drive, the ratio selected shall be that corresponding to the highest speed of the vehicle. The vehicle shall approach line AA' at a steady speed corresponding either to three-quarters of the engine rotation speed at which the engine develops its maximum power or to three-quarters of the maximum engine rotation speed permitted by the governor, or at 50 km/h, whichever is slower.

2.2.4.4.3. Vehicle with automatic gearbox

The vehicle shall approach in line AA' at a steady speed of 50 km/h or three-quarters of its maximum speed, whichever is the slowest. Where several forward drive positions are available, that producing the highest average acceleration of the vehicle between lines AA' and BB' shall be selected. The selector position that is used only for braking, manoeuvring or similar slow movements shall not be used.

2.2.4.5. In case of hybrid vehicle the tests have to be performed two times:

(a) condition A: batteries shall be at their maximum state of charge; if more than one 'hybrid mode' is available, the most electric hybrid mode shall be selected for the test;

(b) condition B: batteries shall be at their minimum state of charge; if more than one 'hybrid mode' is available, the most fuel consuming hybrid mode shall be selected for the test.

2.2.5. Results (test report)

2.2.5.1. The test report drawn up for the purpose of issuing the information document referred to in Annex I of Regulation (EU) No [xxx/2013] shall indicate any circumstances and influences affecting the results of the measurements.

2.2.5.2. The values taken shall be rounded off to the nearest decibel.

If the figure following the decimal point is between 0 and 4, the total is rounded down

and if between 5 and 9, it is rounded up.

Only those measurements whose variation in two consecutive tests on the same side of the vehicle is less than or equal to 2.0 dB(A) may be used for the purpose of issuing the information document referred to in Annex I of Regulation (EU) No [xxx/2013].

2.2.5.3. To take account of inaccuracies in the measurements, the result of each measurement shall be arrived at by deducting 1.0 dB(A) from the value obtained in accordance with 2.2.5.2.

2.2.5.4. If the average of the four results of the measurements does not exceed the maximum permissible level for the category to which the vehicle being tested belongs, the limit laid down in 2.2.1 will be deemed as being complied with. This average value will constitute the result of the test.

2.2.5.5. If the average of four results of condition A and if this average of four results of condition B do not exceed the maximum permissible level for the category to which the hybrid vehicle being tested belongs, the limits laid down in point 2.2.1 shall be deemed as being complied with.

The highest average value shall constitute the result of the test.

2.3. Measurement of the noise of the stationary vehicle (for testing the vehicle in use)

2.3.1. Sound-pressure level in the immediate vicinity of the vehicle.

In order to facilitate subsequent noise tests on vehicles in use, the sound-pressure level shall also be measured in the immediate vicinity of the exhaust-system outlet (silencer) in accordance with the following requirements, the result of the measurement being entered in the test report drawn up for the purpose of issuing the document referred to in Annex I of Regulation (EU) No [xxx/2013].

2.3.2. Measuring instruments.

A precision sound-level meter conforming in accuracy to 2.2.2.1 shall be used.

2.3.3. Conditions of measurement

2.3.3.1. Condition of the vehicle

Before the measurements are made the vehicle engine shall be brought to the normal operating temperature. If the vehicle is fitted with fans with an automatic actuating mechanism, this system shall not be interfered with during the sound measurements.

During the measurements the gearbox shall be in neutral gear. If it is impossible to disconnect the transmission, the driving wheel(s) of the moped or tricycle shall be allowed to rotate freely, for example by placing the vehicle on its centre stand or on rollers.

2.3.3.2. Test site (see Figure 8.3-3)

Any area in which there are no significant acoustic disturbances may be used as a test

site. Flat surfaces which are covered with concrete, asphalt or some other hard material and are highly reflective are suitable; surfaces consisting of earth which has been tamped down shall not be used. The test site shall be in the form of a rectangle whose sides are at least 3 m from the outer edge of the vehicle (handlebars excluded). There shall be no significant obstacles, e.g. no persons other than the rider and the observer may stand within this rectangle.

The vehicle shall be positioned within the said rectangle so that the microphone used for measurement is at least 1 m from any kerb.

2.3.3.3. Miscellaneous

Readings of the measuring instrument caused by ambient noise and wind effects shall be at least 10.0 dB(A) lower than the sound levels to be measured. A suitable windshield may be fitted to the microphone provided that account shall be taken of its effect on the sensitivity of the microphone.

2.3.4. Method of measurement

2.3.4.1. Nature and number of measurements

The maximum sound level expressed in 1-weighted decibels (dB(A)) shall be measured during the period of operation laid down in 2.3.4.3.

At least three measurements shall be taken at each measurement point.

2.3.4.2. Positioning of the microphone (Figure 8.3-3)

The microphone shall be positioned level with the exhaust outlet or 0.2 m above the surface of the track, whichever is the highest. The microphone diaphragm shall face towards the exhaust outlet at a distance of 0.5 m from it. The axis of maximum sensitivity of the microphone shall be parallel to the surface of the track at an angle of $45^{\circ} \pm 10^{\circ}$ to the vertical plane of the direction of the exhaust emissions.

In relation to this vertical plane, the microphone shall be located on the side which gives the maximum possible distance between the microphone and the outline of the vehicle (handlebars excluded).

If the exhaust system has more than one outlet at centres less than 0.3 m apart, the microphone shall be faced towards the outlet which is nearest the vehicle (handlebars excluded) or towards the outlet which is highest above the surface of the track. If the centres of the outlets are more than 0.3 m apart, separate measurements shall be taken for each of them, the highest figure recorded being taken as the test value.

2.3.4.3. Operating conditions

The engine speed shall be held steady at one of the following values:

- $((S)/2)$ if S is more than 5000 rpm,
- $((3S)/4)$ if S is not more than 5000 rpm,

where S is the engine speed at which the maximum power is developed.

When a constant engine speed shall be reached, the throttle shall be returned swiftly to the idle position. The sound level shall be measured during an operating cycle consisting of a brief period of constant engine speed and throughout the deceleration period, the maximum sound-level meter reading being taken as the test value.

2.3.5. Results (test report)

2.3.5.1. The test report drawn up for the purpose of issuing the information document referred to in Annex VIII to Regulation (EU) No [xxx/2013] shall indicate all relevant data and particularly those used in measuring the noise of the stationary vehicle.

2.3.5.2. Values, rounded off to the nearest decibel, shall be read off the measuring instrument.

If the figure following the decimal point is between 0 and 4, the total is rounded down and if between 5 and 9, it is rounded up.

Only those measurements which vary by no more than 2.0 dB(A) in three consecutive tests will be used.

2.3.5.3. The highest of the three measurements will constitute the test result.

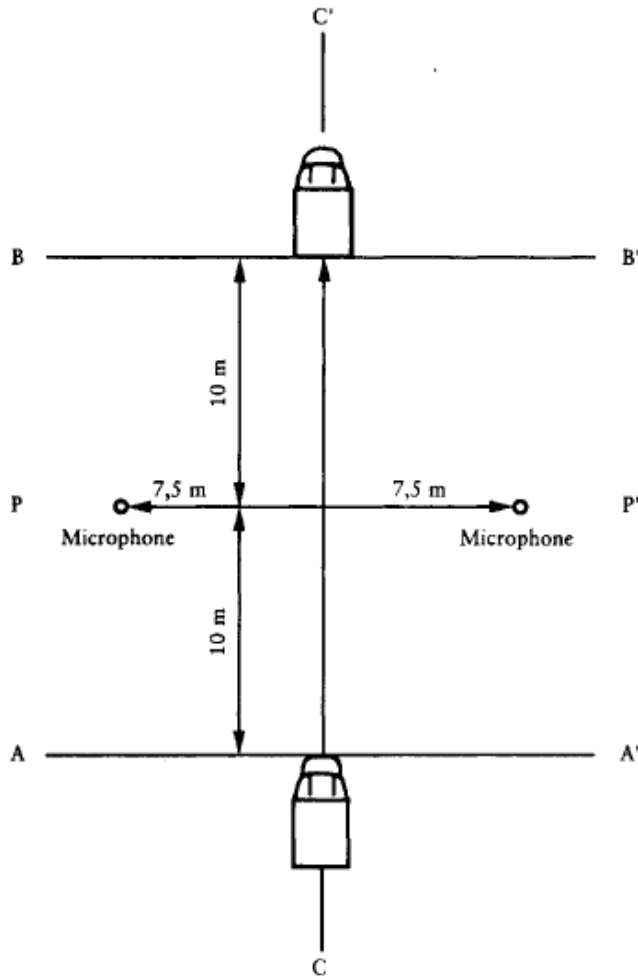


Figure Ap8.3-2 Positions for testing the vehicle in motion

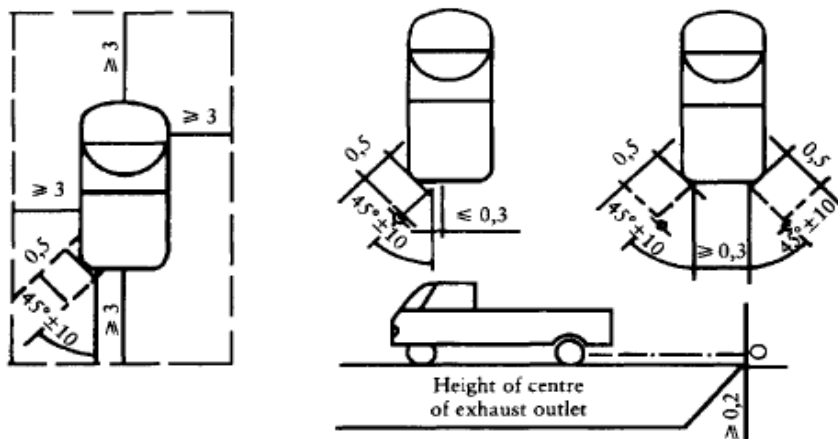


Figure Ap8.3-3: Positions for testing the stationary vehicle

2.4. Original exhaust system (silencer)

- 2.4.1. Requirements for silencers containing absorbent fibrous materials
- 2.4.1.1. Absorbent fibrous material shall be asbestos-free and may be used in the construction of silencers only if it is securely held in place throughout the service life of the silencer and it meets the requirements of any one of 2.4.1.2, 2.4.1.3 or 2.4.1.4.
- 2.4.1.2. After removal of the fibrous material, the sound level shall comply with the requirements of 2.2.1.
- 2.4.1.3. The absorbent fibrous material may not be placed in those parts of the silencer through which the exhaust gases pass and shall comply with the following requirements.
- 2.4.1.3.1. The material shall be heated at a temperature of $650\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ for four hours in a furnace without reduction in average length, diameter or bulk density of the fibre.
- 2.4.1.3.2. After heating at $650\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ for one hour in a furnace, at least 98% of the material shall be retained in a sieve of nominal mesh size $250\text{ }\mu\text{m}$ complying with ISO standard 3310/1 when tested in accordance with ISO standard 2599.
- 2.4.1.3.3. The loss in weight of the material shall not exceed 10.5% after soaking for 24 hours at $90\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ in a synthetic condensate of the following composition:
- 1 N hydrobromic acid (HBr): 10 ml
 - 1 N sulphuric acid (H₂SO₄): 10 ml
 - Distilled water to make up to 1000 ml.

Note: The material shall be washed in distilled water and dried for one hour at $105\text{ }^{\circ}\text{C}$ before weighing.

- 2.4.1.4. Before the system is tested in accordance with section 2, it shall be put into normal working order by one of the following methods:
- 2.4.1.4.1. Conditioning by continuous road operation
- 2.4.1.4.1.1. The table shows the minimum distance to be travelled for each category of vehicle during conditioning:

Category of vehicle by cylinder capacity (cm ³)	Distance (km)
1. ≤ 250	4000
2. $> 250 \leq 500$	6000
3. > 500	8000

Table Ap8.3-1: minimum distance to be travelled during conditioning

- 2.4.1.4.1.2. $50\% \pm 10\%$ of this conditioning cycle shall consist of town driving and the remainder of long-distance runs at high speed; the continuous road cycle may be replaced by a corresponding test-track programme.
- 2.4.1.4.1.3. The two speed regimes shall be alternated at least six times.

2.4.1.4.1.4. The complete test programme shall include at least 10 breaks lasting at least three hours in order to reproduce the effects of cooling and condensation.

2.4.1.4.2. Conditioning by pulsation

2.4.1.4.2.1. The exhaust system or components thereof shall be fitted to the vehicle or to the engine.

In the former case, the vehicle shall be mounted on a roller dynamometer. In the second case, the engine shall be mounted on a test bench.

The test apparatus, as shown in detail in Figure Ap8.3-4, is fitted at the outlet of the exhaust system. Any other apparatus giving equivalent results is acceptable.

2.4.1.4.2.2. The test equipment shall be adjusted so that the flow of exhaust gases is alternately interrupted and restored 2500 times by a rapid-action valve.

2.4.1.4.2.3. The valve shall open when the exhaust gas back-pressure, measured at least 100 mm downstream of the intake flange, reaches a value of between 0.35 and 0.40 bar. Should such a figure be unattainable because of the engine characteristics, the valve shall open when the gas back-pressure reaches a level equivalent to 90% of the maximum that can be measured before the engine stops. It shall close when this pressure differs by no more than 10% from its stabilized value with the valve open.

2.4.1.4.2.4. The time-lapse relay shall be set for the duration of exhaust gases calculated on the basis of the requirements of 2.4.1.4.2.3.

2.4.1.4.2.5. Engine speed shall be 75% of the speed (S) at which the engine develops maximum power.

2.4.1.4.2.6. The power indicated by the dynamometer shall be 50% of the full-throttle power measured at 75% of engine speed (S).

2.4.1.4.2.7. Any drainage holes shall be closed off during the test.

2.4.1.4.2.8. The entire test shall be completed within 48 hours. If necessary, a cooling period shall be allowed after each hour.

2.4.1.4.3. Conditioning on a test bench

2.4.1.4.3.1. The exhaust system shall be fitted to an engine representative of the type fitted to the vehicle for which the system is designed, and mounted on a test bench.

2.4.1.4.3.2. Conditioning consists of the specified number of test bench cycles for the category of vehicle for which the exhaust system was designed. The table shows the number of cycles for each category of vehicle.

Category of vehicle by cylinder capacity (cm ³)	Number of cycles
1. ≤ 250	6
2. > 250 ≤ 500	9
3. > 500	12

Table Ap8.3-2: Number of conditioning cycles.


2.4.1.4.3.3. Each test-bench cycle shall be followed by a break of at least 6 hours in order to reproduce the effects of cooling and condensation.

2.4.1.4.3.4. Each test-bench cycle consists of six phases. The engine conditions and duration are as follows for each phase:

Phase	Conditions	Duration of phase (minutes)	
1	Idling	6	6
2	25% load at 75% S	40	50
3	50% load at 75% S	40	50
4	100% load at 75% S	30	10
5	50% load at 100% S	12	12
6	25% load at 100% S	22	22
Total time:		2 hrs 30mins	2 hrs 30mins

Table Ap8.3-3: duration of test phases.

2.4.1.4.3.5. During this conditioning procedure, at the request of the manufacturer, the engine and the silencer may be cooled in order that the temperature recorded at a point not more than 100 mm from the exhaust gas outlet does not exceed that measured when the vehicle is running at 110 km/h or 75% S in top gear. The engine and/or vehicle speeds shall be determined with an accuracy of $\pm 3\%$.

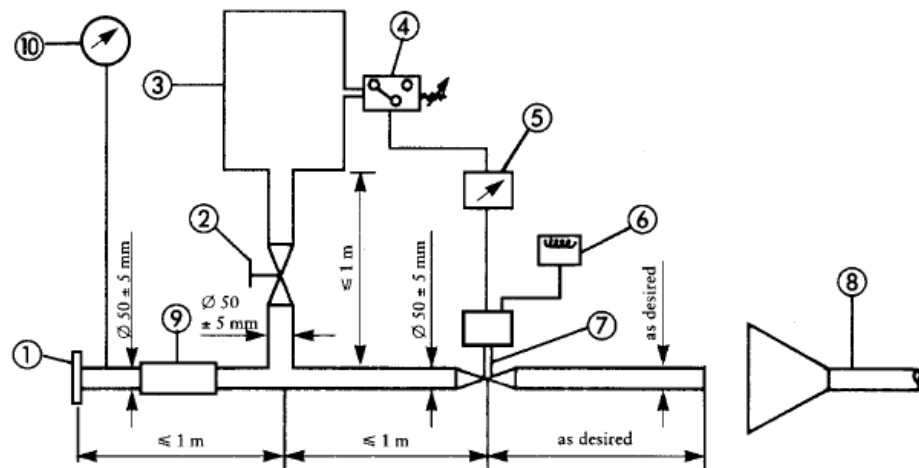

- ① Inlet flange or sleeve for connection to the rear of the test exhaust system.
- ② Hand-operated regulating valve.
- ③ Compensating reservoir with a maximum capacity of 40 l and a filling time of not less than 1 second.
- ④ Pressure switch with an operating range of 0,05 to 2,5 bar.
- ⑤ Time delay switch.
- ⑥ Pulse counter.
- ⑦ Quick-acting valve, such as exhaust brake valve 60 mm in diameter, operated by a pneumatic cylinder with an output of 120 N at 4 bar. The response time, for opening and closing, must not exceed 0,5 seconds.
- ⑧ Exhaust gas evaluation.
- ⑨ Flexible hose.
- ⑩ Pressure gauge.

Figure Ap8.3-4: test apparatus for conditioning by pulsation

2.4.2. Diagram and markings

2.4.2.1. A diagram and a cross-sectional drawing indicating the dimensions of the exhaust system shall be annexed to the information document referred to in Annex I of Regulation (EU) No [xxx/2013]

2.4.2.1. A diagram and a cross-sectional drawing indicating the dimensions of the exhaust system shall be annexed to the document referred to in Annex I of Regulation (EU) No [xxx/2013].

2.4.2.2. All original silencers shall bear at least the following identifications:

- the ‘e’ mark followed by the identification of the country which granted the type-approval,
- the vehicle manufacturer's name or trade mark,
- the make and identifying part number.

This reference shall be legible and indelible and also visible, in the position at which it is to be fitted.

2.4.2.3. Any packing of original replacement silencer systems shall be marked legibly with the

words ‘original part’ and the make and type references integrated together with the ‘e’ mark and also the reference of the country of origin.

2.4.3. Intake silencer

If the engine intake has to be fitted with an air filter and/or intake silencer in order to comply with the permissible sound level, the filter and/or silencer shall be regarded as part of the silencer and the requirements of 2.4 will also apply to them.

3. Component type-approval in respect of a non-original exhaust system or components thereof, as separate technical units, for three-wheel mopeds and tricycles.

This section applies to the component type-approval, as separate technical units, of exhaust systems or components thereof intended to be fitted to one or more particular types of three-wheel mopeds and tricycles as non-original replacement parts.

3.1. Definition

3.1.1. ‘Non-original replacement exhaust system or components thereof’ means any exhaust system component as defined in 1.2 intended to be fitted to a three-wheel moped, tricycle or quadricycle to replace that of the type fitted to the three-wheel moped, tricycle or quadricycle when the information document provided for in Annex I of Regulation (EU) No [xxx/2013] was issued.

3.2. Application for component type-approval

3.2.1. Applications for component type-approval for replacement exhaust systems or components thereof as separate technical units shall be submitted by the manufacturer of the system or by his authorized representative.

3.2.2. For each type of replacement exhaust system or components thereof for which approval is requested, the application for component type-approval shall be accompanied by the following documents in triplicate, and by the following particulars:

3.2.2.1. description, in respect of the characteristics referred to in paragraph 1.1, of the type(s) of vehicle for which the system(s) or component(s) is/are intended;

the numbers and/or symbols specific to the type of engine and vehicle shall be given;

3.2.2.2. description of the replacement exhaust system stating the relative positions of each of its components, together with the fitting instructions;

3.2.2.3. drawings of each component to facilitate location and identification, and statement of materials used. These drawings shall also indicate the intended location of the mandatory component type-approval number.

3.2.3. The applicant shall submit, at the request of the technical service:

3.2.3.1. two samples of the system for which component type-approval is requested,

- 3.2.3.2. an exhaust system conforming to that originally fitted to the vehicle when the information document provided for in Annex I to Regulation *EU) No [xxx/2013] was issued,
- 3.2.3.3. a vehicle representative of the type to which the replacement exhaust system is to be fitted, supplied in such a condition that, when fitted with a silencer of the same type as was originally fitted, it meets the requirements of either of the following two sections:
- 3.2.3.3.1. if the vehicle referred to in 3.2.3.3 is of a type which has been granted type-approval pursuant to the provisions of this appendix:
- during the test in motion, it does not exceed by more than 1.0 dB(A) the limit value laid down in 2.2.1.3;
- during the stationary test, it does not exceed by more than 3.0 dB(A) the value indicated on the manufacturer's statutory plate;
- 3.2.3.3.2. if the vehicle referred to in 3.2.3.3 is not of a type which has been granted type-approval pursuant to the provisions of this appendix it does not exceed by more than 1.0 dB(A) the limit value applicable to that type of vehicle when it was first put into service;
- 3.2.3.4. a separate engine identical to that fitted to the vehicle referred to above, where the approval authorities deem it necessary.
- 3.3. Markings and inscriptions
- 3.3.1. Non-original exhaust systems or components thereof shall be marked in accordance with the requirements of Annex II to Regulation (EU) No [xxx/2013]
- 3.4. Component type-approval
- 3.4.1. Upon completion of the tests laid down in this Appendix, the approval authority will issue a certificate corresponding to the model shown in Annex VI to Regulation (EU) No [xxx/2013]. The component type-approval number shall be preceded by a rectangle surrounding the letter 'e' followed by the distinguishing number or letters of the Member State which issued or refused the component type-approval.
- 3.5. Specifications
- 3.5.1. General specifications
- The design, construction and mounting of the silencer shall be such that:
- 3.5.1.1. the vehicle complies with the requirements of the appendix under normal conditions or use, and in particular regardless of any vibrations to which it may be subjected;
- 3.5.1.2. it displays reasonable resistance to the corrosion phenomena to which it is exposed, with due regard to the normal conditions of use of the vehicle;
- 3.5.1.3. the ground clearance available under the silencer originally fitted, and the angle at

which the vehicle can lean over, are not reduced;

3.5.1.4. the surface does not reach unduly high temperatures;

3.5.1.5. its outline has no projections or sharp edges;

3.5.1.6. shock absorbers and suspension have adequate clearance;

3.5.1.7. adequate safety clearance is provided for pipes;

3.5.1.8. it is impact-resistant in a way that is compatible with clearly-defined maintenance and installation requirements.

3.5.2. Specifications for sound levels

3.5.2.1. The acoustic efficiency of the replacement exhaust systems or components thereof shall be tested using the methods described in 2.3, 2.4, 2.5 and 2.6.

With a replacement exhaust system or component thereof fitted to the vehicle referred to in 3.2.3.3 of this Appendix, the sound-level values obtained shall meet the following conditions:

3.5.2.1.1. they shall not exceed the sound-level values measured, in accordance with 3.2.3.3, using the same vehicle fitted with the original equipment silencer both during the test in motion and during the stationary test.

3.5.3. Testing of vehicle performance

3.5.3.1. The replacement silencer shall be such as to ensure that the vehicle's performance is comparable to that achieved with the original silencer or component thereof.

3.5.3.2. The replacement silencer shall be compared with an originally-fitted silencer, also in new condition, fitted in turn to the vehicle referred to in 3.2.3.3.

3.5.3.3. This test is carried out by measuring the engine power curve. The net maximum power and the top speed measured with the replacement silencer shall not deviate from the net maximum power and top speed measured under the same conditions with the original equipment silencer by more than $\pm 5\%$.

3.5.4. Additional provisions relating to silencers as separate technical units containing fibrous material

Fibrous material may not be used in the construction of such silencers unless the requirements set out in 2.4.1 are met.

3.5.5. Evaluation of the emission of pollutants of vehicles equipped with replacement silencer system.

The vehicle referred to in section 3.2.3.3, equipped with a silencer of the type for which approval is requested, shall undergo a Type I, II and V test under the conditions described in the corresponding Annexes to this Regulation according to the type-

approval of the vehicle.

The requirements regarding emissions shall be deemed to be fulfilled if the results meet the limit values according to the type-approval of the vehicle

DRAFT

Appendix 4
Test track specification

0. Introduction

This Appendix lays down specifications relating to the physical characteristics of the paving and the layout of the test track paving.

1. Required characteristics of surface

A surface is considered to conform to this Regulation provided that the texture and voids content or sound absorption coefficient have been measured and found to fulfil all the requirements given in 1.1 to 1.4 and provided that the design requirements (section 2.2) have been met.

1.1. Residual voids content

The residual voids content, V_c , of the test track paving mixture shall not exceed 8%. See section 3.1 for the measurement procedure.

1.2. Sound absorption coefficient

If the surface fails to comply with the residual voids content requirement, the surface is acceptable only if its sound absorption coefficient, $\alpha \leq 0.10$. See section 3.2 or measurement procedure.

The requirement of section 1.1 and 1.2 is met also if only sound absorption has been measured and found to be: $\alpha \leq 0.10$.

1.3. Texture depth

The texture depth (TD) measured according to the volumetric method (see section 3.3) shall be:

$$TD \geq 0.4 \text{ mm.}$$

1.4. Homogeneity of the surface

Every practical effort shall be taken to ensure that the surface is made to be as homogenous as possible within the test area. This includes the texture and voids content, but it should also be observed that if the rolling process results in more effective rolling at some places than at others, the texture may be different and unevenness causing bumps may also occur.

1.5. Period of testing

In order to check whether the surface continues to conform to the texture and voids content or sound absorption requirements stipulated in this standard, periodic testing of the surface shall be performed at the following intervals:

(a) for residual voids content or sound absorption:

- when the surface is new; if the surface meets the requirements when new, no further periodical testing is required.
- if it does not meet the requirement when it is new, it may do so later because surfaces tend to become clogged and compacted with time;

(b) for texture depth (TD):

- when the surface is new;
- when the noise testing starts (NB: not before four weeks after laying);
- then every twelve months

2. Test surface design

2.1. Area

When designing the test track layout it is important to ensure that, as a minimum requirement, the area traversed by the vehicles running through the test strip is covered with the specified test material with suitable margins for safe and practical driving. This will require that the width of the track is at least 3 m and the length of the track extends beyond lines AA and BB by at least 10 m at either end. Figure 8.4-1 shows a plan of a suitable test site and indicates the minimum area which shall be machine laid and machine compacted with the specified test surface material.

The shaded part is called 'test area'

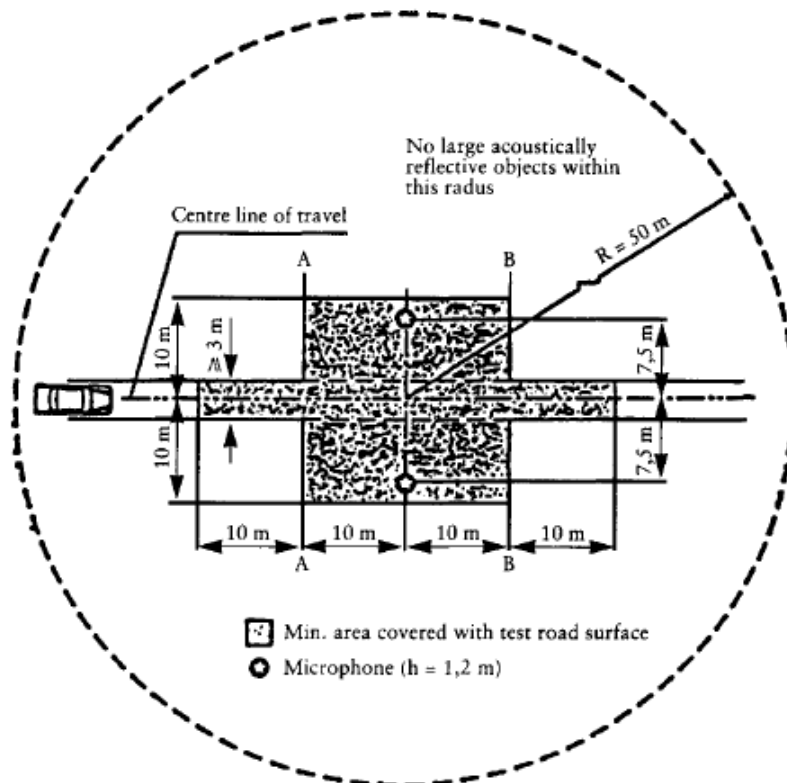


Figure 8.4-1: minimum requirements for test surface area

2.2. Design requirements for the surface

The test surface shall meet four design requirements:

1. it shall be a dense asphaltic concrete;
2. the maximum chipping size shall be 8 mm (tolerances allow from 6.3 to 10 mm);
3. the thickness of the wearing course shall be ≥ 30 mm;
4. the binder shall be a straight penetration grade bitumen without modification.

As a guide to the test surface constructor, an aggregate grading curve which will give desired characteristics is shown in Figure 8.4-2. In addition, Table 8.4-1 gives some guidelines in order to obtain the desired texture and durability. The grading curve fits the following formula:

Equation Ap8-1:

$$P (\% \text{ passing}) = 100 (d/d_{\max})^{1/2}$$

where

- | | |
|------------|--------------------------------------|
| d | square mesh sieve size, in mm |
| d_{\max} | 8 mm for the mean curve |
| d_{\max} | 10 mm for the lower tolerance curve |
| d_{\max} | 6.3 mm for the upper tolerance curve |

In addition to the above, the following recommendations are given:

- the sand fraction ($0.063 \text{ mm} < \text{square mesh sieve size} < 2 \text{ mm}$) should include no more than 55% natural sand and least 45% crushed sand,
- the base and sub-base should ensure a good stability and evenness, according to best road construction practice,
- the chippings should be crushed (100% crushed faces) and of a material with a high resistance to crushing,
- the chippings used in the mix should be washed,
- no extra chippings should be added on to the surface,
- the binder hardness expressed as PEN value should be 40 to 60, 60 to 80 or even 80 to 100, depending on the climatic conditions of the country. The rule is that as hard a binder as possible should be used, provided this is consistent

with common practice,

- the temperature of the mix before rolling should be chosen so as to achieve by subsequent rolling the required voids content. In order to increase the probability of satisfying the specifications of sections 1.1 to 1.4, the compactness should be studied not only by an appropriate choice of mixing temperature, but also by an appropriate number of passings and by the choice of compacting vehicle.

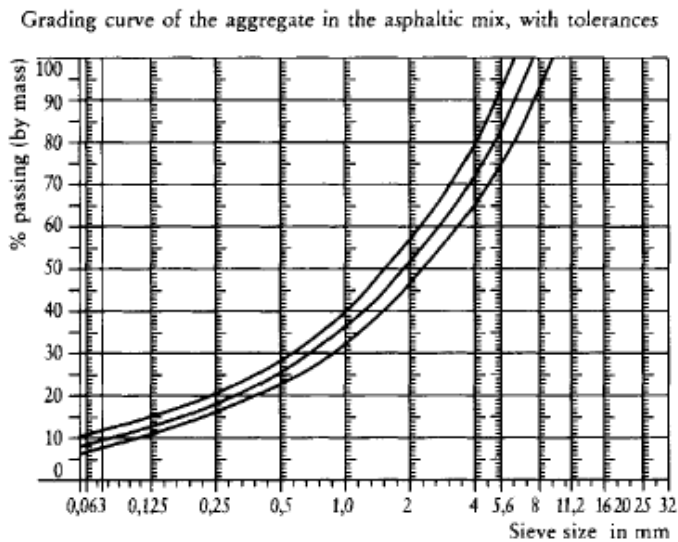


Figure 8.4-2: grading curve of the aggregate in the asphaltic mix, with tolerances

	Target values		Tolerances
	By total mass of mix	By mass of the approucase	
Mass of stones, Square Mesh Sieve (SM) > 2 mm	47.6%	50.5%	± 5
Mass of sand 0.063 < SM < 2 mm	38.0%	40.2%	± 5
Mass of filter SM < 0.063 mm	8.8%	9.3%	± 2
Mass of binder (bitumen)	5.8%	N.A.	± 0.5
Maximum chipping size	8 mm		6.3-10
Binder hardness	(see below)		
Polished stone value (PSV) (see doc. 5 in bibliography)	> 50		
Compactness, relative to Marshall compactness	98%		

Table 8.4-1: Design guidelines

3. Test methods

3.1 Measurement of the residual voids content

For the purpose of this measurement, cores have to be taken from the track at least at four different positions which are equally distributed in the test area between lines AA and BB (see Figure 8.4-1). In order to avoid inhomogeneity and unevenness in the wheel tracks, cores should not be taken in the wheel tracks themselves, but close to them. Two cores (minimum) should be taken close to the wheel tracks and one core (minimum) should be taken approximately midway between the wheel tracks and each microphone location.

If there is a suspicion that the condition of homogeneity is not met (see section 1.4), cores should be taken from more locations within the test area.

The residual voids content has to be determined for each core. Then the average value from all cores is calculated and compared with the requirement of section 1.1. In addition, no single core should have a voids value which is higher than 10%.

The test surface constructor is reminded of the problem which may arise when the test area is heated by pipes or electrical wires and cores shall be taken from this area. Such installations shall be carefully planned with respect to future core drilling locations. It is recommended to leave a few locations of size approximately 200×300 mm where there are no wires or pipes, or where the latter are located deep enough in order not to be damaged by cores taken from the surface layer.

3.2. Sound absorption coefficient

The sound absorption coefficient (normal incidence) is measured by the impedance tube method using the procedure specified in ISO/DIS 10534: 'Acoustics'. Determination of sound absorption coefficient and impedance by a tube method'.

Regarding test specimens, the same requirements are followed as regarding the residual voids content (see section 3.1).

The sound absorption is measured in the range 400 to 800 Hz and in the range 800 to 1600 Hz (at least at the centre frequencies of third octave bands) and the maximum values shall be identified for both of these frequency ranges. Then these values, for all test cores, are averaged to constitute the final result.

3.3. Volumetric macro texture measurement

For the purposes of this standard, texture depth measurements are made on at least 10 positions evenly spaced along the wheel tracks of the test strip and the average value taken to compare with the specified minimum texture depth. See Annex F to Draft Standard ISO/DIS 10844 for a description of the procedure.

4. Stability in time and maintenance

4.1. Age influence

In common with many other surfaces, it is expected that the tyre/road noise levels measured on the test surface may increase slightly during the first 6 to 12 months after construction.

The surface will achieve its required characteristics not earlier than four weeks after construction.

The stability over time is determined mainly by the polishing and compaction by vehicles driving on the surface. It shall be periodically checked as stated in section 1.5.

4.2. Maintenance of the surface.

Loose debris or dust which could significantly reduce the effective texture depth shall be removed from the surface. In countries with winter climates, salt is sometimes used for de-icing. Salt may alter the surface temporarily or even permanently in such a way as to increase noise and is therefore not recommended.

4.3. Repaving the test area.

If it is necessary to repave the test track, it is usually unnecessary to repave more than the test strip (of 3 m width in Figure 8.4-1) where vehicles are driving provided the test area outside the strip met the requirement of residual voids content or sound absorption when it was measured.

5. Documentation of the surface and of tests performed on it.

5.1. Documentation of the test surface.

The following data shall be given in a document describing the test surface:

- (a) the location of the test track;
- (b) type of binder, binder hardness, type of aggregate, maximum theoretical density of the concrete ('DR'), thickness of the wearing course and grading curve determined from cores from the test track;
- (c) method of compaction (e.g. type of roller, roller mass, number of passes);
- (d) temperature of the mix, temperature of the ambient air and wind speed during laying of the surface;
- (e) date when the surface was laid and contractor;
- (f) all or at least the latest test result, including:
 - (i) the residual voids content of each core;
 - (ii) the locations in the test area from where the cores for voids measurement have been taken;
 - (iii) the sound absorption coefficient of each core (if measured). Specify the results both for each core and each frequency range as well as the overall average;
 - (iv) the locations in the test area from where the cores for absorption measurement have been taken;

- (v) texture depth, including the number of tests and standard deviation;
- (vi) the institution responsible for tests (i) and (iii) and the type of equipment used;
- (vii) date of the test(s) and date when the cores were taken from the test track.

5.2. Documentation of vehicle noise tests concluded on the surface

In the document describing the vehicle noise test(s) it shall be stated whether all the requirements were fulfilled or not. Reference shall be made to a document in accordance with section 5.1.

DRAFT

ANNEX IX

Testing procedures and technical requirements on propulsion performance

Appendix Number	Appendix title	Page #
1	Requirements concerning the method of measuring the maximum design vehicle speed	
1.1	Procedure for defining the correction coefficient for the annular vehicle speed-test track	
2.	Requirements concerning the methods of measuring the maximum torque and maximum net power of a vehicle's propulsion containing a combustion engine	
2.1	Determination of the maximum torque and maximum net power of spark-ignition engines for vehicle categories L1e, L2e and L6e	
2.2	Determination of the maximum torque and maximum net power of spark-ignition engines for vehicle categories L3e, L4e, L5e and L7e	
2.2.1.	Measurement of maximum torque and maximum net engine power by means of the engine-temperature method	
2.3.	Determination of the maximum torque and maximum net power of L-category vehicles equipped with a compression ignition engine.	
2.4.	Determination of the maximum torque and maximum power of L-category vehicles equipped with a hybrid propulsion.	
3.	Requirements concerning the methods of measuring the maximum torque and maximum continuous rated power of a vehicle's pure electric propulsion.	
4.	Requirements concerning the test method of measuring the maximum continuous rated power and switch off distance of a L1e vehicle designed to pedal and equipped with a pure electric propulsion.	

Appendix 1

Requirements concerning the method of measuring the maximum design vehicle speed

1. Scope and exemption
 - 1.1. Scope

The measurement of the maximum design vehicle speed is obligatory for L-category vehicles.
 - 1.2. Exemption

Upon request from the vehicle manufacturer vehicles of (sub)categories L3e-A3, L4e-A3 and L5e are exempted from the requirement to measure the maximum design vehicle speed. Instead the vehicle manufacturer shall provide a statement indicating the maximum design vehicle speed.
2. Test vehicle
 - 2.1. The test vehicle(s) used for propulsion performance tests shall be representative for the vehicle type produced in series and placed on the market.
 - 2.2. Preparation of the test vehicle.
 - 2.2.1. The test vehicle shall be clean and only those accessories needed to enable the vehicle to undergo the test shall be in operation.
 - 2.2.2. The fuel-supply and the ignition settings, the viscosity of the lubricants for the mechanical parts in motion, and the tyre pressures, shall be as required by the manufacturer.
 - 2.2.3. The engine, transmission and tyres of the test vehicle shall have been properly run in accordance with the manufacturer's requirements.
 - 2.2.4. Before the test all parts of the test vehicle shall be in a thermally stable state, at their normal operating temperature.
 - 2.2.5. The test vehicle shall be submitted at its mass in running order.
 - 2.2.6. The distribution of the loadings among the wheels of the test vehicle shall be as intended by the manufacturer.
3. Driver.
 - 3.1. Uncabbed vehicle
 - 3.1.1. The driver shall have a mass of $75 \text{ kg} \pm 5 \text{ kg}$ and be $1,75 \text{ m} \pm 0,05 \text{ m}$ tall. However, in the case of mopeds these tolerances are reduced to $\pm 2 \text{ kg}$ and $\pm 0,02 \text{ m}$ respectively.
 - 3.1.2. The driver shall wear an adjusted one-piece suit or an equivalent item of clothing.

- 3.1.3. The driver shall be seated on the driver's seat with his feet on the pedals or footrest and his arms normally extended. Where vehicles achieve a maximum speed of more than 120 km/h when their rider is in a seated position that rider shall be equipped and positioned as recommended by the manufacturer. However, that position shall enable the driver continuously to control the vehicle during the test. The driving position shall be the same throughout the test and a description of that position given in the test report or replaced by photographs.#
- 3.2. Cabbed vehicle.
- 3.2.1. The driver shall have a mass of $75 \text{ kg} \pm 5 \text{ kg}$. However, in the case of mopeds, this tolerance is reduced to $\pm 2 \text{ kg}$.
4. Characteristics of the test track.
- 4.1. The tests shall be carried out on a road:
- 4.1.1. which allows the maximum vehicle speed to be maintained along a measurement base as defined in 4.2. The acceleration track preceding the measuring base shall be of the same type (surface and longitudinal profile) and be sufficiently long in order to enable the vehicle's maximum speed to be reached;
- 4.1.2. that is clean, smooth, dry, asphalted or surfaced in an equivalent manner;
- 4.1.3. having a longitudinal gradient of not more than 1% and a degree of banking of not more than 3%. The variation in altitude between any two points on the test base shall not exceed 1 m.
- 4.2. The possible configurations for the measuring base are illustrated in 4.2.1., 4.2.2. and 4.2.3.
- 4.2.1. *Type 1*

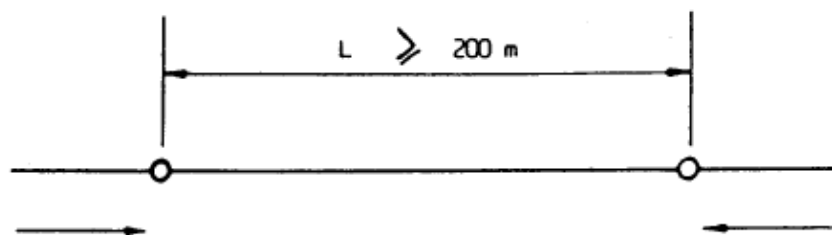


Figure Ap1-1: type 1

4.2.2. *Type 2*

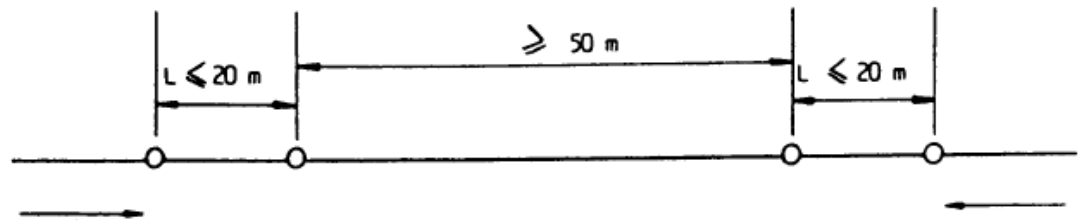


Figure Ap1-2: type 2

4.2.3. *Type 3*

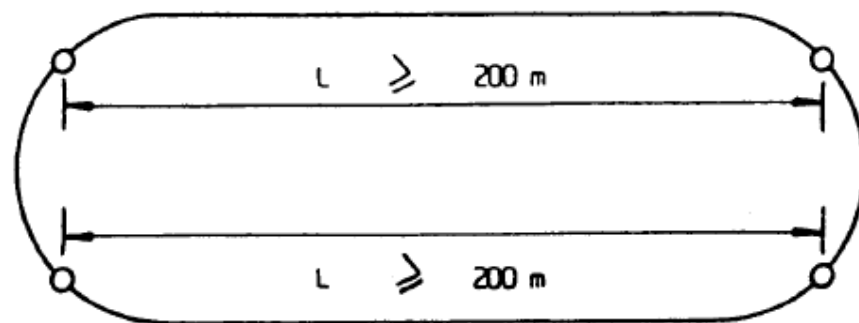


Figure Ap1-3: type 3

- 4.2.3.1. The two measuring bases L shall be equal in length and virtually parallel to each other.
- 4.2.3.2. If both measuring bases are curvilinear in shape despite the requirements of 4.1.3., the effects of centrifugal force shall be compensated for by the cross-section of the bends.
- 4.2.3.3. Instead of the two bases L (see 4.2.3.1.), the measuring base may coincide with the overall length of the annual test track. In this case the minimum radius of the bends shall be 200 m and the effects of centrifugal force compensated for by the cross-section of the bends.
- 4.3. Length L of the measuring base shall be selected in conjunction with the accuracy of the equipment and the methods used to measure testing time t in such a way that the value for actual vehicle speed can be plotted to within $\pm 1\%$. If the measuring equipment is of the manual type, length L of the measuring base shall not be less than 500 m. If a type 2 measuring base has been selected electronic measuring equipment shall be used in order to determine time t .
5. Atmospheric conditions:
- Atmospheric pressure: 97 ± 10 kPa.

Ambient temperature: between 278 and 308 K.

Relative humidity: 30 to 90%.

Average wind speed, measured 1 m above the ground: < 3 m/s, permitting gusts < 5 m/s

6. Test procedures

6.1. On request of the manufacturer a category L1e vehicle in the scope of appendix 4 may be tested according to the test procedure set-out in paragraph 4.2.6 on maximum vehicle speed for which the electric motor gives assistance of EN 15194:2009. If the L1e vehicle in the scope of appendix 4 is tested according to that test procedure paragraphs 6.2 to 6.9. may be omitted.

6.2. The gear ratio used during the test shall be that enabling the vehicle to reach its maximum vehicle speed on level ground. The throttle control shall be kept fully open and any user selectable propulsion operation mode shall be activated such to deploy maximum propulsion performance.

6.3. Drivers of uncabbed vehicles shall maintain their driving position as defined in 3.1.3.

6.4. The vehicle shall arrive at the measuring base at a constant vehicle speed. Type 1 and type 2 bases shall be travelled along in both directions in succession.

6.4.1. Testing in a single direction may be accepted on a type 2 measuring base if, owing to the characteristics of the circuit, it is not possible to reach the maximum speed of the vehicle in both directions. In this case:

6.4.1.1. the test run shall be repeated five times in immediate succession;

6.4.1.2. the speed of the axial wind component shall not exceed 1 m/s.

6.5. Both bases L on a type 3 measuring base shall be travelled along consecutively in a single direction, without interruption.

6.5.1. If the measuring base coincides with the total length of the circuit, it shall be travelled along in a single direction at least twice. The difference between the extremes of the time measurements shall not exceed 3%.

6.6. The fuel and lubricant shall be those recommended by the manufacturer.

6.7. The total time t needed to travel along the measuring base in both directions shall be determined to an accuracy of 0.7%.

6.8. The determination of average speed.

Average speed V (km/h) for the test is determined as follows:

6.8.1. Type 1 and type 2 measuring base:

Equation Ap1-1:

Type 1 and type 2 measuring base

$$V = \frac{3,6 \times 2 L}{t} = \frac{7,2 L}{t}$$

where:

L = length of measuring base (m)

t = time (s) taken to travel along measuring base L (m).

6.8.2. Type 2 measuring base, travelled along in a single direction

Equation Ap1-2:

$$V = v_a$$

where:

Equation Ap1-3:

$$v_a = \text{vehicle speed measured for each test run (km/h)} = \frac{3,6 L}{t}$$

where:

L = length of measuring base (m)

t = time (s) taken to travel along measuring base L (m).

6.8.3. Type 3 measuring base.

6.8.3.1. Measuring base consisting of two parts L (see 4.2.3.1.)

Equation Ap1-4:

$$V = \frac{3,6 \times 2 L}{t} = \frac{7,2 L}{t}$$

where:

L = length of measuring base (m)

t = total time (s) needed to travel along both measuring bases L (m).

6.8.3.2. Measuring base coinciding with the total length of the annular test track (see 3.1.4.2.3.3):

Equation Ap1-5:

$$v = v_a \cdot k$$

where:

Equation Ap1-6:

$$v_a = \text{vehicle speed measured (km/h)} = \frac{3,6 L}{t}$$

where:

L = length of trajectory actually followed on the annular speed-test track (m)

t = time (s) needed to complete a full lap

Equation Ap1-7:

$$t = \frac{1}{n} \cdot \sum_{i=1}^n t_i$$

where:

n = number of laps

t_i = time (s) needed to complete each lap

k = correction factor ($1.00 \leq 1.05$); this factor is specific to the annular test track used and is determined experimentally in line with sub-appendix 1.1.

6.9. The average speed shall be measured at least twice in succession.

7. Maximum vehicle speed

The maximum vehicle speed of the test vehicle shall be expressed in kilometres per hour by the figure corresponding to the closest whole number to the arithmetical mean of the values for the vehicle speeds measured during the two consecutive tests, which shall not diverge by more than 3%. When this arithmetical mean lies exactly between two whole members it is rounded up to the next highest number.

8. Maximum vehicle speed measurement tolerances

8.1. The maximum vehicle speed as determined by the technical service to the satisfaction of the approval authority may differ from the value set-out in paragraph 7 by $\pm 5\%$.

Sub-appendix 1.1

Procedure for defining the correction coefficient for the annular test track

1. Coefficient k relating to the annular test track shall be plotted up to the maximum permitted vehicle speed.
2. Coefficient k shall be plotted for several vehicle speeds in such a way that the difference between two consecutive vehicle speeds will not be more than 30 km/h.
3. For each vehicle speed selected the test shall be carried out in line with the requirements of this Regulation, in two possible ways:
 - 3.1. Vehicle speed measured in a straight line v_d .
 - 3.2. Vehicle Speed measured on the annular test track v_a .
4. For each vehicle speed measured values v_a and v_d are to be entered on a diagram similar set-out in Figure Ap1.1-1 and the successive points linked by means of a segment of a straight line.

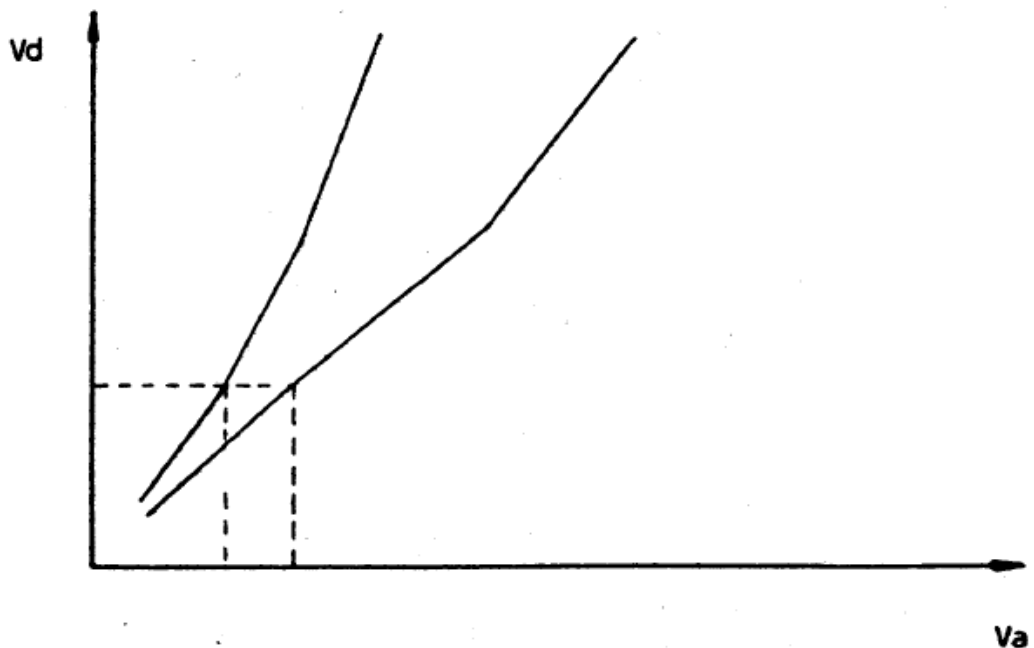


Figure Ap1.1-1

5. The coefficient k is given by the following formula for each vehicle speed measured:

Equation Ap1.1-1:

$$k = \frac{v_d}{v_a}$$

Appendix 2

Requirements concerning the methods of measuring the maximum torque and maximum net power of a propulsion containing a combustion engine or a hybrid propulsion

1. General requirements
2. Sub appendix 2.1. shall apply for the purpose of determining the maximum torque and maximum net power of (spark-ignition) engines for vehicle category L1e, L2e and L6e.
3. Sub appendix 2.2. shall apply for the purpose of determining the maximum torque and maximum net power of (spark-ignition) engines for vehicle category L3e, L4e, L5e and L7e.
4. Sub appendix 2.3. shall apply for the purpose of determining the maximum torque and maximum net power of L-category vehicles equipped with a compression-ignition engine
5. Sub appendix 2.4. shall apply for the purpose of determining the maximum total torque and maximum total power of L-category vehicles equipped with a hybrid propulsion.
6. The torque measuring system shall be calibrated to take friction losses into account. The accuracy in the lower half of the measuring range of the dynamometer bench may be $\pm 2\%$ of measured torque.
7. The tests may be carried out in air-conditioned test chambers where the atmospheric conditions may be controlled.
8. In the case of non-conventional propulsions, systems, and hybrid applications particulars equivalent to those referred to here shall be supplied by the manufacturer.
9. Torque verification requirement for L7e-B heavy all terrain quads

In order to prove that a L7e-B all terrain quad is designed for and capable of driving under off-road conditions and can therefore develop sufficient torque the representative test vehicle shall be capable of climbing a gradient $\geq 25\%$ calculated for a solo vehicle. Before start of the verification test the vehicle shall be parked on the slope (vehicle speed = 0 km/h).

Appendix 2.1

Determination of the maximum torque and maximum net power of spark-ignition engines for vehicle categories L1e, L2e and L6e

- 1. Accuracy of maximum torque and maximum net power measurements under full load
 - 1.1. Torque: $\pm 2\%$ of torque measured.
 - 1.2. Rotational speed: the measurement shall be accurate to $\pm 1\%$ of the reading.
 - 1.3. Fuel consumption $\pm 2\%$ for all the devices used.
 - 1.4. Temperature of engine induction air: ± 2 K.
 - 1.5. Barometric pressure: ± 70 Pa.
 - 1.6. Pressure in the exhaust and under pressure of the intake air: ± 25 Pa.
- 2. Test for the measurements of maximum torque and maximum net engine power
 - 2.1. Accessories
 - 2.1.1. Accessories to be fitted.

During the test the accessories needed for operation of the engine in the application under consideration (as set out in table Ap 2.1-1 shall be located on the test bench as far as possible in the position they would occupy for the application under consideration.

2.1.2.

No	Accessories	Fitted for the torque and net power test
1	Induction system — Induction manifold — Air filter — Induction silencer — Crankcase emission control system — Electrical control device, where fitted	If series-mounted: yes
2	Exhaust system	If series-mounted: yes

	<ul style="list-style-type: none"> — Manifold — Pipe work²⁴ — Silencer²⁸ — Exhaust pipe²⁸ — Electrical control device, where fitted 	
3	Carburettor	If series-mounted: yes
4	Fuel injection system <ul style="list-style-type: none"> — Upstream filter — Filter — Fuel supply pump and high pressure pump if applicable — Compressed air pump in case of DI air assist — Pipe work — Injector — Air inlet flap,²⁵ where fitted — Fuel pressure / flow regulator, where fitted 	If series-mounted: yes
5	Maximum rotational speed-and/or power governors	If series-mounted: yes
6	Liquid-cooling equipment <ul style="list-style-type: none"> — Radiator — Fan²⁶ — Water Pump 	If series-mounted: yes ²⁸

²⁴ If it is difficult to use the standard exhaust system an exhaust system causing an equivalent pressure drop may be fitted for the test with the agreement of the manufacturer. In the test laboratory when the engine is in operation the exhaust gas extraction system shall not cause in the extraction flue at the point where it is connected to the vehicle's exhaust system a pressure differing from atmospheric pressure by ± 740 Pa (7,40 mbar), unless, before the test, the manufacturer accepts a higher back pressure.

²⁵ The air inlet flap shall be that which controls the pneumatic inject pump regulator.

²⁶ Where a fan or blower may be disengaged the net engine power shall first of all be stated with the fan (or blower) disengaged, followed by the net engine power with the fan (or blower) engaged. Where a fixed electrically or mechanically-operated fan cannot be fitted on the test bench the power absorbed by that fan shall be determined at the same rotational speeds as those used when the engine power is measured. That power is deducted from the corrected power in order to obtain the net power.

	— Thermostat ²⁷	
7	Air cooling — Cowl — Blower ³⁰ — Cooling temperature-regulating device(s) — Auxiliary bench blower	If series-mounted: yes
8	Electrical equipment	If series-mounted: yes ²⁹
9	Pollution control devices ³⁰	If series-mounted: yes
9	Lubrication system — Oil feeder	If series-mounted: yes

Table Ap2.1-1: Accessories to be fitted during the propulsion performance test in order to determine torque and net engine power.

2.1.3. Accessories not to be fitted

Certain vehicle accessories which are needed only for use of the vehicle itself, but which are likely to be mounted on the engine, shall be removed for the tests.

The power absorbed by fixed equipment under no load may be determined and added to the power measured.

2.1.4. The radiator, fan, fan nozzle, water pump and thermostat shall, on the test bench, occupy as far as possible the same position relative to each other as if they were on the vehicle. If the radiator, fan, fan nozzle, water pump and/or thermostat have a position on the test bench which is different from that on the vehicle, the position on the test bench shall be described and noted on the test report.

2.2. Setting conditions

The conditions applying to settings during the tests to determine maximum torque

²⁸ The radiator, fan, fan nozzle, water pump and thermostat shall, on the test bench, occupy as far as possible the same position relative to each other as if they were on the vehicle. If the radiator, fan, fan nozzle, water pump and/or thermostat have a position on the test bench which is different from that on the vehicle, the position on the test bench shall be described and noted on the test report. The liquid coolant shall be circulated solely by the water pump for the engine. The coolant may be cooled either by the engine radiator or by an outside circuit, provided that the pressure drops within that circuit remain substantially the same as those in the engine cooling system. Where fitted the engine blind shall be open.

²⁷ The thermostat may be locked in the fully-open position.

²⁹ Minimum generator output: the generator supplies the current that is strictly needed to supply the accessories that are essential to the operation of the engine. The battery shall not receive any charge during the test.

³⁰ Anti-pollution provisions may include, for example, exhaust-gas recirculation (EGR) system, catalytic converter, thermal reactor, secondary air-supply system and fuel-evaporation protecting system.

and maximum net power are set out in table Ap2.1-2.

1	Setting of carburettor(s)	Setting carried out in accordance with the manufacturer's specifications for series production applied, without any other change, to the use under consideration
2	Setting of fuel injection pump flow-rate	
3	Ignition or injection setting (advance curve)	
4	(Electronic) Throttle Control	
5	Any other rotational speed governor setting	
6	(Noise and tailpipe) emission abatement system settings and devices	

Table Ap2.1-2: setting conditions

- 2.3. Test conditions.
- 2.3.1. The tests intended to determine maximum torque and maximum net power shall be carried out at full throttle, with the engine equipped as specified in table Ap2.1-1.
- 2.3.2. The measurements shall be carried out under normal, stable operating conditions and the air supply to the engine shall be adequate. The engine shall have been run in under the conditions recommended by the manufacturer. The combustion chambers may contain deposits, but in limited quantities.
- 2.3.3. The test conditions such as the temperature of the induction air shall be selected as closely as possible to the reference conditions (see 3.2.) in order to reduce the correction factor.
- 2.3.4. The temperature of the engine induction air (ambient air) shall be measured at the most 0.15 m upstream of the air filter inlet or, if there is no filter, 0.15 m from the inlet air trumpet. The thermometer or thermocouple shall be protected against heat radiation and be placed directly in the airstream. It shall also be protected against vaporized fuel. An adequate number of positions shall be used in order to yield a representative average inlet temperature.
- 2.3.5. No measurement shall be taken until the torque, rate of rotation and temperatures have remained substantially constant for at least 30 seconds.
- 2.3.6. Once a rate of rotation has been selected to the measurements its value shall not vary by more than $\pm 2\%$.
- 2.3.7. Observed brake-load and inlet-air temperature data shall be taken simultaneously and shall be the average of two stabilized consecutive values which do not vary more than 2% for the brake load.
- 2.3.8. Where an automatically triggered device is used to measure rotational speed and consumption the measurement shall last for at least 10 seconds and if the measuring device is manually controlled that period shall be at least 20 seconds.

2.3.9. The temperature of the liquid coolant recorded at the engine outlet shall be maintained at ± 5 K of the upper thermostat setting temperature specified by the manufacturer. If the manufacturer does not indicate any values the temperature is $353 \text{ K} \pm 5 \text{ K}$.

In the case of air-cooled engines the temperature at a point specified by the manufacturer shall be maintained at $+ 0/- 20$ K of the maximum temperature intended by the manufacturer under the reference conditions.

2.3.10. The fuel temperature shall be measured at the carburettor or injection system inlet and kept within the limits laid down by the manufacturer.

2.3.11. The temperature of the lubricating oil measured in the oil sump or at the outlet from the oil cooler, if fitted, shall be maintained within the limits established by the engine manufacturer.

2.3.12. The outlet temperature of the exhaust gases shall be measured at right angles to the exhaust flange(s) or manifold(s) or orifices.

2.3.13. Test fuel

The test fuel to be used shall be the reference fuel referred to in Annex I, Appendix 2.

2.4. Test procedure

Measurements shall be taken at a sufficient number of engine speeds to define correctly the power curve completely between the lowest and the highest governed engine speeds recommended by the manufacturer. This range of speeds shall include the speeds of revolution at which the engine produces its maximum torque and at which it produces its maximum power. For each speed, the average of at least two stabilized measurements is to be determined.

2.5. The data to be recorded are those set out Annex VII, test report of Regulation (EU) No [xxx/2013]

3. Power and torque correction factors

3.1. Definition of factor α_1 and α_2

3.1.1. α_1 and α_2 shall be factors by which the torque and power measured are to be multiplied in order to determine the torque and power of an engine, taking account of the efficiency of the transmission (factor α_2) used during the tests and in order to bring that torque and that power within the reference atmospheric conditions specified in 3.2.1 (factor α_1). The power correction formula is as follows:

Equation Ap2.1-1:

$$P_0 = \alpha_1 \cdot \alpha_2 \cdot P$$

where:

P_0 = the corrected power (i.e. the power under the reference conditions at the end of the crankshaft);

α_1 = the correction factor for reference atmospheric conditions;

α_2 = the correction factor for the efficiency of the transmission;

P = the power measured (power observed).

3.2. Reference atmospheric conditions

3.2.1. Temperature: 25 °C (298 K)

3.2.2. Dry reference pressure (p_{so}): 99 kPa (990 mbar)

Note: the dry reference pressure is based on a total pressure of 100 kPa and a water vapour pressure of 1 kPa.

3.2.3. Atmospheric test conditions

3.2.3.1. During the test the atmospheric conditions shall lie within the following range:

$$283 \text{ K} < T < 308 \text{ K}$$

Where T is test temperature (K).

3.3. Determination of the correction factor α_1 ³¹

Equation Ap2.1-2:

$$\alpha_1 = \left(\frac{99}{P_s} \right)^{1,2} \cdot \left(\frac{T}{298} \right)^{0,6}$$

where:

T = the absolute temperature of the ingested air

p_s = the dry atmospheric pressure in kilopascals (kPa) i.e. the total barometric pressure minus the water vapour pressure.

3.3.1. Equation Ap2.1-2 only applies if:

$$0,93 \leq \alpha_1 \leq 1,07$$

If the limit values are exceeded the corrected value obtained shall be stated and the test conditions (temperature and pressure) stated exactly in the test report.

³¹ The test may be carried out in temperature-controlled test chambers where the atmospheric conditions may be controlled.

3.4. Determination of the correction factor for mechanical efficiency of the transmission α_2

Where:

- the measuring point is the crankshaft output side this factor is equal to 1;
- the measuring point is not the output side of the crankshaft this factor is calculated via the formula:

Equation Ap2.1-2:

$$\alpha_2 = \frac{1}{n_t}$$

where n_t is the efficiency of the transmission located between the crankshaft and the measuring point.

This transmission efficiency n_t is determined via the product (multiplication) of efficiency n_j of each of the components of the transmission:

Equation Ap2.1-3:

$$n_t = n_1 \cdot n_2 \cdot \dots \cdot n_j$$

3.4.1.

Type		Efficiency
Gear wheel	Spur gear	0.98
	Helical gear	0.97
	Bevel gear	0.96
Chain	Roller	0.95
	Silent	0.98
Belt	Cogged	0.95
	Vee	0.94
Hydraulic coupling or convertor	Hydraulic coupling ⁽³⁵⁾⁽³²⁾	0.92
	Hydraulic convertor ⁽³⁵⁾⁽³⁶⁾	0.92

Table Ap2.1-3: efficiency n_j of each of the components of the transmission.

4. Maximum torque and maximum net power measurement tolerances

³² If not locked up.

The maximum torque and the maximum net power of the engine as determined by the technical service to the satisfaction of the approval authority shall have a maximum acceptable tolerance of:

Measured power	Acceptable tolerance maximum torque and maximum power
< 1 kW	≤ 10%
1 kW ≤ measured power ≤ 6 kW	≤ 5%

Table Ap2.1-4: acceptable measurement tolerances

Engine speed tolerance when performing maximum torque and net power measurements: ≤ 3%

DRAFT

Appendix 2.2

Determination of the maximum torque and maximum net power of spark-ignition engines for vehicle categories L3e, L4e, L5e and L7e

1. Accuracy of the measurements of maximum net power and maximum torque at full load:
 - 1.1. Torque: $\pm 1\%$ of the torque measured³³.
 - 1.2. Rotational speed: the measurement shall be accurate to $\pm 1\%$.
 - 1.3. Fuel consumption: $\pm 1\%$ overall for the apparatus used.
 - 1.4. Engine inlet air temperature: ± 1 K.
 - 1.5. Barometric pressure ± 70 Pa
 - 1.6. Exhaust pressure and drop in intake air: ± 25 Pa
2. Tests to measure the maximum torque and maximum net engine power
 - 2.1. Accessories
 - 2.1.1. Accessories to be fitted

During the test the accessories needed for operation of the engine in the application under consideration (as referred to in Table Ap2.2-1 shall be able to be located on the test bench as far as possible in the positions that they would occupy for the application under consideration.

2.1.2.

No	Accessories	Fitted for the torque and net power test
1	Induction system — Induction manifold — Air filter — Induction silencer — Crankcase emission control system — Electrical control device, where fitted	If series-mounted: yes
2	Induction manifold heater	If series-mounted: yes (if possible, it shall be set in the

³³

The torque measuring device shall be calibrated in order to take account of frictional losses. This accuracy may be $\pm 2\%$ for the measurements carried out at power levels less than 50% of the maximum value. It will in all cases be $\pm 1\%$ for the measurement maximum torque.

		most favourable position)
3	Exhaust system — Exhaust manifold — Exhaust clean-up system (secondary air system) (where fitted) — Pipe work ²⁸ — Silencer ²⁸ — Exhaust pipe ²⁸ — Electrical control device, where fitted	If series-mounted: yes
4	Carburettor	If series-mounted: yes
5	Fuel injection system — Upstream filter — Filter — Fuel supply pump and high pressure pump if applicable — High-pressure lines — Injector — Air inlet flap ²⁹ , where fitted — Fuel pressure / flow regulator, where fitted	If series-mounted: yes
6	Maximum rotational speed-and/or power governors	If series-mounted: yes
7	Liquid-cooling equipment — Engine bonnet — Radiator — Fan ³⁰ — Fan cowl — Water Pump — Thermostat ³¹	If series-mounted: yes ³²
8	Air cooling — Cowl	If series-mounted: yes

	<ul style="list-style-type: none"> — Blower³⁰ — Cooling temperature-regulating device(s) — Auxiliary bench blower 	
9	Electrical equipment	If series-mounted: yes ³³
10	Supercharging equipment or turbo compressor, where fitted <ul style="list-style-type: none"> — Compressor driven directly by the engine and/or by the exhaust gases — Charge air cooler³⁴ — Coolant pump or fan (engine driven) — Coolant flow control device, where fitted. 	If series-mounted: yes
11	Pollution control devices ³⁴	If series-mounted: yes
12	Lubrication system <ul style="list-style-type: none"> — Oil feeder — Oil cooler, where fitted. 	If series-mounted: yes

Table Ap2.2-1: Accessories to be fitted during the propulsion performance test in order to determine torque and net engine power.

2.1.3. Accessories to be removed

Certain accessories which are necessary only for the operation of the vehicle itself, and which may be mounted on the engine, shall be removed for the test.

Where accessories cannot be removed the power absorbed by them under no load may be determined and added to the engine power measured.

2.2. Setting conditions

The conditions applying to settings during the tests to determine maximum torque and maximum net power are set out in table Ap2.1-2.

1	Setting of carburettor(s)	Setting carried out in accordance with the manufacturer's specifications
2	Setting of injection pump flow-rate	

³⁴ Charge air-cooled engines shall be tested with charge air cooling, whether liquid or air-cooled, but if the manufacturer prefers, a test bench may replace the air-cooled cooler. In either case, the measurement of power at each speed shall be made with the same pressure drop of the engine air across the charge air cooler on the test-bench system as those specified by the manufacturer for the system on the complete vehicle.

3	Ignition or injection setting (advance curve)	for series production applied, without any other change, to the use under consideration
4	(Electronic) Throttle Control	
5	Any other rotational speed governor setting	
6	(Noise and tailpipe) emission abatement system settings and devices	

Table Ap2.2-2: setting conditions

- 2.3. Test conditions.
- 2.3.1. The maximum-torque and net-power tests shall be conducted at full throttle, the engine being equipped as specified in Table Ap2.2-1
- 2.3.2. The measurements shall be carried out under normal, stabilized operating conditions with an adequate fresh-air supply to the engine. The engine shall have been run in accordance with the manufacturer's recommendations. Combustion chambers may contain deposits, but in limited quantities.
- 2.3.3. Test conditions such as air inlet temperature shall be selected as near to reference conditions (see 3.2.) as possible in order to minimize the magnitude of the correction factor.
- 2.3.4. Where the cooling system on the test bench meets the minimum conditions for proper installation but nevertheless does not enable adequate cooling conditions to be reproduced and thus the measurements to be carried out in normal, stable operating conditions, the method described in sub-Appendix 1 may be used.
- 2.3.5. The minimum conditions which shall be fulfilled by the test installation and the scope for conducting the tests in accordance with sub-appendix 1 are defined below:
- 2.3.5.1. v_1 is the maximum speed of the vehicle;
 v_2 is the maximum velocity of the cooling air flow at the fan delivery side;
 \emptyset is the cross-section of the cooling air flow.
- 2.3.5.2. If $v_2 \geq v_1$ and $\emptyset \geq 0.25 \text{ m}^2$ the minimum conditions are fulfilled. If it is not possible to stabilize the operating conditions the method described in sub-appendix 1 shall apply.
- 2.3.5.3. If $v_2 < v_1$ and/or $\emptyset < 0.25 \text{ m}^2$:
- 2.3.5.3.1. if it is possible to stabilize the operating conditions the method described in 3.3. shall be applied;
- 2.3.5.3.2. if it is not possible to stabilize the operating conditions:
- 2.3.5.3.2.1. if $v_2 \geq 20 \text{ km/h}$ and $\emptyset \geq 0.25 \text{ m}^2$, the installation fulfils the minimum conditions and the method described in Appendix 1 may be applied;

- 2.3.5.3.2.2. (ii) if $v_2 \geq 120$ km/h and/or $\emptyset < 0.25$ m², the installation does not fulfil the minimum conditions and the test equipment cooling system shall be improved.
- 2.3.5.3.2.3. However, in this case, the test may be carried out by means of the method described in sub-appendix 1, subject to approval by the manufacturer and the approval authority.
- 2.3.6. The temperature of the (ambient) inlet air to the engine shall be measured at no more than 0.15 m upstream from the point of entry into the air cleaner or, if no air cleaner is used, within 0.15 m of the air-inlet trumpet. The thermometer or thermocouple shall be shielded from radiant heat and be placed directly in the airstream. It shall also be shielded from fuel spray-back.
- A sufficient number of locations shall be used to give a representative average inlet temperature.
- 2.3.7. No data shall be taken until torque, speed and temperature have remained substantially constant for at least 30 seconds.
- 2.3.8. The engine speed during a run or reading shall not deviate from the selected speed by more than $\pm 1\%$ or ± 10 min⁻¹, whichever is greater.
- 2.3.9. Observed brake-load and inlet-air temperature data shall be taken simultaneously and shall be the average of two stabilized consecutive values which do not vary more than 2% for the brake load.
- 2.3.10. The temperature of the coolant at the outlet from the engine shall be kept within ± 5 K from the upper thermostatically controlled temperature specified by the manufacturer. If no temperature is specified by the manufacturer the temperature shall be $353 \text{ K} \pm 5 \text{ K}$.
- For air-cooled engines, the temperature at a point indicated by the manufacturer shall be kept between $+ 0/- 20$ K of the maximum temperature specified by the manufacturer under the reference conditions.
- 2.3.11. The fuel temperature shall be measured at the inlet of the carburettor or injection system and be maintained within the limits set by the manufacturer.
- 2.3.12. The temperature of the lubricating oil measured in the oil sump or at the outlet from the oil cooler, if fitted, shall be maintained within the limits established by the engine manufacturer.
- 2.3.13. The outlet temperature of the exhaust gases shall be measured at right angles to the exhaust flange(s), manifold(s) or orifices.
- 2.3.14. Where an automatically-triggered device is used to measure engine speed and consumption the measurement shall last for at least 10 seconds; if the measuring device is manually controlled it shall measure for at least 20 seconds.
- 2.3.15. Test fuel

The test fuel to be used shall be the reference fuel referred to in Annex I, Appendix 2.

- 2.3.16. If it is not possible to use the standard exhaust silencer a device shall be used for the test that is compatible with the engine's normal operating conditions, and specified by the manufacturer.

During the laboratory tests in particular, when the engine is running, the exhaust gas extractor shall not, at the point where the exhaust system is connected to the test bench, give rise in the exhaust-gas extraction duct to a pressure differing from the atmospheric pressure by more than ± 740 Pa (7.4 mbar) unless the manufacturer has deliberately specified the back pressure existing before the test; in this case the lower of the two pressures shall be used.

- 2.4. Test procedure

Measurements shall be taken at a sufficient number of engine speeds to define correctly the power curve completely between the lowest and the highest engine speeds recommended by the manufacturer. This range of speeds shall include the speeds of revolution at which the engine produces its maximum torque and at which it produces its maximum power. For each speed, the average of at least two stabilized measurements is to be determined.

- 2.5. Data to be recorded

The data to be recorded are those set out Annex VII, test report of Regulation (EU) No [xxx/2013]

3. Power and torque correction factors.

- 3.1. Definition of factor α_1 and α_2

- 3.1.1. α_1 and α_2 shall be factors by which the torque and power measured are to be multiplied in order to determine the torque and power of an engine, taking account of the efficiency of the transmission (factor α_2) used during the tests and in order to bring that torque and that power within the reference atmospheric conditions specified in 3.2.1 (factor α_1). The power correction formula is as follows:

Equation Ap2.2-1:

$$P_0 = \alpha_1 \cdot \alpha_2 \cdot P$$

where:

P_0 = the corrected power (i.e. the power under the reference conditions at the end of the crankshaft);

α_1 = the correction factor for reference atmospheric conditions;

α_2 = the correction factor for the efficiency of the transmission;

P = the power measured (power observed).

3.2. Reference atmospheric conditions

3.2.1. Temperature: 25 °C (298 K)

3.2.2. Dry reference pressure (p_{so}): 99 kPa (990 mbar)

Note: the dry reference pressure is based on a total pressure of 100 kPa and a water vapour pressure of 1 kPa.

3.2.3. Atmospheric test conditions

3.2.3.1. During the test the atmospheric conditions shall lie within the following range:

$$283 \text{ K} < T < 308 \text{ K}$$

Where T is test temperature (K).

3.3. Determination of the correction factor α_1 ³⁵

Equation Ap2.2-2:

$$\alpha_1 = \left(\frac{99}{P_s} \right)^{1.2} \cdot \left(\frac{T}{298} \right)^{0.6}$$

where:

T = the absolute temperature of the ingested air

p_s = the dry atmospheric pressure in kilopascals (kPa) i.e. the total barometric pressure minus the water vapour pressure.

3.3.1. Equation Ap2.2-2 only applies if:

$$0.93 \leq \alpha_1 \leq 1.07$$

If the limit values are exceeded the corrected value obtained shall be stated and the test conditions (temperature and pressure) stated exactly in the test report.

3.4. Determination of the correction factor for mechanical efficiency of the transmission α_2

Where:

- the measuring point is the crankshaft output side this factor is equal to 1;
- the measuring point is not the output side of the crankshaft this factor is calculated via the formula:

Equation Ap2.2-2:

$$\alpha_2 = \frac{1}{n_t}$$

where n_t is the efficiency of the transmission located between the crankshaft and the measuring point.

This transmission efficiency n_t is determined via the product (multiplication) of efficiency n_j of each of the components of the transmission:

Equation Ap2.2-3:

$$n_t = n_1 \cdot n_2 \cdot \dots \cdot n_j$$

3.4.1.

Type		Efficiency
Gear wheel	Spur gear	0.98
	Helical gear	0.97
	Bevel gear	0.96
Chain	Roller	0.95
	Silent	0.98
Belt	Cogged	0.95
	Vee	0.94
Hydraulic coupling or convertor	Hydraulic coupling ⁽³⁶⁾	0.92
	Hydraulic convertor ³⁶	0.92

Table Ap2.1-3: efficiency n_j of each of the components of the transmission.

4. Maximum torque and maximum net power measurement tolerances

The maximum torque and the maximum net power of the engine as determined by the technical service to the satisfaction of the approval authority shall have a maximum acceptable tolerance of:

Measured power	Acceptable tolerance maximum torque and maximum power
≤ 11 kW	$\leq 5\%$
> 11 kW	$\leq 2\%$

Table Ap2.2-4: acceptable measurement tolerances

Engine speed tolerance when performing maximum torque and net power measurements: $\leq 1.5\%$

Appendix 2.2.1

Measurement of maximum torque and maximum net engine power by means of the engine-temperature method

1. Test conditions
 - 1.1. The tests intended to determine maximum torque and maximum net power shall be carried out at full throttle, the engine being equipped as specified in Table Ap2.2-1
 - 1.2. The measurements shall be carried out under normal operating conditions and the supply of induction air to the engine shall be adequate. Engines shall have been run in under the conditions recommended by their manufacturer. The combustion chambers of spark-ignition engines may contain deposits, but in limited quantities.

The test conditions, such as the temperature of the induction air, shall be selected so as to be as close as possible to the reference conditions (see 3.2.) in order to reduce the magnitude of the correction factor.
 - 1.3. The temperature of the air ingested into the engine shall be measured at a maximum distance of 0.15 m from the air filter inlet or, if there is no filter, 0.15 m from the air inlet trumpet. The thermometer or thermocouple shall be protected against radiant heat and placed directly in the air stream. It shall also be shielded from fuel spray-back. A sufficient number of locations shall be used to give a representative average inlet temperature.
 - 1.4. The engine speed during a measurement run shall not deviate from the selected speed while readings are taken by more than $\pm 1\%$.
 - 1.5. The brake load readings for the test engine shall be taken from the dynamometer when the temperature of the engine monitor has reached the set value, the speed of the engine being held virtually constant.
 - 1.6. Brakeload, fuel consumption and inlet air-temperature readings shall be taken simultaneously; the reading adopted for measurement purposes is the average of two stabilized values differing by less than 2% for brake load and fuel consumption.
 - 1.7. The fuel consumption readings begin when it is certain that the engine has reached a specific speed.

Where an automatically triggered device is used to measure rotational speed and consumption the measurement shall last for at least 10 seconds and if the measuring device is manually controlled for at least 20 seconds.
 - 1.8. Where the engine is liquid cooled the temperature of the coolant at the outlet from the engine shall be kept within ± 5 K of the upper thermostatically controlled temperature specified by the manufacturer. If no temperature is specified by the manufacturer, the temperature recorded shall be $353 \text{ K} \pm 5 \text{ K}$.

Where the engine is air cooled, the temperature recorded at the spark-plug washer is the temperature specified by the manufacturer ± 10 K. If the manufacturer has not

specified any temperature, that recorded shall be $483\text{ K} \pm 10\text{ K}$.

- 1.9. The temperature of the spark-plug washers on air-cooled engines shall be measured by a thermometer incorporating a thermocouple and a seal ring.
- 1.10. The fuel temperature at the inlet of the injection pump or carburettor shall be maintained within the limits set by the manufacturer.
- 1.11. The temperature of the lubricating oil, measured in the oil sump or at the outlet from the oil cooler, if fitted, shall be within the limits set by the manufacturer.
- 1.12. The exhaust gas temperature shall be measured at a point at right angles to the exhaust orifice flange(s) or manifold(s).
- 1.13. The fuel used is that referred to in section 3.3.12. of Annex I.
- 1.14. If it is not possible to use the standard exhaust silencer a device shall be used for the test that is compatible with the normal speed of the engine as specified by its manufacturer. In particular, when the engine is operating in the test laboratory the exhaust gas extraction system shall not cause a pressure differing from atmospheric pressure by $\pm 740\text{ Pa}$ (7.45 mbar) in the extraction flue at the point of connection with the vehicle's exhaust system, unless, before the test, the manufacturer has deliberately specified the back pressure existing before the test, in which case the lower of the two pressures shall be used.

Appendix 2.3

Determination of the maximum torque and maximum net power of L-category vehicles equipped with a compression ignition engine.

1. Accuracy of the measurement of full load torque and power
 - 1.1. Torque: $\pm 1\%$ of measured torque
 - 1.2. Engine speed

The measurement shall be accurate to within $\pm 1\%$. Engine speed shall be measured preferably with an automatically synchronized revolution counter and chronometer (or counter-timer).
 - 1.3. Fuel consumption: $\pm 1\%$ of measured consumption.
 - 1.4. Fuel temperature: ± 2 K.
 - 1.5. Engine inlet air temperature: ± 2 K.
 - 1.6. Barometric pressure: ± 100 Pa.
 - 1.7. Pressure in inlet manifold³⁵: ± 50 Pa.
 - 1.8. Pressure in vehicle exhaust pipe: 200 Pa.
2. Tests to measure the maximum torque and maximum net engine power
 - 2.1. Accessories
 - 2.1.1. Accessories to be fitted

During the test the accessories needed for operation of the engine in the application under consideration (as referred to in Table Ap2.3-1 shall be able to be located on the test bench as far as possible in the positions that they would occupy for the application under consideration.
 - 2.1.2.

No	Accessories	Fitted for the torque and net power test
1	Induction system — Induction manifold	If series-mounted: yes

³⁵

The complete intake system shall be fitted as provided for the intended application:
 — where there is a risk of an appreciable effect on the engine power,
 — in the case of two-stroke engines,
 — when the manufacturer requests that this should be done. In other cases, an equivalent system may be used and a check should be made to ascertain that the intake pressure does not differ by more than 100 Pa from the limit specified by the manufacturer for a clean air filter.

	<ul style="list-style-type: none"> — Air filter³⁹ — Induction silencer — Crankcase emission control system — Electrical control device, where fitted 	
2	Induction manifold heater	If series-mounted: yes (if possible, it shall be set in the most favourable position)
3	Exhaust system <ul style="list-style-type: none"> — Exhaust purifier — Exhaust manifold — Pipe work³⁶ — Silencer⁴⁰ — Exhaust pipe⁴⁰ — Exhaust brake³⁷ — Electrical control device, where fitted 	If series-mounted: yes
5	Fuel injection system <ul style="list-style-type: none"> — Upstream filter — Filter — Fuel supply pump³⁸ and high pressure pump if applicable — High-pressure lines — Injector — Air intake valve³⁹, where fitted — Fuel pressure / flow regulator, where 	If series-mounted: yes

³⁶ The complete exhaust system shall be fitted as provided for the intended application:

- where there is a risk of an appreciable effect on the engine power,
- in the case of two-stroke engines,
- when the manufacturer requests that this should be done. In other cases an equivalent system may be installed provided the pressure measured at the exit of the engine exhaust system does not differ by more than 1 000 Pa from that specified by the manufacturer. The exit of the engine exhaust system is defined as a point 150 mm downstream from the termination of the part of the exhaust system mounted on the engine.

³⁷ If an exhaust brake is incorporated in the engine, the throttle valve shall be held in the fully open position.

³⁸ The fuel-feed pressure may be adjusted, if necessary, to reproduce the pressures existing in the particular engine application (particularly when a 'fuel-return' system is used).

³⁹ The air-intake valve is the control valve for the pneumatic governor of the injection pump. The governor or the fuel-injection equipment may contain devices which may affect the amount of injected fuel.

	fitted	
6	Maximum rotational speed-and/or power governors ³⁹	If series-mounted: yes
7	Liquid-cooling equipment — Engine bonnet — Bonnet air outlet — Radiator — Fan ³⁰ — Fan cowl — Water Pump — Thermostat ³¹	If series-mounted: yes ³²
8	Air cooling — Cowl — Blower ⁽⁴⁰⁾⁽⁴¹⁾ — Cooling temperature-regulating device(s) — Auxiliary bench blower	If series-mounted: yes
9	Electrical equipment	If series-mounted: yes ⁴²
10	Supercharging equipment or turbo compressor, where fitted — Compressor driven directly by the engine	If series-mounted: yes

⁴⁰ The radiator, fan, fan nozzle, water pump and thermostat shall, on the test bench, occupy as far as possible the same position relative to each other as if they were on the vehicle. If the radiator, fan, fan nozzle, water pump and/or thermostat have a position on the test bench which is different from that on the vehicle, the position on the test bench shall be described and noted on the test report. The cooling-liquid circulation shall be operated by the engine water pump only. Cooling of the liquid may be produced either by the engine radiator or by an external circuit, provided that the pressure loss of this circuit and the pressure at the pump inlet remain substantially the same as those of the engine cooling system. The radiator shutter, if incorporated, shall be in the open position. Where the fan, radiator and cowl system cannot conveniently be fitted to the engine, the power absorbed by the fan when separately mounted in its correct position in relation to the radiator and cowl (if used) shall be determined at the speeds corresponding to the engine speeds used for measurement of the engine power either by calculation from standard characteristics or by practical tests. This power, corrected to the standard atmospheric conditions defined in 4.2, shall be deducted from the corrected power.

⁴¹ Where a disconnectable or progressive fan or blower is incorporated, the test shall be performed with the disconnectable fan (or blower) disconnected or with the progressive fan or blower running at maximum slip.

⁴² Minimum power of the generator: the power of the generator shall be limited to that necessary for the operation of accessories which are indispensable for the operation of the engine. If the connection of a battery is necessary, a fully-charged battery in good order shall be used.

	and/or by the exhaust gases — Charge air cooler ³⁸ — Coolant pump or fan (engine driven) — Coolant flow control device, where fitted.	
11	Pollution control devices ³⁴	If series-mounted: yes
12	Lubrication system — Oil feeder — Oil cooler, where fitted.	If series-mounted: yes

Table Ap2.3-1: Accessories to be fitted during the propulsion performance test in order to determine torque and net engine power.

2.1.3. Accessories to be removed

Certain vehicle accessories necessary only for the operation of the vehicle and which may be mounted on the engine shall be removed for the test.

The following non-exhaustive list is given as an example:

- air compressor for brakes,
- power-steering compressor,
- suspension compressor,
- air-conditioning system.

Where accessories cannot be removed, the power absorbed by them in the unloaded condition may be determined and added to the measured engine power.

2.1.4. Compression-ignition engine starting accessories

For the accessories used in starting compression-ignition engines, the two following cases shall be considered:

(a) electrical starting: the generator is fitted and supplies, where necessary, the accessories indispensable to the operation of the engine;

(b) starting other than electrical: if there are any electrically-operated accessories indispensable to the operation of the engine, the generator is fitted to supply these accessories. Otherwise it is removed.

In either case, the system for producing and accumulating the energy necessary for starting is fitted and operated in the unloaded condition.

2.2. Setting conditions

The conditions applying to settings during the tests to determine maximum torque and maximum net power are set out in table Ap2.1-2.

1	Setting of injection pump delivery system	
2	Ignition or injection setting (timing curve)	
3	(Electronic) Throttle Control	
4	Any other rotational speed governor setting	
5	(Noise and tailpipe) emission abatement system settings and devices	

Table Ap2.2-2: setting conditions

- 2.2. Test conditions.
- 2.3.1. The maximum-torque and net-power tests shall be conducted at full load fuel-injection pump setting, the engine being equipped as specified in Table Ap2.2-1
- 2.3.2. The measurements shall be carried out under normal, stabilized operating conditions with an adequate fresh-air supply to the engine. The engine shall have been run in accordance with the manufacturer's recommendations. Combustion chambers may contain deposits, but in limited quantities.
- 2.3.3. Test conditions such as air inlet temperature shall be selected as near to reference conditions (see 3.2.) as possible in order to minimize the magnitude of the correction factor.
- 2.3.4. The temperature of the (ambient) inlet air to the engine shall be measured at no more than 0.15 m upstream from the point of entry into the air cleaner or, if no air cleaner is used, within 0.15 m of the air-inlet trumpet. The thermometer or thermocouple shall be shielded from radiant heat and be placed directly in the airstream. It shall also be shielded from fuel spray-back.
- A sufficient number of locations shall be used to give a representative average inlet temperature.
- 2.3.7. No data shall be taken until torque, speed and temperature have remained substantially constant for at least 30 seconds.
- 2.3.8. The engine speed during a run or reading shall not deviate from the selected speed by more than $\pm 1\%$ or $\pm 10 \text{ min}^{-1}$, whichever is greater.
- 2.3.9. Observed brake-load and inlet-air temperature data shall be taken simultaneously and shall be the average of two stabilized consecutive values which do not vary more than 2% for the brake load.
- 2.3.10. The temperature of the coolant at the outlet from the engine shall be kept within $\pm 5 \text{ K}$ from the upper thermostatically controlled temperature specified by the manufacturer. If no temperature is specified by the manufacturer the temperature

shall be $353\text{ K} \pm 5\text{ K}$.

For air-cooled engines, the temperature at a point indicated by the manufacturer shall be kept between $+ 0 / - 20\text{ K}$ of the maximum temperature specified by the manufacturer under the reference conditions.

2.3.11. The fuel temperature shall be measured at the inlet of injection system and be maintained within the limits set by the manufacturer.

2.3.12. The temperature of the lubricating oil measured in the oil sump or at the outlet from the oil cooler, if fitted, shall be maintained within the limits established by the engine manufacturer.

2.3.13. The outlet temperature of the exhaust gases shall be measured at right angles to the exhaust flange(s), manifold(s) or orifices.

2.3.14. An auxiliary regulating system may be used if necessary to maintain the temperature within the limits specified in 2.3.10., 2.3.11 and 2.3.12.

2.3.15. Where an automatically-triggered device is used to measure engine speed and consumption the measurement shall last for at least 10 seconds; if the measuring device is manually controlled it shall measure for at least 20 seconds.

2.3.15. Test fuel

The test fuel to be used shall be the reference fuel referred to in Annex I, Appendix 2.

2.3.16. If it is not possible to use the standard exhaust silencer a device shall be used for the test that is compatible with the engine's normal operating conditions, and specified by the manufacturer.

During the laboratory tests in particular, when the engine is running, the exhaust gas extractor shall not, at the point where the exhaust system is connected to the test bench, give rise in the exhaust-gas extraction duct to a pressure differing from the atmospheric pressure by more than $\pm 740\text{ Pa}$ (7.4 mbar) unless the manufacturer has deliberately specified the back pressure existing before the test; in this case the lower of the two pressures shall be used.

2.4. Test procedure

Measurements shall be taken at a sufficient number of engine speeds to define correctly the power curve completely between the lowest and the highest engine speeds recommended by the manufacturer. This range of speeds shall include the speeds of revolution at which the engine produces its maximum torque and at which it produces its maximum power. For each speed, the average of at least two stabilized measurements is to be determined.

2.5. Measurement of smoke index

In the case of compression-ignition engines, the exhaust gases shall be examined

during the test for compliance with the requirements for test type II.

2.6. Data to be recorded

The data to be recorded are those set out Annex VII, test report of Regulation (EU) No [xxx/2013]

3. Power and torque correction factors.

3.1. Definition of factor α_d and α_2

3.1.1. α_d and α_2 shall be factors by which the torque and power measured are to be multiplied in order to determine the torque and power of an engine, taking account of the efficiency of the transmission (factor α_2) used during the tests and in order to bring that torque and that power within the reference atmospheric conditions specified in 3.2.1 (factor α_d). The power correction formula is as follows:

Equation Ap2.3-1:

$$P_0 = \alpha_d \cdot \alpha_2 \cdot P$$

where:

P_0 = the corrected power (i.e. the power under the reference conditions at the end of the crankshaft);

α_d = the correction factor for reference atmospheric conditions;

α_2 = the correction factor for the efficiency of the transmission (see paragraph 3.4 of appendix 2.2.);

P = the power measured (power observed).

3.2. Reference atmospheric conditions

3.2.1. Temperature: 25 °C (298 K)

3.2.2. Dry reference pressure (p_{s0}): 99 kPa (990 mbar)

Note: the dry reference pressure is based on a total pressure of 100 kPa and a water vapour pressure of 1 kPa.

3.2.3. Atmospheric test conditions

3.2.3.1. During the test the atmospheric conditions shall lie within the following range:

$$283 \text{ K} < T < 308 \text{ K}$$

$$80 \text{ kPa} \leq p_s \leq 110 \text{ kPa}$$

where:

T = test temperature (K);

p_s = the dry atmospheric pressure in kilopascals (kPa) i.e. the total barometric pressure minus the water vapour pressure.

3.3. Determination of the correction factor α_d ³⁵

Equation Ap2.3-2:

The power correction factor (α_d) for compression-ignition engines at constant fuel rate is obtained by applying the formula:

$$\alpha_d = (f_a) f_m$$

where:

f_a = the atmospheric factor

f_m = the characteristic parameter for each type of engine and adjustment.

3.3.1. Atmospheric factor f_a

This factor indicates the effects of environmental conditions (pressure, temperature and humidity) on the air drawn in by the engine. The atmospheric factor formula differs according to type of engine.

3.3.1.1. Naturally aspirated and mechanically supercharged engines

Equation Ap2.3-3

$$f_a = \left(\frac{99}{P_s}\right) \cdot \left(\frac{T}{298}\right)^{0,7}$$

where:

T= the absolute temperature of the ingested air (K)

p_s = the dry atmospheric pressure in kilopascals (kPa) i.e. the total barometric pressure minus the water vapour pressure.

3.3.1.2. Turbocharger engines or without cooling of inlet air

Equation Ap2.3-4

$$f_a = \left(\frac{99}{P_s}\right)^{0,7} \cdot \left(\frac{T}{298}\right)^{1,5}$$

3.3.2. Engine factor f_m

f_m is a function of q_c (fuel flow corrected) as follows:

$$f_m = 0.036 \cdot q_c - 1.14$$

where:

$$q_c = q_r$$

where:

q = the fuel flow in milligrams per cycle per litre of total swept volume [mg/(litre · cycle)]

r = the pressure ratio of compressor outlet and compressor inlet ($r= 1$ for naturally aspirated engines)

3.3.2.1. This formula is valid for a value interval of q_c included between 40 mg/(litre · cycle) and 65 mg/(litre · cycle).

For q_c values lower than 40 mg/(litre · cycle), a constant value of f_m equal to 0.3c ($f_m = 0.3$) will be taken.

For q_c values higher than 65 mg/(litre · cycle), a constant value of f_m equal to 1.2 = ($f_m = 1.2c$) will be taken (see the figure).

3.3.2.2.

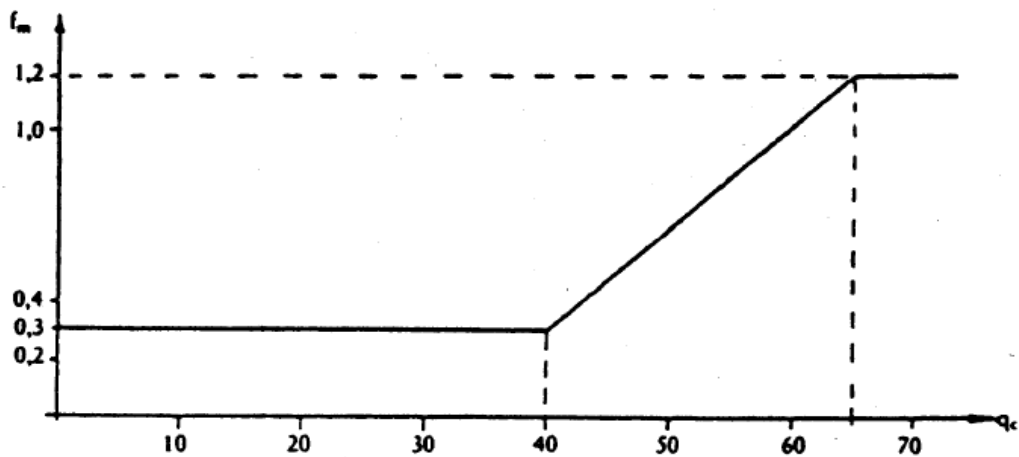


Figure Ap2.3-1: characteristic parameter f_m for each type of engine and adjustment as function of corrected fuel flow.

3.3.3. Conditions to be complied with in the laboratory

For a test to be valid, the correction factor α_d shall be such that:

$$0.9 \alpha_d \leq 1,1$$

If these limits are exceeded, the corrected value obtained shall be given and the test conditions (temperature and pressure) precisely stated in the test report.

4. Measuring maximum torque and maximum net power tolerances.
The same tolerances apply set-out in paragraph 4 from appendix 2.2.

DRAFT

Appendix 2.4

Determination of the maximum torque and maximum power of L-category vehicles equipped with a hybrid propulsion.

1. Requirements
 - 1.1. Hybrid propulsion including a positive ignition combustion engine.

The maximum total torque and maximum total power of the hybrid propulsion assembly of combustion engine and electric motor shall be measured according to the requirements set-out in appendix 2.2.
 - 1.2. Hybrid propulsion including a compression ignition combustion engine

The maximum total torque and maximum total power of the hybrid propulsion assembly of combustion engine and electric motor shall be measured according to the requirements set-out in appendix 2.3.
 - 1.3. Hybrid propulsion including an electric motor

In addition to paragraphs 1.1. or 1.2. the maximum torque and maximum continuous rated power of the electric motor shall be measured according to the requirements set-out in appendix 3.
 - 1.4. If the hybrid technology used on the vehicle allows multi-mode hybrid running conditions, the same procedure has to be repeated for each mode and the highest measured propulsion performance value shall be the final test result of the propulsion performance test procedure.
2. Manufacturer's obligation

The vehicle manufacturer shall ensure that the test set-up of the test vehicle equipped with a hybrid propulsion shall result in measuring the maximum attainable total torque and power. Any series-mounted feature resulting in a higher propulsion performance in terms of maximum design vehicle speed, maximum total torque or maximum total power is to be regarded as a defeat device.

Appendix 3

Requirements concerning the methods of measuring the maximum torque and maximum continuous rated power of L-category vehicles equipped with a pure electric propulsion.

1. Requirements

L-category vehicles equipped with a pure electric propulsion shall meet all the relevant requirements with regard to the measurements of the maximum torque, maximum net power and the maximum 30 minutes power of electric drive trains set-out in UNECE regulation No. 85.

DRAFT

Appendix 4
Requirements concerning the test method of measuring the maximum continuous rated power and switch-off distance of L1e vehicles designed to pedal and equipped with a pure electric propulsion

1. Scope
 - 1.1. Subcategory L1e-A vehicle:
 - 1.1.1. Subcategory L1e-B vehicle with a power controlled pedal assistance which is equipped with one or more auxiliary electric motor(s), having a total maximum continuous rated motor power of 500 W and a maximum peak power of not more than 1.6 x maximum continuous rated motor power, of which the output is progressively reduced and finally cut off as the vehicle reaches a speed of 45 km/h, or sooner, if the cyclist stops pedalling.
2. Exemption

L1e vehicles in the scope of this appendix 4 are exempted from the requirements set-out in appendix 3.
3. Test procedures and requirements
 - 3.1. Test procedure to measure the maximum design vehicle speed up to which the auxiliary motor provides pedal assist.

The test procedure and measurements shall be performed in conformity with paragraph 4.2.6.2. of EN 15194:2009.
 - 3.2. Test procedure to measure the maximum continuous rated power

The maximum continuous rated power shall be measured according to the test procedures set-out in EN 15194:2009 and EN 60034-1:xxxx
 - 3.3. Test procedure to measure the maximum peak power
 - 3.3.1. Acceptable range maximum peak power compared to maximum continuous rated power

The maximum peak power shall be ≤ 1.6 x maximum continuous rated power, measured as mechanical output power at the shaft of the motor unit.
 - 3.3.2. Tolerances

The maximum continuous rated and peak power values may deviate by +/- 5% from the result of the measurements set-out in EN 15194:2009.
 - 3.3.3. Power correction factors
 - 3.3.3.1. Definition of factor α_1 and α_2

- 3.3.3.1.1. α_1 and α_2 shall be factors by which the torque and power measured are to be multiplied in order to determine the torque and power of an engine, taking account of the efficiency of the transmission (factor α_2) used during the tests and in order to bring that torque and that power within the reference atmospheric conditions specified in 3.2.1 (factor α_1). The power correction formula is as follows:

Equation Ap 4-1:

$$P_0 = \alpha_1 \cdot \alpha_2 \cdot P$$

where:

P_0 = the corrected power (i.e. the power under the reference conditions at the end of the crankshaft);

α_1 = the correction factor for reference atmospheric conditions and measurement uncertainties and shall be 1.10;

α_2 = is the correction factor for the efficiency of the transmission and shall be 1.05, unless the real values of these losses are determined;

P = the power measured (power observed) at the tire.

3.3.4. Atmospheric test conditions

- 3.3.4.1. During the test the atmospheric conditions shall lie within the following range:

$$278 \text{ K} < T < 308 \text{ K}$$

where:

T = test temperature (K)

3.3.5. Test preparations

- 3.3.5.1. The test vehicle shall be mounted on a test bench.

- 3.3.5.2. The test vehicle shall be powered by its corresponding battery. If several types of batteries are released for the vehicle, the battery with maximum capacity shall be used.

- 3.3.5.3. The propulsion batter(y)/(ies) shall be fully charged.

- 3.3.5.4. One motor of the test bench shall be attached to the crank or crank axis of the test vehicle (test bench crank motor). This motor shall be variable in rotation speed and torque to simulate the driving actions of the driver. The test bench crank motor shall reach a rotation frequency of 90 min^{-1} and a maximum torque of 50 Nm to cover the typical performance ranges of drivers.

- 3.3.5.5. A brake or a motor shall be attached to a drum below the rear wheel of the test vehicle to simulate the losses and inertia of the vehicle.

- 3.3.5.6. For vehicles equipped with a motor driving the front wheel an additional brake or an additional motor is attached to a drum below the front wheel, simulating the losses and inertia of the vehicle.
- 3.3.5.7. If the assistance level of the vehicle is variable, it shall be set to maximum assistance.
- 3.3.5.8. Peripheral devices powered by the vehicle's power supply have to be dismantled or switched off. If peripheral devices are necessary for motor assistance the vehicle they may remain powered on if the manufacturer has sufficiently justified this to the technical service and to the satisfaction of the approval authority.
- 3.3.5.9. Prior to start of the measurement, the cadence of the test bench crank motor is swept from low to high cadence until a maximum mechanical output power shall be reached. For this preconditioning a medium vehicle gear shall be used at an average test bench crank motor torque of 25 Nm.
- 3.3.5.10. Subsequently the test bench crank motor torque shall be varied to reach the maximum mechanical output of the motor. After adjustment of the test bench crank motor torque, the gear of the vehicle is adjusted for maximum output power. The test bench crank motor conditions with maximum vehicle output power shall be reported and used for the measurement of the maximum power. They shall be monitored during the measurement. For this point of operation the brakes/motors of the test bench for the front and the rear wheel have to be adjusted such that the rotation frequencies remain constant.
- 3.4. Test procedure to calculate maximum motor power
- 3.4.1. The maximum power shall be measured for 5 minutes (maximum 5 minutes power). If the power is not constant, the average power during the 5 minutes measurement shall be taken as maximum 5 minutes power.
- 3.4.2. The maximum motor power of the vehicle is calculated from the sum of the mechanical brake motor powers minus the mechanical input power of the test bench crank motor.
- 3.4.3. Data to be recorded
- The data to be recorded are those set out Annex VII, test report of Regulation (EU) No [xxx/2013]
- 3.5. Test procedure to measure switch-off distance
- After stopping with pedalling, the assistance of the motor shall switch off in a driving distance $\leq 3\text{m}$. The testing vehicle speed is 90% of the maximum assistance speed. The measurements shall be conducted in accordance with EN 15194:2009.

ANNEX X
Vehicle variant, version and propulsion family

1. Vehicle and propulsion family attribution

An L-category vehicle may be attributed to the same vehicle variant, version, propulsion and onboard diagnostic (OBD) family provided that the vehicle variant, version, propulsion, pollution control system and OBD parameters specified below are identical or remain within the prescribed and declared tolerances:

1.1. Vehicle:

- category;
- subcategory;
- the inertia of a vehicles variant(s) or version(s) positioned within two inertia categories adjacent above or below the nominal inertia category;
- type of bodywork if applicable;
- Overall gear ratios:
- Engine revolutions per kilometre.

1.2. Propulsion family characteristics:

- number of engines or motors;
- hybrid operation mode(s) (parallel / sequential / other)
- number of cylinders of the combustion engine;
- engine capacity (+/- 30%) of the combustion engine;
- number and control (cam phasing) of combustion engine valves;
- monofuel / bifuel / flex fuel H₂NG / multifuel;
- fuel system (carburettor / scavenging port / port fuel injection / direct fuel injection / other);
- fuel storage;
- type of cooling system of combustion engine;
- combustion cycle (PI / CI / two-stroke / four-stroke / other);
- intake air (naturally aspirated / charged (turbo / compressor));
- CO₂ emissions measured by the technical service do not exceed by more than 4 per cent the type approved value:

1.3. Pollution control system characteristics:

- catalytic converter(s):
 - number and elements of catalytic converters;
 - size of catalytic converters (volume of monolith(s) +/- 10%);
 - type of catalytic activity (oxidizing, three-way, heated, SCR etc);
 - precious metal load (identical or higher);
 - precious metal ratio (+/- 15%);
 - substrate (structure and material);
 - cell density;
 - type of casing for the catalytic converter(s);
 - temperature variation of no more than 50 °C at the inlet of the catalytic converter. This temperature variation shall be checked under stabilised conditions at a vehicle speed according to the highest value in km/h in the applicable Type V test cycle and at the dynamometer load setting of the type I test set-out in Annex I.
- particulate filter(s) (PF):
 - not equipped with PF;
 - equipped with PF;
 - PF operation principle (partial / wall-flow);
 - PF characteristics (number / volume / filtering size / size of active surface / other).
- periodically regenerating system:
 - not equipped with periodically regenerating system;
 - equipped with periodically regenerating system;
 - operation principle of periodically regenerating system.
- selective catalyst reduction (SCR) system:
 - not equipped with SCR system;
 - equipped with SCR system;
 - SCR system characteristics (SCR catalyst number / volume / size / size

- of active surface / other);
 - SCR system operation principle.
- lean NO_x trap:
 - not equipped with lean NO_x trap;
 - equipped with lean NO_x trap;
 - operation principle of lean NO_x trap.
- air injection:
 - not equipped with air injection;
 - equipped with air injection;
 - operation principle of air injection (pulsed, air pumps, etc.);
 - duty cycle (only limited time activated after cold start / continuous operation)
- O₂ sensor:
 - operation principle of O₂ sensor (binary / wide-range);
 - interaction with closed loop fuelling system (stoichiometry / lean and / or rich operation).
- exhaust gas recirculation (EGR) system:
 - equipped with EGR system;
 - not equipped with EGR system;
 - operation principle of EGR system (external / internal);
 - maximum EGR rate (+/- 5%);
- evaporative emission control system:
 - not equipped with evaporative emission control system;
 - equipped with evaporative emission control system;
 - operation principle of evaporative emission control system (passive / active);
- 1.4. – Onboard diagnostic (OBD) system:
 - stage (stage I or II) and system;

- method of OBD functionality, malfunction detection and indication;
- communication protocol.

DRAFT

ANNEX XI
Amendment of Annex V to Regulation (EU) No [xxx/2013]

1. Amendments of Annex V to Regulation (EU) No [xxx/2013]

Annex V to Regulation (EU) No [xxx/2013] shall be supplemented as follows:

Test type	Description	Requirements: limit values	Requirements: test procedures
I	ANNEX I
II	ANNEX II
III	ANNEX III
IV	ANNEX IV
V	ANNEX V
VI
VII	ANNEX VI
VIII	ANNEX VII
IX	ANNEX VIII

Table 10-1: Amendments of Annex V to Regulation (EU) No [xxx/2013]