

**DISCUSSION PAPER  
DRAFT CONCEPT  
DELEGATED ACT  
NRMM V3**

Deleted: V2

**DEADLINE FOR COMMENTS**  
**31st MAY 2016**

Deleted: 30th APRIL

**This document does not represent an official position of the European Commission. It is a tool to explore the views of interested parties. The suggestions contained in this document do not prejudice the form and content of any possible future proposal by the European Commission.**

**COMMISSION DELEGATED REGULATION (EU) 2016/..**

**of XXX**

**supplementing Regulation (EU) 2015/XXX of the European Parliament and of the Council with regard to the technical and general requirements relating to emission limits and type-approval for internal combustion engines for non-road mobile machinery**

(Text with EEA relevance)

THE EUROPEAN COMMISSION,

Having regard to the Treaty on the Functioning of the European Union,

Having regard to Regulation No 2015/XXX of the European Parliament and of the Council on requirements relating to emission limits and type-approval for internal combustion engines for non-road mobile machinery<sup>1</sup>, and in particular Articles 3, 17(5), 23(11), 24(4), 25(6), 31(5), 32(5), 40(4), 41(5), 46(4), 47, and 55 thereto,

Whereas:

- (1) This Regulation aims to set out the technical requirements and test methods relating to EU type-approval procedures for engines to be installed in non-road mobile machinery.
- (2) By Council Decision 97/836/EC<sup>2</sup>, the Union has acceded to the Agreement of the United Nations Economic Commission for Europe (UNECE) concerning the adoption of uniform technical prescriptions for wheeled vehicles, equipment and parts which can be fitted to and/or be used on wheeled vehicles and the conditions for reciprocal recognition of approvals granted on the basis of these prescriptions ('Revised 1958 Agreement'). In its Communication CARS 2020: Action Plan for a competitive and sustainable automotive industry in Europe, the Commission highlighted that the acceptance of international regulations under the 1958 UNECE Agreement is the best way to remove non-tariff barriers to trade.
- (3) The possibility to apply UNECE regulations for the purposes of EU type-approval for engines to be installed in non-road mobile machinery is provided for in Regulation (EU) 2015/XXX. UNECE regulations being part of the requirements for the EU type-approval of a vehicle help avoid duplication not only of technical requirements but also of certification and administrative procedures. In addition, type-approval that is directly based on internationally agreed standards should improve market access in

---

<sup>1</sup> OJ L

<sup>2</sup> Council Decision 97/836/EC of 27 November 1997 with a view to accession by the European Community to the Agreement of the United Nations Economic Commission for Europe concerning the adoption of uniform technical prescriptions for wheeled vehicles, equipment and parts which can be fitted to and/or be used on wheeled vehicles and the conditions for reciprocal recognition of approvals granted on the basis of these prescriptions ('Revised 1958 Agreement') (OJ L 346, 17.12.97, p. 78).

third countries, in particular in those which are contracting parties to the Revised 1958 Agreement, thus enhancing the Union industry's competitiveness.

- (4) With the aim to adapt the provisions on the construction of engines to be installed in non-road mobile machinery to technical progress, latest versions of CEN/Cenelec or ISO standards which are accessible by the public should be made applicable as regards certain requirements.
- (5) Checks on the conformity of engines throughout the production process are an essential part of the EU type-approval process. The conformity of production procedures should be further improved and aligned with similar procedures applicable to vehicles.
- (6) While large parts of the requirements laid down in this Regulation have been carried over from repealed directives, important modifications should be introduced where necessary to update to technical progress, extent the scope to further engine categories or to increase the level of environmental protection as regards, for example: particulate number (PN).
- (7) In order to ensure that technical services meet the same high level of performance standards in all Member States, this Regulation should set out the standards with which technical services have to comply, as well as the procedure for the assessment of that compliance and for the accreditation of those services.
- (8) For the purposes of clarity, it is appropriate to align the numbering of the test procedures between this Regulation, Global Technical Regulation n° 11 and UNECE Regulation 96. Therefore, Articles 9 to 11 should reference to the relevant sections of Annex VI.
- (9) This Regulation should apply from the date of application of Regulation (EU) 2015/XXX,

HAS ADOPTED THIS REGULATION:

## **CHAPTER I**

### **SUBJECT MATTER AND DEFINITIONS**

#### *Article 1*

##### *Subject matter*

This Regulation establishes the detailed technical requirements and test procedures relating to emission limits and type-approval for internal combustion engines for non-road mobile machinery, the detailed arrangements and requirements with regard to type-approval procedures and conformity of production, and the performance standards and criteria for the assessment of technical services in accordance with Regulation (EU) 2015/XXX.

## Article 2

### Definitions

The following definitions shall apply:

- (1) "Adjustment factors" mean additive or multiplicative factors (upward adjustment factor and downward adjustment factor) ~~to be used for engines equipped with emissions controls that are regenerated on an~~ infrequent (periodic) basis;
- (2) "Ambient temperature" means one of the following:
  - (a) for a laboratory environment (e.g. filter weighing room or chamber), the temperature within the specified laboratory environment;
  - (b) for an engine installed in a test-bed, the temperature of combustion air supplied to the engine, upstream of any part of the engine being tested;
  - (c) for an engine installed in non-road mobile machinery, the air temperature immediately outside the perimeter of the non-road mobile machinery.
- (3) "Applicable emission limit" means an emission limit to which an engine is subject;
- (4) "Aqueous condensation" means the precipitation of water-containing constituents from a gas phase to a liquid phase. Aqueous condensation is a function of humidity, pressure, temperature, and concentrations of other constituents such as sulphuric acid. These parameters vary as a function of engine intake-air humidity, dilution-air humidity, engine air-to-fuel ratio, and fuel composition - including the amount of hydrogen and sulphur in the fuel;
- (5) "Atmospheric pressure" means the wet, absolute, atmospheric static pressure. Note that if the atmospheric pressure is measured in a duct, negligible pressure losses shall be ensured between the atmosphere and the measurement location, and changes in the duct's static pressure resulting from the flow shall be accounted for;
- (6) "Auxiliary Emission Control Strategy" (hereinafter "AECS") means an emission strategy that becomes active and replaces or modifies a base emission strategy for a specific purpose and in response to a specific set of ambient and/or operating conditions and only remains operational as long as those conditions exist;
- (7) "Base Emission Control Strategy" (hereinafter "BECS") means an emission strategy that is active throughout the speed and load operating range of the engine unless an AECS is activated;
- (8) "Calibration" means the process of setting a measurement system's response so that its output agrees with a range of reference signals. Contrast with "verification";
- (9) "Calibration gas" means a purified gas mixture used to calibrate gas analyzers. Calibration gases shall meet the specifications of 9.5.1. Note that calibration gases and span gases are qualitatively the same, but differ in terms of their primary function. Various performance verification checks for gas analyzers and sample handling components might refer to either calibration gases or span gases;
- (10) "Certification" means relating to the process of obtaining a certificate of conformity;

**Deleted:** or multiplicative factors

**Deleted:** considered during the

**Deleted:** regeneration

**Moved (insertion) [1]**

- (11) "Constant-speed engine" means an engine whose type approval or certification is limited to constant-speed operation. Engines whose constant-speed governor function is removed or disabled are no longer constant-speed engines;
- (12) "Constant-speed NRSC" means any of the following NRSC: D2, E2, G1, G2 or G3
- (13) "Constant-speed operation" means engine operation with a governor that automatically controls the operator demand to maintain engine speed, even under changing load. Governors do not always maintain speed exactly constant. Typically, speed can decrease (0.1 to 10) per cent below the speed at zero load, such that the minimum speed occurs near the engine's point of maximum power;
- (14) "Continuous regeneration" means the regeneration process of an exhaust after-treatment system that occurs either in a sustained manner or at least once over the applicable transient test cycle or ramped-modal cycle; in contrast to infrequent (periodic) regeneration;
- (15) "Delay time" means the difference in time between the change of the component to be measured at the reference point and a system response of 10 per cent of the final reading ( $t_{10}$ ) with the sampling probe being defined as the reference point. For the gaseous components, this is the transport time of the measured component from the sampling probe to the detector (see figure-1);
- (16) "deNO<sub>x</sub> system" means an exhaust after-treatment system designed to reduce emissions of oxides of nitrogen (NO<sub>x</sub>) (e.g. passive and active lean NO<sub>x</sub> catalysts, NO<sub>x</sub> adsorbers and selective catalytic reduction (SCR) systems);
- (17) "Dew point" means a measure of humidity stated as the equilibrium temperature at which water condenses under a given pressure from moist air with a given absolute humidity. Dew point is specified as a temperature in °C or K, and is valid only for the pressure at which it is measured;
- (18) "Discrete-mode" means relating to a discrete-mode type of steady-state test, as described in paragraph 7.4.1.1. and Annex A.1;
- (19) "Drift" means the difference between a zero or calibration signal and the respective value reported by a measurement instrument immediately after it was used in an emission test, as long as the instrument was zeroed and spanned just before the test;
- (20) "Dual-fuel engine" means an engine system that is designed to simultaneously operate with diesel fuel and a gaseous fuel, both fuels being metered separately, where the consumed amount of one of the fuels relative to the other one may vary depending on the operation;
- (21) "Dual-fuel mode" means the normal operating mode of a dual-fuel engine during which the engine simultaneously uses diesel fuel and a gaseous fuel at some engine operating conditions;
- (22) "Electronic control unit" means an engine's electronic device that uses data from engine sensors to control engine parameters;
- (23) "Emission-control system" means any device, system, or element of design that controls or reduces the emissions of regulated pollutants from an engine;

**Deleted:** <#>"Conversion efficiency of non-methane cutter (NMC)  $E$ " means the efficiency of the conversion of a NMC that is used for the removal of the non-methane hydrocarbons from the sample gas by oxidizing all hydrocarbons except methane. Ideally, the conversion for methane is 0 per cent ( $E_{CH_4} = 0$ ) and for the other hydrocarbons represented by ethane is 100 per cent ( $E_{C_2H_6} = 100$  per cent). For the accurate measurement of NMHC, the two efficiencies shall be determined and used for the calculation of the NMHC emission mass flow rate for methane and ethane. Contrast with "penetration fraction";¶

- (24) "Emission durability period" means the relevant period of distance and/or time over which compliance with the relevant gaseous and particulate emission limits has to be assured;
- (25) "Engine family" means a manufacturers grouping of engines which, through their design as defined in paragraph 5.2. of this regulation, have similar exhaust emission characteristics; all members of the family shall comply with the applicable emission limit values;
- (26) "Engine governed speed" means the engine operating speed when it is controlled by the installed governor;
- (27) "Engine system" means the engine, the emission control system and the communication interface (hardware and messages) between the engine system electronic control unit(s) (ECU) and any other powertrain or vehicle control unit;
- (28) "Engine type" means a category of engines which do not differ in essential engine characteristics;
- (29) "Exhaust after-treatment system" means a catalyst, particulate filter, deNOx system, combined deNOx particulate filter or any other emission-reducing device that is installed downstream of the engine. This definition excludes exhaust gas recirculation (EGR) and turbochargers, which are considered an integral part of the engine;
- (30) "Exhaust-gas recirculation" means a technology that reduces emissions by routing exhaust gases that had been exhausted from the combustion chamber(s) back into the engine to be mixed with incoming air before or during combustion. The use of valve timing to increase the amount of residual exhaust gas in the combustion chamber(s) that is mixed with incoming air before or during combustion is not considered exhaust-gas recirculation for the purposes of this regulation;
- (31) "Full flow dilution method" means the process of mixing the total exhaust flow with dilution air prior to separating a fraction of the diluted exhaust stream for analysis;
- (32) "Gaseous pollutants" means carbon monoxide, hydrocarbons (assuming a ratio of CH<sub>1.85</sub> for diesel) and oxides of nitrogen (expressed as nitrogen dioxide (NO<sub>2</sub>) equivalent);
- (33) "Good engineering judgment" means judgments made consistent with generally accepted scientific and engineering principles and available relevant information;
- (34) "Governor" means a device or control strategy that automatically controls engine speed or load that is not an over-speed limiter;
- (35) "HEPA filter" means high-efficiency particulate air filters that are rated to achieve a minimum initial particle-removal efficiency of 99.97 per cent using ASTM F 1471–93 or equivalent standard;
- (36) "High speed ( $n_{hi}$ )" means the highest engine speed where 70 per cent of the maximum power occurs;
- (37) "Idle speed" means the lowest engine speed with minimum load (greater than or equal to zero load), where an engine governor function controls engine speed. For engines without a governor function that controls idle speed, idle speed means the

**Deleted:** and/or non-methane hydrocarbons

**Deleted:** ), methane

**Deleted:** <#>"Hydrocarbon (HC)" means THC, NMHC as applicable. Hydrocarbon generally means the hydrocarbon group on which the emission standards are based for each type of fuel and engine,¶

manufacturer-declared value for lowest engine speed possible with minimum load. Note that warm idle speed is the idle speed of a warmed-up engine;

- (38) "Intermediate test speed" means that engine speed which meets one of the following requirements:
- (a) For engines which are designed to operate over a speed range on a full load torque curve, the intermediate speed shall be the declared maximum torque speed if it occurs between 60 per cent and 75 per cent of rated speed;
  - (b) If the declared maximum torque speed is less than 60 per cent of rated speed, then the intermediate speed shall be 60 per cent of the rated speed;
  - (c) If the declared maximum torque speed is greater than 75 per cent of the rated speed then the intermediate speed shall be 75 per cent of rated speed.
- (39) "Linearity" means the degree to which measured values agree with respective reference values. Linearity is quantified using a linear regression of pairs of measured values and reference values over a range of values expected or observed during testing;
- (40) "Liquid-fuel mode" means the normal operating mode of a dual-fuel engine during which the engine does not use any gaseous fuel for any engine operating condition;
- (41) "Low speed ( $n_{lo}$ )" means the lowest engine speed where 50 per cent of the maximum power occurs;
- (42) " $\lambda$ -shift factor ( $S_\lambda$ )" means an expression that describes the required flexibility of the engine management system regarding a change of the excess-air ratio  $\lambda$  if the engine is fuelled with a gas composition different from pure methane (see Appendix 5 to Annex 4 for the calculation of  $S_\lambda$ );
- (43) "Maximum no load speed" means the engine speed at which an engine governor function controls engine speed with operator demand at maximum and with zero load applied;
- (44) "Maximum power ( $P_{max}$ )" means the maximum power in kW as designed by the manufacturer;
- (45) "Maximum torque speed" means the engine speed at which the maximum torque is obtained from the engine, as designed by the manufacturer;
- (46) "Means of a quantity" based upon flow-weighted mean values means the mean level of a quantity after it is weighted proportionally to the corresponding flow rate;
- (47) "Open crankcase emissions" means any flow from an engine's crankcase that is emitted directly into the environment;
- (48) "Operator demand" means an engine operator's input to control engine output. The "operator" may be a person (i.e., manual), or a governor (i.e., automatic) that mechanically or electronically signals an input that demands engine output. Input may be from an accelerator pedal or signal, a throttle-control lever or signal, a fuel lever or signal, a speed lever or signal, or a governor setpoint or signal;

**Deleted:** <#>"Non-methane hydrocarbons (NMHC)" means the sum of all hydrocarbon species except methane;¶

(49) “Over-speed limiter” means a safety device or control strategy installed on an engine of category NRSh that limits the maximum rotational speed of the engine for the sole purpose of preventing the engine operating at speeds in excess of the safe limit;

(50) "Oxides of nitrogen" means compounds containing only nitrogen and oxygen as measured by the procedures specified in this regulation. Oxides of nitrogen are expressed quantitatively as if the NO is in the form of NO<sub>2</sub>, such that an effective molar mass is used for all oxides of nitrogen equivalent to that of NO<sub>2</sub>;

(51) "Parent engine" means an engine selected from an engine family in such a way that its emissions characteristics are representative for that engine family, see paragraph 5.2.4;

Deleted: .;

(52) "Partial pressure" means the pressure,  $p$ , attributable to a single gas in a gas mixture. For an ideal gas, the partial pressure divided by the total pressure is equal to the constituent's molar concentration,  $x$ ;

(53) "Particulate after-treatment device" means an exhaust after-treatment system designed to reduce emissions of particulate pollutants (PM) through a mechanical, aerodynamic, diffusional or inertial separation;

(54) "Partial flow dilution method" means the process of separating a part from the total exhaust flow, then mixing it with an appropriate amount of dilution air prior to the particulate sampling filter;

(55) "Particulate matter (PM) " means any material collected on a specified filter medium after diluting exhaust with clean filtered air to a temperature and a point as specified in paragraph 9.3.3.4.; this is primarily carbon, condensed hydrocarbons, and sulphates with associated water;

(56) "Per cent load" means the fraction of the maximum available torque at an engine speed;

Deleted: <#>"Penetration fraction PF" means the deviation from ideal functioning of a non-methane cutter (see Conversion efficiency of non-methane cutter (NMC)  $E$ ). An ideal non-methane cutter would have a methane penetration factor,  $PF_{CH_4}$ , of 1.000 (that is, a methane conversion efficiency  $E_{CH_4}$  of 0), and the penetration fraction for all other hydrocarbons would be 0.000, as represented by  $PF_{C_2H_6}$  (that is, an ethane conversion efficiency  $E_{C_2H_6}$  of 1). The relationship is:  $PF_{CH_4} = 1 - E_{CH_4}$  and  $PF_{C_2H_6} = 1 - E_{C_2H_6}$ ;

(57) "Periodic (or infrequent) regeneration" means the regeneration process of an exhaust after-treatment system that occurs periodically in typically less than 100 hours of normal engine operation. During cycles where regeneration occurs, emission standards may be exceeded;

(58) "Probe" means the first section of the transfer line which transfers the sample to next component in the sampling system;

(59) "PTFE" means polytetrafluoroethylene, commonly known as Teflon™;

(60) "Ramped modal steady state test cycle" means a test cycle with a sequence of steady state engine test modes with defined speed and torque criteria at each mode and defined speed and torque ramps between these modes;

(61) "Rated speed" means the maximum full load speed allowed by the governor, as designed by the manufacturer, or, if such a governor is not present, the speed at which the maximum power is obtained from the engine, as designed by the manufacturer;

(62) "Reagent" means any consumable or non-recoverable medium required and used for the effective operation of the exhaust after-treatment system;



- (63) "Regeneration" means an event during which emissions levels change while the aftertreatment performance is being restored by design. Two types of regeneration can occur: continuous regeneration (see paragraph 6.6.1.) and infrequent (periodic) regeneration (see paragraph 6.6.2.);
- (64) "Response time" means the difference in time between the change of the component to be measured at the reference point and a system response of 90 per cent of the final reading ( $t_{90}$ ) with the sampling probe being defined as the reference point, whereby the change of the measured component is at least 60 per cent full scale (FS) and the devices for gas switching shall be specified to perform the gas switching in less than 0.1 second. The system response time consists of the delay time to the system and of the rise time of the system;
- (65) "Rise time" means the difference in time the 10 per cent and 90 per cent response of the final reading ( $t_{90} - t_{10}$ );
- (66) "Service mode" means a special mode of a dual-fuel engine that is activated for the purpose of repairing, or of moving the non-road mobile machinery to a safe location when operation in the dual-fuel mode is not possible;
- (67) "Shared atmospheric pressure meter" means an atmospheric pressure meter whose output is used as the atmospheric pressure for an entire test facility that has more than one dynamometer test cell;
- (68) "Shared humidity measurement" means a humidity measurement that is used as the humidity for an entire test facility that has more than one dynamometer test cell;
- (69) "Span" means to adjust an instrument so that it gives a proper response to a calibration standard that represents between 75 per cent and 100 per cent of the maximum value in the instrument range or expected range of use;
- (70) "Span gas" means a purified gas mixture used to span gas analyzers. Span gases shall meet the specifications of paragraph 9.5.1. Note that calibration gases and span gases are qualitatively the same, but differ in terms of their primary function. Various performance verification checks for gas analyzers and sample handling components might refer to either calibration gases or span gases;
- (71) "Specific emissions" means the mass emissions expressed in g/kWh;
- (72) "Standalone" means something that has no dependencies; it can "stand alone";
- (73) "Steady-state" means relating to emission tests in which engine speed and load are held at a finite set of nominally constant values. Steady-state tests are either discrete-mode tests or ramped-modal tests;
- (74) "Stoichiometric" means relating to the particular ratio of air and fuel such that if the fuel were fully oxidized, there would be no remaining fuel or oxygen;
- (75) "Storage medium" means a particulate filter, sample bag, or any other storage device used for batch sampling;
- (76) "Test (or duty) cycle" means a sequence of test points each with a defined speed and torque to be followed by the engine under steady state or transient operating conditions. Duty cycles are specified in the Annex A.1. A single duty cycle may consist of one or more test intervals;

- (77) "Test interval" means a duration of time over which brake-specific emissions are determined. In cases where multiple test intervals occur over a duty cycle, the regulation may specify additional calculations that weigh and combine results to arrive at composite values for comparison against the applicable emission limits;
- (78) "Tolerance" means the interval in which 95 per cent of a set of recorded values of a certain quantity shall lie, with the remaining 5 per cent of the recorded values deviating from the tolerance interval. The specified recording frequencies and time intervals shall be used to determine if a quantity is within the applicable tolerance.;
- (79) "Transformation time" means the difference in time between the change of the component to be measured at the reference point and a system response of 50 per cent of the final reading ( $t_{50}$ ) with the sampling probe being defined as the reference point. The transformation time is used for the signal alignment of different measurement instruments. (see figure-1);
- (80) "Transient test cycle" means a test cycle with a sequence of normalized speed and torque values that vary relatively quickly with time (NRTC);
- (81) "Type approval" means the approval of an engine type with regard to its emissions measured in accordance with the procedures specified in this regulation;
- (82) "Updating-recording" means the frequency at which the analyser provides new, current, values;
- (83) "Variable-speed engine" means an engine that is not a constant-speed engine;
- (84) "Variable speed NRSC" means any NRSC that is not a constant speed NRSC
- (85) "Verification" means to evaluate whether or not a measurement system's outputs agree with a range of applied reference signals to within one or more predetermined thresholds for acceptance. Contrast with "calibration";
- (86) "Wobbe index (lower  $W_l$ ; or upper  $W_u$ )" means the ratio of the corresponding calorific value of a gas per unit volume and the square root of its relative density under the same reference conditions:
- $$W = H_{\text{gas}} \times \sqrt{\rho_{\text{air}} / \rho_{\text{gas}}}$$
- (87) "To zero" means to adjust an instrument so it gives a zero response to a zero calibration standard, such as purified nitrogen or purified air for measuring concentrations of emission constituents;
- (88) "Zero gas" means a gas that yields a zero response in an analyzer. This may either be purified nitrogen, purified air, a combination of purified air and purified nitrogen.

**Deleted:** <#>"Total hydrocarbon (THC)" means the combined mass of organic compounds measured by the specified procedure for measuring total hydrocarbon, expressed as a hydrocarbon with a hydrogen-to-carbon mass ratio of 1.85:1;¶

**Deleted:** <#>"Useful life" means the relevant period of distance and/or time over which compliance with the relevant gaseous and particulate emission limits has to be assured;¶

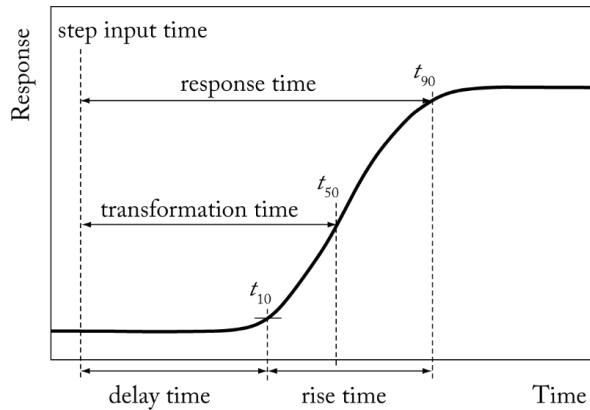


Figure-1: Definitions of system response: delay time (12), response time (58), rise time (59.) and transformation time (73)

## CHAPTER II TYPE-APPROVAL REQUIREMENTS

### PART 1

#### GENERAL TYPE-APPROVAL REQUIREMENTS

##### *Article 3*

##### ***Manufacturer's general obligations***

Engines shall be designed, constructed and assembled so as to enable them to comply with the provisions of Regulation (EU) 2015/XXX and of this Regulation.

The technical measures taken by the manufacturer shall be such as to ensure that the gaseous and particulate pollutant emissions are effectively limited, throughout the emission durability period of the engine, as set out in Annex V to Regulation (EU) 2015/XXX, and under normal conditions of use. For this purpose, engines shall:

- (a) meet the performance requirements set out in Chapter IV to this Regulation; and,

- (b) when tested in accordance with the test conditions and detailed technical procedures set out in Chapter V to this Regulation, using the test cycles specified in Annex IV to Regulation (EU) 2015/XXX and set out in Chapter V of this Regulation, the final emission result calculated according to the requirements of Article 24(1) to Regulation (EU) 2015/XXX shall not exceed the exhaust emission limits set out in Annex II of that Regulation, or where applicable, Annex VI to that Regulation.

*Article 4*

**Arrangements with regard to the fuel range**

The arrangements with regard to the type approval requirements for the different fuels covered by this Regulation shall be laid down in Annex I to this Regulation.

*Article 5*

***Arrangements with regard to conformity of production***

The arrangements with regard to conformity of production referred to in Article 25(1) of Regulation (EU) 2015/XXX shall be laid down in Annex II to this Regulation.

**PART 2  
ENGINE PERFORMANCE REQUIREMENTS**

*Article 6*

***Methodology for adapting the emission laboratory test results to include the deterioration factors***

Deleted: 5

The methodology for adapting the emission laboratory test results to include the deterioration factors referred to in Article 24(3)(d), including those related with the measurement of PN laid down in Article 24(4)(d) and for gaseous fuelled engines laid down in Article 24(4)(e), of Regulation (EU) 2015/XXX shall be laid down in Annex III to this Regulation.

*Article 7*

***Technical requirements on emission control strategies, including documentation required to demonstrate these strategies***

Deleted: 6

The technical requirements on emission control strategies, including documentation required to demonstrate these strategies referred to in Article 24(3)(f)(i) of Regulation (EU) 2015/XXX, the technical requirements on NO<sub>x</sub> control measures

referred to in Article 24(3)(f)(ii) of Regulation (EU) 2016/XXX and the technical requirements on particulate control measures shall be laid down in Annex IV to this Regulation.

Article 8

***Detailed technical requirements on the area associated with the relevant NRSC cycle, within which there is control on the amount that the emissions shall be permitted to exceed the limit values set out in Annex II to Regulation (EU) 2015/XXX***

Deleted: ¶

Deleted: 7

The detailed technical requirements on the area associated with the relevant NRSC cycle, within which there is control on the amount that the emissions shall be permitted to exceed the limit values set out in Annex II to Regulation (EU) 2015/XXX referred to in Article 24(3)(f)(iii) of Regulation (EU) 2015/XXX shall be laid down in Annex V to this Regulation.

**PART 3  
PROCEDURES FOR CONDUCT OF TESTS**

*Article [9](#)*

Deleted: 8

***Test Conditions for conduct of tests including the method for accounting for emissions of crankcase gases, the method for determining and accounting for continuous and infrequent regeneration of after-treatment systems and method for determination of the load and speed settings referred to in Article 23(5) of Regulation (EU) 2016/XXX***

The test conditions for conduct of tests referred to in Articles 24(3)(a) and (b), including the method for accounting for emissions of crankcase gases referred to in Article 24(3)(e)(i), the method for determining and accounting for continuous and infrequent regeneration of after-treatment systems referred to in Article 24(3)(e)(ii) and the technical characteristics of the reference fuels referred to in Article 24(2) of Regulation (EU) 2015/XXX shall be laid down in Annex VI, sections 5 and 6 to this Regulation.

*Article [10](#)*

Deleted: 9

***Detailed technical procedures for conduct of tests***

The procedures for conduct of tests referred to in Articles 24(3)(a) and 24(3)(f)(iv), including those related with the measurement of PN laid down in Article 24(4)(d) and for gaseous fuelled and dual fuel engines laid down in Article 24(4)(e) of Regulation (EU) 2015/XXX shall be laid down in Annex VI, section 7 and in Annex VIII to this Regulation.

*Article [11](#)*

Deleted: 10

***Detailed technical procedures for emission measurement and sampling***

The procedures for procedures for emission measurement and sampling referred to in Article 24(3)(b), including those related with the measurement of PN laid down in Article 24(4)(d) and for gaseous fuelled engines laid down in Article 24(4)(e), of Regulation (EU) 2015/XXX shall be laid down in the technical characteristics of the reference fuels referred to in Article 24(2) of Regulation (EU) 2015/XXX shall be laid down in Annex VI, section 8 and in Annex VI, Appendix 1 to this Regulation.

*Article [12](#)*

Deleted: 11

***Apparatus for conduct of tests and for emission measurement and sampling***

The apparatus for conduct of tests and for emission measurement and sampling referred to in Article 24(3)(a)(b), including those related with the measurement of PN laid down in Article 24(4)(d) and for gaseous fuelled engines laid down in Article 24(4)(e), of Regulation (EU) 2015/XXX shall be laid down in Annex VI, section 9 to this Regulation.

Article [13](#)

***Method for data evaluation and calculations***

Deleted: 12

The method for data evaluation and calculations referred to in Article 24(3)(a)(b), including those related with the measurement of PN laid down in Article 24(4)(d) and for gaseous fuelled engines laid down in Article 24(4)(e), of Regulation (EU) 2015/XXX shall be laid down in Annex VII to this Regulation.

Article [14](#)

***Technical characteristics of the reference fuels***

Deleted: 13

The technical characteristics of the reference fuels referred to in Article 24(2) of Regulation (EU) 2015/XXX shall be laid down in Annex IX to this Regulation.

## **CHAPTER III PLACING ON THE MARKET AND ISTRUCTIONS REQUIREMENTS**

### **PART 1 PLACING ON THE MARKET REQUIREMENTS**

Article [15](#)

***Detailed technical specifications and conditions for delivering an engine separately from its exhaust after-treatment***

Deleted: 14

The detailed technical specifications and conditions for a manufacturer to deliver an engine separately from its exhaust after-treatment system to an OEM referred to in Article 32(2) of Regulation (EU) 2015/XXX shall be laid down in Annex X to this Regulation.

Article [16](#)

***Detailed technical specifications and conditions for the temporary placing on the market, for the purposes of field testing***

Deleted: 15

The detailed technical specifications and conditions for the temporary placing on the market, for the purposes of field testing, of engines that have not been EU type-approved in accordance with this Regulation referred to in Article 32(3) of Regulation (EU) 2015/XXX shall be laid down in Annex XI to this Regulation.

Deleted: 16

Article [17](#)

***Detailed technical specifications and conditions for the EU type-approval and placing on the market of engines that meet the gaseous and particulate emission limit values for special purpose engines***

The detailed technical specifications and conditions for the EU type-approval and placing on the market of engines that meet the gaseous and particulate emission limit values for special purpose engines referred to in Article 32(4) Regulation (EU) 2015/XXX shall be laid down in Annex XII to this Regulation.

Deleted: 17

Article [18](#)

***Acceptance of equivalent engine type-approvals***

The list of UNECE regulations or amendments thereto which the Union has voted in favour of or to which the Union has acceded granting type-approval of engines and engine families to be installed in non-road mobile machinery referred to in Article 40(4)(a) of Regulation (EU) 2015/XXX and the list of Union acts granting type-approvals referred to in Article 40(4)(b) of Regulation (EU) 2015/XXX shall be laid down in Annex I to this Regulation. National authorities shall recognise alternative type-approvals as equivalent to an approval under this Regulation in accordance with this Annex XIII.

**PART 2  
INSTRUCTIONS FOR OEMS AND END-USERS**

Deleted: 18

Article [19](#)

***Details of the relevant information and instructions for the OEMs***

The details of the relevant information and instructions for the OEMs and the end-users referred to in Article 41(2), (3) and (4) of Regulation (EU) 2015/XXX shall be laid down in Annex XIV to this Regulation.

Deleted: 19

Article [20](#)

***Details of the relevant information and instructions for the end-users***

The details of the relevant information and instructions for the OEMs and the end-users referred to in Article 41(3) and (4) of Regulation (EU) 2015/XXX shall be laid down in Annex XV to this Regulation.



## CHAPTER IV REQUIREMENTS RELATING TO TECHNICAL SERVICES

Article [21](#)

Deleted: 20

### *Performance standards and assessment of technical services*

Technical services have to comply with the performance standards and the procedure for their assessment referred to in Article 47 of Regulation (EU) 2015/XXX, which shall be verified in accordance with Annex XVI to this Regulation.

## CHAPTER V REQUIREMENTS RELATING TO TEST CYCLES

Article [22](#)

Deleted: 21

### *Characteristics of the steady-state and transient test cycles*

The characteristics of the steady-state and transient test cycles shall be laid down in Annex XVII to this Regulation.

## CHAPTER [VI](#) FINAL PROVISIONS

Deleted: v

Article [23](#)

Deleted: 22

### *Entry into force and application*

This Regulation shall enter into force on the twentieth day following that of its publication in the *Official Journal of the European Union*. It shall apply from 1 January 2017.

This Regulation shall be binding in its entirety and directly applicable in all Member States.

Done at Brussels,

*For the Commission*  
*The President*

## ANNEXES

Annex Number	Annex title	Page
<b>TYPE-APPROVAL REQUIREMENTS</b>		
<b>GENERAL TYPE-APPROVAL REQUIREMENTS</b>		
I	Arrangements with regard to the fuel range	
II	Arrangements with regard to conformity of production	
<b>ENGINE PERFORMANCE REQUIREMENTS</b>		
III	Methodology for adapting the emission laboratory test results to include the deterioration factors	▼
IV	Technical requirements on emission control strategies and on NO <sub>x</sub> and PM control measures, including documentation required to demonstrate these strategies	▼
V	Detailed technical requirements on the area associated with the relevant NRSC cycle, within which there is control on the amount that the emissions shall be permitted to exceed the limit values set out in Annex II to Regulation (EU) 2015/XXX	
<b>PROCEDURES FOR CONDUCT OF TESTS</b>		
VI	Conduct of emission tests and requirements for measurement equipment	▼
VII	Method for data evaluation and calculation	▼
VIII	Performance requirements and test procedures for dual-fuel engines	
IX	Reference fuels	
<b>PLACING ON THE MARKET AND INSTRUCTIONS REQUIREMENTS</b>		
<b>PLACING ON THE MARKET REQUIREMENTS</b>		
X	Detailed technical specifications and conditions for delivering an engine separately from its exhaust after-treatment	
XI	Detailed technical specifications and conditions for the temporary placing on the market, for the purposes of field testing	

Deleted: ART 24(1)

Deleted: ART 24(3) (F)(i)

Deleted: ART 24(3) (E)(i)

Deleted: ART 24(3) (C) AND ART 24(4) (D) AND (E) AND ART 24(3)(F)(IV)

XII	Detailed technical specifications and conditions for the EU type-approval and placing on the market of engines that meet the gaseous and particulate emission limit values for special purpose engines	
XIII	Acceptance of equivalent engine type-approvals	
<b>INSTRUCTIONS FOR OEMS AND END USERS</b>		
XIV	Details of the relevant information and instructions for the OEMs	
XV	Details of the relevant information and instructions for the end-users	
<b>REQUIREMENTS RELATING TO TECHNICAL SERVICES</b>		
XVI	Performance standards and assessment of technical services	
<b>REQUIREMENTS RELATING TO THE TEST CYCLES</b>		
XVII	Characteristics of the steady-state and transient test cycles	

Deleted: XIII

## ANNEX I

### Arrangements with regard to the fuel range

#### 1 Requirements on universal fuel range type approval

A universal fuel range approval shall be granted subject to the requirements specified in paragraphs 1.1 to 1.6.

- 1.1 The parent engine shall meet the requirements of this Regulation on the appropriate reference fuels specified in Annex IX to this Regulation.
- 1.2 Specific requirements shall apply to engines fuelled with natural gas/biomethane (including dual-fuel engines), as laid down in paragraph 2 of this Annex.
- 1.3 In the absence of either a CEN standard for non-road gas-oil or a table of fuel properties for non-road gas-oil in Directive 98/70/EC of the European Parliament and of the Council, the diesel (non-road gas-oil) reference fuel in Annex IX to this Regulation shall represent market non-road gas-oils with a sulphur content not greater than 10 mg/kg, cetane number not less than 45 and an FAME content not greater than 7% v/v. Except as permitted by paragraphs 1.3.1, 1.4 and 1.5 the manufacturer shall make a corresponding declaration to the end-users in accordance with the requirements in Annex XV that operation of the engine on non-road gas-oil is limited to those fuels with a sulphur content not greater than 10 mg/kg (20 mg/kg at point of final distribution) cetane number not less than 45 and an FAME content not greater than 7% v/v. The manufacturer may optionally specify other parameters (eg for lubricity).
  - 1.3.1 The engine manufacturer shall not indicate that an engine type or engine family may be operated within the Union on market fuels other than those that comply with the requirements in this paragraph unless the manufacturer additionally complies with the requirement in paragraph 1.4.
    - (a) In the case of petrol, Directive 98/70/EC of the European Parliament and of the Council or the CEN standard EN 228:2012. [Lubricating](#) oil may be added according to the specification of the manufacturer;
    - (b) In the case of diesel (other than non-road gas-oil), Directive 98/70/EC of the European Parliament and of the Council or the CEN standard EN 590:2013;
    - (c) In the case of diesel (non-road gas-oil), both Directive 98/70/EC of the European Parliament and of the Council and also both a cetane number not less than 45 and FAME not greater than 7.0% v/v.
- 1.4 If the manufacturer permits engines to run on additional market fuels other than those identified in paragraph 1.3, such as running on B100 (EN 14214:[2012+A1:2014](#)), [B20](#) or [B30](#)

**Deleted:** For two-stroke engines  
Lubricating

**Deleted:** ),

(EN16709:2015), or on specific fuels, fuel mixtures or fuel emulsions, all of the following actions shall be taken by the manufacturer in addition to the requirements of paragraph 1.3.1:

- (a) declare, in the information document set out in Commission Implementing Regulation 2016/CCC on administrative requirements, the specification of the commercial fuels, fuel mixtures or emulsions on which the engine family is capable to run;
- (b) demonstrate the capability of the parent engine to meet the requirements of this Regulation on the fuels, fuel mixtures or emulsions declared;
- (c) be liable to meet the requirements of in-service monitoring specified in Commission Delegated Regulation 2016/BBB on monitoring of in-service engines on the fuels, fuel mixtures or emulsions declared, including any blend between the declared fuels, fuel mixtures or emulsions, and the applicable market fuel identified in paragraph 1.3.1.

**Deleted:**

**Deleted:** on in point [insert correct cross-reference to information document];

**Deleted:** xxx

**Deleted:** fuels included in Directive 98/70/EC and the relevant CEN standards.¶  
¶ The requirements of paragraphs

**Deleted:** and

**Deleted:** 4 shall not be required to be met in respect to fuels used for military purposes.

**Deleted:** two-stroke

**Deleted:** feeding the two-stroke engines and the resulting density of the fuel

**Deleted:** at [insert correct IA

**Deleted:** section number].

1.5 For SI engines, the fuel/oil mixture ratio must be the ratio which shall be recommended by the manufacturer. The percentage of oil in the fuel/lubricant mixture shall be recorded in the information document set out in Commission Implementing Regulation 2016/CCC on administrative requirements.

## 2 Requirements for engines fuelled with natural gas/biomethane or LPG, including dual-fuel engines

2.1 In order to receive a type approval the manufacturer shall ensure compliance with the requirements on fuel range for one of the following:

- (a) A universal fuel range type-approval as specified in paragraph 2.3; or,
- (b) A restricted fuel range type approval as specified in paragraph 2.4; or,
- (c) A fuel-specific type-approval as specified in paragraph 2.5

2.2 Tables summarizing the requirements for approval of NG-fuelled engines, LPG-fuelled engines and dual-fuelled engines are provided in Appendix 1 to this Annex.

2.3 Universal fuel range type approval

2.3.1 In the case of natural gas/biomethane fuelled engines, including dual-fuel engines, the manufacturer shall demonstrate the parent engines capability to adapt to any natural gas/biomethane composition that may occur across the market. This demonstration shall be carried out according to this paragraph and, in case of dual-fuel engines, also according to the additional provisions regarding the fuel adaptation procedure set out in paragraph 6.4. of Annex 15 to this Regulation.

2.3.1.1 In the case of compressed natural gas/biomethane (CNG) there are generally two types of fuel, high calorific fuel (H-gas) and low calorific fuel (L-gas), but with a significant spread within both ranges; they differ significantly in their energy content expressed by the Wobbe Index and in their  $\lambda$ -shift factor ( $S\lambda$ ). Natural gases with a  $\lambda$ -shift factor between 0.89 and

1.08 ( $0.89 \leq S\lambda \leq 1.08$ ) are considered to belong to H-range, while natural gases with a  $\lambda$ -shift factor between 1.08 and 1.19 ( $1.08 \leq S\lambda \leq 1.19$ ) are considered to belong to L-range. The composition of the reference fuels reflects the extreme variations of  $S\lambda$ .

The parent engine shall meet the requirements of this Regulation on the reference fuels  $G_R$  (fuel 1) and  $G_{25}$  (fuel 2), as specified in Annex IX of this Regulation, or on the equivalent fuels created using admixtures of pipeline gas with other gases as specified in Appendix 1 to Annex IX of this Regulation, without any manual readjustment to the engine fuelling system between the two tests (self-adaptation is required). One adaptation run is permitted after the change of the fuel. The adaption run shall consist of performing the pre-conditioning for the following emission test according to the respective test cycle. In the case of engines tested on the NRSC, where the pre-conditioning cycle is in-adequate for the engine fuelling to self-adapt an alternative adaption run specified by the manufacturer may be performed prior to pre-conditioning the engine..

- 2.3.1.1.1 At the manufacturer's request the engine may be tested on a third fuel (fuel 3) if the  $\lambda$ -shift factor ( $S\lambda$ ) lies between 0.89 (that is the lower range of GR) and 1.19 (that is the upper range of G25), for example when fuel 3 is a market fuel. The results of this test may be used as a basis for the evaluation of the conformity of the production.
- 2.3.1.2 In the case of liquefied natural gas/liquefied biomethane (LNG) the parent engine shall meet the requirements of this Regulation on the reference fuels GR (fuel 1) and G20 (fuel 2), as specified in Annex IX of this Regulation, or on the equivalent fuels created using admixtures of pipeline gas with other gases as specified in Appendix 1 to Annex IX of this Regulation, without any manual readjustment to the engine fuelling system between the two tests (self-adaptation is required). One adaptation run is permitted after the change of the fuel. The adaption run shall consist of performing the pre-conditioning for the following emission test according to the respective test cycle. In the case of engines tested on the NRSC, where the pre-conditioning cycle is in-adequate for the engine fuelling to self-adapt an alternative adaption run specified by the manufacturer may be performed prior to pre-conditioning the engine.
- 2.3.2 In the case of an engine fuelled with compressed natural gas/biomethane (CNG) which is self-adaptive for the range of H-gases on the one hand and the range of L-gases on the other hand, and which switches between the H-range and the L-range by means of a switch, the parent engine shall be tested on the relevant reference fuel as specified in in Annex IX of this Regulation for each range, at each position of the switch. The fuels are GR (fuel 1) and G23 (fuel 3) for the H-range of gases and G25 (fuel 2) and G23 (fuel 3) for the L-range of gases, or the equivalent fuels created using admixtures of pipeline gas with other gases as specified in Appendix 1 to Annex IX of this Regulation of this Regulation. The parent engine shall meet the requirements of this Regulation at both positions of the switch without any readjustment to the fuelling between the two tests at each position of the switch. One adaptation run is permitted after the change of the fuel. The adaption run shall consist of performing the pre-conditioning for the following emission test according to the respective test cycle. In the case of engines tested on the NRSC, where the pre-conditioning cycle is in-adequate for the engine

fuelling to self-adapt an alternative adaption run specified by the manufacturer may be performed prior to pre-conditioning the engine.

2.3.2.1 At the manufacturer's request the engine may be tested on a third fuel instead of G23 (fuel 3) if the  $\lambda$ -shift factor ( $S\lambda$ ) lies between 0.89 (that is the lower range of GR) and 1.19 (that is the upper range of G25), for example when fuel 3 is a market fuel. The results of this test may be used as a basis for the evaluation of the conformity of the production.

2.3.3 In the case of natural gas/biomethane engines, the ratio of the emission results "r" shall be determined for each pollutant as follows:

$$r = \frac{\text{emission result on reference fuel 2}}{\text{emission result on reference fuel 1}}$$

or,

$$r_a = \frac{\text{emission result on reference fuel 2}}{\text{emission result on reference fuel 3}}$$

and,

$$r_b = \frac{\text{emission result on reference fuel 1}}{\text{emission result on reference fuel 3}}$$

2.3.4 In the case of LPG the manufacturer shall demonstrate the parent engines capability to adapt to any fuel composition that may occur across the market.

In the case of LPG there are variations in  $C_3/C_4$  composition. These variations are reflected in the reference fuels. The parent engine shall meet the emission requirements on the reference fuels A and B as specified in Annex IX of this Regulation without any readjustment to the fuelling between the two tests. One adaptation run is permitted after the change of the fuel. The adaption run shall consist of performing the pre-conditioning for the following emission test according to the respective test cycle. In the case of engines tested on the NRSC, where the pre-conditioning cycle is in-adequate for the engine fuelling to self-adapt an alternative adaption run specified by the manufacturer may be performed prior to pre-conditioning the engine.

2.3.4.1 The ratio of emission results "r" shall be determined for each pollutant as follows:

$$r = \frac{\text{emission result on reference fuel B}}{\text{emission result on reference fuel A}}$$

## 2.4 Restricted fuel range type-approval

Restricted fuel range type approval shall be granted subject to the requirements specified in paragraphs 2.4.1 to 2.4.3 below.

2.4.1 Exhaust emissions type-approval of an engine running on CNG and laid out for operation on either the range of H-gases or on the range of L-gases.

2.4.1.1 The parent engine shall be tested on the relevant reference fuel, as specified in Annex IX of this Regulation, for the relevant range. The fuels are GR (fuel 1) and G23 (fuel 3) for the H-range of gases and G25 (fuel 2) and G23 (fuel 3) for the L-range of gases or the equivalent fuels created using admixtures of pipeline gas with other gases as specified in Appendix 1 to Annex IX of this Regulation. The parent engine shall meet the requirements of this Regulation without any readjustment to the fuelling between the two tests. One adaptation run is permitted after the change of the fuel. The adaptation run shall consist of performing the pre-conditioning for the following emission test according to the respective test cycle. In the case of engines tested on the NRSC, where the pre-conditioning cycle is in-adequate for the engine fuelling to self-adapt an alternative adaption run specified by the manufacturer may be performed prior to pre-conditioning the engine.

2.4.1.2 At the manufacturer's request the engine may be tested on a third fuel instead of G23 (fuel 3) if the  $\lambda$ -shift factor ( $S\lambda$ ) lies between 0.89 (that is the lower range of GR) and 1.19 (that is the upper range of G25), for example when fuel 3 is a market fuel. The results of this test may be used as a basis for the evaluation of the conformity of the production.

2.4.1.3 The ratio of emission results "r" shall be determined for each pollutant as follows:

$$r = \frac{\text{emission result on reference fuel 2}}{\text{emission result on reference fuel 1}}$$

or,

$$r_a = \frac{\text{emission result on reference fuel 2}}{\text{emission result on reference fuel 3}}$$

and,

$$r_b = \frac{\text{emission result on reference fuel 1}}{\text{emission result on reference fuel 3}}$$

2.4.1.4 On delivery to the customer the engine shall bear a label as specified in Annex III of Regulation EU/2016/XXX stating for which range of gases the engine is approved.

2.4.2 Exhaust emissions type approval of an engine running on natural gas or LPG and designed for operation on one specific fuel composition.

2.4.2.1 The parent engine shall meet the emission requirements on the reference fuels GR and G25 or on the equivalent fuels created using admixtures of pipeline gas with other gases as specified in Appendix 1 to Annex IX of this Regulation in the case of CNG, on the reference fuels GR and G20 or on the equivalent fuels created using admixtures of pipeline gas with other gases as specified in Appendix 2 of Annex VI of this Regulation in the case of LNG, or



on the reference fuels A and B in the case of LPG, as specified in Annex IX of this Regulation. Fine-tuning of the fuelling system is allowed between the tests. This fine-tuning will consist of a recalibration of the fuelling database, without any alteration to either the basic control strategy or the basic structure of the database. If necessary the exchange of parts that are directly related to the amount of fuel flow such as injector nozzles is allowed.

- 2.4.2.2 In the case of CNG, at the manufacturer's request, the engine may be tested on the reference fuels GR and G23, or on the reference fuels G25 and G23, or on the equivalent fuels created using admixtures of pipeline gas with other gases as specified in Appendix 1 to Annex IX of this Regulation, in which case the type-approval is only valid for the H-range or the L-range of gases respectively.
- 2.4.2.3 On delivery to the customer the engine shall bear a label as specified in Annex III of Regulation EU/2016/XXX stating for which fuel range composition the engine has been calibrated.
- 2.5 Requirements on fuel-specific type-approval in the case of engines fuelled with liquefied natural gas/liquefied biomethane (LNG)
- In case of liquefied natural gas/liquefied biomethane, a fuel specific type-approval may be granted subject to the requirements specified in paragraphs 2.5.1 to 2.5.2.
- 2.5.1 Conditions for applying for a fuel-specific type approval in the case of engines fuelled with liquefied natural gas/liquefied biomethane (LNG).
- 2.5.1.1 The manufacturer can only apply for a fuel specific type-approval in the case of the engine being calibrated for a specific LNG gas composition<sup>4</sup> resulting in a  $\lambda$  -shift factor not differing by more than 3 per cent from the  $\lambda$  -shift factor of the G20 fuel specified in Annex IX of this Regulation, and the ethane content of which does not exceed 1.5 per cent.
- 2.5.1.2 In all other cases the manufacturer shall apply for a universal fuel type approval according to the specifications of paragraph 2.1.3.2.
- 2.5.2 Specific test requirements in the case of a fuel-specific type approval (LNG).
- 2.5.2.1 In the case of a dual-fuel engine family where the engines are calibrated for a specific LNG gas composition<sup>4</sup> resulting in a  $\lambda$  -shift factor not differing by more than 3 per cent from the  $\lambda$  -shift factor of the G20 fuel specified in Annex IX of this Regulation, and the ethane content of which does not exceed 1.5 per cent, the parent engine shall only be tested on the G20 reference gas fuel, or on the equivalent fuel created using an admixture of pipeline gas with other gases, as specified in Appendix 1 to Annex IX of this Regulation.
- 2.6 Exhaust emissions type approval of a member of a family
- 2.6.1 With the exception of the case mentioned in paragraph 2.6.2, the type approval of a parent engine shall be extended to all family members, without further testing, for any fuel composition within the range for which the parent engine has been approved (in the case of

engines described in paragraph 2.5) or the same range of fuels (in the case of engines described in either paragraph 2.3 or 2.4) for which the parent engine has been type-approved.

- 2.6.2 If the technical service determines that, with regard to the selected parent engine the submitted application does not fully represent the engine family defined in Annex II, an alternative and if necessary an additional reference test engine may be selected by the technical service and tested.

2.7 Additional requirements for dual-fuel engines

Deleted: 3.

In order to receive a type approval of a dual-fuel engine or engine family, the manufacturer shall

- (a) conduct the tests in accordance with table 3 of Appendix 1 to this Annex
- (b) in addition to the requirements of point 2, demonstrate that the dual-fuel engines are subject to the tests and comply with the requirements set out in Annex VIII to this Regulation.

## Appendix 1

### Summary of approval process for natural gas and LPG fuelled engines including dual-fuel engines

**Table 1.1:** Approval of natural gas fuelled engines

	Paragraph 4.6.: Requirements on universal fuel range type approval	Number of test runs	Calculation of "r"	Paragraph 4.7.: Requirements on restricted fuel range type approval in case of positive ignition engines fuelled with natural gas or LPG	Number of test runs	Calculation of "r"
Refer to para. 4.6.3. NG-engine adaptable to any fuel composition	G <sub>0</sub> (1) and G <sub>0</sub> (2) At manufacturer's request engine may be tested on an additional market fuel (3), if S <sub>0</sub> = 0.89 – 1.19	2  (max. 3)	$r = \frac{\text{fuel 2 (G2)}}{\text{fuel 1 (G1)}}$ and, if tested with an additional fuel, $r_A = \frac{\text{fuel 2 (G2)}}{\text{fuel 3 (market fuel)}}$ and $r_B = \frac{\text{fuel 1 (G1)}}{\text{fuel 3 (G3 or market fuel)}}$			
Refer to para. 4.6.4. NG-engine which is self-adaptive by a switch	G <sub>0</sub> (1) and G <sub>0</sub> (3) for H and G <sub>0</sub> (2) and G <sub>0</sub> (3) for L At manufacturer's request engine may be tested on a market fuel (3) instead of G <sub>0</sub> , if S <sub>0</sub> = 0.89 – 1.19	2 for the H-range, and 2 for the L-range; at respective position of switch 4	$r_B = \frac{\text{fuel 1 (G1)}}{\text{fuel 3 (G3 or market fuel)}}$ and $r_A = \frac{\text{fuel 2 (G2)}}{\text{fuel 3 (G3 or market fuel)}}$			
Refer to para. 4.7.1. NG-engine laid out for operation on either H-range gas or L-range gas				G <sub>0</sub> (1) and G <sub>0</sub> (3) for H or G <sub>0</sub> (2) and G <sub>0</sub> (3) for L At manufacturer's request engine may be tested on a market fuel (3) instead of G <sub>0</sub> , if S <sub>0</sub> = 0.89 – 1.19	2 for the H-range or 2 for the L-range  2	$r_B = \frac{\text{fuel 1 (G1)}}{\text{fuel 3 (G3 or market fuel)}}$ for the H-range or $r_A = \frac{\text{fuel 2 (G2)}}{\text{fuel 3 (G3 or market fuel)}}$ for the L-range
Refer to para. 4.7.2. NG-engine laid out for operation on one specific fuel composition				G <sub>0</sub> (1) and G <sub>0</sub> (2). Fine-tuning between the tests allowed; At manufacturer's request engine may be tested on: G <sub>0</sub> (1) and G <sub>0</sub> (3) for H or G <sub>0</sub> (2) and G <sub>0</sub> (3) for L	2 or 2 for the H-range or 2 for the L-range 2	

**Deleted:** To be inserted based on R 49 table¶  
¶

**Table 1.2: Approval of LPG fuelled engines**

	<i>Paragraph 4.6.: Requirements on universal fuel range type approval</i>	<i>Number of test runs</i>	<i>Calculation of "r"</i>	<i>Paragraph 4.7.: Requirements on restricted fuel range type approval in case of positive ignition engines fuelled with natural gas or LPG</i>	<i>Number of test runs</i>	<i>Calculation of "r"</i>
Refer to para. 4.6.6. LPG-engine adaptable to any fuel composition	Fuel A and fuel B	2	$r = \frac{\text{fuel B}}{\text{fuel A}}$			
Refer to para. 4.7.2. LPG-engine laid out for operation on one specific fuel composition				Fuel A and fuel B, fine-tuning between the tests allowed	2	

**Deleted:** To be inserted based on R 49 table¶  
¶  
¶

**Table 1.3: Summary of minimum number of tests required for approval of dual-fuel engines**

Dual-fuel type	Liquid-fuel mode	Dual-fuel mode			
		CNG	LNG	LNG <sub>20</sub>	LPG
1A		Universal or restricted (2 tests)	Universal (2 tests)	Fuel-specific (1 test)	Universal or restricted (2 tests)
1B	Universal (1 test)	Universal or restricted (2 tests)	Universal (2 tests)	Fuel-specific (1 test)	Universal or restricted (2 tests)
2A		Universal or restricted (2 tests)	Universal (2 tests)	Fuel-specific (1 test)	Universal or restricted (2 tests)
2B	Universal (1 test)	Universal or restricted (2 tests)	Universal (2 tests)	Fuel-specific (1 test)	Universal or restricted (2 tests)
3B	Universal (1 test)	Universal or restricted (2 tests)	Universal (2 tests)	Fuel-specific (1 test)	Universal or restricted (2 tests)

**ANNEX II**

**Arrangements with regard to conformity of production**

**1 Definitions**

For the purposes of this Annex the following definitions shall apply:

- 1.1 “quality management system” means a set of interrelated or interacting elements that organisations use to direct and control how quality policies are implemented and quality objectives are achieved;
- 1.2 “audit” means an evidence-gathering process used to evaluate how well audit criteria are being applied; it should be objective, impartial and independent, and the audit process should be both systematic and documented;
- 1.3 “corrective actions” means a problem-solving process with subsequent steps taken to remove the causes of a nonconformity or undesirable situation and designed to prevent their recurrence;

**2 Purpose**

- 2.1 The conformity of production procedure aims to ensure that each engine is in conformity with the specification, performance and marking requirements of the approved type.
- 2.2 Procedures include, inseparably, the assessment of quality management systems, referred as ‘initial assessment’ and set out in section 3, and verification and production-related controls, referred to as ‘product conformity arrangements’ and set out in section 4.

Deleted: .

**3 Initial assessment**

- 3.1 Before granting type-approval, the approval authority shall verify the existence of satisfactory arrangements and procedures established by the manufacturer for ensuring effective control so that engines when in production conform to the approved type.
- 3.2 Guidelines for quality and/or environmental management systems auditing set out in the EN ISO 19011:2011 standard shall apply to the initial assessment.
- 3.3 The requirements referred to in point 3.1 shall be verified to the satisfaction of the approval authority granting type-approval. The approval authority shall be satisfied with the initial assessment and the product conformity arrangements in section 4, taking account as necessary of one of the arrangements described in paragraphs 3.3.1, 3.3.2 or 3.3.3 or a combination of those arrangements in full or in part as appropriate.
- 3.3.1 The initial assessment and/or verification of product conformity arrangements shall be carried out by the approval authority granting the approval or an appointed body acting on behalf of the approval authority.

Deleted: .

Deleted: points

Deleted: .

Deleted:

Deleted: .

3.3.1.1 When considering the extent of the initial assessment to be carried out, the approval authority may take account of available information relating to the manufacturer's certification described in point 3.3.3, which has not been qualified or recognised under that point;

Deleted: ..

3.3.2 The initial assessment and/or verification of product conformity arrangements may also be carried out by the approval authority of another Member State, or the appointed body designated for this purpose by the approval authority.

3.3.2.1 In such a case, the approval authority of the other Member State shall prepare a statement of compliance outlining the areas and production facilities it has covered as relevant to the engines to be type-approved.

3.3.2.2 On receiving an application for a compliance statement from the approval authority of a Member State granting type-approval, the approval authority of another Member State shall send forthwith the statement of compliance or advise that it is not in a position to provide such a statement.

3.3.2.3 The statement of compliance shall include at least the following:

3.3.2.3.1 group or company (e.g. XYZ manufacturing);

3.3.2.3.2 particular organisation (e.g. European division);

3.3.2.3.3 plants/sites (e.g. Engine plant 1 (United Kingdom) — engine plant 2 (Germany));

3.3.2.3.4 Engine types/families included

3.3.2.3.5 areas assessed (e.g. Engine assembly, engine testing, after-treatment manufacture)

3.3.2.3.6 documents examined (e.g. Company and site quality manual and procedures);

3.3.2.3.7 date of the assessment (e.g. Audit conducted from 18 to 30.5.2013);

3.3.2.3.8 planned monitoring visit (e.g. October 2014).

3.3.3 The approval authority shall also accept the manufacturer's suitable certification to harmonised standard EN ISO 9001:2008 or an equivalent harmonised standard as satisfying the initial assessment requirements of point 3.3. The manufacturer shall provide details of the certification and undertake to inform the approval authority of any revisions to its validity or scope.

#### **4 Product conformity arrangements**

4.1 Every engine approved pursuant to Regulation (EU) No 2015/XXX and the delegated and implementing acts adopted pursuant to that Regulation shall be so manufactured as to conform to the approved type by meeting the requirements of this Annex, Regulation (EU) No 2015/XXX and the delegated and implementing acts adopted pursuant to that Regulation.

4.2 Before granting a type-approval pursuant to Regulation (EU) No 2015/XXX and the delegated and implementing acts adopted pursuant to that Regulation, the approval authority of a Member State shall verify the existence of adequate arrangements and documented control plans, to be agreed with the manufacturer for each approval, to carry out at specified intervals those tests or associated checks necessary to verify continued conformity with the approved type, including, where applicable, tests specified in Regulation (EU) No 2015/XXX and the delegated and implementing acts adopted pursuant to that Regulation..

4.3 The holder of the type-approval shall, in particular:

4.3.1 ensure the existence and application of procedures for effective control of the conformity of engines to the approved type;

4.3.2 have access to the testing or other appropriate equipment necessary for checking conformity to each approved type;

4.3.3 ensure that test or check result data are recorded and that annexed documents remain available for a period of up to 10 years to be determined in agreement with the approval authority;

4.3.4 for engine categories NRS and NRS ensure that for each type of engine, at least the checks and the tests prescribed in Regulation (EU) No xxxx/2016 and the delegated and implementing acts adopted pursuant to that Regulation are carried out. For other categories tests at a component or assembly of components level with appropriate criterion may be agreed between the manufacturer and the approval authority.

Deleted: [

Deleted: ]

4.3.5 analyse the results of each type of test or check, in order to verify and ensure the stability of the product characteristics, making allowance for variation in industrial production;

4.3.6 ensure that any set of samples or test pieces giving evidence of non-conformity in the type of test in question gives rise to a further sampling and test or check.

4.3.7 If the further audit or check results referred to in [paragraph 4.3.6](#) are deemed not to be satisfactory in the opinion of the approval authority, the manufacturer shall ensure that conformity of production is restored as soon as possible by corrective actions to the satisfaction of the approval authority.

## 5 Continued verification arrangements

5.1 The authority which has granted type-approval may at any time verify the conformity of production control methods applied in each production facility by means of periodic audits. The manufacturer shall for that purpose allow access to the manufacture, inspection, testing, storage and distribution sites and shall provide all necessary information with regard to the quality management system documentation and records.

5.1.1 The normal approach for such periodic audits shall be to monitor the continued effectiveness of the procedures laid down in sections 3 and 4 (initial assessment and product conformity arrangements) of this Annex.

5.1.1.1 Surveillance activities carried out by the technical services (qualified or recognised as required in [paragraph 3.3.3](#)) shall be accepted as satisfying the requirements of [paragraph 5.1.1](#) with regard to the procedures established at initial assessment.

Deleted: point

Deleted: point

5.1.1.2 The normal frequency of these verifications by the approval authority (other than those referred to in [paragraph 5.1.1.1](#)) shall be such as to ensure that the relevant conformity of production controls applied in accordance with sections 3 and 4 are reviewed over a period consistent with the climate of trust established by the approval authority.

Deleted: point

Deleted: .)

5.2 At every review, the records of tests, checks and production records, and in particular the records of those tests or checks documented as required in [paragraph 4.2](#), shall be available to the inspector.

Deleted: point

Deleted: ..

5.3 The inspector may select random samples to be tested in the manufacturer's laboratory or in the facilities of the technical service, in which case only physical tests shall be carried out. The minimum number of samples may be determined according to the results of the manufacturer's own verification.

5.4 Where the level of control appears unsatisfactory, or when it seems necessary to verify the validity of the tests carried out in application of [paragraph 5.2](#), the inspector shall select samples to be tested in the manufacturer's laboratory or sent to the technical service to perform physical tests in accordance with the requirements set out in section 6 and in Regulation (EU) No 2015/XXX, the delegated and implementing acts adopted pursuant to that Regulation.

Deleted: point

Deleted: ..

5.5 Where unsatisfactory results are found during an inspection or a monitoring review, the approval authority shall ensure that all necessary steps are taken to restore conformity of production as rapidly as possible.

## 6 Conformity of production test requirements in cases of an unsatisfactory level of product conformity control as referred to in point 5.4.

6.1 For engines categories and sub-categories other than NRSh and NRS [NRS but including NRS-v-2b and NRS-v-3](#) the procedure in [paragraph 6.2](#) shall be followed. For engines in categories and sub-categories NRSh and NRS [except for NRS-v-2b and NRS-v-3](#) the procedure [paragraph 6.3](#) shall be followed.

Deleted: Option A - [

Deleted:

Option B- [For engines categories and sub-categories NRE-v-7, NRE-c-7, NRG-v-1, NRG-c-1, IWP-v-4, IWP-c-4, IWA-v-4, IWA-c-4, RLL and RLR. the procedure in 6.2 shall be followed. For engines in all other subcategories the procedure in 6.3 shall be followed.]

6.2 A [\[Three\]](#) representative engine[s] and, if applicable, after-treatment [system\[s\]](#) shall be selected for test. Engines shall be tested in accordance with the requirements of Annex [VI](#).

Option C - [For engine types or families where the annual number of engines produced is not more than [100] the procedure in 6.2 shall be followed. For engines types or families where the annual number of engines produced is higher the procedure in 6.3 shall be followed.]

6.2.1 After selection of the [engine\[s\]](#) by the inspector the manufacturer shall not carry out any adjustment to the engines selected

Deleted: nnn ,

Deleted: engines

6.2.2 The measured emission of the gaseous and particulate pollutants from engines subject to checking for conformity of production shall be adjusted by application of the appropriate deterioration factors (DFs) for that engine [as determined in accordance with Annex III](#).

Deleted: DF's

6.2.3 At the request of the manufacturer, the tests may be carried out on engines which have been run-in, up to a maximum of [2, per cent](#) of the durability time but not shorter than 2 hours or longer than 125 hours. In this case, the running-in procedure shall be conducted by the manufacturer who shall undertake not to make any adjustments to those engines.

Deleted: [reference required].

Deleted:

Deleted: %



6.2.4 ~~If the first engine taken from the series meets the requirements no further test is necessary.~~  
~~If the first test does not satisfy the requirements the manufacturer may ask for measurements to be performed on a sample of engines of the same specification taken from the series and including the engine originally taken. The manufacturer shall determine the size n of the sample in agreement with the technical service. Engines other than the engine originally taken shall be subjected to a test. If three engines are tested, the arithmetical mean (x) and the standard deviation (s) of the results obtained with the sample shall be determined for each pollutant in accordance with Appendix 3 to Annex VII, equations 7-152 and 7-153. The production of the series shall be deemed to confirm if the following condition is met:~~

$$\bar{x} + k \cdot S_t \leq L \quad (2-1)$$

where:

L is the limit value laid down in [annex II of regulation 2016/XXX] for each pollutant considered.

k is a statistical factor depending on n and given in table 2.1

Table 2.1 Statistical factor

n	2	3	4	5	6	7	8	9	10
k	0.973	0.613	0.489	0.421	0.376	0.342	0.317	0.296	0.279
n	11	12	13	14	15	16	17	18	19
k	0.265	0.253	0.242	0.233	0.224	0.216	0.210	0.203	0.198

$$\text{If } n \geq 20, k = \frac{0,860}{\sqrt{n}}$$

6.2.5 ~~If the test result in paragraph 6.2.4 does not satisfy the requirements, the manufacturer may ask for measurements to be performed on a sample of additional engines of the same specification taken from the series. The manufacturer shall determine the size n of the sample in agreement with the technical service.~~

6.3 Conformity of the engine subjected to a pollutant test

6.3.1 After submission of the engine to the authorities, the manufacturer may not carry out any adjustment to the engines selected.

6.3.2 Three engines shall be taken from the series production of the engines under consideration. Engines shall be subjected to testing in accordance with the requirements of Annex VI to this Regulation. The limit values shall be those set out in Annex II to Regulation (EU) No 2015/XXX adjusted by application of the appropriate deterioration factors (DFs) for that engine, as determined in accordance with Annex III.

The tests shall be carried out in accordance with Appendix 1 to this Annex.

6.3.3 On the basis of tests of the engine by sampling as set out in paragraph 6.3.2., the series production of the engines under consideration is regarded as conforming

Deleted: .

Deleted: The

Deleted: then

Deleted: .

Deleted: then

Deleted:

$$\bar{x} + k \cdot S_t \leq L$$

where:

L is the limit value laid down in [annex II of regulation 2015/XXX] for each pollutant considered,  
 k is a statistical factor depending on n and given in the following table

n	2	3
k	0,973	0,6

n	11	1
k	0,265	0,2

Deleted: ...

Deleted: x

Deleted: any one of

Deleted: individual results obtained

Deleted: sample n

Deleted: : [Note this is the statistical procedure from Euro VI – more work required to fully convert for non-road]

Deleted: VII

Deleted: DF's

Deleted: Where the Type Approval Authority is satisfied with the production standard deviation ...

Deleted: according to Appendix 1.¶ ...

Deleted: 3

where a pass decision is reached for all the pollutants and as non-conforming where a fail decision is reached for one pollutant, in accordance with the test criteria applied in [Appendix 1 to this Annex](#).

6.3.4 When a pass decision has been reached for one pollutant, this decision may not be changed as a consequence of a result from any additional tests made in order to reach a decision for the other pollutants.

6.3.5 If a pass decision is not reached for all the pollutants and if no fail decision is reached for any pollutant, a test is carried out on another engine.

6.3.6 If no decision is reached, the manufacturer may at any time decide to stop testing. In that case a fail decision is recorded.

6.3.7 The tests shall be carried out on newly manufactured engines.

6.3.8 At the request of the manufacturer, the tests may be carried out on engines which have been run-in, up to a maximum of 2 per cent of the durability period, but no shorter than 2 hours and no longer than 125 hours. In this case, the running-in procedure shall be conducted by the manufacturer who shall undertake not to make any adjustments to those engines.

6.4 All these tests may be conducted with the applicable market fuels. However, at the manufacturer's request, the reference fuels described in Annex [IX](#) may be used. This implies tests, as described in [Appendix 1 to Annex I](#), with at least two of the reference fuels for each gas engine.

**Deleted:** the appropriate

**Deleted:** %

**Deleted:** ~~<#>When the manufacturer requests to conduct a running-in procedure in accordance with paragraph 6.3.8., it may be carried out on either of the following:¶  
<#>All the engines that are tested;¶  
<#>The first engine tested, with the determination of an evolution coefficient as follows:¶  
<#>The pollutant emissions shall be measured both on the newly manufactured engine and before the maximum of 2% of the durability period, but no shorter than 2 hours and no longer than 125 hours set in paragraph 6.3.8. on the first engine tested;¶  
<#>The evolution coefficient of the emissions between the two tests shall be calculated for each pollutant;¶  
<#>Emissions on second test/Emissions first test;¶  
<#>The evolution coefficient may have a value less than one.¶  
<#>The subsequent test engines shall not be subjected to the running-in procedure, but their emissions when newly manufactured shall be modified by the evolution coefficient.¶  
<#>In this case, the values to be taken shall be the following:¶  
<#>For the first engine, the values from the second test;¶  
<#>For the other engines, the values when newly manufactured multiplied by the evolution coefficient.¶  
For diesel, ethanol (ED95), petrol, E85 and LPG fuelled engines,~~

**Deleted:** 5

**Deleted:** paragraph 4.,

**Deleted:** ~~<#>For natural gas fuelled engines, all these tests may be conducted with market fuel in the following way:¶  
<#>For H marked engines with a market fuel within the H-range ( $0.89 \leq S_x \leq 1.00$ );¶  
<#>For L marked engines with a market fuel within the L-range ( $1.00 \leq S_x \leq 1.19$ );¶  
<#>For HL marked engines with a market fuel within the extreme range of the  $\lambda$ -shift factor ( $0.89 \leq S_x \leq 1.19$ ).¶  
<#>However, at the manufacturer's request, the reference fuels described in [reference required] may be used. This implies tests as described [reference required].¶  
<#>In the case of dispute caused by the non-compliance of gas fuelled engines when using a market fuel,~~

## Appendix 1

### Procedure for production conformity testing

1 This appendix describes the procedure to be used to verify production conformity for the emissions of pollutants.

2 With a minimum sample size of three engines the sampling procedure is set so that the probability of a lot passing a test with 30 per cent of the engines defective is 0.90 (producer's risk = 10 per cent) while the probability of a lot being accepted with 65 per cent of the engines defective is 0.10 (consumer's risk = 10 per cent).

3 The following procedure is used for each of the pollutants of this Regulation (see Figure 1 in paragraph 8.3. of this Regulation):

Let: n = the current sample number.

4 Determine for the sample the test statistic quantifying the cumulative number of nonconforming tests at the n<sup>th</sup> test.

5 Then:

(a) If the test statistic is less than or equal to the pass decision number for the sample size given in Table 2.2, a pass decision is reached for the pollutant;

(b) If the test statistic is greater than or equal to the fail decision number for the sample size given in Table 2.2, a fail decision is reached for the pollutant;

(c) Otherwise, an additional engine is tested in accordance with Annex VI and the calculation procedure is applied to the sample increased by one more unit.

In Table 2.2 the pass and fail decision numbers are calculated by means of the International Standard ISO 8422/1991.

**Table 2.2 Appendix 1 Test Statistics**

Minimum sample size: 3

<i>Cumulative number of engines tested (sample size)</i>	<i>Pass decision number</i>	<i>Fail decision number</i>
<u>3</u>	<u>—</u>	<u>3</u>
<u>4</u>	<u>0</u>	<u>4</u>
<u>5</u>	<u>0</u>	<u>4</u>
<u>6</u>	<u>1</u>	<u>5</u>
<u>7</u>	<u>1</u>	<u>5</u>
<u>8</u>	<u>2</u>	<u>6</u>
<u>9</u>	<u>2</u>	<u>6</u>
<u>10</u>	<u>3</u>	<u>7</u>
<u>11</u>	<u>3</u>	<u>7</u>
<u>12</u>	<u>4</u>	<u>8</u>
<u>13</u>	<u>4</u>	<u>8</u>
<u>14</u>	<u>5</u>	<u>9</u>
<u>15</u>	<u>5</u>	<u>9</u>
<u>16</u>	<u>6</u>	<u>10</u>
<u>17</u>	<u>6</u>	<u>10</u>
<u>18</u>	<u>7</u>	<u>11</u>
<u>19</u>	<u>8</u>	<u>9</u>

**ANNEX III**  
**Methodology for adapting the emission laboratory test results to include the deterioration factors**

**1 Engine categories NRE, NRG, IWP, IWA, RLL, RLR, SMB, ATS and sub-categories NRS-v-2b and NRS-v-3**

1.1 General

- 1.1.1 The emission durability periods (EDP) for all engine categories and sub-categories are specified in Annex V of Regulation (EU) 2015/XXX
- 1.1.2 This paragraph 1 details the procedures for selecting engines to be tested over a service accumulation schedule for the purpose of determining deterioration factors for engine type approval and conformity of production assessments. The deterioration factors shall be applied in accordance with paragraph 1.4.7 to the emissions measured according to Annex IX to this Regulation.
- 1.1.3 The service accumulation tests or the emissions tests performed to determine deterioration need not be witnessed by the approval authority.
- 1.1.4 This paragraph 1 also details the emission-related and non-emission-related maintenance that should be or may be carried out on engines undergoing a service accumulation schedule. Such maintenance shall conform to the maintenance performed on in-service engines and communicated to owners of new engines.
- 1.1.5 At the request of the manufacturer, the type-approval authority may allow the use of deterioration factors that have been established using alternative procedures to those specified in paragraphs 1.4.1 to 1.4.5. In this case, the manufacturer shall demonstrate to the satisfaction of the Type Approval Authority that the alternative procedures that have been used are no less rigorous than those contained in paragraphs 1.4.1 to 1.4.5.

1.2 Definitions

- 1.2.1 ‘Ageing cycle’ means the machine or engine operation (speed, load, power) to be executed during the service accumulation period.
- 1.2.2 ‘Critical emission-related components’ means the components which are designed primarily for emission control, that is, any exhaust after-treatment system, the electronic engine control unit and its associated sensors and actuators, and the EGR system including all related filters, coolers, control valves and tubing.
- 1.2.3 ‘Critical emission-related maintenance’ means the maintenance to be performed on critical emission-related components.

- 1.2.4 ‘Emission-related maintenance’ means the maintenance which substantially affects emissions or which is likely to affect emissions performance deterioration of the vehicle or the engine during normal in-use operation.
- 1.2.5 ‘Engine-after-treatment system family’ means a manufacturer’s grouping of engines that comply with the definition of engine family, but which are further grouped into a family of engine families utilising a similar exhaust after-treatment system.
- 1.2.6 ‘Non-emission-related maintenance’ means maintenance which does not substantially affect emissions and which does not have a lasting effect on the emissions performance deterioration of the machine or the engine during normal in-use operation once the maintenance is performed.
- 1.2.7 ‘Service accumulation schedule’ means the ageing cycle and the service accumulation period for determining the deterioration factors for the engine-after-treatment system family.
- 1.3 Selection of engines for establishing emission durability period deterioration factors
- 1.3.1 Engines shall be selected from the engine family defined in paragraph 2 of Annex II to this Regulation for emission testing to establish emission durability period deterioration factors.
- 1.3.2 Engines from different engine families may be further combined into families based on the type of exhaust after-treatment system utilised. In order to place engines with different cylinder configuration but having similar technical specifications and installation for the exhaust after-treatment systems into the same engine after-treatment system family, the manufacturer shall provide data to the approval authority that demonstrates that the emissions reduction performance of such engine systems is similar.
- 1.3.3 One engine representing the engine-after-treatment system family, as determined in accordance with paragraph 1.3.2, shall be selected by the engine manufacturer for testing over the service accumulation schedule defined in paragraph 1.4.2, and shall be reported to the type-approval authority before any testing commences.
- 1.3.4 If the type-approval authority decides that the worst case emissions of the engine-after-treatment system family can be characterised better by another engine then the test engine shall be selected jointly by the type-approval authority and the engine manufacturer.
- 1.4 Establishing emission durability period deterioration factors
- 1.4.1 General
- Deterioration factors applicable to an engine-after-treatment system family are developed from the selected engines based on a service accumulation schedule that includes periodic testing for gaseous and particulate emissions over each test cycle applicable to the engine category, as given in Annex IV

of Regulation (EU) 2015/XXX. In the case of the NRTC only the hot-start cycle shall be used.

#### 1.4.2 Service accumulation schedule

Service accumulation schedules may be carried out at the choice of the manufacturer by running a machine equipped with the selected engine over an "in-service" accumulation schedule or by running the selected engine over a "dynamometer service" accumulation schedule. It shall not be required to use reference fuel for the service accumulation in-between emission measurement test points.

##### 1.4.2.1 In-service and dynamometer service accumulation

1.4.2.1.1 The manufacturer shall determine the form and duration of the service accumulation and the ageing cycle for engines in a manner consistent with good engineering practice.

1.4.2.1.2 The manufacturer shall determine the test points where gaseous and particulate emissions will be measured over the applicable cycles, as follows:

1.4.2.1.2.1 When running a service accumulation schedule shorter than the emission durability period in accordance with paragraph 1.4.2.1.7, the minimum number of test points shall be three, one at the beginning, one approximately in the middle and one at the end of the service accumulation schedule.

1.4.2.1.2.2 When completing the service accumulation up to the end of the emission durability period, the minimum number of test points shall be two, one at the beginning and one at the end of the service accumulation.

1.4.2.1.2.3 The manufacturer may additionally test at evenly spaced intermediate points.

1.4.2.1.3 The emission values at the start point and at the emission durability period endpoint either calculated in accordance with paragraph 1.4.5.2 or measured directly in accordance with paragraph 1.4.2.1.2.2 shall be within the limit values applicable to the engine family, but individual emission results from the intermediate test points may exceed those limit values.

1.4.2.1.4 In the case of engine categories or sub-categories for which a transient cycle applies, at the request of the manufacturer and with the agreement of the Type Approval Authority, only one test cycle (either the hot NRTC or LSI-NRTC, as applicable, or NRSC cycle) needs to be run at each test point, with the other test cycle run only at the beginning and at the end of the service accumulation schedule.

1.4.2.1.5 In the case of engine categories or sub-categories for which there is no applicable non-road transient cycle given in Annex IV of Regulation (EU) 2015/XXX, only the NRSC cycle shall be run at each test point.

- 1.4.2.1.6 Service accumulation schedules may be different for different engine-after-treatment system families.
- 1.4.2.1.7 Service accumulation schedules may be shorter than the emission durability period, but shall not be shorter than the equivalent of at least one quarter of the relevant emission durability period specified in Annex V of Regulation (EU) 2015/XXX.
- 1.4.2.1.8 Accelerated ageing by adjusting the service accumulation schedule on a fuel consumption basis is permitted. The adjustment shall be based on the ratio between the typical in-use fuel consumption and the fuel consumption on the ageing cycle, but fuel consumption on the ageing cycle shall not exceed typical in-use fuel consumption by more than 30%.
- 1.4.2.1.9 At the request of the manufacturer and with the agreement of the type - approval authority, alternative methods of accelerated ageing may be permitted.
- 1.4.2.1.10 The service accumulation schedule shall be fully described in the application for type-approval and reported to the type-approval authority before the start of any testing.
- 1.4.2.2 If the type-approval authority decides that additional measurements need to be performed between the points selected by the manufacturer it shall notify the manufacturer. The revised service accumulation schedule shall be prepared by the manufacturer and agreed by the type-approval authority.
- 1.4.3 Engine testing
  - 1.4.3.1 Engine system stabilisation
    - 1.4.3.1.1 For each engine-after-treatment system family, the manufacturer shall determine the number of hours of machine or engine running after which the operation of the engine-after-treatment system has stabilised. If requested by the approval authority the manufacturer shall make available the data and analysis used to make this determination. As an alternative, the manufacturer may select to run the engine or machine between 60 and 125 hours or the equivalent time on the ageing cycle to stabilise the engine-after-treatment system.
    - 1.4.3.1.2 The end of the stabilisation period determined in paragraph 1.3.3.1.1 shall be deemed to be the start of the service accumulation schedule.
  - 1.4.3.2 Service accumulation testing
    - 1.4.3.2.1 After stabilisation, the engine shall be run over the service accumulation schedule selected by the manufacturer, as described in paragraph 1.3.2. At the periodic intervals in the service accumulation schedule determined by the manufacturer, and, where appropriate, also stipulated by the Type Approval Authority in accordance with paragraph 1.4.2.2., the engine shall be tested for gaseous and particulate emissions over the hot NRTC



and NRSC cycles, or LSI-NRTC and NRSC cycles applicable to the engine category, as given in Annex IV of Regulation (EU) 2015/XXX.

The manufacturer may select to measure the pollutant emissions before any exhaust after-treatment system separately from the pollutant emissions after any exhaust after-treatment system.

In accordance with paragraph 1.4.2.1.4., if it has been agreed that only one test cycle (hot NRTC, LSI-NRTC or NRSC) be run at each test point, the other test cycle (hot NRTC, LSI-NRTC or NRSC) shall be run at the beginning and end of the service accumulation schedule.

In accordance with paragraph 1.4.2.1.5, in the case of engine categories or sub-categories for which there is no applicable non-road transient cycle given in Annex IV of Regulation (EU) 2015/XXX, only the NRSC cycle shall be run at each test point.

1.4.3.2.2 During the service accumulation schedule, maintenance shall be carried out on the engine in accordance with paragraph 1.5.

1.4.3.2.3 During the service accumulation schedule, unscheduled maintenance on the engine or machine may be performed, for example if the manufacturer's normal diagnostic system has detected a problem that would have indicated to the machine operator that a fault had arisen.

#### 1.4.4 Reporting

1.4.4.1 The results of all emission tests (hot NRTC, LSI-NRTC and NRSC) conducted during the service accumulation schedule shall be made available to the type-approval authority. If any emission test is declared to be void, the manufacturer shall provide an explanation of why the test has been declared void. In such a case, another series of emission tests shall be carried out within the following 100 hours of service accumulation.

1.4.4.2 The manufacturer shall retain records of all information concerning all the emission tests and maintenance carried out on the engine during the service accumulation schedule. This information shall be submitted to the approval authority along with the results of the emission tests conducted over the service accumulation schedule.

#### 1.4.5 Determination of deterioration factors

1.4.5.1 When running a service accumulation schedule in accordance with paragraph 1.4.2.1.2.1 or paragraph 1.4.2.1.2.3, for each pollutant measured over the the hot NRTC, LSI-NRTC and NRSC cycles at each test point during the service accumulation schedule, a "best fit" linear regression analysis shall be made on the basis of all test results. The results of each test for each pollutant shall be expressed to the same number of decimal places as the limit value for that pollutant, as applicable to the engine family, plus one additional decimal place.

In accordance with paragraph 1.4.2.1.4 or paragraph 1.4.2.1.5, if only one test cycle (hot NRTC, LSI-NRTC or NRSC) has been run at each test point,

the regression analysis shall be made only on the basis of the test results from the test cycle run at each test point.

At the request of the manufacturer and with the prior approval of the type approval authority, non-linear regression is permitted.

1.4.5.2 The emission values for each pollutant at the start of the service accumulation schedule and at the emission durability period end point that is applicable for the engine under test shall be either

- a) determined by extrapolation of the regression equation in paragraph 1.4.5.1, when running a service accumulation schedule in accordance with paragraph 1.4.2.1.2.1 or paragraph 1.4.2.1.2.3, or
- b) measured directly, when running a service accumulation schedule in accordance with paragraph 1.4.2.1.2.2.

In the case that emission values are used for engine families in the same engine-after-treatment family but with different emission durability periods, then the emission values at the emission durability period end point shall be recalculated for each emission durability period by extrapolation or interpolation of the regression equation as determined in paragraph 1.4.5.1.

1.4.5.3 The deterioration factor (DF) for each pollutant is defined as the ratio of the applied emission values at the emission durability period end point and at the start of the service accumulation schedule (multiplicative deterioration factor).

At the request of the manufacturer and with the prior approval of the type-approval authority, an additive DF for each pollutant may be applied. The additive DF is defined as the difference between the calculated emission values at the emission durability period end point and at the start of the service accumulation schedule.

An example for determination of DFs by using linear regression is shown in Figure 1 for NO<sub>x</sub> emission.


Mixing of multiplicative and additive DFs within one set of pollutants is not permitted.

If the calculation results in a value of less than 1.00 for a multiplicative DF, or less than 0.00 for an additive DF, then the deterioration factor shall be 1.0 or 0.00, respectively.

In accordance with paragraph 1.4.2.1.4, if it has been agreed that only one test cycle (hot NRTC, LSI-NRTC or NRSC) be run at each test point and the other test cycle (hot non-road transient cycle or NRSC) run only at the beginning and end of the service accumulation schedule, the deterioration factor calculated for the test cycle that has been run at each test point shall be applicable also for the other test cycle.

Figure 3.1

Example of DF determination

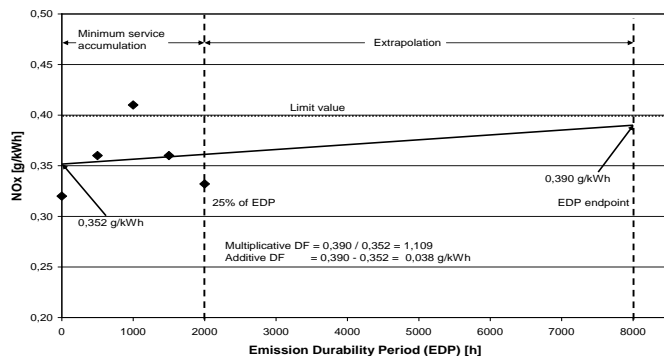

1.4.6 Assigned deterioration factors

1.4.6.1 As an alternative to using a service accumulation schedule to determine DFs, engine manufacturers may select to use the following assigned multiplicative DFs:

Test cycle	CO	HC	NO <sub>x</sub>	PM	PN
NRTC and LSI-NRTC	1.3	1.3	1.15	1.05	1.0
NRSC	1.3	1.3	1.15	1.05	1.0

Assigned additive DFs are not given. It is not permitted to transform the assigned multiplicative DFs into additive DFs. It is permitted to use, for PN, either an additive DF of 0.0 or a multiplicative DF of 1.0, in conjunction with the results of previous DF testing that did not establish a value for PN in the case that both the following conditions are fulfilled:

- the previous DF test was conducted on engine technology that would have qualified for inclusion in the same engine after-treatment system family, as set out in point 2.3.2, as the engine family to which it is intended to apply the DFs; and,
- the test results were used in a previous EU type approval granted before the applicable type approval date given in Annex III of Regulation (EU) 2015/XXX.

Where assigned DFs are used, the manufacturer shall present to the type approval authority robust evidence that the emission control components can reasonably be expected to have the emission durability associated with those assigned factors. This evidence may be based upon design analysis, or tests, or a combination of both.

1.4.7 Application of deterioration factors

1.4.7.1 The engines shall meet the respective emission limits for each pollutant, as applicable to the engine family, after application of the deterioration factors to the test result as measured in accordance with Annex XI to this Regulation (cycle-weighted specific emission for particulate and each individual gas). Depending on the type of DF, the following provisions apply:

- Multiplicative: (cycle weighted specific emission) \* DF  $\leq$  emission limit
- Additive: (cycle weighted specific emission) + DF  $\leq$  emission limit

Cycle weighted specific emission may include the adjustment for infrequent regeneration, where applicable.

1.4.7.2 For a multiplicative NO<sub>x</sub>+HC DF, separate HC and NO<sub>x</sub> DFs shall be determined and applied separately when calculating the deteriorated emission levels from an emissions test result before combining the resultant deteriorated NO<sub>x</sub> and HC values to establish compliance with the emission limit.

1.4.7.3 The manufacturer may select to carry across the DFs determined for an engine-after-treatment system family to an engine system that does not fall into the same engine-after-treatment system family. In such cases, the manufacturer shall demonstrate to the approval authority that the engine system for which the engine-after-treatment system family was originally tested and the engine system for which the DFs are being carried across have similar technical specifications and installation requirements on the machine and that the emissions of such engine or engine system are similar.

In the case that DFs are carried across to an engine system with a different emission durability period, then the DFs shall be recalculated for the applicable emission durability period by extrapolation or interpolation of the regression equation as determined in paragraph 1.4.5.1.

1.4.7.4 The DF for each pollutant for each applicable test cycle shall be recorded in the test result document set out in Appendix 1 to Annex VII.

## 1.5 Checking of conformity of production

1.5.1 Conformity of production for emissions compliance is checked on the basis of Section 5 of Annex I.

1.5.2 The manufacturer may select to measure the pollutant emissions before any exhaust after-treatment system at the same time as the type-approval test is being performed. In so doing, the manufacturer may develop informal DFs separately for the engine and for the after-treatment system that may be used by the manufacturer as an aid to end of production line auditing.

1.5.3 For the purposes of type-approval, only the DFs determined in accordance with paragraph 1.4.5 or 1.4.6 shall be recorded in the test result document set out in Appendix 1 to Annex VII.

## 1.6 Maintenance

For the purpose of the service accumulation schedule, maintenance shall be performed in accordance with the manufacturer's manual for service and maintenance.

### 1.6.1 Emission-related scheduled maintenance

1.6.1.1 Emission-related scheduled maintenance during engine running, undertaken for the purpose of conducting a service accumulation schedule, shall occur at equivalent intervals to those that shall be specified in the manufacturer's maintenance instructions to the owner of the machine or engine. This maintenance schedule may be updated as necessary throughout the service accumulation schedule provided that no maintenance operation is deleted from the maintenance schedule after the operation has been performed on the test engine.

1.6.1.2 The engine manufacturer shall specify for the service accumulation schedules any adjustment, cleaning, maintenance (where necessary) and scheduled exchange of the following items:

- filters and coolers in the exhaust gas re-circulation system
- positive crankcase ventilation valve, if applicable
- fuel injector tips (only cleaning is permitted)
- fuel injectors
- turbocharger
- electronic engine control unit and its associated sensors and actuators
- particulate after-treatment system (including related components)
- NO<sub>x</sub> after-treatment system (including related components)
- exhaust gas re-circulation system, including all related control valves and tubing
- any other exhaust after-treatment system.

1.6.1.3 Critical emission-related scheduled maintenance shall only be performed if intended to be performed in-use and the requirement to perform such maintenance is to be communicated to the owner of the machine.

### 1.6.2 Changes to scheduled maintenance

1.6.2.1 The manufacturer shall submit a request to the type-approval authority for approval of any new scheduled maintenance that it wishes to perform during the service accumulation schedule and subsequently to recommend to owners of machines and engines. The request shall be accompanied by data supporting the need for the new scheduled maintenance and the maintenance interval.

### 1.6.3 Non-emission-related scheduled maintenance

1.6.3.1 Non-emission-related scheduled maintenance which is reasonable and technically necessary (for example oil change, oil filter change, fuel filter change, air filter change, cooling system maintenance, idle speed adjustment, governor, engine bolt torque, valve lash, injector lash, adjustment of the tension of any drive-belt, etc.) may be performed on engines or machines selected for the service accumulation schedule at the least frequent intervals recommended by the manufacturer to the owner (for example not at the intervals recommended for severe service).

## 1.7 Repair

1.7.1 Repairs to the components of an engine system selected for testing over a service accumulation schedule shall be performed only as a result of component failure or engine system malfunction. Repair of the engine itself, the emission control system or the fuel system is not permitted except to the extent defined in paragraph 1.7.2.

1.7.2 If the engine itself, the emission control system or the fuel system fail during the service accumulation schedule, the service accumulation shall be considered void, and a new service accumulation shall be started with a new engine system, unless the failed components are replaced with equivalent components that have been subject to a similar number of hours of service accumulation.

## **2 Engine categories and sub-categories NRSh and NRS except for NRS-v-2b and NRS-v-3**

- 2.1 The exhaust emission limits specified in Annex II of Regulation (EU) 2015/XXX apply to the emissions of the engines for their emission durability period EDP specified in Annex V of that Regulation when tested on the applicable test cycle specified in Annex IV of that Regulation. The applicable EDP category and corresponding deterioration factor (DF) shall be determined in accordance with this section.
- 2.2 For all engines, if, when properly tested according to the procedures in this Regulation, all test engines representing an engine family have emissions which, when adjusted by multiplication by the DF laid down in this section, are less than or equal to each limit value for a given engine sub-category, that family shall be considered to comply with the emission limits for that engine class. If any test engine representing an engine family has emissions which, when adjusted by multiplication by the deterioration factor laid down in this section, are greater than any single emission limit for a given engine sub-category, that family shall be considered not to comply with the emission limits for that engine sub-category.
- 2.3 DFs shall be determined as follows:
  - 2.3.1 On at least one test engine representing the configuration chosen to be the most likely to exceed HC + NO<sub>x</sub> emission limits, and constructed to be representative of production engines, conduct (full) test procedure emission testing as described in this Regulation after the number of hours representing stabilised emissions.
  - 2.3.2 If more than one engine is tested, average the results and round to the same number of decimal places contained in the applicable limit, expressed to one additional significant figure.
  - 2.3.3 Conduct such emission testing again following ageing of the engine. The ageing procedure should be designed to allow the manufacturer to appropriately predict the in-use emission deterioration expected over the EDP of the engine, taking into account the type of wear and other deterioration mechanisms expected under typical consumer use which could affect emissions performance. If more than one engine is tested, average the results and round to the same number of decimal places contained in the applicable limit, expressed to one additional significant figure.
  - 2.3.4 Divide the emissions at the end of the EDP (average emissions, if applicable) for each regulated pollutant by the stabilised emissions (average emissions, if applicable) and round to two significant figures. The resulting number shall be the DF, unless it is less than 1.00, in which case the DF shall be 1.0.
  - 2.3.5 At the manufacturer's option additional emission test points can be scheduled between the stabilised emission test point and the end of the EDP. If intermediate tests are scheduled, the test points must be evenly spaced over the EDP (plus or minus two hours) and one such test point shall be at one half of full EDP (plus or minus two hours).

2.3.6 For each pollutant HC + NOx and CO, a straight line must be fitted to the data points treating the initial test as occurring at hour zero, and using the method of least-squares. The DF is the calculated emission at the end of the durability period divided by the calculated emission at zero hours.

The DF for each pollutant for the applicable test cycle shall be recorded in the test result document set out in Appendix 1 to Annex VII.

2.3.7 Calculated deterioration factors may cover families in addition to the one on which they were generated if the manufacturer submits a justification acceptable to the type approval authority in advance of type approval that the affected engine families can be reasonably expected to have similar emission deterioration characteristic based on the design and technology used.

A non-exclusive list of design and technology groupings is given below:

- conventional two-stroke engines without after treatment system,
- conventional two-stroke engines with a catalyst of the same active material and loading, and the same number of cells per cm<sup>2</sup>,
- stratified scavenging two-stroke engines,
- stratified scavenging two-stroke engines with a catalyst of the same active material and loading, and the same number of cells per cm<sup>2</sup>,
- four-stroke engines with catalyst with same valve technology and identical lubrication system,
- four-stroke engines without catalyst with the same valve technology and identical lubrication system.

#### 2.4 EDP categories

2.4.1 For those engine categories in table V-3 or V-4 of Annex V of Regulation (EU) 2016/XXX that have alternative values for EDP, manufacturers shall declare the applicable EDP category for each engine family at the time of type approval. Such category shall be the category from table 1 which most closely approximates the expected useful lives of the equipment into which the engines are expected to be installed as determined by the engine manufacturer. Manufacturers shall retain data appropriate to support their choice of EDP category for each engine family. Such data shall be supplied to the approval authority upon request.

Table 3.1. EDP categories

<b>EDP Category</b>	<b>Application of Engine</b>
Cat 1	Consumer products
Cat 2	Semi-professional products
Cat 3	Professional products



2.4.2 The manufacturer shall satisfy the approval authority that the declared EDP category is appropriate. Data to support a manufacturer's choice of EDP category, for a given engine family, may include but are not limited to:

- surveys of the life spans of the equipment in which the subject engines are installed,
- engineering evaluations of field aged engines to ascertain when engine performance deteriorates to the point where usefulness and/or reliability is impacted to a degree sufficient to necessitate overhaul or replacement,
- warranty statements and warranty periods,
- marketing materials regarding engine life,
- failure reports from engine customers, and
- engineering evaluations of the durability, in hours, of specific engine technologies, engine materials or engine designs.

## ANNEX IV

### Technical requirements on emission control strategies, including documentation required to demonstrate these strategies

#### 1 Definitions and abbreviations

For the purposes of this Annex, the following definitions and abbreviations apply:

- 1.1 "Diagnostic trouble code (DTC)" means a numeric or alphanumeric identifier which identifies or labels a NCM and/ PCM.
- 1.2 "Confirmed and active DTC" means a DTC that is stored during the time the NCD and/or PCD system concludes that a malfunction exists.
- 1.3 "NCD engine family" means a manufacturer's grouping of engine systems having common methods of monitoring/diagnosing NCMs.
- 1.4 "NO<sub>x</sub> Control Diagnostic system (NCD)" means a system on-board the engine which has the capability of
  - (a) detecting a NO<sub>x</sub> Control Malfunction;
  - (b) identifying the likely cause of NO<sub>x</sub> control malfunctions by means of information stored in computer memory and/or communicating that information off-board.
- 1.5 "NO<sub>x</sub> Control Malfunction (NCM)" means an attempt to tamper with the NO<sub>x</sub> control system of an engine or a malfunction affecting that system that might be due to tampering, that is considered by this Regulation as requiring the activation of a warning or an inducement system once detected.
- 1.6 "Particulate Control Diagnostic system (PCD)" means a system on-board the engine which has a capability of
  - (a) detecting a Particulate Control Malfunction;
  - (b) identifying the likely cause of particulate control malfunctions by means of information stored in computer memory and/or communicating that information off-board.
- 1.7 "Particulate Control Malfunction (PCM)" means an attempt to tamper with the diesel particulate filter (DPF) of an engine or a malfunction affecting the DPF that might be due to tampering, that is considered by this Regulation as requiring the activation of a warning once detected.
- 1.8 "PCD engine family" means a manufacturer's grouping of engine systems having common methods of monitoring/diagnosing PCMs
- 1.9 "Scan-tool" means an external test equipment used for off-board communication with the NCD and/or PCD system.

**Moved up [1]:** <#>"Ambient temperature" means one of the following:¶

<#>for a laboratory environment (e.g. filter weighing room or chamber), the temperature within the specified laboratory environment;¶

<#>for an engine installed in a test-bed, the temperature of combustion air supplied to the engine, upstream of any part of the engine being tested;¶

**Deleted:** <#>for an engine installed in non-road mobile machinery, where the combustion air is drawn through ducting from outside the perimeter of the non-road mobile machinery, the temperature of combustion air entering the ducting;¶

<#>for an engine installed in non-road mobile machinery, where the combustion air is drawn from within the perimeter of the non-road mobile machinery, the air temperature immediately outside the perimeter.¶

## **2 Technical requirements relating to emission control strategies**

- 2.1 This paragraph 3 shall apply for electronically controlled engines of categories NRE, NRG, IWP, IWA, RLL and RLR, complying with “Stage V” emission limits set out in Annex II of Regulation (EU) 2016/XXX and using electronic control to determine both the quantity and timing of injecting fuel or using electronic control to activate, de-activate or modulate the emission control system used to reduce NO<sub>x</sub>.
- 2.2 Requirements for base emission control strategy
  - 2.2.1 The base emission control strategy, activated throughout the speed and torque operating range of the engine, shall be designed as to enable the engine, in normal use, to comply with the provisions of this Regulation. Normal use is not restricted to the control conditions as specified in paragraph 2.3.
  - 2.2.2 Any base emission control strategy that can distinguish engine operation between a standardised type approval test and other operating conditions and subsequently reduce the level of emission control when not operating under conditions substantially included in the type approval procedure is prohibited.

## 2.3 Control conditions

The control conditions specify an altitude, ambient temperature and engine coolant range, outside of which auxiliary emission control strategies may be applied in accordance with paragraph 2.4.

### 2.3.1 Control conditions for engines of categories IWP and IWA:

- (i) an altitude not exceeding 500 metres (or equivalent atmospheric pressure of 95.5 kPa);
- (ii) an ambient temperature within the range 275 K to 303 K (2 °C to 30 °C);
- (iii) the engine coolant temperature above 343 K (70 °C).

### 2.3.2 Control conditions for engines of category RLL:

- (i) an altitude not exceeding 1000 metres (or equivalent atmospheric pressure of 90 kPa);
- (ii) an ambient temperature within the range 275 K to 303 K (2 °C to 30 °C);
- (iii) the engine coolant temperature above 343 K (70 °C).

### 2.3.3 Control conditions for engines of categories NRE, NRG and RLR:

- (i) the atmospheric pressure greater than or equal to 82.5 kPa;
- (ii) the ambient temperature within the following range:
  - equal to or above 266 K (– 7 °C),
  - less than or equal to the temperature determined by the following equation at the specified atmospheric pressure:  $T_c = -0.4514 \cdot (101.3 - P_b) + 311$ , where:  $T_c$  is the calculated ambient air temperature, K and  $P_b$  is the atmospheric pressure, kPa;
- (iii) the engine coolant temperature above 343 K (70 °C).

## 2.4 Requirements for auxiliary emission control strategy

2.4.1 An auxiliary emission control strategy may be used by an engine or a non-road mobile machine, provided that the auxiliary emission control strategy, when activated, modifies the base emission control strategy in response to a specific set of ambient and/or operating conditions but does not permanently reduce the effectiveness of the emission control system:

(a) where the auxiliary emission control strategy is activated during the type approval test, paragraphs 2.3.1., 2.3.2 and 2.3.3. shall not apply;

(b) where the auxiliary emission control strategy is not activated during the type approval test, it must be demonstrated that the auxiliary emission control strategy is active only for as long as required for the purposes identified in paragraph 2.4.4.

2.4.2 Where the auxiliary emission control strategy is activated when the engine is operating within the control conditions set out in points (i), (ii) and (iii) of paragraphs 2.3.1, 2.3.2 or 2.3.3, respectively, the strategy shall only be activated exceptionally when demonstrated to be necessary for the purposes identified in paragraph 2.4.4 and approved by the Type Approval authority.

### 2.4.3 Cold temperature operation

An auxiliary emission control strategy may be used on an engine equipped with exhaust gas recirculation (EGR) when the ambient temperature is below 275 K (2 °C) and if one of the two following criteria is met:

- (i) intake manifold temperature is less than or equal to the temperature defined by the following equation:  $IMT_c = PIM / 15.75 + 304.4$ , where:  $IMT_c$  is the calculated intake manifold temperature, K and PIM is the absolute intake manifold pressure in kPa;
- (ii) engine coolant temperature is less than or equal to the temperature defined by the following equation:  $ECT_c = PIM / 14.004 + 325.8$ , where:  $ECT_c$  is the calculated engine coolant temperature, K and PIM is the absolute intake manifold pressure, kPa.

### 2.4.4 An auxiliary emission control strategy may be activated in particular for the following purposes:

- (a) by on-board signals, for protecting the engine (including air-handling device protection) and/or non-road mobile machine into which the engine is installed from damage;
- (b) for operational safety reasons;
- (c) for prevention of excessive emissions, during cold start or warming-up, during shut-down;
- (d) if used to trade-off the control of one regulated pollutant under specific ambient or operating conditions, for maintaining control of all other regulated pollutants, within the emission limit values that are appropriate for the engine concerned. The purpose is to compensate for naturally occurring phenomena in a manner that provides acceptable control of all emission constituents.

### 2.4.5 The manufacturer shall demonstrate to the technical service at the time of the type-approval test that the operation of any auxiliary emission strategy complies with the provisions of paragraph 2.4. The demonstration shall consist of an evaluation of the documentation referred to in paragraph 2.6.

### 2.4.6 Any operation of an auxiliary emission control strategy not compliant with paragraphs 2.4.1 to 2.4.4 is prohibited.

### 2.5 In the case that the engine inlet air temperature sensor is being used to estimate ambient air temperature the nominal offset between the two measurement points shall be evaluated for an engine type or engine family. Where used, the measured intake air temperature shall be adjusted by an amount equal to the nominal offset to estimate ambient temperature for an installation using the specified engine type or engine family.

**Deleted:** and taken into account

The evaluation of the offset shall be made using good engineering judgement based on technical elements (calculations, simulations, experimental results, data etc.) including:

**Deleted:** Recognising that the value of this offset will not be known for every type of non-road mobile machinery in which an engine may be installed, a nominal offset between the engine inlet air temperature and the ambient temperature may be evaluated for an engine type or engine family. The evaluation

- a) the typical types of non-road mobile machinery into which the engine type or engine family will be installed; and,
- b) the installation instructions provided to the OEM by the manufacturer.

A copy of the evaluation shall be made available to the approval authority upon request.

**Deleted:** taking into account

### 2.6 Documentation requirements

**Deleted:** ¶

The manufacturer shall comply with the documentation requirements of paragraph xx of Annex xx

### **3 Technical requirements relating to NOx control measures**

- 3.1 This paragraph 3 shall apply for electronically controlled engines of categories NRE, NRG, IWP, IWA, RLL and RLR, complying with “Stage V” emission limits set out in Annex II of Regulation (EU) 2016/XXX and using electronic control to determine both the quantity and timing of injecting fuel or using electronic control to activate, de-activate or modulate the emission control system used to reduce NOx.
- 3.2 The manufacturer shall provide information that fully describes the functional operational characteristics of the NOx control measures using the documents set out in Annex I of Regulation (EU) 2016/XXX.
- 3.3 The NOx control strategy shall be operational under all environmental conditions regularly pertaining in the territory of the Union, especially at low ambient temperatures. This requirement is not restricted to the control conditions as specified in paragraph 2.3.
- 3.4 The manufacturer shall demonstrate that the emission of ammonia during the applicable emission test cycle of the type approval procedure, when a reagent is used, does not exceed a mean value of 25 ppm for engines of category RLL and 10 ppm for engines of all other applicable categories.
- 3.5 If reagent containers are installed on or connected to a non-road mobile machine, means for taking a sample of the reagent inside the containers must be included. The sampling point must be easily accessible without requiring the use of any specialised tool or device.
- 3.6 In addition to the requirements in paragraphs 3.2 to 3.5, the following shall apply:
  - (a) For engines of category NRE and NRG the technical requirements set out in Appendix 1 to this Annex;
  - (b) For engines of category IWP, IWA and RLR the technical requirements set out in Appendix 2 to this Annex;
  - (c) For engines of category RLL the technical requirements set out in Appendix 3 to this Annex.

### **4 Technical requirements relating to particulate pollutant control measures**

- 4.1 This paragraph 4 shall apply for engines of sub-categories subject to a PN limit according to the “Stage V” emission limits set out in Annex II of Regulation (EU) 2016/XXX fitted with a DPF.
- 4.2 In cases where the NOx control system and the particulate control system share the same physical components (e.g. same substrate (SCR on filter), same exhaust temperature sensor) the requirements of this section shall not apply to any component or malfunction where, after consideration of a reasoned assessment provided by the manufacturer, the type approval authority concludes that a particulate control malfunction within the scope of this section would lead to a corresponding NOx control malfunction within the scope of paragraph 3.
- 4.3 The detailed technical requirements relating to particulate pollutant control measures are specified in Appendix 4 to this Annex.

## Appendix 1

### **Additional technical requirements on NO<sub>x</sub> control measures for engines of categories NRE and NRG, including the method to demonstrate these strategies**

#### 1. Introduction

This Appendix sets out the additional requirements to ensure the correct operation of NO<sub>x</sub> control measures. It includes requirements for engines that rely on the use of a reagent in order to reduce emissions. The type approval shall be made conditional upon the application of the relevant provisions on operator instruction, installation documents, operator warning system, inducement system and reagent freeze protection that are set out in this Appendix.

#### 2. General requirements

The engine system shall be equipped with a NO<sub>x</sub> Control Diagnostic system (NCD) able to identify the NO<sub>x</sub> control malfunctions (NCMs) considered by this Annex. Any engine system covered by this section shall be designed, constructed and installed so as to be capable of meeting these requirements throughout the normal life of the engine under normal conditions of use. In achieving this objective it is acceptable that engines which have been used in excess of the emission durability period as specified in Annex V of Regulation (EU) 2015/XXX show some deterioration in the performance and the sensitivity of the NO<sub>x</sub> Control Diagnostic system (NCD), such that the thresholds specified in this Annex may be exceeded before the warning and/or inducement systems are activated.

#### 2.1. Required information

- 2.1.1. If the emission control system requires a reagent, the characteristics of that reagent, including the type of reagent, information on concentration when the reagent is in solution, operational temperature conditions and reference to international standards for composition and quality shall be specified by the manufacturer, in accordance with Annex I of Regulation (EU) 2016/XXX.
- 2.1.2. Detailed written information fully describing the functional operation characteristics of the operator warning system in paragraph 4 and of the operator inducement system in paragraph 5 shall be provided to the approval authority at the time of type-approval.
- 2.1.3. The manufacturer shall provide installation documents that, when used by the OEM, will ensure that the engine, inclusive of the emission control system that is part of the approved engine type, when installed in the machine, will operate, in conjunction with the necessary machinery parts, in a manner that will comply with the requirements of this Appendix. This documentation shall include the detailed technical requirements and the provisions of the engine system (software, hardware, and communication) needed for the correct installation of the engine system in the machine.

#### 2.2. Operating conditions

- 2.2.1. The NO<sub>x</sub> control diagnostic system shall be operational at
- (a) ambient temperatures between 266 K and 308 K (-7°C and 35°C);
  - (b) all altitudes below 1600 m;
  - (c) engine coolant temperatures above 343 K (70°C).

This section does not apply in the case of monitoring for reagent level in the storage tank where monitoring shall be conducted under all conditions where measurement is technically feasible (for instance, under all conditions when a liquid reagent is not frozen).

2.3. Reagent freeze protection

2.3.1. It is permitted to use a heated or a non heated reagent tank and dosing system. A heated system shall meet the requirements of paragraph 2.3.2. A non heated system shall meet the requirements of paragraph 2.3.3.

2.3.1.1. The use of a non-heated reagent tank and dosing system shall be indicated in the written instructions to the owner of the machine.

2.3.2. Reagent tank and dosing system

2.3.2.1. If the reagent has frozen, the reagent shall be available for use within a maximum of 70 minutes after the start of the engine at 266 K (- 7 °C) ambient temperature.

2.3.2.2. Design criteria for a heated system

A heated system shall be so designed that it meets the performance requirements set out in this section when tested using the procedure defined.

2.3.2.2.1. The reagent tank and dosing system shall be soaked at 255 K (- 18°C) for 72 hours or until the reagent becomes solid, whichever occurs first.

2.3.2.2.2. After the soak period in paragraph 2.3.2.2.1., the machine/engine shall be started and operated at 266 K (- 7 °C) ambient temperature or lower as follows:

- (a) 10 to 20 minutes idling, followed by
- (b) up to 50 minutes at no more than 40 per cent of rated load.

2.3.2.2.3. At the conclusion of the test procedure in paragraph 2.3.2.2.2., the reagent dosing system shall be fully functional.

2.3.2.3. Evaluation of the design criteria may be performed in a cold chamber test cell using an entire machine or parts representative of those to be installed on a machine or based on field tests.

2.3.3. Activation of the operator warning and inducement system for a non-heated system

2.3.3.1. The operator warning system described in paragraph 4 shall be activated if no reagent dosing occurs at an ambient temperature  $\leq$  266 K (- 7°C).

2.3.3.2. The severe inducement system described in paragraph 5.4. shall be activated if no reagent dosing occurs within a maximum of 70 minutes after engine start at an ambient temperature  $\leq$  266 K (- 7°C).

2.4. Diagnostic requirements



- 2.4.1 The NO<sub>x</sub> Control Diagnostic system (NCD) shall be able to identify the NO<sub>x</sub> control malfunctions (NCMs) considered by this Annex by means of Diagnostic Trouble Codes (DTCs) stored in the computer memory and to communicate that information off-board upon request.
- 2.4.2 Requirements for recording Diagnostic Trouble Codes (DTCs)
- 2.4.2.1 The NCD system shall record a DTC for each distinct NO<sub>x</sub> Control Malfunction (NCM).
- 2.4.2.2 The NCD system shall conclude within 60 minutes of engine operation whether a detectable malfunction is present. At this time, a "confirmed and active" DTC shall be stored and the warning system be activated according to paragraph 4.
- 2.4.2.3 In cases where more than 60 minutes running time is required for the monitors to accurately detect and confirm a NCM (e.g. monitors using statistical models or with respect to fluid consumption on the machine), the Approval Authority may permit a longer period for monitoring provided the manufacturer justifies the need for the longer period (for example by technical rationale, experimental results, in house experience, etc.).
- 2.4.3. Requirements for erasing Diagnostic trouble codes (DTCs)
- (a) DTCs shall not be erased by the NCD system itself from the computer memory until the failure related to that DTC has been remedied.
- (b) The NCD system may erase all the DTCs upon request of a proprietary scan or maintenance tool that is provided by the engine manufacturer upon request, or using a pass code provided by the engine manufacturer.
- 2.4.4. An NCD system shall not be programmed or otherwise designed to partially or totally deactivate based on age of the machine during the actual life of the engine, nor shall the system contain any algorithm or strategy designed to reduce the effectiveness of the NCD system over time.
- 2.4.5. Any reprogrammable computer codes or operating parameters of the NCD system shall be resistant to tampering.
- 2.4.6. NCD engine family
- The manufacturer is responsible for determining the composition of an NCD engine family. Grouping engine systems within an NCD engine family shall be based on good engineering judgment and be subject to approval by the Approval Authority.
- Engines that do not belong to the same engine family may still belong to the same NCD engine family.
- 2.4.6.1. Parameters defining an NCD engine family
- An NCD engine family is characterized by basic design parameters that shall be common to engine systems within the family.
- In order that engine systems are considered to belong to the same NCD engine family, the following list of basic parameters shall be similar:
- (a) emission control systems;

- (b) methods of NCD monitoring;
- (c) criteria for NCD monitoring;
- (d) monitoring parameters (e.g. frequency).

These similarities shall be demonstrated by the manufacturer by means of relevant engineering demonstration or other appropriate procedures and subject to the approval of the Approval Authority.

The manufacturer may request approval by the Approval Authority of minor differences in the methods of monitoring/diagnosing the NCD system due to engine system configuration variation, when these methods are considered similar by the manufacturer and they differ only in order to match specific characteristics of the components under consideration (for example size, exhaust flow, etc.); or their similarities are based on good engineering judgment.

### 3. Maintenance requirements

- 3.1. The manufacturer shall furnish or cause to be furnished to all owners of new engines or machines written instructions about the emission control system and its correct operation as required by Annex xx.

### 4. Operator warning system

- 4.1. The machine shall include an operator warning system using visual alarms that informs the operator when a low reagent level, incorrect reagent quality, interruption of dosing or a malfunction of the type specified in paragraph 9 has been detected that will lead to activation of the operator inducement system if not rectified in a timely manner. The warning system shall remain active when the operator inducement system described in paragraph 5 has been activated.
- 4.2. The warning shall not be the same as the warning used for the purposes of malfunction or other engine maintenance, though it may use the same warning system.
- 4.3. The operator warning system may consist of one or more lamps, or display short messages, which may include, for example, messages indicating clearly:
  - the remaining time before activation of the low-level and/or severe inducements,
  - the amount of low-level and/or severe inducement, for example the amount of torque reduction,
  - the conditions under which machine disablement can be cleared.

Where messages are displayed, the system used for displaying these messages may be the same as the one used for other maintenance purposes.

- 4.4. At the choice of the manufacturer, the warning system may include an audible component to alert the operator. The cancelling of audible warnings by the operator is permitted.
- 4.5. The operator warning system shall be activated as specified in paragraphs 2.3.3.1., 6.2., 7.2., 8.4., and 9.3. respectively.

- 4.6. The operator warning system shall be deactivated when the conditions for its activation have ceased to exist. The operator warning system shall not be automatically deactivated without the reason for its activation having been remedied.
- 4.7. The warning system may be temporarily interrupted by other warning signals providing important safety related messages.
- 4.8. Details of the operator warning system activation and deactivation procedures are described in section 11.
- 4.9. As part of the application for type-approval under this Regulation, the manufacturer shall demonstrate the operation of the operator warning system, as specified in section 11.
5. Operator inducement system
  - 5.1. The machine shall incorporate an operator inducement system based on one of the following principles:
    - 5.1.1. a two-stage inducement system starting with a low-level inducement (performance restriction) followed by a severe inducement (effective disablement of machine operation);
    - 5.1.2. a one-stage severe inducement system (effective disablement of machine operation) activated under the conditions of a low-level inducement system as specified in paragraphs 6.3.1., 7.3.1., 8.4.1., and 9.4.1.

In the case that the manufacturer elects to shut down the engine to fulfil the requirement for one-stage severe inducement then the inducement for reagent level may, at the choice of the manufacturer, be activated under the conditions of paragraph 6.3.2 instead of the conditions of paragraph 6.3.1.
  - 5.2. The engine may be fitted with a means to disable the operator inducement in the case that it complies with the requirements of section 5.2.1.
    - 5.2.1 The engine may be fitted with a means to temporarily disable the operator inducement during an emergency declared by a national or regional government, their emergency services or their armed services.
      - 5.2.1.1 All of the following conditions shall apply when a means to temporarily disable the operator inducement in an emergency is fitted to an engine:
        - The maximum operating period for which the inducement may be disabled by the operator shall be 120 hours
        - The method of activation shall be designed to prevent accidental operation by requiring a double voluntary action and shall be clearly marked with the warning "EMERGENCY USE ONLY. SEE OWNERS MANUAL."
        - The disablement shall de-activate automatically after the 120 hours has expired, and there shall be a means for the operator to manually de-activate the disablement if the emergency has ended
        - After the 120 hours of operation has expired it shall no longer be possible to disable the inducement unless the means to disable has been re-armed by the input of a manufacturer's temporary security code, or re-configuration of the

engine's ECU by a qualified service technician, or an equivalent security feature that is unique to each engine

- The total number and duration of activations of the disablement must be stored in non-volatile electronic memory in a manner to ensure that the information cannot be intentionally deleted. It shall be possible for national inspection authorities to read these records with a scan tool.
- The manufacturer shall maintain a record of each request to re-arm the means to temporarily disable the operator inducement and shall make those records available to Commission or national authorities upon request

### 5.3. Low-level inducement system

- 5.3.1. The low-level inducement system shall be activated after any of the conditions specified in paragraphs 6.3.1., 7.3.1., 8.4.1., and 9.4.1. has occurred.
- 5.3.2. The low-level inducement system shall gradually reduce the maximum available engine torque across the engine speed range by at least 25 per cent between the peak torque speed and the governor breakpoint as shown in figure 1. The rate of torque reduction shall be a minimum of 1% per minute.
- 5.3.3. Other inducement measures that are demonstrated to the type approval authority as having the same or greater level of severity may be used.

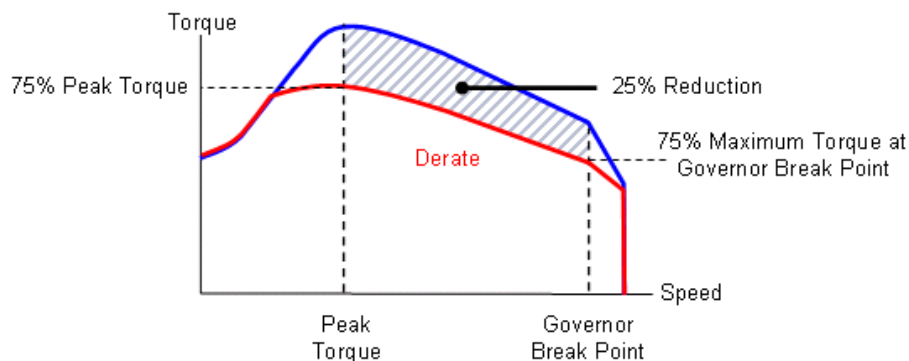


Figure 4.1: Low-level inducement torque reduction scheme

### 5.4. Severe inducement system

- 5.4.1. The severe inducement system shall be activated after any of the conditions specified in paragraphs 2.3.3.2., 6.3.2., 7.3.2., 8.4.2., and 9.4.2. has occurred.
- 5.4.2. The severe inducement system shall reduce the machine's utility to a level that is sufficiently onerous as to cause the operator to remedy any problems related to sections 6 to 9. The following strategies are acceptable:
  - 5.4.2.1. Engine torque between the peak torque speed and the governor breakpoint shall be gradually reduced from the low-level inducement torque in figure 1 by a minimum of 1 per cent per minute to 50 per cent of maximum torque or lower and for variable speed engines the engine speed shall be gradually reduced to 60 per cent of rated speed or lower within the same time period as the torque reduction, as shown in figure 2.

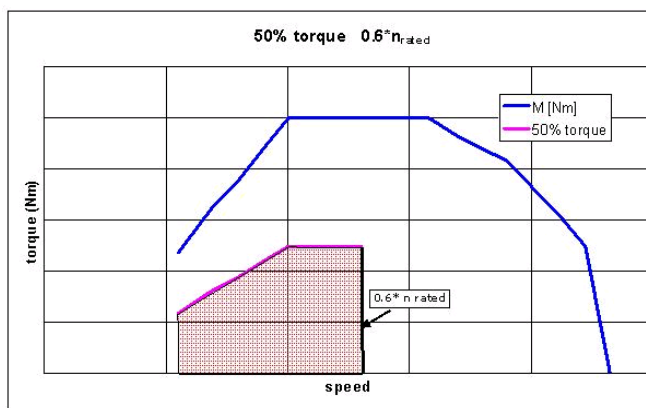


Figure 4.2: Severe inducement torque reduction scheme

- 5.4.2.2. Other inducement measures that are demonstrated to the type approval authority as having the same or greater level of severity may be used.
- 5.5. In order to account for safety concerns and to allow for self-healing diagnostics, use of an inducement override function for releasing full engine power is permitted provided it
- is active for no longer than 30 minutes, and
  - is limited to 3 activations during each period that the operator inducement system is active.
- 5.6. The operator inducement system shall be deactivated when the conditions for its activation have ceased to exist. The operator inducement system shall not be automatically deactivated without the reason for its activation having been remedied.
- 5.7. Details of the operator inducement system activation and deactivation procedures are described in section 11.
- 5.8. As part of the application for type-approval under this Regulation, the manufacturer shall demonstrate the operation of the operator inducement system, as specified in section 11.
6. Reagent availability
- 6.1. Reagent level indicator
- The machine shall include an indicator that clearly informs the operator of the level of reagent in the reagent storage tank. The minimum acceptable performance level for the reagent indicator is that it shall continuously indicate the reagent level whilst the operator warning system referred to in paragraph 4 is activated. The reagent indicator may be in the form of an analogue or digital display, and may show the level as a proportion of the full tank capacity, the amount of remaining reagent, or the estimated operating hours remaining.
- 6.2. Activation of the operator warning system

- 6.2.1. The operator warning system specified in paragraph 4. shall be activated when the level of reagent goes below 10 % of the capacity of the reagent tank or a higher percentage at the choice of the manufacturer.
- 6.2.2. The warning provided shall be sufficiently clear, in conjunction with the reagent indicator, for the operator to understand that the reagent level is low. When the warning system includes a message display system, the visual warning shall display a message indicating a low level of reagent. (for example “urea level low”, “AdBlue level low”, or “reagent low”).
- 6.2.3. The operator warning system does not initially need to be continuously activated (for example a message does not need to be continuously displayed), however activation shall escalate in intensity so that it becomes continuous as the level of the reagent approaches empty and the point where the operator inducement system will come into effect is approached (for example frequency at which a lamp flashes). It shall culminate in an operator notification at a level that is at the choice of the manufacturer, but sufficiently more noticeable at the point where the operator inducement system in paragraph 6.3 comes into effect than when it was first activated.
- 6.2.4. The continuous warning shall not be easily disabled or ignored. When the warning system includes a message display system, an explicit message shall be displayed (for example “fill up urea”, “fill up AdBlue”, or “fill up reagent”). The continuous warning may be temporarily interrupted by other warning signals providing important safety related messages.
- 6.2.5. It shall not be possible to turn off the operating warning system until the reagent has been replenished to a level not requiring its activation.
- 6.3 Activation of the operator inducement system
  - 6.3.1 The low-level inducement system described in paragraph 5.3. shall be activated if the reagent tank level goes below 2.5% of its nominally full capacity or a higher percentage at the choice of the manufacturer.
  - 6.3.2. The severe inducement system described in paragraph 5.4. shall be activated if the reagent tank is empty, [that is, when the dosing system is unable to draw further reagent from the tank,] or at any level below 2.5% of its nominally full capacity at the discretion of the manufacturer.
  - 6.3.3. Except to the extent permitted by paragraph 5.5, it shall not be possible to turn off the low-level or severe inducement system until the reagent has been replenished to a level not requiring their respective activation.
7. Reagent quality monitoring
  - 7.1. The engine or machine shall include a means of determining the presence of an incorrect reagent on board a machine.
    - 7.1.1. The manufacturer shall specify a minimum acceptable reagent concentration  $CD_{min}$ , which results in tailpipe NO<sub>x</sub> emissions not exceeding the lower of either the applicable NO<sub>x</sub> limit multiplied by 2.25 or the applicable NO<sub>x</sub> limit plus 1.5 g/kWh. [For engine sub-categories with a combined HC and NO<sub>x</sub> limit, the applicable NO<sub>x</sub>](#)

limit value for the purpose of this paragraph shall be the combined limit value for HC and NOx reduced by 0.19 g/kWh.

- 7.1.1.1. The correct value of CDmin shall be demonstrated during type approval by the procedure defined in section 12 and recorded in the extended documentation package as specified in section 8 of Annex I.
- 7.1.2. Any reagent concentration lower than CDmin shall be detected and be regarded, for the purpose of section 7.1., as being incorrect reagent.
- 7.1.3. A specific counter ("the reagent quality counter") shall be attributed to the reagent quality. The reagent quality counter shall count the number of engine operating hours with an incorrect reagent.
  - 7.1.3.1. Optionally, the manufacturer may group the reagent quality failure together with one or more of the failures listed in sections 8 and 9 into a single counter.
- 7.1.4. Details of the reagent quality counter activation and deactivation criteria and mechanisms are described in section 11.
- 7.2. Activation of the operator warning system

When the monitoring system confirms that the reagent quality is incorrect, the operator warning system described in paragraph 4. shall be activated. When the warning system includes a message display system, it shall display a message indicating the reason of the warning (for example "incorrect urea detected", "incorrect AdBlue detected", or "incorrect reagent detected").
- 7.3. Activation of the operator inducement system
  - 7.3.1. The low-level inducement system described in paragraph 5.3. shall be activated if the reagent quality is not rectified within a maximum of 10 engine operating hours after the activation of the operator warning system described in paragraph 7.2.
  - 7.3.2. The severe inducement system described in paragraph 5.4. shall be activated if the reagent quality is not rectified within a maximum of 20 engine operating hours after the activation of the operator warning system in described paragraph 7.2.
  - 7.3.3. The number of hours prior to activation of the inducement systems shall be reduced in case of a repetitive occurrence of the malfunction according to the mechanism described in section 11.
8. Reagent dosing activity
  - 8.1. The engine shall include a means of determining interruption of dosing.
  - 8.2. Reagent dosing activity counter
    - 8.2.1. A specific counter shall be attributed to the dosing activity (the "dosing activity counter"). The counter shall count the number of engine operating hours which occur with an interruption of the reagent dosing activity. This is not required where such interruption is demanded by the engine ECU because the machine operating conditions are such that the machine's emission performance does not require reagent dosing.

- 8.2.1.1. Optionally, the manufacturer may group the reagent dosing failure together with one or more of the failures listed in sections 7 and 9 into a single counter.
- 8.2.2. Details of the reagent dosing activity counter activation and deactivation criteria and mechanisms are described in section 11.
- 8.3. Activation of the operator warning system
 

The operator warning system described in paragraph 4. shall be activated in the case of interruption of dosing which sets the dosing activity counter in accordance with paragraph 8.2.1.. When the warning system includes a message display system, it shall display a message indicating the reason of the warning (e.g. “urea dosing malfunction”, “AdBlue dosing malfunction”, or “reagent dosing malfunction”).
- 8.4. Activation of the operator inducement system
  - 8.4.1. The low-level inducement system described in paragraph 5.3. shall be activated if an interruption in reagent dosing is not rectified within a maximum of 10 engine operating hours after the activation of the operator warning system in paragraph 8.3.
  - 8.4.2. The severe inducement system described in paragraph 5.4. shall be activated if an interruption in reagent dosing is not rectified within a maximum of 20 engine operating hours after the activation of the operator warning system in paragraph 8.3.
  - 8.4.3. The number of hours prior to activation of the inducement systems shall be reduced in case of a repetitive occurrence of the malfunction according to the mechanism described in section 11.
- 9. Monitoring failures that may be attributed to tampering
  - 9.1. In addition to the level of reagent in the reagent tank, the reagent quality, and the interruption of dosing, the following failures shall be monitored because they may be attributed to tampering:
    - (i) impeded EGR valve;
    - (ii) failures of the NOx Control Diagnostic (NCD) system, as described in paragraph 9.2.1.
  - 9.2. Monitoring requirements
    - 9.2.1. The NOx Control Diagnostic (NCD) system shall be monitored for electrical failures and for removal or deactivation of any sensor that prevents it from diagnosing any other failures mentioned in paragraphs 6 to 8 (component monitoring).
 

A non-exhaustive list of sensors that affect the diagnostic capability are those directly measuring NOx concentration, urea quality sensors, ambient sensors and sensors used for monitoring reagent dosing activity, reagent level, or reagent consumption.
    - 9.2.2. EGR valve counter
      - 9.2.2.1. A specific counter shall be attributed to an impeded EGR valve. The EGR valve counter shall count the number of engine operating hours when the DTC associated to an impeded EGR valve is confirmed to be active.



9.2.2.1.1. Optionally, the manufacturer may group the impeded EGR valve failure together with one or more of the failures listed in sections 7, 8 and 9.2.3. into a single counter.

9.2.2.2. Details of the EGR valve counter activation and deactivation criteria and mechanisms are described in section 11.

9.2.3. NCD system counter(s)

9.2.3.1. A specific counter shall be attributed to each of the monitoring failures considered in paragraph 9.1 (ii). The NCD system counters shall count the number of engine operating hours when the DTC associated to a malfunction of the NCD system is confirmed to be active. Grouping of several faults into a single counter is permitted.

9.2.3.1.1. Optionally, the manufacturer may group the NCD system failure together with one or more of the failures listed in sections 7, 8 and 9.2.2. into a single counter.

9.2.3.2. Details of the NCD system counter(s) activation and deactivation criteria and mechanisms are described in section 11.

9.3. Activation of the operator warning system

The operator warning system described in paragraph 4. shall be activated in case any of the failures specified in paragraph 9.1. occur, and shall indicate that an urgent repair is required. When the warning system includes a message display system, it shall display a message indicating either the reason of the warning (for example "reagent dosing valve disconnected", or "critical emission failure").

9.4. Activation of the operator inducement system

9.4.1. The low-level inducement system described in paragraph 5.3. shall be activated if a failure specified in paragraph 9.1. is not rectified within a maximum of 36 engine operating hours after the activation of the operator warning system in paragraph 9.3.

9.4.2. The severe inducement system described in paragraph 5.4. shall be activated if a failure specified in paragraph 9.1. is not rectified within a maximum of 100 engine operating hours after the activation of the operator warning system in paragraph 9.3.

9.4.3. The number of hours prior to activation of the inducement systems shall be reduced in case of a repetitive occurrence of the malfunction according to the mechanism described in section 11.

9.5. As an alternative to the requirements in 9.2., the manufacturer may use a NO<sub>x</sub> sensor located in the exhaust gas. In this case,

- the NO<sub>x</sub> value shall not ~~exceed~~ the lower of either the applicable NO<sub>x</sub> limit multiplied by 2.25 or the applicable NO<sub>x</sub> limit plus 1.5 g/kWh. For engine sub-categories with a combined HC and NO<sub>x</sub> limit, the applicable NO<sub>x</sub> limit value for the purpose of this paragraph shall be the combined limit value for HC and NO<sub>x</sub> reduced by 0.19 g/kWh.
- use of a single failure "high NO<sub>x</sub> - root cause unknown" may be used,
- section 9.4.1. shall read "within 10 engine hours",
- section 9.4.2. shall read "within 20 engine hours".

Deleted: exceeding

## 10. DEMONSTRATION REQUIREMENTS

### 10.1. GENERAL

The compliance to the requirements of this Appendix shall be demonstrated during type-approval by performing, as illustrated in table 1 and specified in this section:

- (a) a demonstration of the warning system activation
- (b) a demonstration of the low level inducement system activation, if applicable
- (c) a demonstration of the severe inducement system activation

Table 4.1: Illustration of the content of the demonstration process according to the provisions in sections 10.3 and 10.4 of this Appendix

Mechanism	demonstration elements
Warning system activation specified in section 10.3 of this Appendix	<ul style="list-style-type: none"> <li>• 2 activation tests (incl. lack of reagent)</li> <li>• Supplementary demonstration elements, as appropriate</li> </ul>
Low-level inducement activation specified in section 10.4 of this Appendix	<ul style="list-style-type: none"> <li>• 2 activation tests (incl. lack of reagent)</li> <li>• Supplementary demonstration elements, as appropriate</li> <li>• 1 torque reduction test</li> </ul>
Severe inducement activation specified in section 10.4.6 of this Appendix	<ul style="list-style-type: none"> <li>• 2 activation tests (incl. lack of reagent)</li> <li>• Supplementary demonstration elements, as appropriate</li> </ul>

### 10.2. ENGINE FAMILIES AND NCD ENGINE FAMILIES

The compliance of an engine family or an NCD engine family with the requirements of this section 10 may be demonstrated by testing one of the members of the considered family, provided the manufacturer demonstrates to the approval authority that the monitoring systems necessary for complying with the requirements of this Appendix are similar within the family.

10.2.1. The demonstration that the monitoring systems for other members of the NCD family are similar may be performed by presenting to the approval authorities such elements as algorithms, functional analyses, etc.

10.2.2. The test engine is selected by the manufacturer in agreement with the approval authority. It may or may not be the parent engine of the considered family.

10.2.3. In the case where engines of an engine family belong to an NCD engine family that has already been type-approved according to paragraph 10.2.1 (Figure 3), the

compliance of that engine family is deemed to be demonstrated without further testing, provided the manufacturer demonstrates to the authority that the monitoring systems necessary for complying with the requirements of this Appendix are similar within the considered engine and NCD engine families.

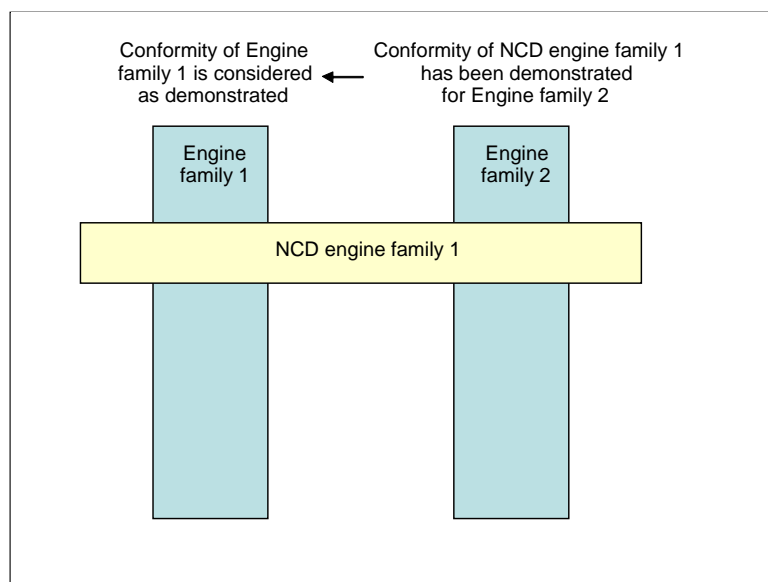


Figure 4.3: Previously demonstrated conformity of an NCD engine family

### 10.3. DEMONSTRATION OF THE WARNING SYSTEM ACTIVATION

10.3.1. The compliance of the warning system activation shall be demonstrated by performing two tests: lack of reagent, and one failure category considered in section 7 to 9 of this Appendix.

10.3.2. Selection of the failures to be tested

10.3.2.1. For the purpose of demonstrating the activation of the warning system in case of a wrong reagent quality, a reagent shall be selected with a dilution of the active ingredient at least as dilute as that communicated by the manufacturer according to the requirements of section 7 of this Appendix

10.3.2.2. For the purpose of demonstrating the activation of the warning system in case of failures that may be attributed to tampering, and are defined in section 9 of this Appendix the selection shall be performed according to the following requirements:

10.3.2.2.1. The manufacturer shall provide the approval authority with a list of such potential failures.

10.3.2.2.2. The failure to be considered in the test shall be selected by the approval authority from this list referred to in section 10.3.2.2.1.

10.3.3. Demonstration

10.3.3.1. For the purpose of this demonstration, a separate test shall be performed for each of the failures considered in section 10.3.1.

10.3.3.2. During a test, no failure shall be present other than the one addressed by the test.

10.3.3.3. Prior to starting a test, all DTC shall have been erased.

10.3.3.4. At the request of the manufacturer, and with the agreement of the approval authority, the failures subject to testing may be simulated.

10.3.3.5. Detection of failures other than lack of reagent

For failures other than lack of reagent, once the failure installed or simulated, the detection of that failure shall be performed as follows:

10.3.3.5.1. The NCD system shall respond to the introduction of a failure selected as appropriate by the type approval authority in accordance to the provisions of this Appendix. This is considered to be demonstrated if activation occurs within two consecutive NCD test-cycles according to paragraph 10.3.3.7 of this Appendix.

When it has been specified in the monitoring description and agreed by the Approval Authority that a specific monitor needs more than two NCD test-cycles to complete its monitoring, the number of NCD test-cycles may be increased to 3 NCD test-cycles.

Each individual NCD test-cycle in the demonstration test may be separated by an engine shut-off. The time until the next start-up shall take into consideration any monitoring that may occur after engine shut-off and any necessary condition that must exist for monitoring to occur at the next start up.

10.3.3.5.2. The demonstration of the warning system activation is deemed to be accomplished if, at the end of each demonstration test performed according to section 10.3.2.1, the warning system has been properly activated and the DTC for the selected failure has got the “confirmed and active” status.

10.3.3.6. Detection in case of lack of reagent availability

For the purpose of demonstrating the activation of the warning system in case of lack of reagent availability, the engine system shall be operated over one or more NCD test cycles at the discretion of the manufacturer.

10.3.3.6.1. The demonstration shall start with a level of reagent in the tank to be agreed between the manufacturer and the approval authority but representing not less than 10 per cent of the nominal capacity of the tank.

10.3.3.6.2. The warning system is deemed to have performed in the correct manner if the following conditions are met simultaneously:

- (a) the warning system has been activated with a reagent availability greater or equal to 10 per cent of the capacity of the reagent tank, and
- (b) the "continuous" warning system has been activated with a reagent availability greater or equal to the value declared by the manufacturer according to the provisions of section 6 of this Appendix.

10.3.3.7. NCD test cycle

10.3.3.7.1 The NCD test cycle considered in this section 10 for demonstrating the correct performance of the NCD system is the hot NRTC cycle for engines of sub-category

NRE-v-3, NRE-v-4, NRE-v-5 NRE-v-6 and the applicable NRSC for all other categories.

10.3.3.7.2 On request of the manufacturer and with approval of the Approval Authority, an alternative NCD test-cycle can be used (e.g. other than the NTRC or the NRSC) for a specific monitor. The request shall contain elements (technical considerations, simulation, test results, etc.) demonstrating:

- (a) the requested test-cycle results in a monitor that will run in real world driving, and;
- (b) the applicable NCD test-cycle specified in paragraph 10.3.3.7.1 is shown to be less appropriate for the considered monitoring.

10.3.4. The demonstration of the warning system activation is deemed to be accomplished if, at the end of each demonstration test performed according to section 10.3.3, the warning system has been properly activated.

#### 10.4. DEMONSTRATION OF THE INDUCEMENT SYSTEM

10.4.1. The demonstration of the inducement system shall be done by tests performed on an engine test bench.

10.4.1.1. Any components or sub-systems not physically mounted on the engine system, such as, but not limited to, ambient temperature sensors, level sensors, and operator warning and information systems, that are required in order to perform the demonstrations shall be connected to the engine system for that purpose, or shall be simulated, to the satisfaction of the approval authority.

10.4.1.2. If the manufacturer chooses, and subject to the agreement of the approval authority, the demonstration tests may be performed on a complete machine or machinery either by mounting the machine on a suitable test bed or by running it on a test track under controlled conditions.

10.4.2. The test sequence shall demonstrate the activation of the inducement system in case of lack of reagent and in case of one of the failures defined in sections 7, 8, or 9 of this Appendix.

10.4.3. For the purpose of this demonstration,

- (a) the approval authority shall select, in addition to the lack of reagent, one of the failures defined in sections 7, 8 or 9 of this Appendix that has been previously used in the demonstration of the warning system,
- (b) the manufacturer shall, in agreement with the approval authority, be permitted to accelerate the test by simulating the achievement of a certain number of operating hours,
- (c) the achievement of the torque reduction required for low-level inducement may be demonstrated at the same time as the general engine performance approval process performed in accordance with this Regulation. Separate torque measurement during the inducement system demonstration is not required in this case,

(d) the severe inducement shall be demonstrated according to the requirements of section 10.4.6 of this Appendix.

10.4.4. The manufacturer shall, in addition, demonstrate the operation of the inducement system under those failure conditions defined in sections 7, 8 or 9 of this Appendix which have not been chosen for use in demonstration tests described in sections 10.4.1. to 10.4.3.

These additional demonstrations may be performed by presentation to the approval authority of a technical case using evidence such as algorithms, functional analyses, and the result of previous tests.

10.4.4.1. These additional demonstrations shall in particular demonstrate to the satisfaction of the approval authority the inclusion of the correct torque reduction mechanism in the engine ECU.

10.4.5. Demonstration test of the low level inducement system

10.4.5.1. This demonstration starts when the warning system or when appropriate "continuous" warning system has been activated as a result of the detection of a failure selected by the approval authority.

10.4.5.2. When the system is being checked for its reaction to the case of lack of reagent in the tank, the engine system shall be run until the reagent availability has reached a value of 2.5 per cent of the tank nominal full capacity of the tank or the value declared by the manufacturer in accordance with section 6.3.1 of this Appendix at which the low-level inducement system is intended to operate.

10.4.5.2.1. The manufacturer may, with the agreement of the approval authority, simulate continuous running by extracting reagent from the tank, either whilst the engine is running or is stopped.

10.4.5.3. When the system is checked for its reaction in the case of a failure other than a lack of reagent in the tank, the engine system shall be run for the relevant number of operating hours indicated in Table 3 of this Appendix or, at the choice of the manufacturer, until the relevant counter has reached the value at which the low-level inducement system is activated.

10.4.5.4. The demonstration of the low level inducement system shall be deemed to be accomplished if, at the end of each demonstration test performed according to sections 10.4.5.2. and 10.4.5.3, the manufacturer has demonstrated to the approval authority that the engine ECU has activated the torque reduction mechanism.

10.4.6. Demonstration test of the severe inducement system

10.4.6.1. This demonstration shall start from a condition where the low-level inducement system has been previously activated and may be performed as a continuation of the tests undertaken to demonstrate the low-level inducement system.

10.4.6.2. When the system is checked for its reaction in the case of lack of reagent in the tank, the engine system shall be run until the reagent tank is empty, or has reached the level below 2.5 per cent of nominal full capacity of the tank at which the manufacturer has declared to activate the severe inducement system.

- 10.4.6.2.1. The manufacturer may, with the agreement of the approval authority, simulate continuous running by extracting reagent from the tank, either whilst the engine is running or is stopped.
- 10.4.6.3. When the system is checked for its reaction in the case of a failure that is not a lack of reagent in the tank, the engine system shall then be run for the relevant number of operating hours indicated in Table 3 of this Appendix or, at the choice of the manufacturer, until the relevant counter has reached the value at which the severe inducement system is activated.
- 10.4.6.4. The demonstration of the severe inducement system shall be deemed to be accomplished if, at the end of each demonstration test performed according to paragraphs 10.4.6.2. and 10.4.6.3, the manufacturer has demonstrated to the type-approval authority that the severe inducement mechanism considered in this Appendix has been activated.
- 10.4.7. Alternatively, if the manufacturer chooses, and subject to the agreement of the approval authority, the demonstration of the inducement mechanisms may be performed on a complete machine in accordance with the requirements of section 5.4, either by mounting the machine on a suitable test bed or by running it on a test track under controlled conditions.
- 10.4.7.1. The machine shall be operated until the counter associated with the selected failure has reached the relevant number of operating hours indicated in Table 3 of this Appendix or, as appropriate, until either the reagent tank is empty or, has reached the level below 2.5 per cent of nominal full capacity of the tank at which the manufacturer has chosen to activate the severe inducement system.

11. DESCRIPTION OF THE OPERATOR WARNING AND INDUCEMENT ACTIVATION AND DEACTIVATION MECHANISMS

- 11.1 To complement the requirements specified in this Appendix concerning the warning and inducement activation and deactivation mechanisms, this section 11 specifies the technical requirements for an implementation of those activation and deactivation mechanisms.
- 11.2. Activation and deactivation mechanisms of the warning system
  - 11.2.1. The operator warning system shall be activated when the diagnostic trouble code (DTC) associated with a NCM justifying its activation has the status defined in Table 2 of this Appendix.

Table 4.2: Activation of the operator warning system

Failure type	DTC status for activation of the warning system
poor reagent quality	confirmed and active

interruption of dosing	confirmed and active
impeded EGR valve	confirmed and active
malfunction of the monitoring system	confirmed and active
NOx threshold, if applicable	confirmed and active

11.2.2. The operator warning system shall be deactivated when the diagnosis system concludes that the malfunction relevant to that warning is no longer present or when the information including DTCs relative to the failures justifying its activation is erased by a scan tool.

11.2.2.1 Requirements for erasing "NOx control information"

11.2.2.1.1 Erasing / resetting "NOx control information" by a scan-tool

On request of the scan tool, the following data shall be erased or reset to the value specified in this Appendix from the computer memory (see Table 3).

Table 4.3: Erasing / resetting "NOx control information" by a scan-tool

NO <sub>x</sub> control information	Erasable	Resetable
all DTCs	X	
the value of the counter with the highest number of engine operating hours		X
the number of engine operating hours from the NCD counter(s)		X

11.2.2.1.2. NO<sub>x</sub> control information shall not be erased by disconnection of the machine's battery(s).

11.2.2.1.3. The erasing of "NO<sub>x</sub> control information" shall only be possible under "engine-off" conditions.

11.2.2.1.4. When "NOx control information" including DTCs are erased, any counter associated with these failures and which is specified in this Appendix shall not be erased, but reset to the value specified in the appropriate section of this Appendix.

11.3. Activation and deactivation mechanism of the operator inducement system

11.3.1. The operator inducement system shall be activated when the warning system is active and the counter relevant to the type of NCM justifying their activation have reached the value specified in Table 4 of this Appendix.

11.3.2. The operator inducement system shall be deactivated when the system no longer detects a malfunction justifying its activation, or if the information including the



DTCs relative to the NCMs justifying its activation has been erased by a scan tool or maintenance tool.

11.3.3. The operator warning and inducement systems shall be immediately activated or deactivated as appropriate according to the provisions of section 6 of this Appendix after assessment of the reagent quantity in the reagent tank. In that case, the activation or deactivation mechanisms shall not depend upon the status of any associated DTC.

11.4. Counter mechanism

11.4.1. General

11.4.1.1. To comply with the requirements of this Appendix, the system shall contain at least 4 counters to record the number of hours during which the engine has been operated while the system has detected any of the following:

- (a) an incorrect reagent quality;
- (b) an interruption of reagent dosing activity;
- (c) an impeded EGR valve;
- (d) a failure of the NCD system according to section 9.1 (ii) of this Appendix.

11.4.1.1.1. Optionally, the manufacturer may use one or more counters for grouping the failures indicated in section 11.4.1.1.

11.4.1.2. Each of the counters shall count up to the maximum value provided in a 2 byte counter with 1 hour resolution and hold that value unless the conditions allowing the counter to be reset to zero are met.

11.4.1.3. A manufacturer may use a single or multiple NCD system counters. A single counter may accumulate the number of hours of 2 or more different malfunctions relevant to that type of counter, none of them having reached the time the single counter indicates.

11.4.1.3.1. When the manufacturer decides to use multiple NCD system counters, the system shall be capable of assigning a specific monitoring system counter to each malfunction relevant according to this Appendix to that type of counters.

11.4.2. Principle of counters mechanism

11.4.2.1. Each of the counters shall operate as follows:

11.4.2.1.1. If starting from zero, the counter shall begin counting as soon as a malfunction relevant to that counter is detected and the corresponding diagnostic trouble code (DTC) has the status defined in Table 2.

11.4.2.1.2. In case of repeated failures, one of the following provisions shall apply at the choice of the manufacturer.

- (i) If a single monitoring event occurs and the malfunction that originally activated the counter is no longer detected or if the failure has been erased by a scan tool or a maintenance tool, the counter shall halt and hold its current value. If the counter stops counting when the severe inducement system is active, the counter shall be kept frozen at the value defined in Table 4 of this

Appendix or a value of greater than or equal to the counter value for severe inducement minus 30 minutes.

- (ii) The counter shall be kept frozen at the value defined in Table 4 of this Appendix or a value of greater than or equal to the counter value for severe inducement minus 30 minutes.

11.4.2.1.3. In the case of a single monitoring system counter, that counter shall continue counting if a NCM relevant to that counter has been detected and its corresponding Diagnostic trouble code (DTC) has the status "confirmed and active". It shall halt and hold one of the values specified in section 11.4.2.1.2, if no NCM that would justify the counter activation is detected or if all the failures relevant to that counter have been erased by a scan tool or a maintenance tool.

Table 4.4: Counters and inducement

	DTC status for first activation of the counter	counter value for low-level inducement	counter value for severe inducement	Frozen value held by the counter
reagent quality counter	confirmed and active	≤ 10 hours	≤ 20 hours	≥ 90% of counter value for severe inducement
dosing counter	confirmed and active	≤ 10 hours	≤ 20 hours	≥ 90% of counter value for severe inducement
EGR valve counter	confirmed and active	≤ 36 hours	≤ 100 hours	≥ 95% of counter value for severe inducement
monitoring system counter	confirmed and active	≤ 36 hours	≤ 100 hours	≥ 95% of counter value for severe inducement
NOx threshold, if applicable	confirmed and active	≤ 10 hours	≤ 20 hours	≥ 90% of counter value for severe inducement

11.4.2.1.4. Once frozen, the counter shall be reset to zero when the monitors relevant to that counter have run at least once to completion of their monitoring cycle without having detected a malfunction and no malfunction relevant to that counter has been detected during 40 engine operating hours since the counter was last held (see Figure 4.4).

11.4.2.1.5. The counter shall continue counting from the point at which it had been held if a malfunction relevant to that counter is detected during a period when the counter is frozen (see Figure 4.4).

11.5. Illustration of the activation and deactivation and counter mechanisms

11.5.1. This section 11.5 illustrates the activation and deactivation and counter mechanisms for some typical cases. The figures and descriptions given in paragraphs 11.5.2., 11.5.3. and 11.5.4. are provided solely for the purposes of illustration in this Appendix and should not be referenced as examples of either the requirements of this Regulation or as definitive statements of the processes involved. The counter hours in figures 4.6 and 4.7 refer to the maximum severe inducement values in Table 4.4. For simplification purposes, for example, the fact that the warning system will also be active when the inducement system is active has not been mentioned in the illustrations given.

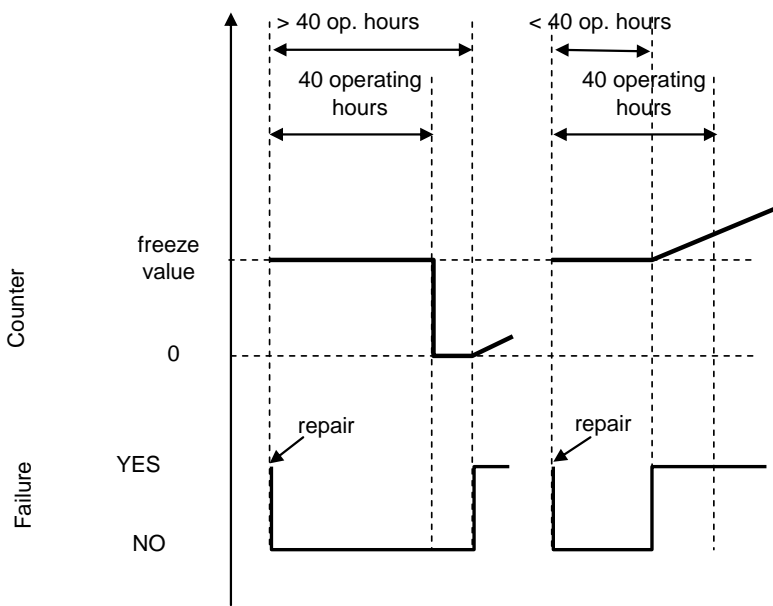


Figure 4.4: Reactivation and resetting to zero of a counter after a period when its value has been frozen.

11.5.2. Figure 4.5 illustrates the operation of the activation and deactivation mechanisms when monitoring the reagent availability for five cases:

- use case 1: the operator continues operating the machine in spite of the warning until machine operation is disabled;
- refilling case 1 ("adequate" refilling): the operator refills the reagent tank so that a level above the 10% threshold is reached. Warning and inducement are de-activated;
- refilling cases 2 and 3 ("inadequate" refilling): The warning system is activated. The level of warning depends on the amount of available reagent;

- refilling case 4 ("very inadequate" refilling): The low level inducement is activated immediately.

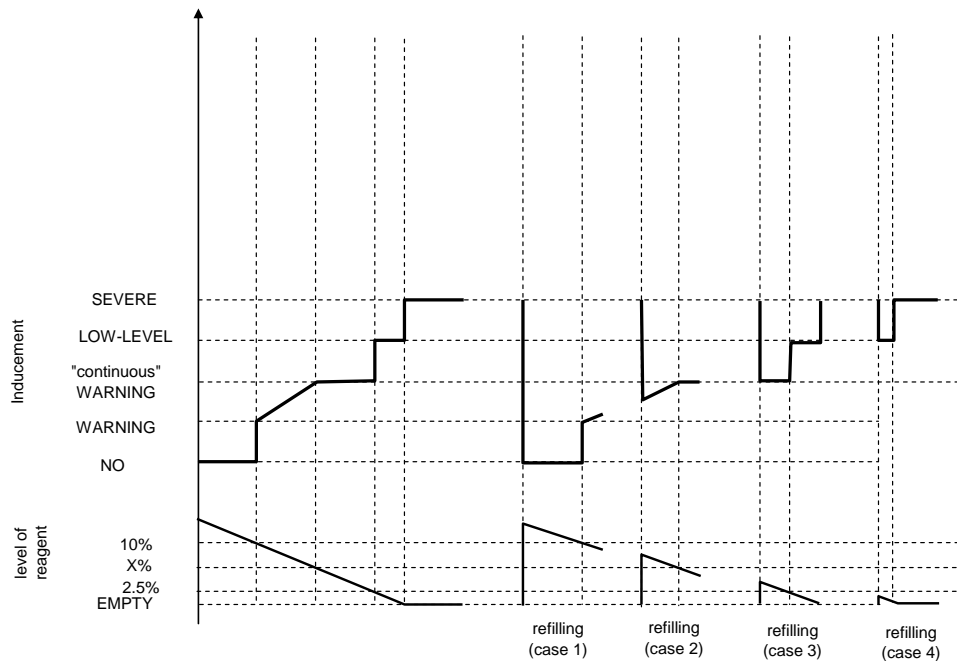


Figure 4.5 - Reagent availability

11.5.3. Figure 4.6 illustrates three cases of wrong reagent quality:

- use case 1: the operator continues operating the machine in spite of the warning until machine operation is disabled.
- repair case 1 ("bad" or "dishonest" repair): after disablement of the machine, the operator changes the quality of the reagent, but soon after, changes it again for a poor quality one. The inducement system is immediately reactivated and machine operation is disabled after 2 engine operating hours.
- repair case 2 ("good" repair): after disablement of the machine, the operator rectifies the quality of the reagent. However some time afterwards, he refills again with a poor quality reagent. The warning, inducement and counting processes restart from zero.

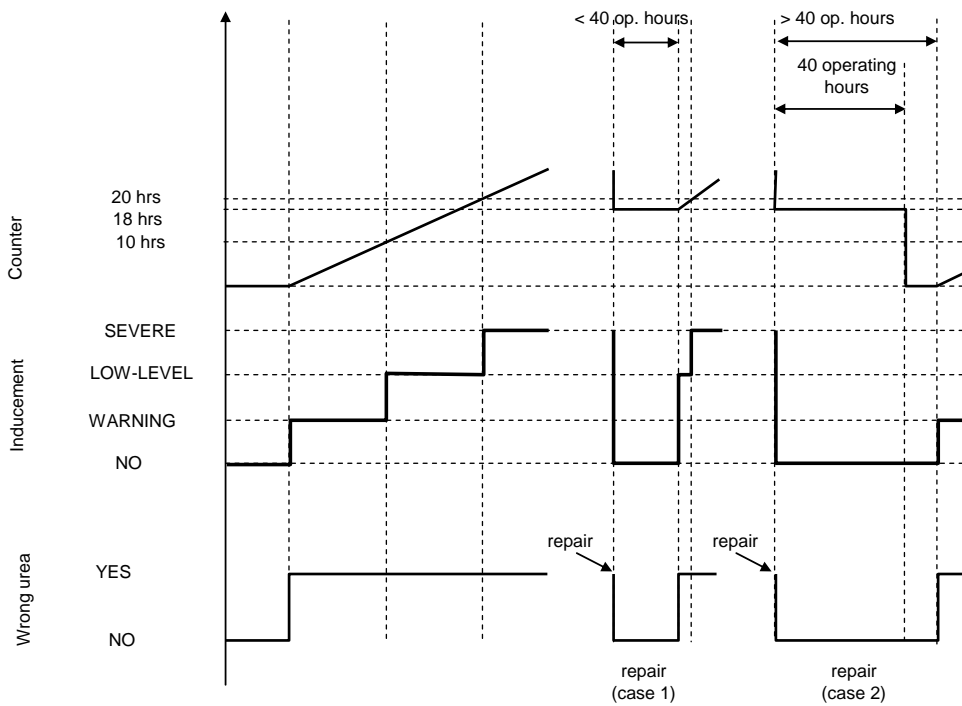


Figure 4.6 - Filling with poor reagent quality

11.5.4. Figure 4.7 illustrates three cases of failure of the urea dosing system. This figure also illustrates the process that applies in the case of the monitoring failures described in section 9 of this Appendix.

- use case 1: the operator continues operating the machine in spite of the warning until machine operation is disabled.
- repair case 1 ("good" repair): after disablement of the machine, the operator repairs the dosing system. However some time afterwards, the dosing system fails again. The warning, inducement and counting processes restart from zero.
- repair case 2 ("bad" repair): during the low-level inducement time (torque reduction), the operator repairs the dosing system. Soon after, however, the dosing system fails again. The low-level inducement system is immediately reactivated and the counter restarts from the value it had at the time of repair.

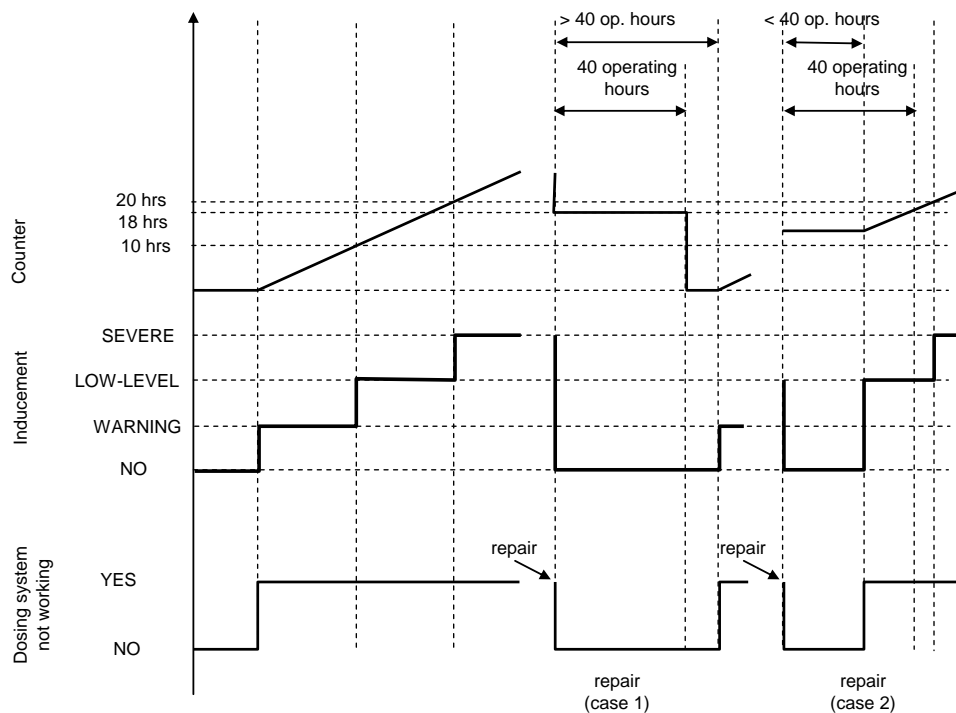


Figure 4.7 - Failure of the reagent dosing system

12. DEMONSTRATION OF THE MINIMUM ACCEPTABLE REAGENT CONCENTRATION  $CD_{min}$ 
  - 12.1. The manufacturer shall demonstrate the correct value of  $CD_{min}$  during type approval by performing the hot part of the NRTC cycle for engines of sub-category NRE-v-3, NRE-v-4, NRE-v-5 NRE-v-6 and the applicable NRSC for all other categories using a reagent with the concentration  $CD_{min}$ .
  - 12.2. The test shall follow the appropriate NCD cycle(s) or manufacturer defined pre-conditioning cycle, permitting a closed loop  $NO_x$  control system to perform adaptation to the quality of the reagent with the concentration  $CD_{min}$ .
  - 12.3. The pollutant emissions resulting from this test shall be lower than the  $NO_x$  threshold specified in section 7.1.1 of this Appendix.

## Appendix 2

### **Additional technical requirements on NOx control measures for engines of categories IWP, IWA and RLR, including the method to demonstrate these strategies**

#### **1 Introduction**

This Appendix sets out the additional requirements to ensure the correct operation of NOx control measures for engines of categories IWP, IWA and RLR.

#### **2 General requirements**

The requirements of Appendix 1 apply additionally to engines in scope of this Appendix.

#### **3 Exceptions to the requirements of Appendix 1**

In order to account for safety concerns the inducements required in Appendix 1 shall not apply to engines in scope of this Appendix. Consequently the following paragraphs of Appendix 1 shall not apply: 2.3.3.2, 5, 6.3, 7.3, 8.4, 9.4, 10.4, 11.3.

#### **4 Requirement for storing incidents of engine operation with inadequate reagent injection or reagent quality.**

Deleted: reductant

Deleted: reductant

4.1 The on-board computer log must record in non-volatile computer memory the total number and duration of all incidents of engine operation with inadequate reagent injection or reagent quality in a manner to ensure that the information cannot be intentionally deleted.

Deleted: reductant

Deleted: reductant

It shall be possible for national inspection authorities to read these records with a scan tool.

4.1.1 The duration of an incident logged in the memory according to paragraph 4.1 shall commence when the reagent tank becomes empty, [that is, when the dosing system is unable to draw further reagent from the tank,] or at any level below 2.5% of its nominally full capacity at the discretion of the manufacturer.

4.1.2 For incidents other than those specified in paragraph 4.1.1 the duration of an incident logged in the memory according to paragraph 4.1 shall commence when the respective counter reaches the value for severe inducement in table 4.4 of Appendix 1.

4.1.3 The duration of an incident logged in the memory according to paragraph 4.1 shall end when the incident has been remedied.

4.2 When conducting a demonstration according to the requirements of paragraph 10 of Appendix 1 the demonstration of the severe inducement system in paragraph 10.1(c) of that Annex and the corresponding Table 4.1 shall be replaced by a demonstration of the storage of an incident of engine operation with inadequate reagent injection or reagent quality.

Deleted: reductant

Deleted: reductant

In this case the requirements of paragraph 10.4.1 of Annex 1 shall apply and the manufacturer shall, in agreement with the approval authority, be permitted to accelerate the test by simulating the achievement of a certain number of operating hours.



## Appendix 3

### **Additional technical requirements on NOx control measures for engines of category RLL**

#### **1 Introduction**

This Appendix sets out the additional requirements to ensure the correct operation of NOx control measures for engines of category RLL. It includes requirements for engines that rely on the use of a reagent in order to reduce emissions. The type approval shall be made conditional upon the application of the relevant provisions on operator instruction, installation documents and operator warning system that are set out in this Appendix.

#### **2 Required information**

- 2.1 The manufacturer shall provide information that fully describes the functional operational characteristics of the NOx control measures, in accordance with [paragraph ?? of implementing act].
- 2.2 If the emission control system requires a reagent, the characteristics of that reagent, including the type of reagent, information on concentration when the reagent is in solution, operational temperature conditions and reference to international standards for composition and quality must be specified by the manufacturer, in accordance with [paragraph ?? of implementing act].

#### **3 Reagent availability and warning system**

When a reagent is used the type approval shall be conditional upon providing indicators or other appropriate means, according to the configuration of the non-road mobile machinery, informing the operator on:

- (a) the amount of reagent remaining in the reagent storage container and by an additional specific signal, when the remaining reagent is less than 10 % of the full container's capacity;
- (b) when the reagent container becomes empty, or almost empty;
- (c) when the reagent in the storage tank does not comply with the characteristics declared and recorded in [insert reference to relevant section of IA], according to the installed means of assessment.
- (d) when the dosing activity of the reagent is interrupted, in cases other than those executed by the engine ECU or the dosing controller, reacting to engine operating conditions where the dosing is not required, provided that these operating conditions are made available to the type approval authority.

#### **4 Reagent quality**

By the choice of the manufacturer the requirements of reagent compliance with the declared characteristics and the associated NO<sub>x</sub> emission tolerance shall be satisfied by one of the following means:

- (a) direct means, such as the use of a reagent quality sensor.
- (b) indirect means, such as the use of a NO<sub>x</sub> sensor in the exhaust to evaluate reagent effectiveness.
- (c) any other means, provided that its efficacy is at least equal to the one resulting by the use of the means of points (a) or (b) and the main requirements of this section are maintained.

## Appendix 4

### **Technical requirements on particulate pollutant control measures, including the method to demonstrate these measures**

#### 1. Introduction

This Appendix sets out the requirements to ensure the correct operation of particulate control measures.

#### 2. General requirements

The engine shall be equipped with a Particulate Control Diagnostic system (PCD) able to identify the DPF malfunctions considered by this Annex. Any engine system covered by this section shall be designed, constructed and installed so as to be capable of meeting these requirements throughout the normal life of the engine under normal conditions of use. In achieving this objective it is acceptable that engines which have been used in excess of the emission durability period as specified in Annex V of Regulation (EU) 2016/XXX show some deterioration in the performance and the sensitivity of the PCD.

##### 2.1. Required information

- 2.1.1. If the emission control system requires a reagent e.g. fuel borne catalyst, the characteristics of that reagent, including the type of reagent, information on concentration when the reagent is in solution, operational temperature conditions and reference to international standards for composition and quality must be specified by the manufacturer, in Section XXX of Annex XX to the implementing act.
- 2.1.2. Detailed written information fully describing the functional operation characteristics of the operator warning system in paragraph 4 shall be provided to the approval authority at the time of type-approval.
- 2.1.3. The manufacturer shall provide installation documents that, when used by the OEM, will ensure that the engine, inclusive of the emission control system that is part of the approved engine type, when installed in the machine, will operate, in conjunction with the necessary machinery parts, in a manner that will comply with the requirements of this Annex. This documentation shall include the detailed technical requirements and the provisions of the engine system (software, hardware, and communication) needed for the correct installation of the engine system in the machine.

##### 2.2. Operating conditions

- 2.2.1. The PCD system shall be operational at the following conditions:
  - (a) ambient temperatures between 266 K and 308 K (– 7 °C and 35 °C);
  - (b) all altitudes below 1600 m;
  - (c) engine coolant temperatures above 343 K (70 °C).

##### 2.3. Diagnostic requirements

- 2.3.1. The PCD system shall be able to identify the particulate control malfunctions (PCM) considered by this Annex by means of Diagnostic Trouble Codes (DTCs) stored in the computer memory and to communicate that information off-board upon request.
- 2.3.2. Requirements for recording Diagnostic Trouble Codes (DTCs)
  - 2.3.2.1. The PCD system shall record a DTC for each distinct PCM.
  - 2.3.2.2. The PCD system shall conclude within the periods of engine operation indicated in table 1 whether a detectable malfunction is present. At this time, a “confirmed and active” DTC shall be stored and the warning system specified in paragraph 4 shall be activated.
  - 2.3.2.3. In cases where more than the period of running time indicated in table 1 is required for the monitors to accurately detect and confirm a PCM (e.g. monitors using statistical models or with respect to fluid consumption on the machine), the Approval Authority may permit a longer period for monitoring provided the manufacturer justifies the need for the longer period (for example by technical rationale, experimental results, in-house experience, etc.).

Table 4.5: Monitor types and corresponding period within which a “confirmed and active” DTC shall be stored

Deleted: 1

Monitor type	Period of accumulated running time within which a “confirmed and active” DTC shall be stored
Removal of DPF	60 minutes of non-idle engine operation
Loss of function of DPF	240 minutes of non-idle engine operation
Failures of the PCD system	60 minutes of engine operation

- 2.3.3. Requirements for erasing Diagnostic trouble codes (DTCs):
  - (a) DTCs shall not be erased by the PCD system itself from the computer memory until the failure related to that DTC has been remedied;
  - (b) the PCD system may erase all the DTCs upon request of a proprietary scan or maintenance tool that is provided by the engine manufacturer upon request, or using a pass code provided by the engine manufacturer.
  - (c) the record of incidents of operation with a DTC confirmed and active that are stored in non-volatile memory as required by paragraph 5.2 shall not be erased.
- 2.3.4. A PCD system shall not be programmed or otherwise designed to partially or totally deactivate based on age of the machine during the actual life of the engine, nor shall the system contain any algorithm or strategy designed to reduce the effectiveness of the PCD system over time.
- 2.3.5. Any reprogrammable computer codes or operating parameters of the PCD system shall be resistant to tampering.

### 2.3.6. PCD engine family

The manufacturer is responsible for determining the composition of a PCD engine family. Grouping engine systems within a PCD engine family shall be based on good engineering judgement and be subject to approval by the Approval Authority.

Engines that do not belong to the same engine family may still belong to the same PCD engine family.

#### 2.3.6.1. Parameters defining a PCD engine family

A PCD engine family is characterised by basic design parameters that shall be common to engines within the family.

In order that engine systems are considered to belong to the same PCD engine family, the following list of basic parameters shall be similar:

- (a) working principle of DPF (e.g. mechanical, aerodynamic, diffusional, inertial, periodically regenerating, continuously regenerating, etc.)
- (b) methods of PCD monitoring;
- (c) criteria for PCD monitoring;
- (d) monitoring parameters (e.g. frequency).

These similarities shall be demonstrated by the manufacturer by means of relevant engineering demonstration or other appropriate procedures and subject to the approval of the Approval Authority.

The manufacturer may request approval by the Approval Authority of minor differences in the methods of monitoring/diagnosing the PCD monitoring system due to engine system configuration variation, when these methods are considered similar by the manufacturer and they differ only in order to match specific characteristics of the components under consideration (for example size, exhaust flow, etc.); or their similarities are based on good engineering judgement.

### 3. Maintenance requirements

- 3.1. The manufacturer shall furnish or cause to be furnished to all owners of new engines or machines written instructions about the emission control system and its correct operation as required by Annex XV.

#### 4. Operator warning system

- 4.1. The machine shall include an operator warning system using visual alarms.
- 4.2. The operator warning system may consist of one or more lamps, or display short messages.

The system used for displaying these messages may be the same as the one used for other maintenance or NCD purposes

The warning system shall indicate that an urgent repair is required. When the warning system includes a message display system, it shall display a message indicating the reason of the warning (for example “sensor disconnected”, or “critical emission failure”)

- 4.3. At the choice of the manufacturer, the warning system may include an audible component to alert the operator. The cancelling of audible warnings by the operator is permitted.
- 4.4. The operator warning system shall be activated as specified in paragraph 2.3.2.2.
- 4.5. The operator warning system shall be deactivated when the conditions for its activation have ceased to exist. The operator warning system shall not be automatically deactivated without the reason for its activation having been remedied.
- 4.6. The warning system may be temporarily interrupted by other warning signals providing important safety related messages.
- 4.7. As part of the application for type-approval under this Directive, the manufacturer shall demonstrate the operation of the operator warning system, as specified in Section 8.
- 5. System to store information on operator warning system activation
  - 5.1 The PCD system shall include a non-volatile computer memory to store incidents of engine operation with a DTC confirmed and active in a manner to ensure that the information cannot be intentionally deleted.
  - 5.2 The PCD shall store in the non-volatile memory all incidents of engine operation with a DTC confirmed and active where the operator warning system has been active for 20 hours of engine operation, or a shorter period at the choice of the manufacturer.
  - 5.2 It shall be possible for national inspection authorities to read these records with a scan tool.
- 6. Monitoring for removal of DPF
  - 6.1 The PCD shall detect the complete removal of the DPF inclusive of the removal of any sensors used to monitor, activate, de-activate or modulate its operation.
- 7. Additional requirements in the case of a DPF that uses a reagent (eg fuel borne catalyst)
  - 7.1 In the case of a confirmed and active DTC for either removal of DPF or loss of DPF function the reagent dosing shall be immediately interrupted. Dosing shall recommence when the DTC is no longer active.
  - 7.2 The warning system shall be activated if the reagent level in the additive tank falls below the minimum value specified by the manufacturer.
- 8. Monitoring failures that may be attributed to tampering
  - 8.1. In addition to monitoring for removal of DPF the following failures shall be monitored because they may be attributed to tampering:
    - (a) loss of DPF function
    - (b) failures of the PCD system, as described in paragraph 8.3
  - 8.2 Monitoring loss of DPF function

The PCD shall detect the complete removal of the DPF substrate (“empty can”). In this case the DPF housing and sensors used to monitor, activate, de-activate or modulate its operation are still present.

8.3. Monitoring failures of the PCD system

8.3.1. The PCD system shall be monitored for electrical failures and for removal or deactivation of any sensor or actuator that prevents it from diagnosing any other failures mentioned in paragraph 6.1 and 8.1 (a) (component monitoring).

A non-exhaustive list of sensors that affect the diagnostic capability are those directly measuring differential pressures over the DPF and exhaust temperature sensors for control of the DPF regeneration.

8.3.2. Where the failure, removal or deactivation of a single sensor or actuator of the PCD system does not prevent the diagnosis within the required time period of the failures mentioned in paragraph 6.1 and 8.1(a) (redundant system), the activation of the warning system and storage of information on operator warning system activation shall not be required unless additional sensor or actuator failures are confirmed and active.

9. DEMONSTRATION REQUIREMENTS

9.1. GENERAL

The compliance to the requirements of this Appendix shall be demonstrated during type-approval by performing, as illustrated in table 2 and specified in this section a demonstration of the warning system activation.

Table 4.6: Illustration of the content of the demonstration process according to the provisions in sections 9.3 and 9.4 of this Appendix

Deleted: 2

Mechanism	demonstration elements
Warning system activation specified in section 8.3 of this Appendix	<ul style="list-style-type: none"> <li>• 2 activation tests (incl. loss of DPF function)</li> <li>• Supplementary demonstration elements, as appropriate</li> </ul>

9.2 Engine families and PCD engine families

9.2.1. In the case where engines of an engine family belong to a PCD engine family that has already been type-approved according to paragraph 9.2.1 (Figure 4.8), the compliance of that engine family is deemed to be demonstrated without further testing, provided the manufacturer demonstrates to the authority that the monitoring systems necessary for complying with the requirements of this Annex are similar within the considered engine and PCD engine families.

Deleted: 1

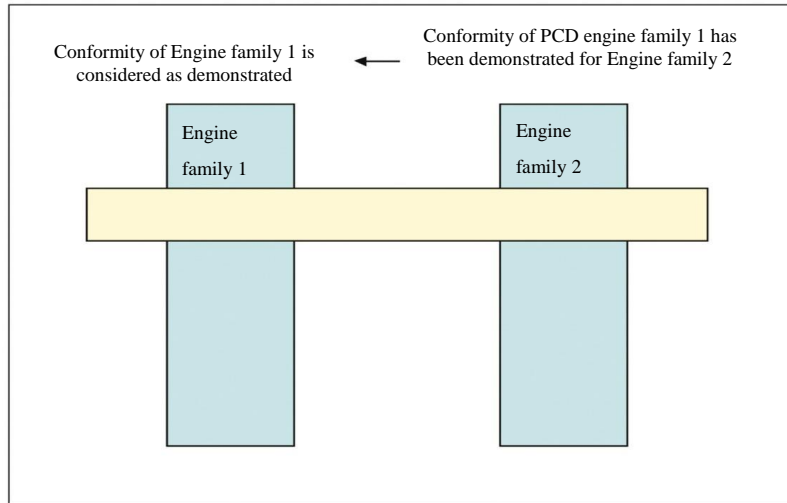


Figure 4.8: Previously demonstrated conformity of a PCD engine family

Deleted: 1

### 9.3. Demonstration of the warning system activation

9.3.1. The compliance of the warning system activation shall be demonstrated by performing two tests: Loss of DPF function and one failure category considered in paragraph 6 or paragraph 8.3 of this Annex.

#### 9.3.2. Selection of the failures to be tested

9.3.2.1. The manufacturer shall provide the approval authority with a list of such potential failures.

9.3.2.2. The failure to be considered in the test shall be selected by the approval authority from this list referred to in paragraph 9.3.2.1.

#### 9.3.3. Demonstration

9.3.3.1. For the purpose of this demonstration, a separate test shall be performed for the loss of DPF function in paragraph 8.2 and one of the failures considered in paragraph 6 or paragraph 8.3. The loss of DPF function shall be created by complete removal of the substrate from the DPF housing.

9.3.3.2. During a test, no failure shall be present other than the one addressed by the test.

9.3.3.3. Prior to starting a test, all DTC shall have been erased.

9.3.3.4. At the request of the manufacturer, and with the agreement of the approval authority, the failures subject to testing may be simulated.

9.3.3.5. Detection of failures



9.3.3.5.1. The PCD system shall respond to the introduction of a failure selected as appropriate by the type approval authority in accordance to the provisions of this Appendix. This is considered to be demonstrated if activation occurs within the number of consecutive PCD test-cycles given in table 3.

When it has been specified in the monitoring description and agreed by the Approval Authority that a specific monitor needs more PCD test-cycles to complete its monitoring than indicated in table 3, the number of PCD test-cycles may be increased by up to 50%.

Each individual PCD test-cycle in the demonstration test may be separated by an engine shut-off. The time until the next start-up shall take into consideration any monitoring that may occur after engine shut- off and any necessary condition that must exist for monitoring to occur at the next start-up.

Table 4.7: Monitor types and corresponding number of PCD test cycles within which a “confirmed and active” DTC shall be stored

Deleted: 3

Monitor type	Number of PCD test cycles within which a “confirmed and active” DTC shall be stored
Removal of DPF	2
Loss of function of DPF	8
Failures of the PCD system	2

9.3.3.6. PCD test cycle

9.3.3.6.1. The PCD test cycle considered in this Section 9 for demonstrating the correct performance of the DPF monitoring system is the hot NRTC cycle for engines of sub-category NRE-v-3, NRE-v-4, NRE-v-5, NRE-v-6 and the applicable NRSC for all other categories..

9.3.3.6.2. On request of the manufacturer and with approval of the Approval Authority, an alternative PCD test- cycle (e.g. other than the NRTC or the NRSC) can be used for a specific monitor. The request shall contain elements (technical considerations, simulation, test results, etc.) demonstrating:

- (a) the requested test-cycle results in a monitor that will run in real world driving, and
- (b) the applicable PCD test-cycle specified in paragraph 9.3.3.6.1 is shown to be less appropriate for the considered monitoring.

9.3.3.7 Configuration for demonstration of the warning system activation

9.3.3.7.1. The demonstration of the warning system activation shall be done by tests performed on an engine test bench.

9.3.3.7.2. Any components or subsystems not physically mounted on the engine system, such as, but not limited to, ambient temperature sensors, level sensors, and operator warning and information systems, that are required in order to perform the

demonstrations shall be connected to the engine system for that purpose, or shall be simulated, to the satisfaction of the approval authority.

- 9.3.3.7.3. If the manufacturer chooses, and subject to the agreement of the approval authority, the demonstration tests may be performed on a complete machine or machinery either by mounting the machine on a suitable test bed or by running it on a test track under controlled conditions.
- 9.3.4. The demonstration of the warning system activation is deemed to be accomplished if, at the end of each demonstration test performed according to Section 9.3.3 the warning system has been properly activated and the DTC for the selected failure has a “confirmed and active” status.
- 9.3.5 Where a DPF that uses a reagent is subjected to a demonstration test for loss of DPF function or removal of DPF it shall also be confirmed that reagent dosing has been interrupted.

## ANNEX V

### **Detailed technical requirements on the area associated with the relevant NRSC cycle, within which there is control on the amount that the emissions shall be permitted to exceed the limit values set out in Annex II to Regulation (EU) 2015/XXX**

#### **1 General requirements**

This section shall apply for electronically controlled engines of categories NRE, NRG, IWP, IWA, and RLR, complying with “Stage V” emission limits set out in Annex II of Regulation (EU) 2016/XXX and using electronic control to determine both the quantity and timing of injecting fuel or using electronic control to activate, de-activate or modulate the emission control system used to reduce NO<sub>x</sub>.

This section sets out the technical requirements relating to the area associated with the relevant non-road steady-state cycle (NRSC), within which the amount by which that the emissions shall be permitted to exceed the emission limits set out in Annex II is controlled.

When an engine is tested in the manner set out in test requirements of point 4 the emissions sampled at any randomly selected point within the applicable control area set out in point 2 shall not exceed the applicable emission limit values in Annex II of Regulation (EU) 2016/XXX multiplied by a factor of 2.0.

Point 3 sets out the selection by the technical service of additional measurement points from within the control area during the emission bench test, in order to demonstrate that the requirements of this section have been met.

The manufacturer may request that the Technical Service excludes operating points from any of the control areas set out in point 2 during the demonstration set out in point 3. The Technical Service may grant this exclusion if the manufacturer can demonstrate that the engine is never capable of operating at such points when used in any non-road mobile machine combination.

#### **2 Engine control area**

The applicable control area for conducting the engine test shall be the area identified in this paragraph that corresponds to the applicable NRSC for the engine being tested.

##### **2.1 Control area for engines tested on NRSC cycle CI**

These engines operate with variable speed and load. Different control area exclusions apply depending upon the (sub-)category and operating speed of the engine.

##### **2.1.1 Variable speed engines of category NRE with maximum net power $\geq 19$ kW, variable speed engines of category IWA with maximum net power $\geq 300$ kW, variable speed engines of category RLR and variable speed engines of category NRG**

The control area (see Figure 1) is defined as follows:

upper torque limit: full load torque curve

speed range: speed A to  $n_{hi}$ ;

where:

$$\text{speed A} = n_{lo} + 0.15 \cdot (n_{hi} - n_{lo});$$

$n_{hi}$  = high speed (see paragraph 3.26)

$n_{lo}$  = low speed (see paragraph 3.31)

The following engine operating conditions shall be excluded from testing:

- (a) points below 30% of maximum torque;
- (b) points below 30% of maximum net power.


If the measured engine speed A is within  $\pm 3\%$  of the engine speed declared by the manufacturer, the declared engine speeds shall be used. If the tolerance is exceeded for any of the test speeds, the measured engine speeds shall be used.

Intermediate test points within the control area shall be determined as follows:

%torque = per cent of maximum torque;

$$\%speed = \frac{(n - n_{idle})}{(n_{100\%} - n_{idle})} \cdot 100;$$

where:  $n_{100\%}$  is the 100% speed for the corresponding test cycle.

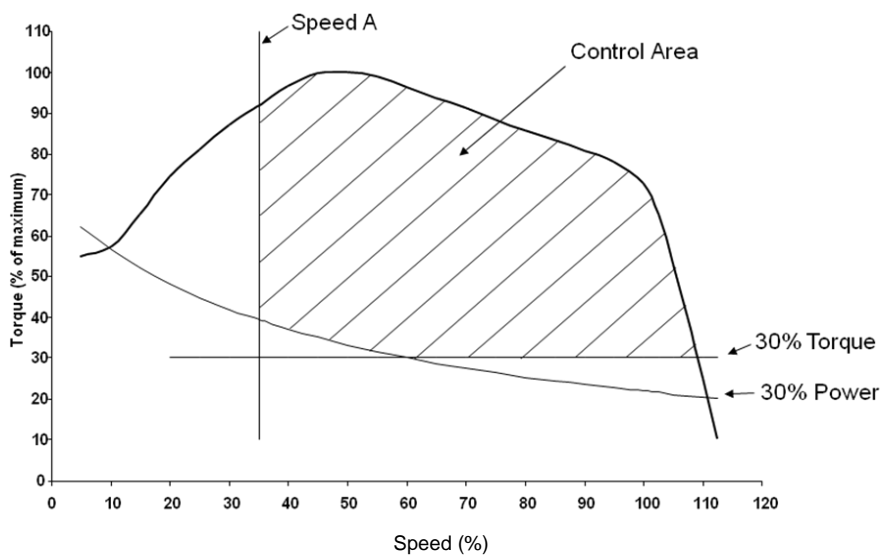

**Figure 1.** Control area for variable speed engines of category NRE with maximum net power  $\geq 19$  kW, variable speed engines of category IWA with maximum net power  $\geq 300$  kW and variable speed engines of category NRG

- 2.1.2 Variable speed engines of category NRE with maximum net power  $< 19$  kW and variable speed engines of category IWA with maximum net power  $< 300$  kW

The control area specified in paragraph 2.1.1 shall apply but with the additional exclusion of the engine operating conditions given in this paragraph and illustrated in figures 2 and 3.

- (a) for particulate matter only, if the C speed is below 2400 r/min, points to the right of or below the line formed by connecting the points of 30 % of maximum torque or 30 % of maximum net power, whichever is greater, at the B speed and 70 % of maximum net power at the high speed;
- (b) for particulate matter only, if the C speed is at or above 2400 r/min, points to the right of the line formed by connecting the points of 30 % of maximum torque or 30 % of maximum net power, whichever is greater, at the B speed, 50 % of maximum net power at 2400 r/min, and 70 % of maximum net power at the high speed.

where:


$$\text{speed B} = n_{lo} + 0.5 \cdot (n_{hi} - n_{lo});$$

$$\text{speed C} = n_{lo} + 0.75 \cdot (n_{hi} - n_{lo}).$$

$n_{hi}$  = high speed (see paragraph 3.26)

$n_{lo}$  = low speed (see paragraph 3.31)

If the measured engine speeds A, B and C are within  $\pm 3\%$  of the engine speed declared by the manufacturer, the declared engine speeds shall be used. If the tolerance is exceeded for any of the test speeds, the measured engine speeds shall be used.

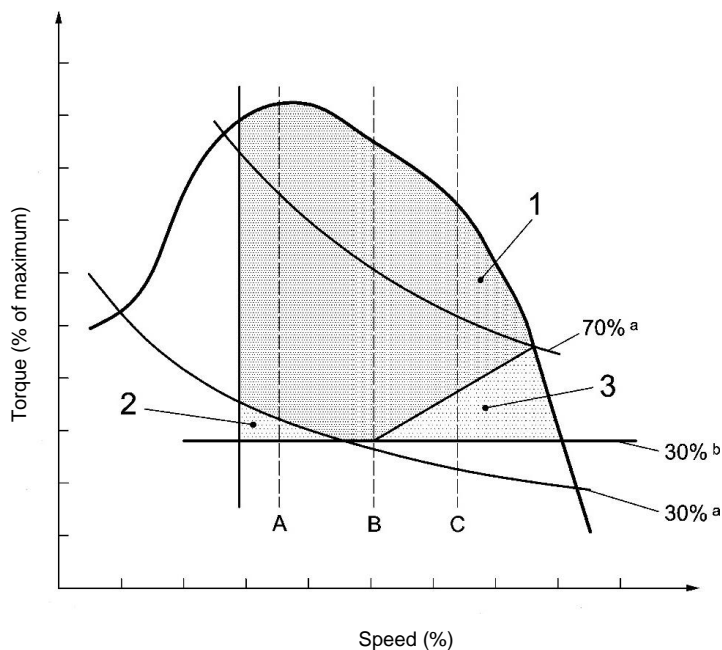


**Key**

- 1 Engine Control Area
- 2 All Emissions Carve-Out

3 PM Carve-Out<sup>a</sup> Per cent of maximum net power  
 b Per cent of maximum torque

**Figure 2.** Control area for variable speed engines of category NRE with maximum net power < 19 kW and variable speed engines of category IWA with maximum net power < 300 kW, , speed C < 2400 rpm

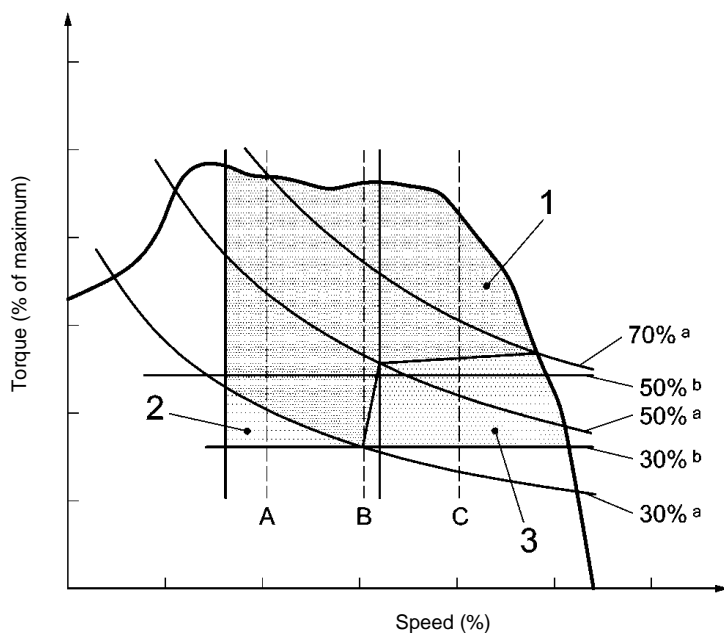

**Key**

1	Engine Control Area	2	All Emissions Carve-Out
3	PM Carve-Out	<sup>a</sup>	Per cent of maximum net power
	<sup>b</sup>		Per cent of maximum torque

**Figure 3.** Control area for variable speed engines of category NRE with maximum net power < 19 kW and variable speed engines of category IWA with maximum net power < 300 kW, speed C ≥ 2400 rpm

**2.2 Control area for engines tested on NRSC cycles D2, E2 and G2**

These engines are mainly operated very close to their designed operating speed, hence the control area is defined as:

speed: \_\_\_\_\_ 100%

torque range: \_\_\_\_\_ 50 % to the torque corresponding to maximum power.

Deleted: 100 %.


**2.3 Control area for engines tested on NRSC cycle E3**

These engines are mainly operated slightly above and below a fixed pitch propeller curve. The control area is related to the propeller curve and has exponents of mathematical equations defining the boundaries of the control area. The control area is defined as follows:

- Lower speed limit:  $0.7 \cdot n_{100\%}$ ;
- Upper boundary curve:  $\%power = 100 \cdot (\%speed/90)^{3.5}$ ;
- Lower boundary curve:  $\%power = 70 \cdot (\%speed/100)^{2.5}$ ;
- Upper power limit: Full load power curve
- Upper speed limit: Maximum speed permitted by governor

where:

- $\%power$  is per cent of maximum net power;
- $\%speed$  is per cent of  $n_{100\%}$
- $n_{100\%}$  is the 100% speed for the corresponding test cycle.

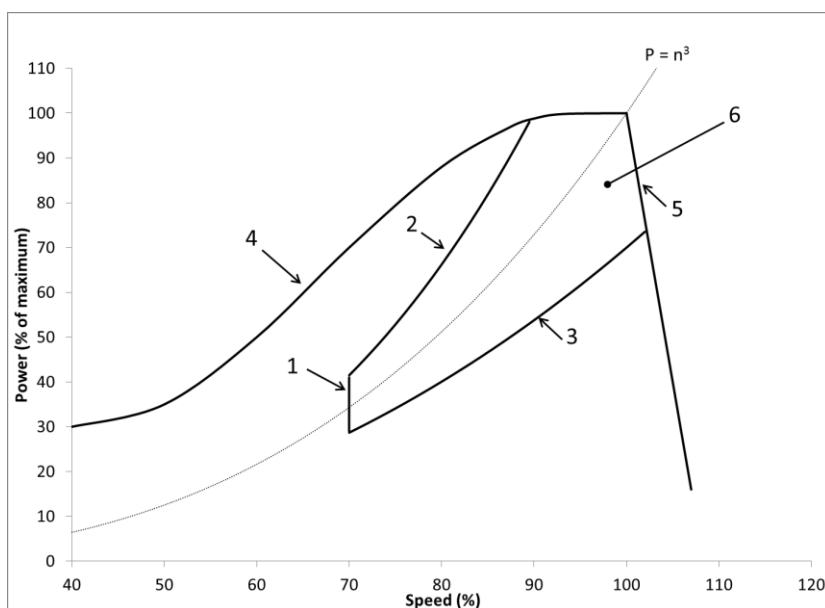

**Key**

- |                                |                         |
|--------------------------------|-------------------------|
| 1 Lower speed limit            | 2 Upper boundary curve  |
| 3 Lower boundary curve         | 4 Full load power curve |
| 5 Governor maximum speed curve | 6 Engine Control Area   |

**Figure 4.** Control area for engines tested on NRSC cycle E3

**3 Demonstration requirements**

The technical service shall select random load and speed points within the control area for testing. For engines subject to paragraph 2.1 up to three points shall be selected. For engines subject to paragraph 2.2 one point shall be selected. For engines subject to paragraphs 2.3 or 2.4 up to two points shall be selected. The technical service shall also determine a random running order of the test points. The test shall be run in accordance with the principal requirements of the NRSC, but each test point shall be evaluated separately.

#### **4 Test requirements**

The test shall be carried out immediately after the discrete mode test cycles as follows:

- (a) the test shall be carried out immediately after the discrete mode test cycles as described in points (a) to (e) of paragraph 7.8.1.2. of Annex 4B but before the post test procedures (f) or after the Ramped Modal Cycle (RMC) test in points (a) to (d) of paragraph 7.8.2.2. of Annex 4B but before the post test procedures (e) as relevant;
- (b) the tests shall be carried out as required in points (b) to (e) of paragraph 7.8.1.2. of Annex 4B using the multiple filter method (one filter for each test point) for each of the three chosen test points;
- (c) a specific emission value shall be calculated (in g/kWh or #/kWh as applicable) for each test point;
- (d) emissions values may be calculated on a molar basis using Appendix A.7 or on a mass basis using Appendix A.8, but should be consistent with the method used for the discrete mode or RMC test;
- (e) for gaseous summation calculations the  $N_{mode}$  shall be set to 1 and a weighting factor of 1 shall be used;
- (f) for particulate calculations use the multiple filter method and for summation calculations  $N_{mode}$  shall be set to 1 and a weighting factor of 1 shall be used.



## ANNEX VI

### Conduct of emission tests and requirements for measurement equipment

#### 1 Introduction

This Annex describes the method of determining emissions of gaseous and particulate pollutants from the engine to be tested and the specifications related to the measurement equipment. As from paragraph 6, the numbering of this Annex is consistent with the numbering of the NRMM gtr 11 and UN R 96-03, Annex 4B. However, some paragraphs of the NRMM gtr 11 are not needed in this Annex, or are modified according to the technical progress.

#### 2 General overview

This Annex contains the following technical provisions needed for conducting an emissions test. Additional provisions are listed in paragraph 3.

- Paragraph 5: Performance requirements, including the determination of tests speeds
- Paragraph 6: Test conditions, including the method for accounting for emissions of crankcase gases, the method for determining and accounting for continuous and infrequent regeneration of after-treatment systems
- Paragraph 7: Test procedures, including the mapping of engines, the test cycle generation and the test cycle running procedure
- Paragraph 8: Measurement procedures, including the instrument calibration and performance checks and the instrument validation for the test
- Paragraph 9: Measurement equipment, including the measurement instruments, the dilution procedures, the sampling procedures and the analytical gases and mass standards
- Appendix 1: PN measurement procedure

#### 3 Related annexes

- Data evaluation and calculation: Annex VIII
- Reference fuels: Annex IX
- Test cycles: Annex XIX

#### 4 General requirements

The engines to be tested shall meet the performance requirements of paragraph 5 when tested in accordance with the test conditions of paragraph 6 and the test procedures of paragraph 7.

## 5 Performance requirements

### 5.1 Emissions of gaseous and particulate pollutants

The pollutants are represented by:

- (a) Oxides of nitrogen, NO<sub>x</sub>;
- (b) Hydrocarbons, expressed ~~as~~ total hydrocarbons, HC or THC;
- (c) Carbon monoxide, CO;
- (d) Particulate matter, PM;
- (e) Particle number, PN, if applicable.

**Deleted:** which may be

**Deleted:** in the following ways: ¶  
(i)

**Deleted:** ¶  
(ii) Non-methane hydrocarbons, NMHC;

The measured values of gaseous and particulate pollutants exhausted by the engine refer to the brake-specific emissions in grams per kilowatt-hour (g/kWh).

The emissions shall be determined on the duty cycles (steady-state and/or transient), as described in paragraph 7 and Annex [XVII](#). The measurement systems shall meet the calibration and performance checks of paragraph 8 with measurement equipment of paragraph 9.

**Deleted:** XIX

Other systems or analysers may be approved by the Type Approval Authority if it is found that they yield equivalent results in accordance with paragraph 5.1.1.

#### 5.1.1 Equivalency

The determination of system equivalency shall be based on a seven-sample pair (or larger) correlation study between the system under consideration and one of the systems of this annex. "Results" refer to the specific cycle weighted emissions value. The correlation testing is to be performed at the same laboratory, test cell, and on the same engine, and is preferred to be run concurrently. The equivalency of the sample pair averages shall be determined by *F*-test and *t*-test statistics as described in Annex VIII, Appendix 2 obtained under the laboratory test cell and the engine conditions described above. Outliers shall be determined in accordance with ISO 5725 and excluded from the database. The systems to be used for correlation testing shall be subject to the approval by the Type Approval Authority.

## 5.2 General requirements on the test cycles

5.2.1 The type-approval test shall be conducted using the appropriate non-road steady cycle (NRSC) and, where applicable, non-road transient cycle (NRTC or LSI-NRTC), specified in Article 23 and Annex IV to Regulation (EU) 2015 XXX.

**Deleted:** The method for determination of the speed and load settings for these cycles is laid down in paragraphs 5.2.5 and 5.2.6.

5.2.2 The technical specifications and characteristics of the NRSC cycles are set out in Annex XIX, Appendix 1 (discrete-mode cycle) and Appendix 2 (ramped-modal cycle). At the choice of the manufacturer, a NRSC steady-state test may be run as a discrete-mode cycle or, where available, as a ramped-modal cycle (RMC) as set out in paragraph 7.4.1.

**Deleted:** It shall not be required to conduct an emission test according to both Appendices 1 and 2.

5.2.3 The technical specifications and characteristics of the NRTC and LSI-NRTC cycles are set out in Annex XIX, Appendix 3.

5.2.4 The test cycles specified in paragraph 7.4 and in Annex XVII are designed around percentages of maximum torque or power and test speeds that need to be determined for the correct performance of the test cycles:

- (a) 100 % speed (maximum test speed or rated speed)
- (b) Intermediate test speed(s)
- (c) Idle speed

The determination of the test speeds is set out in paragraph 5.2.5, the use of torque and power in paragraph 5.2.6.

### 5.2.5 Test speeds

Test speeds are set out in paragraphs 5.2.5.1 to 5.2.5.5 and shall be determined according to the test cycle(s) to be used.

In certain cases the rated speed will be used to represent 100% speed. In other cases the MTS (maximum test speed) will be used to represent 100% speed. The correct use of the 100 % speed is set out in paragraph 7.7.

For constant speed engines the 100% speed shall be determined in accordance with paragraph 5.2.5.5.

Where applicable, an intermediate speed shall be determined in accordance with paragraph 5.2.5.3. Where intermediate speed is not used the other speeds shall be determined as a percentage of the rated speed or MTS.

#### 5.2.5.1 MTS (Maximum test speed)

The maximum test speed (MTS) shall be calculated in accordance with paragraph 5.2.5.1.1 or paragraph 5.2.5.1.3.

**Deleted:** For engines that are tested with the NRTC or LSI-NRTC, the MTS shall be determined in accordance with this paragraph. In this case the 100% test speed is equal to the MTS. For engines that are tested with both a NRSC (discrete or ramped modal) and also the NRTC or LSI-NRTC, the MTS shall also be used in place of the rated speed for operating the NRSC.¶

##### 5.2.5.1.1 Calculation of MTS

In order to calculate the MTS the transient mapping procedure shall be performed in accordance with paragraph 7.4. The MTS is then determined from the mapped values of engine speed versus power. For the calculation of the MTS one of the following equations shall be used:

$$(a) \text{ MTS} = n_{lo} + 0.95 \cdot (n_{hi} - n_{lo}) \quad (6-1)$$

where:

$n_{hi}$  = high speed (see article 2 (34))

$n_{lo}$  = low speed (see article 2 (39))

$$(b) \text{ MTS} = n_i \text{ at the average of the lowest and highest speeds at which } (n_{normi}^2 + P_{normi}^2) \text{ is equal to 98 percent of the maximum value of } (n_{normi}^2 + P_{normi}^2). \quad (6-2)$$

$$(c) \text{ If there is only one speed at which the value of } (n_{normi}^2 + P_{normi}^2) \text{ is equal to 98\% of the maximum value of } (n_{normi}^2 + P_{normi}^2) \text{ then } \text{MTS} = n_i \text{ at which the maximum value of } (n_{normi}^2 + P_{normi}^2) \text{ occurs.} \quad (6-3)$$

where:

$n$  = engine speed

$i$  = an indexing variable that represents one recorded value of an engine map

$n_{normi}$  = an engine speed normalized by dividing it by  $n_{Pmax}$

$P_{normi}$  = an engine power normalized by dividing it by  $P_{max}$

$n_{Pmax}$  is the average of the lowest and highest speeds at which power is equal to 98 percent of  $P_{max}$ . Use linear interpolation between the mapped values to determine the speeds where power is equal to 98 % of  $P_{max}$ . If there is only one speed at which power is equal to 98% of  $P_{max}$  then  $n_{Pmax}$  shall be the speed at which  $P_{max}$  occurs.

Linear interpolation shall be used between the mapped values to determine the speeds where  $(n_{normi}^2 + P_{normi}^2)$  is equal to 98 % of the maximum value of  $(n_{normi}^2 + P_{normi}^2)$ .

#### 5.2.5.1.2 Use of a declared MTS

If the MTS calculated in accordance with paragraph 5.2.5.1.1 or 5.2.5.1.3 is within  $\pm 3$  per cent of the MTS declared by the manufacturer, the declared MTS may be used for the emissions test. If the tolerance is exceeded, the measured MTS shall be used for the emissions test.

#### 5.2.5.1.3 Use of an adjusted MTS for correct driving of the NRTC

If the falling part of the full load curve has a very steep edge, this may cause problems to drive the 105 per cent speeds of the NRTC test cycle correctly. In this case it is allowed, with prior agreement of the technical service, to use an alternative value of MTS determined using one of the following methods:

- (a) reduce the MTS slightly (maximum 3 per cent) in order to make correct driving of the NRTC possible.
- (b) Calculate an alternative MTS using the following formulation:

$$MTS = ((n_{max} - n_{idle})/1.05) + n_{idle} \quad (6-4)$$

where:

$n_{max}$  = maximum no load speed

$n_{idle}$  = idle speed

#### 5.2.5.2 Rated speed

The rated speed is defined in Article 3 (27) of Regulation (EU) 2016 XXX. Rated speed for variable speed engines subject to an emission test shall be determined from the applicable mapping procedure in section 7.6. Rated speed for constant speed engines shall be declared by the manufacturer according to the characteristics of the governor. In the case that an engine type equipped with alternative speeds as permitted by Article 3 (18) of Regulation (EU) 2015/XXX is subject to an emission test each alternative speed shall be declared and tested.

**Deleted:** and shall be determined in accordance with UNECE regulation 120

If the rated speed determined from the mapping procedure in section 7.6 is within ± 150 rpm of the value declared by the manufacturer for engines of category NRS provided with governor, or within ± 350 rpm or ± 4 per cent for engines of category NRS without governor, whichever is smaller, or within ±100 rpm for all other engine categories, the declared value may be used. If the tolerance is exceeded, the rated speed determined from the mapping procedure shall be used.

**Deleted:** For variable-speed engines that are not tested with a transient cycle the 100% test speed shall be the rated speed.

For engines of category NRSh the 100% test speed shall be within ± 350 rpm of the rated speed.

Optionally, maximum test speed may be used instead of rated speed for any steady state test cycle.

#### 5.2.5.3 Maximum torque speed for variable speed engines

The maximum torque speed determined from the maximum torque curve established from the applicable engine mapping procedure in paragraph 7.6.1 or 7.6.2. shall be one of the following:

- a) The speed at which the highest torque was recorded; or,
- b) The average of the lowest and highest speeds at which the torque is equal to 98 per cent of the maximum torque. Where necessary, linear interpolation shall be used to determine the speeds at which the torque is equal to 98 per cent of the maximum.

If the maximum torque speed determined from the maximum torque curve is within  $\pm 4$  per cent of the maximum torque speed declared by the manufacturer for engines of category NRS or NRSh, or  $\pm 2.5$  per cent of the maximum torque speed declared by the manufacturer for all other engine categories, the declared value may be used for the purpose of this regulation. If the tolerance is exceeded, the maximum torque speed determined from the maximum torque curve shall be used.

#### 5.2.5.4 Intermediate speed

The intermediate speed shall meet one of the following requirements:

- (a) For engines that are designed to operate over a speed range on a full load torque curve, the intermediate speed shall be the maximum torque speed if it occurs between 60 per cent and 75 per cent of rated speed;
- (b) If the maximum torque speed is less than 60 per cent of rated speed, then the intermediate speed shall be 60 per cent of the rated speed;
- (c) If the maximum torque speed is greater than 75 per cent of the rated speed then the intermediate speed shall be 75 per cent of rated speed. Where the engine is only capable of operation at speeds higher than 75% of rated speed the intermediate speed shall be the lowest speed at which the engine can be operated;
- (d) For engines that are not designed to operate over a speed range on a full-load torque curve at steady-state conditions, the intermediate speed will typically be between 60 % and 70 % of the rated speed.
- (e) For engines to be tested on cycle G1, except for engines of category ATS, the intermediate speed shall be 85 % of the rated speed.
- (f) For engines of category ATS tested on cycle G1 the intermediate speed shall be 60% or 85% of rated speed based on which is closer to the actual maximum torque speed.

**Deleted:** declared

**Deleted:** declared

**Deleted:** declared

In the case that the maximum test speed (MTS) is used in place of rated speed for the 100% test speed, MTS shall also replace rated speed when determining the intermediate speed.

**Deleted:** For engines that are tested with the NRTC or LSI-NRTC in addition to a NRSC (discrete or ramped modal) the maximum test speed (MTS) shall be used in place of rated speed when determining the intermediate speed.¶

#### 5.2.5.5 Idle speed

The idle speed is the lowest engine speed with minimum load (greater than or equal to zero load), where an engine governor function controls engine speed. For engines without a governor function that controls idle speed, idle speed means the manufacturer-declared value for lowest engine speed possible with minimum load. Note that warm idle speed is the idle speed of a warmed-up engine.

**Deleted:** ¶

#### 5.2.5.6 Test speed for constant speed engines

The governors of constant speed engines may not always maintain speed exactly constant. Typically speed can decrease (0.1 to 10) per cent below the speed at zero load, such that the minimum speed occurs near the engine's point of maximum power. The test speed for constant speed engines may be commanded by using the governor installed on the engine or using a test-bed speed demand where this represents the engine governor.

Where the governor installed on the engine is used the 100% speed shall be the engine governed speed as defined in xx.

Where a test-bed speed demand signal is used to simulate the governor, the 100% speed at zero load shall be the no load speed specified by the manufacturer for that governor setting and the 100% speed at full load shall be the rated speed for that governor setting. Interpolation shall be used to determine the speed for the other test modes.

In the case that the governor has an isochronous operation setting, or the nominal rated speed and no-load speed declared by the manufacturer differ by no more than 3%, a single value declared by the manufacturer may be used for the 100% speed at all load points.

#### 5.2.6 Torque and Power

##### 5.2.6.1 Torque

The torque figures given in the test cycles are percentage values that represent, for a given test mode, one of the following:

- (a) The ratio of the required torque to the maximum possible torque at the specified test speed (all cycles except D2 & E2)
- (b) The ratio of the required torque to the torque corresponding to the rated net power declared by the manufacturer (cycle D2 & E2)

##### 5.2.6.2 Power

The power figures given in the test cycles are percentage values that represent, for a given test mode, one of the following:

- (a) For the test cycle E3 the power figures are percentage values of the maximum net power at the 100 per cent speed as this cycle is based on a theoretical propeller characteristic curve for vessels driven by heavy-duty engines without limitation of length.
- (b) For the test cycle F the power figures are percentage values of the maximum net power at the given test speed, except for idle speed where it is a percentage of the maximum net power at the 100 per cent speed.

## 6 Test Conditions

### 6.1 Laboratory test conditions

The absolute temperature ( $T_a$ ) of the engine air at the inlet to the engine expressed in Kelvin, and the dry atmospheric pressure ( $p_s$ ), expressed in kPa shall be measured and the parameter  $f_a$  shall be determined according to the following provisions. In multi-cylinder engines having distinct groups of intake manifolds, such as in a "V" engine configuration, the average temperature of the distinct groups shall be taken. The parameter  $f_a$  shall be reported with the test results.

Naturally aspirated and mechanically supercharged engines:

$$f_a = \left(\frac{99}{p_s}\right) \times \left(\frac{T_a}{298}\right)^{0.7}$$

(6-5)

Deleted: 1

Turbocharged engines with or without cooling of the intake air:

$$f_a = \left(\frac{99}{p_s}\right)^{0.7} \times \left(\frac{T_a}{298}\right)^{1.5}$$

(6-6)

Deleted: 2

6.1.1 For the test to be considered valid both the following conditions must be met:

- (a)  $f_a$  shall be within the range  $0.93 \leq f_a \leq 1.07$  except as permitted by paragraphs 6.1.2 and 6.1.4;
- (b) The temperature of intake air shall be maintained to  $(25 \pm 5)$  °C, as measured upstream of any engine component, except as permitted by paragraphs 6.1.3 and 6.1.4, and required by paragraphs 6.1.5 and 6.1.6.

Deleted: ., 6.1.4



- 6.1.2 Where the altitude of the laboratory in which the engine is being tested exceeds 600 m, with the agreement of the manufacturer  $p_a$  may exceed 1.07 on the condition that  $p_s$  shall not be less than 80 kPa.
- 6.1.3 Where the power of the engine being tested is greater than 560 kW, with the agreement of the manufacturer the maximum value of intake air temperature may exceed 30°C on the condition that it shall not exceed 35°C.
- 6.1.4 Where the altitude of the laboratory in which the engine is being tested exceeds 300 m and the power of the engine being tested is greater than 560 kW, with the agreement of the manufacturer  $p_a$  may exceed 1.07 on the condition that  $p_s$  shall not be less than 80 kPa and the maximum value of intake air temperature may exceed 30°C on the condition that it shall not exceed 35°C.
- 6.1.5 In the case of an engine family of category NRS less than 19 kW exclusively consisting of engine types to be used in snow throwers, the temperature of the intake air shall be maintained to  $0 \pm 0/-5$  °C.
- 6.1.6 For engines of category SMB the temperature of the intake air shall be maintained to minus  $10 \pm 5$  °C, except as permitted by paragraph 6.1.6.1.
- 6.1.6.1 For engines of category SMB fitted with electronically controlled fuel injection that adjusts the fuel flow to the intake air temperature, at the choice of the manufacturer the temperature of the intake air may alternatively be maintained to  $25 \pm 5$  °C.
- 6.1.7 It is allowed to use:
- A shared atmospheric pressure meter as long as the equipment for handling intake air maintains ambient pressure, where the engine is tested, within  $\pm 1$  kPa of the shared atmospheric pressure;
  - A shared humidity measurement for intake air as long as the equipment for handling intake air maintains dew point, where the engine is tested, within  $\pm 0.5$  °C of the shared humidity measurement.

## 6.2 Engines with charge air cooling

- A charge-air cooling system with a total intake-air capacity that represents production engines' in-use installation shall be used. Any laboratory charge-air cooling system to minimize accumulation of condensate shall be designed. Any accumulated condensate shall be drained and all drains shall be completely closed before emission testing. The drains shall be kept closed during the emission test. Coolant conditions shall be maintained as follows:
  - A coolant temperature of at least 20 °C shall be maintained at the inlet to the charge-air cooler throughout testing;
  - At the rated speed and full load, the coolant flow rate shall be set to achieve an air temperature within  $\pm 5$  °C of the value designed by the

**Deleted:** <#>Where engines are exclusively used in ambient temperature below freezing point, i.e. Snowmobiles, alternatively to 6.1.2 the temperature of air intake may be maintained to minus  $10 \pm 5$  °C. Such engines must be grouped in a family that contains only engines of snowmobiles.\*  
The engines must comply with the exhaust emission limit values as described for engines category SMB, see Council Document 10077/15 dated 25 June 2015.\*  
Furthermore, the type approval authority must validate the fact that engines are mainly used in ambient temperature below freezing point.\*

manufacturer after the charge-air cooler's outlet. The air-outlet temperature shall be measured at the location specified by the manufacturer. This coolant flow rate set point shall be used throughout testing;

- (iii) If the engine manufacturer specifies pressure-drop limits across the charge-air cooling system, it shall be ensured that the pressure drop across the charge-air cooling system at engine conditions specified by the manufacturer is within the manufacturer's specified limit(s). The pressure drop shall be measured at the manufacturer's specified locations;

When the maximum test speed (MTS) defined in paragraph 5.2.5.1 is being used in place of rated speed to run the test cycle then this speed may be used in place of rated speed when setting the charge air temperature.

- (b) The objective is to produce emission results that are representative of in-use operation. If good engineering judgment indicates that the specifications in this section would result in unrepresentative testing (such as overcooling of the intake air), more sophisticated set points and controls of charge-air pressure drop, coolant temperature, and flow rate may be used to achieve more representative results.

### 6.3 Engine power

#### 6.3.1 Basis for emission measurement

The basis of specific emissions measurement is uncorrected net power as defined in Article 3(23) of Regulation (EU) 2016 XXX.

#### 6.3.2 Auxiliaries to be fitted

During the test, the auxiliaries necessary for the engine operation shall be installed on the test bench according to the requirements of Appendix 2 to this Annex.

Where the necessary auxiliaries cannot be fitted for the test, the power they absorb shall be determined and subtracted from the measured engine power.

#### 6.3.3 Auxiliaries to be removed

Certain auxiliaries whose definition is linked with the operation of the machine and which may be mounted on the engine shall be removed for the test.

Where auxiliaries cannot be removed, the power they absorb in the unloaded condition may be determined and added to the measured engine power (see note g in Appendix 2 to this Annex). If this value is greater than 3 per cent of the maximum power at the test speed it may be verified by the Technical Service. The power absorbed by auxiliaries shall be used to adjust the set values and to calculate the

work produced by the engine over the test cycle in accordance with paragraph 7.7.1.3 or paragraph 7.7.2.3.1.

#### 6.3.4 Determination of auxiliary power

The power absorbed by the auxiliaries/equipment needs only be determined, if:

(a) Auxiliaries/equipment required according to Appendix 2 to this Annex, are not fitted to the engine;

and/or

(b) Auxiliaries/equipment not required according to Appendix 2 to this Annex, are fitted to the engine.

The values of auxiliary power and the measurement/calculation method for determining auxiliary power shall be submitted by the engine manufacturer for the whole operating area of the applicable test cycles, and approved by the Type Approval Authority.

#### 6.3.5 Engine cycle work

The calculation of reference and actual cycle work (see paragraphs 7.4.8. and 7.8.6.) shall be based upon engine power in accordance with paragraph 6.3.1. In this case,  $P_f$  and  $P_r$  of equation 4 are zero, and  $P$  equals  $P_m$ .

If auxiliaries/equipment are installed in accordance with paragraphs 6.3.2. and/or 6.3.3., the power absorbed by them shall be used to correct each instantaneous cycle power value  $P_{m,i}$ , as follows:

$$P_i = P_{m,i} - P_{f,i} + P_{r,i} \quad P_i = P_{m,i} + P_{AUX}$$

(6-8)

Deleted: (4)

Where:

$P_{m,i}$  is the measured engine power, kW

$$P_{AUX} = P_{r,i} - P_{f,i}$$

$P_{f,i}$  is the power absorbed by auxiliaries/equipment to be fitted for the test but that were not installed, kW

$P_{r,i}$  is the power absorbed by auxiliaries/equipment to be removed for the test but that were installed, kW.

## 6.4 Engine intake air

### 6.4.1 Introduction

The intake-air system installed on the engine or one that represents a typical in-use configuration shall be used. This includes the charge-air cooling and exhaust gas recirculation systems.

### 6.4.2 Intake air restriction

An engine air intake system or a test laboratory system shall be used presenting an air intake restriction within  $\pm 300$  Pa of the maximum value specified by the manufacturer for a clean air cleaner at the rated speed and full load. Where this is not possible due to the design of the test laboratory air supply system a restriction not exceeding the value specified by the manufacturer for a dirty filter shall be permitted subject to prior approval of the technical service. The static differential pressure of the restriction shall be measured at the location and at the speed and torque set points specified by the manufacturer. If the manufacturer does not specify a location, this pressure shall be measured upstream of any turbocharger or exhaust gas recirculation system connection to the intake air system.

When the maximum test speed (MTS) defined in paragraph 5.2.5.1 is being used in place of rated speed to run the test cycle then this speed may be used in place of rated speed when setting the intake air restriction.

## 6.5 Engine exhaust system

The exhaust system installed with the engine or one that represents a typical in-use configuration shall be used. The exhaust system shall conform to the requirements for exhaust gas sampling, as set out in paragraph 9.3. An engine exhaust system or a test laboratory system shall be used presenting a static exhaust backpressure within 80 to 100 per cent of the maximum exhaust restriction at the rated speed and full load. The restriction may be set using a valve. If the maximum restriction is 5 kPa or less, the set point shall not be more than 1.0 kPa from the maximum. When the maximum test speed (MTS) defined in paragraph 5.2.5.1 is being used in place of rated speed to run the test cycle then this speed may be used in place of rated speed when setting the exhaust restriction.

## 6.6 Engine with exhaust after-treatment system

If the engine is equipped with an exhaust after-treatment system that is not mounted directly on the engine, the exhaust pipe shall have the same diameter as found in-use for at least four pipe diameters upstream of the expansion section containing the after-treatment device. The distance from the exhaust manifold flange or turbocharger outlet to the exhaust after-treatment system shall be the same as in the non-road mobile machine configuration or within the distance specifications of the manufacturer. Where specified by the manufacturer the pipe shall be insulated to achieve an after-treatment inlet temperature within the specification of the manufacturer. Where other installation requirements are specified by the manufacturer these shall also be respected for the test configuration. The exhaust backpressure or restriction shall be set according to paragraph 6.5. For variable-restriction after-treatment devices, the maximum exhaust restriction used in paragraph 6.5 is defined at the after-treatment condition (degreening/ageing and regeneration/loading level) specified by the manufacturer. The after-treatment container may be removed during dummy tests and during engine mapping, and replaced with an equivalent container having an inactive catalyst support.

The emissions measured on the test cycle shall be representative of the emissions in the field. In the case of an engine equipped with an exhaust after-treatment system that requires the consumption of a reagent, the reagent used for all tests shall be declared by the manufacturer.

For engines of category NRE, NRG, IWP, IWA, RLR, NRS, NRSh, SMB, and ATS equipped with exhaust after-treatment systems that are regenerated on an infrequent (periodic) basis, as described in paragraph 6.6.2, emission results shall be adjusted to account for regeneration events. In this case, the average emission depends on the frequency of the regeneration event in terms of fraction of tests during which the regeneration occurs. After-treatment systems with continuous regeneration according to paragraph 6.6.1. do not require a special test procedure.

### 6.6.1 Continuous regeneration

For an exhaust aftertreatment system based on a continuous regeneration process the emissions shall be measured on an aftertreatment system that has been stabilized so as to result in repeatable emissions behaviour. The regeneration process shall occur at least once during the NRTC hot start test, LSI-NRTC or NRSC test, and the manufacturer shall declare the normal conditions under which regeneration occurs (soot load, temperature, exhaust back-pressure, etc.). In order to demonstrate that the regeneration process is continuous, at least three NRTC hot start tests, LSI-NRTC or NRSC tests shall be conducted. In case of NRTC hot start test, the engine shall be warmed up in accordance with paragraph 7.8.2.1., the engine be soaked according to paragraph 7.4.2. and the first NRTC hot start test be run. The subsequent NRTC hot start tests shall be started after soaking according to paragraph 7.4.2. During the tests, exhaust temperatures and pressures shall be recorded (temperature before and after

the after-treatment system, exhaust back pressure, etc.). The aftertreatment system is considered to be satisfactory if the conditions declared by the manufacturer occur during the test during a sufficient time and the emission results do not scatter by more than  $\pm 25$  per cent from the mean value or 0.005 g/kWh, whichever is greater.

#### 6.6.2 Infrequent (periodic) regeneration

This provision only applies for engines equipped with emission controls that are regenerated on a periodic basis.

Testing and development of adjustment factors is only required for one applicable transient (NRTC or LSI-NRTC) or RMC NRSC test cycle. The factors that have been developed may be applied to results from the other applicable test cycles including discrete-mode NRSC.

In case that no suitable adjustment factors are available from testing using transient or RMC NRSC test cycles then adjustment factors shall be established using an applicable discrete-mode test. Factors developed using a discrete-mode test cycle shall only be applied to discrete-mode test cycles.

It shall not be required to conduct testing and develop adjustment factors on both RMC and discrete-mode NRSCs.

Deleted: ¶  
¶

##### 6.6.2.1 Requirement for establishing adjustment factors using NRTC, LSI-NRTC or RMC NRSC testing

The emissions shall be measured on at least three NRTC hot start tests, LSI-NRTC or ramped-modal cycle (RMC) NRSC tests, one with and two without a regeneration event on a stabilized after-treatment system. The regeneration process shall occur at least once during the NRTC, LSI-NRTC or RMC NRSC test with a regeneration event. If regeneration takes longer than one NRTC, LSI-NRTC or RMC NRSC test, consecutive NRTC, LSI-NRTC or RMC NRSC tests shall be run and emissions continued to be measured without shutting the engine off until regeneration is completed and the average of the tests shall be calculated. If regeneration is completed during any test, the test shall be continued over its entire length.

An appropriate adjustment factor shall be determined for the entire applicable cycle using equations 6-10 to 6-13.

Deleted: 3

Deleted: 6

##### 6.6.2.2 Requirement for establishing adjustment factors using discrete-mode NRSC testing

Starting with a stabilized after-treatment system the emissions shall be measured on at least three runs of each test mode of the applicable discrete-mode NRSC on which the conditions for regeneration can be met, one with and two without a regeneration event. The measurement of PM shall be conducted using the multiple filter method. If regeneration has started but is not complete at the end of the sampling period for a

specific test mode extend the sampling period until regeneration is complete. Where there are multiple runs for the same mode an average result shall be calculated. The process shall be repeated for each test mode.

An appropriate adjustment factor shall be determined using equations 6-10 to 6-13 for those modes of the applicable cycle for which regeneration occurs.

Deleted: 3

Deleted: 6

#### 6.6.2.3 General procedure for developing infrequent regeneration adjustment factors (IRAFs)

The manufacturer shall declare the normal parameter conditions under which the regeneration process occurs (soot load, temperature, exhaust back pressure, etc.). The manufacturer shall also provide the frequency of the regeneration event in terms of number of tests during which the regeneration occurs. The exact procedure to determine this frequency shall be agreed by the type approval or certification authority based upon good engineering judgement.

For a regeneration test, the manufacturer shall provide an after-treatment system that has been loaded. Regeneration shall not occur during this engine conditioning phase. As an option, the manufacturer may run consecutive tests of the applicable cycle until the after-treatment system is loaded. Emissions measurement is not required on all tests.

Average emissions between regeneration phases shall be determined from the arithmetic mean of several approximately equidistant tests of the applicable cycle. As a minimum, at least one applicable cycle as close as possible prior to a regeneration test and one applicable cycle immediately after a regeneration test shall be conducted.

During the regeneration test, all the data needed to detect regeneration shall be recorded (CO or NO<sub>x</sub> emissions, temperature before and after the after-treatment system, exhaust back pressure, etc.). During the regeneration process, the applicable emission limits may be exceeded. The test procedure is schematically shown in figure 6.1.

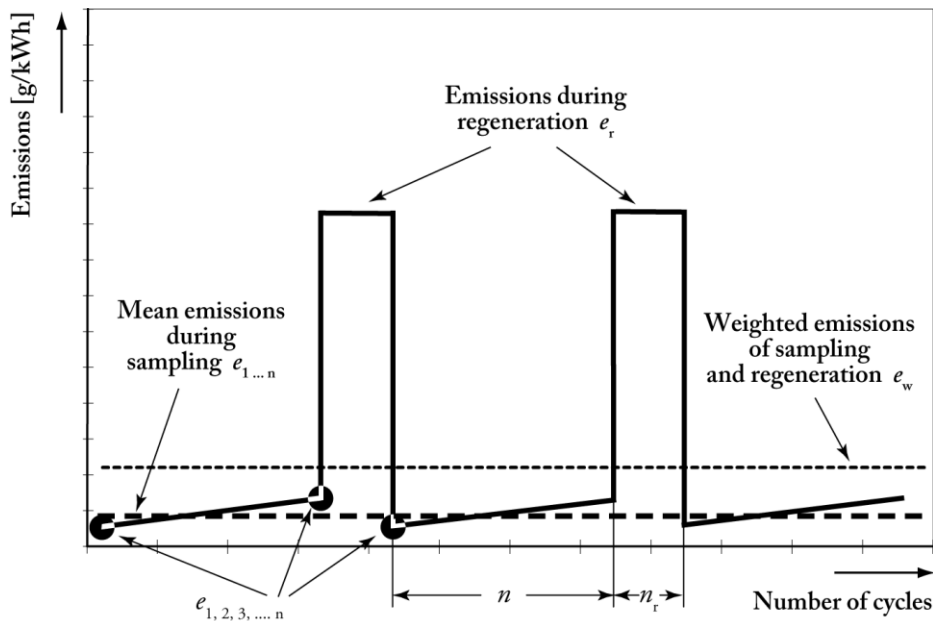


Figure 6.1 - Scheme of infrequent (periodic) regeneration with  $n$  number of measurements and  $n_r$  number of measurements during regeneration.

The average specific emission rate related to the test runs conducted according to paragraphs 6.6.2.1 or 6.6.2.2 [g/kWh or #/kWh] shall be weighted as follows (see figure 6.1):

$$\bar{e}_w = \frac{n \cdot \bar{e} + n_r \cdot \bar{e}_r}{n + n_r}$$

(6-9)

Deleted: 3

Where:

- $n$  = number of tests in which regeneration does not occur,
- $n_r$  = number of tests in which regeneration occurs (minimum one test),
- $\bar{e}$  = average specific emission from a test in which the regeneration does not occur [g/kWh or #/kWh]
- $\bar{e}_r$  = average specific emission from a test in which the regeneration occurs [g/kWh or #/kWh]

At the choice of the manufacturer and based on upon good engineering analysis, the regeneration adjustment factor  $k_r$ , expressing the average emission rate, may be



calculated either multiplicative or additive for all gaseous pollutants, and, where there is an applicable limit, for PM and PN, as follows:

Multiplicative

$$k_{ru,m} = \frac{e_w}{e} \quad \text{(upward adjustment factor)} \quad (6-10)$$

**Deleted:**  $k_{Ur} = \frac{\bar{e}_w}{\bar{e}}$

$$k_{rd,m} = \frac{e_w}{e_r} \quad \text{(downward adjustment factor)} \quad (6-11)$$

**Deleted:** 4a

**Deleted:**  $k_{Dr} = \frac{\bar{e}_w}{\bar{e}_r}$

Additive

$$k_{ru,a} = e_w - e \quad \text{(upward adjustment factor)} \quad (6-12)$$

**Deleted:** 4b

$$k_{rd,a} = e_w - e_r \quad \text{(downward adjustment factor)} \quad (6-13)$$

**Deleted:**  $k_{Ur} = \bar{e}_w - \bar{e}$

**Deleted:** 5

**Deleted:**  $k_{Dr} = \bar{e}_w - \bar{e}_r$

**Deleted:** 6

6.6.2.4 Application of adjustment factors

Upward adjustment factors are multiplied with or added to measured emission rates for all tests in which the regeneration does not occur. Downward adjustment factors are multiplied with or added to measured emission rates for all tests in which the regeneration occurs. The occurrence of the regeneration shall be identified in a manner that is readily apparent during all testing. Where no regeneration is identified, the upward adjustment factor shall be applied.

With reference to Annex VII and Appendix 5 to Annex VII on brake specific emission calculations, the regeneration adjustment factor:

**Deleted:** VIII

**Deleted:** 1

**Deleted:** VIII

- (a) When established for an entire weighted cycle, shall be applied to the results of the applicable weighted NRTC, LSI-NRTC and NRSC tests;
- (b) When established specifically for the individual modes of the applicable discrete-mode cycle, shall be applied to the results of those modes of the applicable discrete-mode NRSC cycle for which regeneration occurs prior to calculating the cycle weighted emission result. In this case the multiple filter method shall be used for PM measurement;
- (c) May be extended to other members of the same engine family;
- (d) May be extended to other engine families within the same engine after-treatment system family, as defined in Annex XI to Regulation 2016/XXX, with the prior approval of the type approval authority based on technical evidence to be supplied by the manufacturer that the emissions are similar.

**Deleted:** applied to the ramped modal cycles and cold NRTC, if a regeneration occurs during the cycle; (d) . May be

**Deleted:** e

The following options shall be considered:

- (a) A manufacturer may elect to omit adjustment factors for one or more of its engine families (or configurations) because the effect of the regeneration is small, or because it is not practical to identify when regenerations occur. In these cases, no adjustment factor shall be used, and the manufacturer is liable for compliance with the emission limits for all tests, without regard to whether a regeneration occurs;
- (b) Upon request by the manufacturer, the type-approval authority may account for regeneration events differently than is provided in paragraph (a). However, this option only applies for events that occur extremely infrequently, and which cannot be practically addressed using the adjustment factors described in paragraph (a).

#### 6.7 Cooling system

An engine cooling system with sufficient capacity to maintain the engine, with its intake-air, oil, coolant, block and head temperatures, at normal operating temperatures prescribed by the manufacturer shall be used. Laboratory auxiliary coolers and fans may be used.

#### 6.8 Lubricating oil

The lubricating oil shall be specified by the manufacturer and be representative of lubricating oil available in the market; the specifications of the lubricating oil used for the test shall be recorded and presented with the results of the test.

#### 6.9 Specification of the reference fuel

The reference fuels to be used for the test are specified in Annex X.

The fuel temperature shall be in accordance with the manufacturer's recommendations. The fuel temperature shall be measured at the inlet to the fuel injection pump or as specified by the manufacturer, and the location of measurement recorded.

#### 6.10 Crankcase emissions

This section shall apply to engines of category NRE, NRG, IWP, IWA, RLR, NRS, NRSh, SMB, & ATS complying with Stage V emission limits set out in Annex II of Regulation (EU) 2016/XXX.

Crankcase emissions that are discharged directly into the ambient atmosphere shall be added to the exhaust emissions (either physically or mathematically) during all emission testing.

Manufacturers taking advantage of this exception shall install the engines so that all crankcase emission can be routed into the emissions sampling system. For the purpose

of this paragraph, crankcase emissions that are routed into the exhaust upstream of exhaust after-treatment during all operation are not considered to be discharged directly into the ambient atmosphere.

Open crankcase emissions shall be routed into the exhaust system for emission measurement, as follows:

- (a) The tubing materials shall be smooth-walled, electrically conductive, and not reactive with crankcase emissions. Tube lengths shall be minimized as far as possible;
- (b) The number of bends in the laboratory crankcase tubing shall be minimized, and the radius of any unavoidable bend shall be maximized;
- (c) The laboratory crankcase exhaust tubing shall meet the engine manufacturer's specifications for crankcase back pressure;
- (d) The crankcase exhaust tubing shall connect into the raw exhaust downstream of any after-treatment system, downstream of any installed exhaust restriction, and sufficiently upstream of any sample probes to ensure complete mixing with the engine's exhaust before sampling. The crankcase exhaust tube shall extend into the free stream of exhaust to avoid boundary-layer effects and to promote mixing. The crankcase exhaust tube's outlet may orient in any direction relative to the raw exhaust flow.

## 7 Test procedures

### 7.1 Introduction

This chapter describes the determination of brake specific emissions of gaseous and particulate pollutants on engines to be tested. The test engine shall be the parent engine configuration for the engine family as specified in Annex III.

A laboratory emission test consists of measuring emissions and other parameters for the test cycles specified in Annex XVII. The following aspects are treated:

- (a) The laboratory configurations for measuring the brake specific emissions (para. 7.2.);
- (b) The pre-test and post-test verification procedures (para. 7.3.);
- (c) The test cycles (para. 7.4.);
- (d) The general test sequence (para. 7.5.);
- (e) The engine mapping (para. 7.6.);
- (f) The test cycle generation (para. 7.7.);
- (g) The specific test cycle running procedure (para. 7.8.).

Deleted: XIX

### 7.2 Principle of emission measurement

To measure the brake-specific emissions, the engine shall be operated over the test cycles defined in paragraph 7.4., as applicable. The measurement of brake-specific emissions requires the determination of the mass of pollutants in the exhaust (i.e. HC, CO, NO<sub>x</sub> and PM), the number of particulates in the exhaust (i.e. PN), the mass of CO<sub>2</sub> in the exhaust, and the corresponding engine work.

#### 7.2.1 Mass of constituent

The total mass of each constituent shall be determined over the applicable test cycle by using the following methods:

##### 7.2.1.1 Continuous sampling

In continuous sampling, the constituent's concentration is measured continuously from raw or dilute exhaust. This concentration is multiplied by the continuous (raw or dilute) exhaust flow rate at the emission sampling location to determine the constituent's flow rate. The constituent's emission is continuously summed over the test interval. This sum is the total mass of the emitted constituent.

##### 7.2.1.2 Batch sampling

In batch sampling, a sample of raw or dilute exhaust is continuously extracted and stored for later measurement. The extracted sample shall be proportional to the raw or dilute exhaust flow rate. Examples of batch sampling are collecting diluted gaseous emissions in a bag and collecting PM on a filter. In principal the method of emission calculation is done as follows: the batch sampled concentrations are multiplied by the total mass or mass flow (raw or dilute) from which it was extracted during the test cycle. This product is the total mass or mass flow of the emitted constituent. To calculate the PM concentration, the PM deposited onto a filter from proportionally extracted exhaust shall be divided by the amount of filtered exhaust.

Deleted:

##### 7.2.1.3 Combined sampling

Any combination of continuous and batch sampling is permitted (e.g. PM with batch sampling and gaseous emissions with continuous sampling).



The following figure [6.2](#) illustrates the two aspects of the test procedures for measuring emissions: the equipments with the sampling lines in raw and diluted exhaust gas and the operations requested to calculate the pollutant emissions in steady-state and transient test cycles (figure [6.2](#)).

Deleted: 7.1

Deleted: 7.1

Figure [6.2](#)  
**Test procedures for emission measurement**

Deleted: 7.1

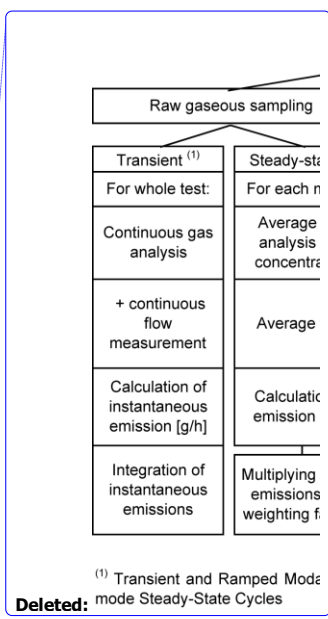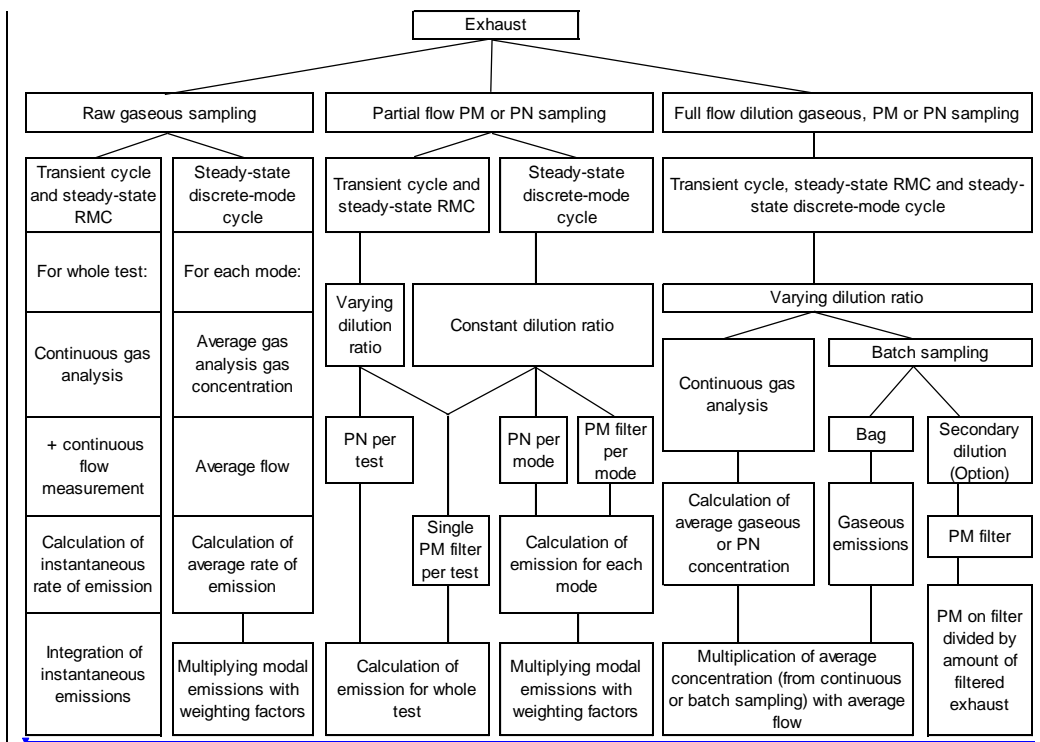

Note on figure 6.2: The term "Partial flow PM sampling" includes the partial flow dilution to extract only raw exhaust with constant or varying dilution ratio.

Deleted: 7.1

### 7.2.2 Work determination

The work shall be determined over the test cycle by synchronously multiplying speed and brake torque to calculate instantaneous values for engine brake power. Engine brake power shall be integrated over the test cycle to determine total work.

### 7.3 Verification and calibration

#### 7.3.1 Pre-test procedures

##### 7.3.1.1 Preconditioning

To achieve stable conditions, the sampling system and the engine shall be preconditioned before starting a test sequence as specified in this paragraph.

The intent of engine preconditioning is to manage the representativeness of emissions and emission controls over the duty cycle and to reduce bias in order to meet stable conditions for the following emission test.

Emissions may be measured during preconditioning cycles, as long as a predefined number of preconditioning cycles are performed and the measurement system has been started according to the requirements of paragraph 7.3.1.4. The amount of preconditioning shall be identified by the engine manufacturer before starting to precondition. Preconditioning shall be performed as follows, noting that the specific cycles for preconditioning are the same ones that apply for emission testing.

#### 7.3.1.1.1 Preconditioning for cold-start transient cycle (NRTC)

The engine shall be preconditioned by running at least one hot-start transient cycle. Immediately after completing each preconditioning cycle, the engine shall be shut down and the engine-off hot-soak period shall be completed. Immediately after completing the last preconditioning cycle, the engine shall be shut down and the engine cool down described in paragraph 7.3.1.2 shall be started.

#### 7.3.1.1.2 Preconditioning for hot-start transient cycle (hot-start NRTC or LSI-NRTC)

This paragraph describes the pre-conditioning that shall be applied when it is intended to sample emissions from the hot-start NRTC without running the cold start NRTC, or for the LSI-NRTC. The engine shall be preconditioned by running at least one hot-start NRTC or LSI-NRTC cycle as applicable. Immediately after completing each preconditioning cycle, the engine shall be shut down, and then the next cycle shall be started as soon as practical. It is recommended that the next preconditioning cycle shall be started within 60 seconds after completing the last preconditioning cycle. Where applicable, following the last pre-conditioning cycle the appropriate hot-soak (hot-start NRTC) or cool-down (LSI-NRTC) period shall apply before the engine is started for the emissions test. Where no hot-soak or cool down period applies it is recommended that the emissions test shall be started within 60 seconds after completing the last preconditioning cycle.

#### 7.3.1.1.3 Preconditioning for discrete-mode NRSC

For engine categories other than NRS and NRSh the engine shall be warmed-up and run until engine temperatures (cooling water and lube oil) have been stabilized on 50 per cent speed and 50 per cent torque for any discrete-mode NRSC test cycle other than type D2, E2, or G, or nominal engine speed and 50 per cent torque for any discrete-mode NRSC test cycle D2, E2 or G. The 50 per cent speed is calculated in accordance with paragraph 7.7.2.1 in the case of an engine where MTS is used for the generation of test speeds, and calculated in accordance with paragraph 7.7.1.2 in all other cases. 50 per cent torque is defined as 50 per cent of the maximum available torque at this speed. The emissions test shall be started without stopping the engine.

For engine categories NRS and NRSh the engine shall be warmed up according to the recommendation of the manufacturer and good engineering judgment. Before emission sampling can start, the engine shall be running on mode 1 of the appropriate test cycle until engine temperatures have been stabilized. The emissions test shall be started without stopping the engine.

#### 7.3.1.1.4 Preconditioning for RMC NRSC

The engine manufacturer shall select one of the following pre-conditioning sequences (a) or (b). The engine shall be pre-conditioned according to the chosen sequence.

(a) The engine shall be preconditioned by running at least the second half of the ramped-modal cycle, based on the number of test modes. The engine shall not be shut down between cycles. Immediately after completing each preconditioning cycle, the next cycle (including the emission test) shall be started as soon as practical. Where possible, it is recommended that the next cycle be started within 60 seconds after completing the last preconditioning cycle.

(b) The engine shall be warmed-up and run until engine temperatures (cooling water and lube oil) have been stabilized on 50 per cent speed and 50 per cent torque for any RMC test cycle other than type D2, E2, or G, or nominal engine speed and 50 per cent torque for any RMC test cycle D2, E2 or G. The 50 per cent speed is calculated in accordance with paragraph 7.7.2.1 in the case of an engine where MTS is used for the generation of test speeds, and calculated in accordance with paragraph 7.7.1.2 in all other cases. 50 per cent torque is defined as 50 per cent of the maximum available torque at this speed.

#### 7.3.1.2 Engine cool down (NRTC)

A natural or forced cool-down procedure may be applied. For forced cool-down, good engineering judgment shall be used to set up systems to send cooling air across the engine, to send cool oil through the engine lubrication system, to remove heat from the coolant through the engine cooling system, and to remove heat from an exhaust after-treatment system. In the case of a forced after-treatment cool down, cooling air shall not be applied until the after-treatment system has cooled below its catalytic activation temperature. Any cooling procedure that results in unrepresentative emissions is not permitted.

#### 7.3.1.3 Verification of HC contamination

If there is any presumption of an essential HC contamination of the exhaust gas measuring system, the contamination with HC may be checked with zero gas and the hang-up may then be corrected. If the amount of contamination of the measuring system and the background HC system has to be checked, it shall be conducted within 8 hours of starting each test-cycle. The values shall be recorded for later correction. Before this check, the leak check has to be performed and the FID analyzer has to be calibrated.

#### 7.3.1.4 Preparation of measurement equipment for sampling

The following steps shall be taken before emission sampling begins:

- (a) Leak checks shall be performed within 8 hours prior to emission sampling according to paragraph 8.1.8.7;
- (b) For batch sampling, clean storage media shall be connected, such as evacuated bags or tare-weighed filters;
- (c) All measurement instruments shall be started according to the instrument manufacturer's instructions and good engineering judgment;
- (d) Dilution systems, sample pumps, cooling fans, and the data-collection system shall be started;
- (e) The sample flow rates shall be adjusted to desired levels, using bypass flow, if desired;
- (f) Heat exchangers in the sampling system shall be pre-heated or pre-cooled to within their operating temperature ranges for a test;
- (g) Heated or cooled components such as sample lines, filters, chillers, and pumps shall be allowed to stabilize at their operating temperatures;
- (h) Exhaust dilution system flow shall be switched on at least 10 minutes before a test sequence;
- (i) Calibration of gas analyzers and zeroing of continuous analyzers shall be carried out according to the procedure of the next paragraph 7.3.1.5;
- (j) Any electronic integrating devices shall be zeroed or re-zeroed, before the start of any test interval.

#### 7.3.1.5 Calibration of gas analyzers

Appropriate gas analyzer ranges shall be selected. Emission analyzers with automatic or manual range switching are allowed. During a ramped modal or a NRTC test and during a sampling period of a gaseous emission at the end of each mode for discrete mode testing, the range of the emission analyzers may not be switched. Also the gains of an analyzer's analogue operational amplifier(s) may not be switched during a test cycle.

All continuous analyzers shall be zeroed and spanned using internationally-traceable gases that meet the specifications of paragraph 9.5.1. FID analyzers shall be spanned on a carbon number basis of one (C<sub>1</sub>).

#### 7.3.1.6 PM filter preconditioning and tare weighing

The procedures for PM filter preconditioning and tare weighing shall be followed according to paragraph 8.2.3.

#### 7.3.2 Post-test procedures

The following steps shall be taken after emission sampling is complete:



#### 7.3.2.1 Verification of proportional sampling

For any proportional batch sample, such as a bag sample or PM sample, it shall be verified that proportional sampling was maintained according to paragraph 8.2.1. For the single filter method and the discrete steady-state test cycle, effective PM weighting factor shall be calculated. Any sample that does not fulfil the requirements of paragraph 8.2.1 shall be voided.

#### 7.3.2.2 Post-test PM conditioning and weighing

Used PM sample filters shall be placed into covered or sealed containers or the filter holders shall be closed, in order to protect the sample filters against ambient contamination. Thus protected, the loaded filters have to be returned to the PM-filter conditioning chamber or room. Then the PM sample filters shall be conditioned and weighted accordingly to paragraph 8.2.4 (PM filter post-conditioning and total weighing procedures).

#### 7.3.2.3 Analysis of gaseous batch sampling

As soon as practical, the following shall be performed:

- (a) All batch gas analyzers shall be zeroed and spanned no later than 30 minutes after the test cycle is complete or during the soak period if practical to check if gaseous analyzers are still stable;
- (b) Any conventional gaseous batch samples shall be analyzed no later than 30 minutes after the hot-start test cycle is complete or during the soak period;
- (c) The background samples shall be analyzed no later than 60 minutes after the hot-start test cycle is complete.

#### 7.3.2.4 Drift verification

After quantifying exhaust gases, drift shall be verified as follows:

- (a) For batch and continuous gas analyzers, the mean analyzer value shall be recorded after stabilizing a zero gas to the analyzer. Stabilization may include time to purge the analyzer of any sample gas, plus any additional time to account for analyzer response;
- (b) The mean analyzer value shall be recorded after stabilizing the span gas to the analyzer. Stabilization may include time to purge the analyzer of any sample gas, plus any additional time to account for analyzer response;
- (c) These data shall be used to validate and correct for drift as described in paragraph 8.2.2.

#### 7.4 Test cycles

The type-approval test shall be conducted using the appropriate non-road steady cycle (NRSC) and, where applicable, non-road transient cycle (NRTC or LSI-NRTC), specified

in Article 23 and Annex IV to Regulation (EU) 2015 XXX. The technical specifications and characteristics of the NRSC, NRTC and LSI-NRTC test cycles and the method for determination of the load and speed settings for these cycles is laid down in Annex XX of this Regulation.

#### 7.4.1 Steady-state test cycles

Steady-state test cycles are specified in Appendices 1 and 2 of Annex XVII as a list of discrete modes (operating points), where each operating point has one value of speed and one value of torque. A steady-state test cycle shall be measured with a warmed up and running engine according to manufacturer's specification. At the choice of the manufacturer, a steady-state test cycle may be run as a discrete-mode cycle or a ramped-modal cycle, as explained in the following paragraphs. It shall not be required to conduct an emission test according to both paragraphs 7.4.1.1 and 7.4.1.2.

Deleted: XIX

##### 7.4.1.1 Steady-state discrete mode test cycles

The steady-state discrete mode test cycles are hot running cycles where emissions shall be started to be measured after the engine is started, warmed up and running as specified in paragraph 7.8.1.2. Each cycle consists of a number of speed and load modes (with the respective weighing factor for each mode) which cover the typical operating range of the specified engine category.

##### 7.4.1.2 Steady-state ramped modal test cycles

The ramped modal test cycles (RMC) are hot running cycles where emissions shall be started to be measured after the engine is started, warmed up and running as specified in paragraph 7.8.2.1. The engine shall be continuously controlled by the test bed control unit during the RMC test cycle. The gaseous and particulate emissions shall be measured and sampled continuously during the RMC test cycle in the same way as in a transient cycle.

An RMC is intended to provide a method for performing a steady-state test in a pseudo-transient manner. Each RMC consists of a series of steady state modes with a linear transition between them. The relative total time at each mode and its preceding transition match the weighting of the discrete mode steady state cycles. The change in engine speed and load from one mode to the next one has to be linearly controlled in a time of  $20 \pm 1$  seconds. The mode change time is part of the new mode (including the first mode). In some cases modes are not run in the same order as the discrete model steady state cycles or are split to prevent extreme changes in temperature.

#### 7.4.2 Transient test cycle (NRTC and LSI-NRTC)

The Non-Road Transient Cycle (NRTC) and Large Spark Ignition NRTC (LSI-NRTC) are each specified in Appendix 3 of Annex XIX as a second-by-second sequence of normalized speed and torque values. In order to perform the test in an engine test cell, the normalized values shall be converted to their equivalent reference values for the

individual engine to be tested, based on specific speed and torque values identified in the engine-mapping curve. The conversion is referred to as denormalization, and the resulting test cycle is the reference NRTC or LSI-NRTC test cycle of the engine to be tested (see paragraph 7.7.2.).

#### 7.4.2.1 Test sequence for NRTC

A graphical display of the normalized NRTC dynamometer schedule is shown in [Figure 6.3](#) below.

Deleted: here

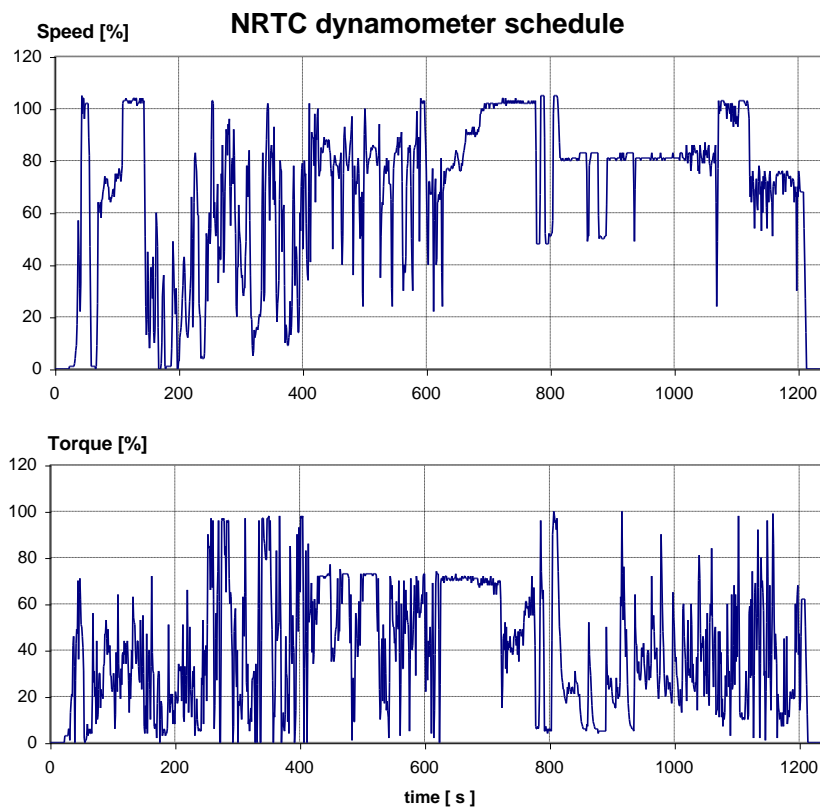


Figure [6.3](#) - NRTC normalized dynamometer schedule

Deleted: 7.2

The transient test cycle shall be run twice after completion of pre-conditioning (see paragraph 7.8.3.):

- (a) As cold start after the engine and aftertreatment systems have cooled down to room temperature after natural engine cool down, or as cold start after forced cool down and the engine, coolant and oil temperatures, aftertreatment systems and all

- engine control devices are stabilized between 20 and 30 °C. The measurement of the cold start emissions shall be started with the start of the cold engine;
- (b) Hot soak period – Immediately upon completion of the cold start phase, the engine shall be shut-down and conditioned for the hot start by a 20 minutes ± 1 minute hot soak period;
  - (c) The hot-start shall be started immediately after the soak period with the cranking of the engine. The gaseous analyzers shall be switched on at least 10 seconds before the end of the soak period to avoid switching signal peaks. The measurement of emissions shall be started in parallel with the start of the hot start phase including the cranking of the engine.

Brake specific emissions expressed in (g/kWh) shall be determined by using the procedures of this section for both the cold and hot start test cycles. Composite weighted emissions shall be computed by weighting the cold start results by 10 per cent and the hot start results by 90 per cent as detailed in Annex VIII.

#### 7.4.2.2 Test sequence for LSI-NRTC

The transient test cycle shall be run once after completion of pre-conditioning:

- (a) Warm up the test engine by starting and operating for the first 180 seconds of the duty cycle, then operate at idle without load for 30 seconds. Emissions are not measured during this warm-up sequence.
- (b) At the end of the 30-second idling period start measuring emissions and operate the engine over the entire duty cycle starting from the beginning.

Brake specific emissions expressed in (g/kWh) shall be determined by using the procedures of Annex [VII](#).

Deleted: VIII

If the engine was already operating before the test, use good engineering judgment to let the engine cool down enough so measured emissions will accurately represent those from an engine starting at room temperature. For example, if an engine starting at room temperature warms up enough in three minutes to start closed-loop operation and achieve full catalyst activity, then minimal engine cooling is necessary before starting the next test.

With the prior agreement of the technical service, the engine warm-up procedure may include up to 15 minutes of operation over the duty cycle.

#### 7.5 General test sequence

To measure engine emissions the following steps have to be performed:

- (a) The engine test speeds and test loads have to be defined for the engine to be tested by measuring the max torque (for constant speed engines) or max torque curve (for variable speed engines) as function of the engine speed;

- (b) Normalized test cycles have to be denormalized with the torque (for constant speed engines) or speeds and torques (for variable speed engines) found in the previous paragraph 7.5. (a);
- (c) The engine, equipment, and measurement instruments shall be prepared for the following emission test or test series (cold and hot cycle) in advance;
- (d) Pre-test procedures shall be performed to verify proper operation of certain equipment and analyzers. All analysers have to be calibrated. All pre-test data shall be recorded;
- (e) The engine shall be started (NRTC) or kept running (steady-state cycles and LSI-NRTC) at the beginning of the test cycle and the sampling systems shall be started at the same time;
- (f) Emissions and other required parameters shall be measured or recorded during sampling time (for NRTC, LSI-NRTC and steady-state ramped modal cycles throughout the whole test cycle);
- (g) Post-test procedures shall be performed to verify proper operation of certain equipment and analyzers;
- (h) PM filter(s) shall be pre-conditioned, weighed (empty weight), loaded, re-conditioned, again weighed (loaded weight) and then samples shall be evaluated according to pre- (para. 7.3.1.5.) and post-test (para. 7.3.2.2.) procedures;
- (i) Emission test results shall be evaluated.


The following diagram gives an overview about the procedures needed to conduct NRMM test cycles with measuring exhaust engine emissions.

Figure [6.4](#)  
**Test sequence**

Deleted: 7.3

Deleted:

...

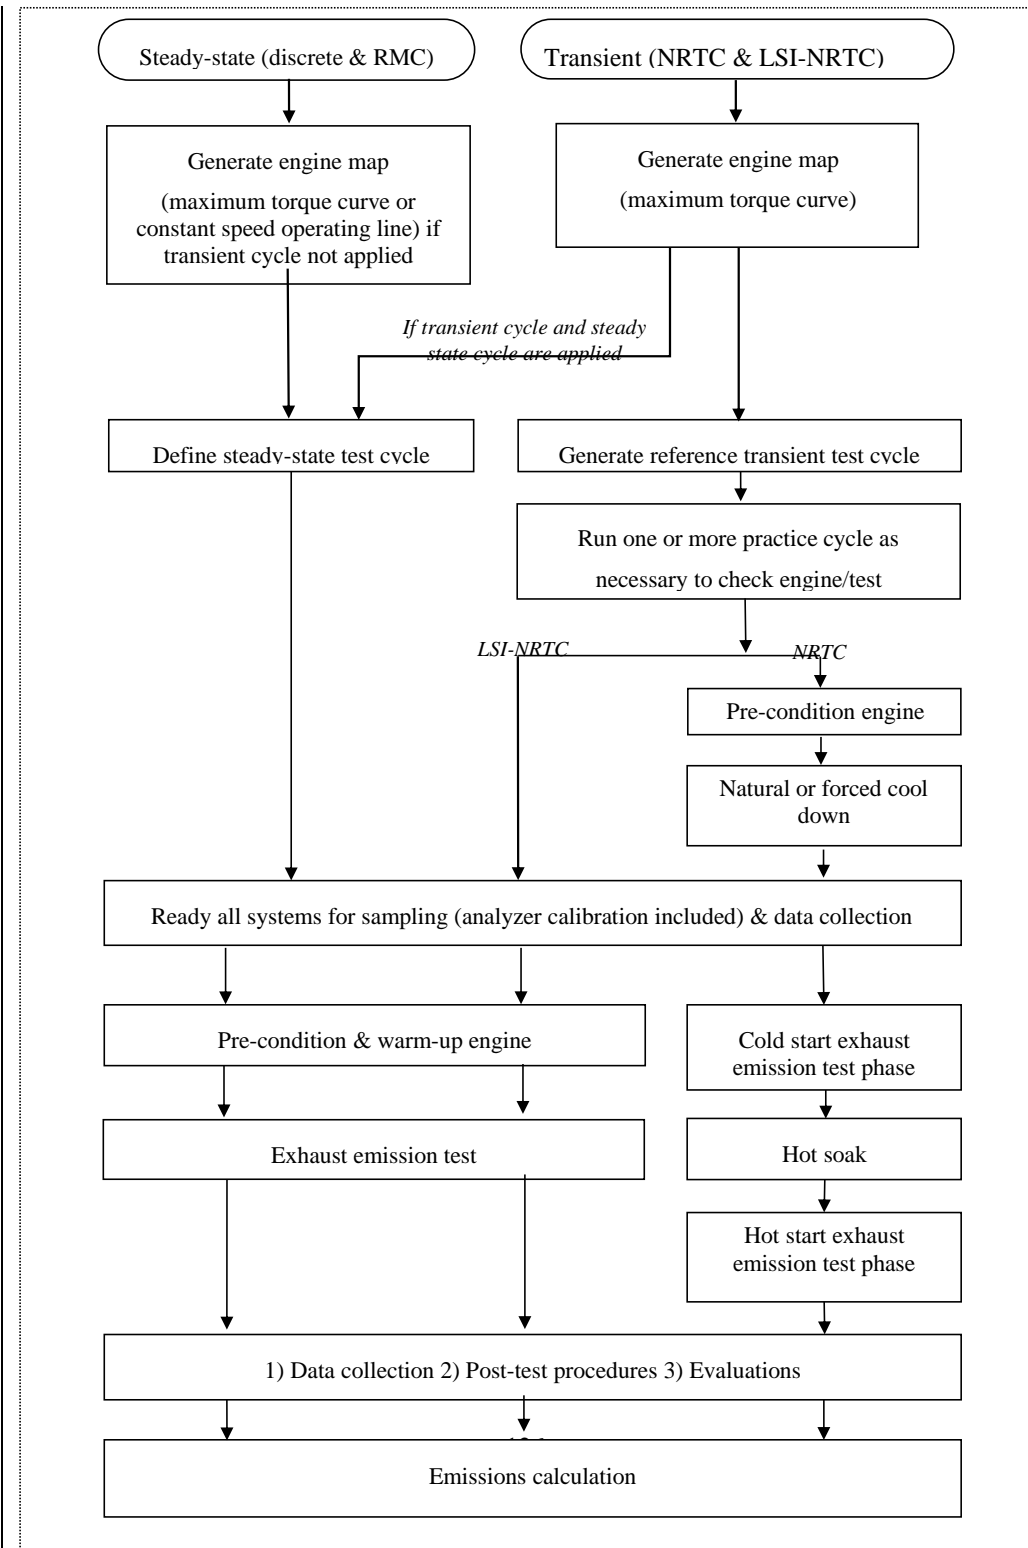

## 7.5.1 Engine starting, and restarting

### 7.5.1.1 Engine start

The engine shall be started:

- (a) As recommended in the owner's manual using a production starter motor or air-start system and either an adequately charged battery, a suitable power supply or a suitable compressed air source; or
- (b) By using the dynamometer to crank the engine until it starts. Typically motor the engine within  $\pm 25$  per cent of its typical in-use cranking speed or start the engine by linearly increasing the dynamometer speed from zero to  $100 \text{ min}^{-1}$  below low idle speed but only until the engine starts.

Cranking shall be stopped within 1 s of starting the engine. If the engine does not start after 15 s of cranking, cranking shall be stopped and the reason for the failure to start determined, unless the owner's manual or the service-repair manual describes a longer cranking time as normal.

### 7.5.1.2 Engine stalling

- (a) If the engine stalls anywhere during the cold start test of the NRTC, the test shall be voided;
- (b) If the engine stalls anywhere during the hot start test of the NRTC, the test shall be voided. The engine shall be soaked according to paragraph 7.8.3., and the hot start test repeated. In this case, the cold start test does not need to be repeated;
- (c) If the engine stalls anywhere during the LSI-NRTC, the test shall be voided.
- (d) If the engine stalls anywhere during the NRSC (discrete or ramped), the test shall be voided and be repeated beginning with the engine warm-up procedure. In the case of PM measurement utilizing the multi-filter method (one sampling filter for each operating mode), the test shall be continued by stabilizing the engine at the previous mode for engine temperature conditioning and then initiating measurement with the mode where the engine stalled.

## 7.6 Engine mapping

Before starting the engine mapping, the engine shall be warmed up and towards the end of the warm up it shall be operated for at least 10 minutes at maximum power or according to the recommendation of the manufacturer and good engineering judgement in order to stabilize the engine coolant and lube oil temperatures. When the engine is stabilized, the engine mapping shall be performed.

Except constant speed engines, engine mapping shall be performed with fully open fuel lever or governor using discrete speeds in ascending order. The minimum and maximum mapping speeds are defined as follows:

Minimum mapping speed = warm idle speed

Maximum mapping speed =  $n_{hi} \times 1.02$  or speed where max torque drops off to zero, whichever is smaller.

Where  $n_{hi}$  is the high speed, defined as the highest engine speed where 70 per cent of the maximum power is delivered.

If the highest speed is unsafe or unrepresentative (e.g., for ungoverned engines), good engineering judgement shall be used to map up to the maximum safe speed or the maximum representative one.

#### 7.6.1 Engine mapping for variable speed NRSC

In the case of engine mapping for a variable speed NRSC (only for engines which have not to run the NRTC or LSI-NRTC cycle), good engineering judgment shall be used to select a sufficient number of evenly spaced set-points. At each set-point, speed shall be stabilized and torque allowed to stabilize at least for 15 seconds. The mean speed and torque shall be recorded at each set-point. It is recommended that the mean speed and torque are calculated using the recorded data from the last 4 to 6 seconds. Linear interpolation shall be used to determine the NRSC test speeds and torques if needed. Except as set-out in section 5.2.5, if the derived test speeds and loads do not deviate for more than  $\pm 3$  per cent from the speeds and torques indicated by the manufacturer, the manufacturer defined speeds and loads shall be applied. When engines are additionally required to run an NRTC or LSI-NRTC, the NRTC engine mapping curve shall be used to determine steady-state test speeds and torques.

Deleted: -

Deleted: 8-mode

At the choice of the manufacturer the engine mapping may alternatively be conducted according to the procedure in paragraph 7.6.2.

#### 7.6.2 Engine mapping for NRTC and LSI-NRTC

The engine mapping shall be performed according to the following procedure:

- (a) The engine shall be unloaded and operated at idle speed;
  - (i) For engines with a low-speed governor, the operator demand shall be set to the minimum, the dynamometer or another loading device shall be used to target a torque of zero on the engine's primary output shaft and the engine shall be allowed to govern the speed. This warm idle speed shall be measured;
  - (ii) For engines without a low-speed governor, the dynamometer shall be set to target a torque of zero on the engine's primary output shaft, and the operator demand shall be set to control the speed to the manufacturer-declared lowest engine speed possible with minimum load (also known as manufacturer-declared warm idle speed);



- (iii) The manufacturer declared idle torque may be used for all variable-speed engines (with or without a low-speed governor), if a nonzero idle torque is representative of in-use operation;
- (b) Operator demand shall be set to maximum and engine speed shall be controlled to between warm idle and 95 per cent of its warm idle speed. For engines with reference duty cycles, which lowest speed is greater than warm idle speed, the mapping may be started at between the lowest reference speed and 95 per cent of the lowest reference speed;
- (c) The engine speed shall be increased at an average rate of  $8 \pm 1 \text{ min}^{-1}/\text{s}$  or the engine shall be mapped by using a continuous sweep of speed at a constant rate such that it takes 4 to 6 min to sweep from minimum to maximum mapping speed. The mapping speed range shall be started between warm idle and 95 per cent of warm idle and ended at the highest speed above maximum power at which less than 70 per cent of maximum power occurs. If this highest speed is unsafe or unrepresentative (e.g., for ungoverned engines), good engineering judgment shall be used to map up to the maximum safe speed or the maximum representative speed. Engine speed and torque points shall be recorded at a sample rate of at least 1 Hz;
- (d) If a manufacturer believes that the above mapping techniques are unsafe or unrepresentative for any given engine, alternate mapping techniques may be used. These alternate techniques shall satisfy the intent of the specified mapping procedures to determine the maximum available torque at all engine speeds achieved during the test cycles. Deviations from the mapping techniques specified in this paragraph for reasons of safety or representativeness shall be approved by the type approval or certification authority along with the justification for their use. In no case, however, the torque curve shall be run by descending engine speeds for governed or turbocharged engines;
- (e) An engine need not be mapped before each and every test cycle. An engine shall be remapped if:
  - (i) An unreasonable amount of time has transpired since the last map, as determined by good engineering judgement; or
  - (ii) Physical changes or recalibrations have been made to the engine which potentially affect engine performance; or
  - (iii) The atmospheric pressure near the engine's air inlet is not within  $\pm 5 \text{ kPa}$  of the value recorded at the time of the last engine map.

### 7.6.3 Engine mapping for constant-speed NRSC

The engine may be operated with a production constant-speed governor or a constant-speed governor maybe simulated by controlling engine speed with an operator demand control system. Either isochronous or speed-droop governor operation shall be used, as appropriate.

Deleted: (a)

Deleted:

Deleted: ;

7.6.3.1 Rated power check for engines to be tested on cycles D2 or E2

Deleted: (b)

The following check shall be conducted:

(a) With the governor or simulated governor controlling speed using operator demand the engine shall be operated at the rated speed and the rated power for as long as required to achieve stable operation:

(b) The torque shall be increased until the engine is unable to maintain the governed speed. The power at this point shall be recorded. Before this check is performed the method to safely determine when this point has been reached shall be agreed between the manufacturer and the technical service conducting the check, depending upon the characteristics of the governor. The power recorded at point (b) shall not exceed the rated power as defined in Article 3(25) of regulation (EU) 2016/xxx by more than 12.5 per cent. If this value is exceeded the manufacturer shall revise the declared rated power.

If the specific engine being tested is unable to perform this check due to risk of damage to the engine or dynamometer the manufacturer shall present to the type approval authority robust evidence that maximum power does not exceed the rated power by more than 12.5 per cent.

7.6.3.2 Mapping procedure for constant speed NRSC

(a) With the governor or simulated governor controlling speed using operator demand, the engine shall be operated at no-load governed speed (at high speed, not low idle) for at least 15 seconds, unless the specific engine is unable to perform this task;

Deleted: c

(b) The dynamometer shall be used to increase torque at a constant rate. The map shall be conducted such that it takes no less than 2 min to sweep from no-load governed speed to the torque corresponding to rated power for engines to be tested on cycle D2 or E2 or to maximum torque in the case of other constant speed test cycles. During the engine mapping actual speed and torque shall be recorded with at least 1 Hz;

Deleted: to-4

(c) In case of a constant speed engine with a governor that can be reset to alternative speeds, the engine shall be tested at each applicable constant speed.

Deleted: d

For constant speed engines good engineering judgment shall be used to apply other methods to record torque and power at the defined operating speed(s).

Deleted: ¶

Deleted: max

Deleted: ¶

For engines tested on cycles other than D2 or E2, when both measured and declared values are available for the maximum torque, the declared value may be used instead of the measured value if it is between 95 and 100 per cent of the measured value.

Deleted: within

Deleted: to

## 7.7 Test cycle generation

### 7.7.1 Generation of NRSC

This paragraph shall be used to generate the engine speeds and loads over which the engine shall be operated during steady-state discrete-mode or RMC tests.

#### 7.7.1.1 Generation of NRSC test speeds for engines tested with both NRSC and either NRTC or LSI-NRTC

For engines that are tested with either NRTC or LSI-NRTC in addition to a steady-state cycle, the MTS specified in paragraph 5.2.5.1 shall be used as the 100% speed for both transient and steady state tests. A declared MTS in accordance with paragraph 5.2.5.1.3 is permitted at the choice of the manufacturer.

The MTS shall be used in place of rated speed when determining intermediate speed in accordance with paragraph 5.2.5.3.

The idle speed shall be determined in accordance with paragraph 5.2.5.4.

#### 7.7.1.2 Generation of NRSC test speeds for engines only tested with NRSC

For engines that are not tested with a transient cycle, the rated speed specified in paragraph 5.2.5.2 shall be used as the 100% speed.

The rated speed shall be used to determine the intermediate speed in accordance with paragraph 5.2.5.3. If the NRSC specifies additional speeds as a percentage they shall be calculated as a percentage of the rated speed.

The idle speed shall be determined in accordance with paragraph 5.2.5.4.

With prior approval of the technical service, MTS may be used instead of rated speed for the generation of test speeds in this paragraph.

#### 7.7.1.3 Generation of NRSC load for each test mode

The percent load for each test mode of the chosen test cycle shall be taken from the appropriate NRSC table of Appendix 1 or 2 of Annex XIX. Depending upon the test cycle, the load in these tables is expressed as either power or torque in accordance with paragraph 5.2.6 and in the footnotes for each table.

The 100% value at a given test speed shall be the measured or declared value taken from the mapping curve generated in accordance with paragraph 7.6.1, paragraph 7.6.2 or paragraph 7.6.3 respectively, expressed as power (kW).

The engine setting for each test mode shall be calculated using the formula:

$$S = \left( (P_{\max} + P_{\text{AUX}}) \cdot \frac{L}{100} \right) - P_{\text{AUX}}$$

(6-14)

Deleted: (7-1)

Where:

- $S$  = dynamometer setting in kW  
 $P_{\max}$  = maximum observed or declared power at the test speed under the test conditions (specified by the manufacturer) in kW  
 $P_{\text{AUX}}$  = sum of the declared total power absorbed by auxiliaries that are to be removed for the test but which are installed minus the declared total power absorbed by auxiliaries that should be fitted for the test but were not installed (see paragraph 6.3.) at the specified test speed in kW  
 $L$  = per cent torque

A warm minimum torque that is representative of in-use operation may be declared. For example, if the engine is typically connected to a machine that does not operate below a certain minimum torque, this torque may be declared and used for any load point that would otherwise fall below this value.

In the case of cycles E2 and D2 the manufacturer shall declare the rated power and these shall be used as 100% power when generating the test cycle.

#### 7.7.2 Generation of NRTC & LSI-NRTC speed and load for each test point (denormalization)

This paragraph shall be used to generate the corresponding engine speeds and loads over which the engine shall be operated during NRTC or LSI-NRTC tests. Appendix 3 of Annex XIX defines applicable test cycles in a normalized format. A normalized test cycle consists of a sequence of paired values for speed and torque per cent.

Normalized values of speed and torque shall be transformed using the following conventions:

- (a) The normalized speed shall be transformed into a sequence of reference speeds,  $n_{\text{ref}}$ , in accordance with paragraph 7.7.2.2;
- (b) The normalized torque is expressed as a percentage of the mapped torque from the curve generated according to paragraph 7.6.3 at the corresponding reference speed. These normalized values shall be transformed into a sequence of reference torques,  $T_{\text{ref}}$ , according to paragraph 7.7.2.3;
- (c) The reference speed and reference torque values expressed in coherent units are multiplied to calculate the reference power values.

##### 7.7.2.1 Reserved

##### 7.7.2.2 Denormalization of engine speed

The engine speed shall be denormalized using the following equation:

$$n_{ref} = \frac{\%speed \times (MTS - n_{idle})}{100} + n_{idle}$$

(6-15)

Deleted: 7-4

Where:

$n_{ref}$  = reference speed

$MTS$  = maximum test speed

$n_{idle}$  = idle speed

$\%speed$  = value of NRTC or LSI-NRTC normalized speed taken from Appendix 3 of Annex XIX.

### 7.7.2.3 Denormalization of engine torque

The torque values in the engine dynamometer schedule of Appendix 3 of Annex XX. are normalized to the maximum torque at the respective speed. The torque values of the reference cycle shall be denormalized, using the mapping curve determined according to paragraph 7.6.2., as follows:

$$T_{ref} = \frac{\%torque \cdot max.torque}{100}$$

(6-16)

Deleted: (7-5

for the respective reference speed as determined in paragraph 7.7.2.2.

Where:

$T_{ref}$  = reference torque for the respective reference speed

$Max.torque$  = maximum torque for the respective test speed taken from the engine mapping performed according to paragraph 7.6.2 adjusted where necessary according to paragraph 7.7.2.3.1.

$\%torque$  = value of NRTC or LSI-NRTC normalized torque taken from Annex C

#### 7.7.2.3.1 Declared minimum torque

A minimum torque that is representative of in-use operation may be declared. For example, if the engine is typically connected to a machine that does not operate below a certain minimum torque, this torque may be declared and used for any load point that would otherwise fall below this value.

#### 7.7.2.3.2 Adjustment of engine torque due to auxiliaries fitted for the emissions test

Deleted: .

Where auxiliaries are fitted in accordance with Appendix 2 to this Annex there shall be no adjustment to the maximum torque for the respective test speed taken from the engine mapping performed according to paragraph 7.6.2.

Where, according to paragraphs 6.3.2 or 6.3.3 necessary auxiliaries that should have been fitted for the test are not installed, or auxiliaries that should have been removed for the test are installed, the value of  $T_{max}$  shall be adjusted according to this paragraph.

$$T_{\max} = T_{\text{map}} - T_{\text{AUX}} \quad (6-17)$$

Where:

$T_{\text{map}}$  = unadjusted maximum torque for the respective test speed taken from the engine mapping performed according to paragraph 7.6.2.

$$T_{\text{AUX}} = T_r - T_f$$

$T_f$  = torque required to drive auxiliaries that should have been fitted but were not installed for the test

$T_r$  = torque required to drive auxiliaries that should have been removed for the test but were installed for the test

#### 7.7.2.4 Example of denormalization procedure

As an example, the following test point shall be denormalized:

*% speed* = 43 per cent

*% torque* = 82 per cent

Given the following values:

$$MTS = 2200 \text{ min}^{-1}$$

$$n_{\text{idle}} = 600 \text{ min}^{-1}$$

results in

$$n_{\text{ref}} = \frac{43 \cdot (2200 - 600)}{100} + 600 = 1288 \text{ min}^{-1}$$

With the maximum torque of 700 Nm observed from the mapping curve at 1288  $\text{min}^{-1}$

$$T_{\text{ref}} = \frac{82 \times 700}{100} = 574 \text{ Nm}$$

### 7.8 Specific test cycle running procedure

#### 7.8.1 Emission test sequence for discrete-mode NRSC

##### 7.8.1.1 Engine warming-up for steady state discrete-mode test cycles

Pre-test procedure according to paragraph 7.3.1. shall be performed, including analyzer calibration. The engine shall be warmed-up using the pre-conditioning sequence in paragraph 7.3.1.1.3. Immediately from this engine conditioning point, the test cycle measurement starts.

##### 7.8.1.2 Performing discrete-mode NRSC

- (a) The test shall be performed in ascending order of mode numbers as set out for the test cycle (see Appendix 1 of Annex XIX.);
- (b) Each mode has a mode length of at least 10 minutes, except when testing spark ignition engines using cycles G1, G2 or G3 where each mode has a length of at least 3 minutes. In each mode the engine shall be stabilized for at least 5 minutes and emissions shall be sampled for 1-3 minutes for gaseous emissions and, where there is an applicable limit, PN at the end of each mode, except when testing spark ignition engines using cycles G1, G2 or G3 where emissions shall be sampled for at least the last 2 minutes of the respective test mode. Extended time of sampling is permitted to improve the accuracy of PM sampling;

The mode length shall be recorded and reported.

- (c) The PM sampling may be done either with the single filter method or with the multiple filter method. Since the results of the methods may differ slightly, the method used shall be declared with the results;

For the single filter method the modal weighting factors specified in the test cycle procedure and the actual exhaust flow shall be taken into account during sampling by adjusting sample flow rate and/or sampling time, accordingly. It is required that the effective weighing factor of the PM sampling is within  $\pm 0.005$  of the weighing factor of the given mode;

Sampling shall be conducted as late as possible within each mode. For the single filter method, the completion of PM sampling shall be coincident within  $\pm 5$  s with the completion of the gaseous emission measurement. The sampling time per mode shall be at least 20 s for the single filter method and at least 60 s for the multi-filter method. For systems without bypass capability, the sampling time per mode shall be at least 60 s for single and multiple filter methods;

- (d) The engine speed and load, intake air temperature, fuel flow and where applicable air or exhaust gas flow shall be measured for each mode at the same time interval which is used for the measurement of the gaseous concentrations; Any additional data required for calculation shall be recorded.
- (e) If the engine stalls or the emission sampling is interrupted at any time after emission sampling begins for a discrete mode and the single filter method, the test shall be voided and be repeated beginning with the engine warm-up procedure. In the case of PM measurement utilizing the multi-filter method (one sampling filter for each operating mode), the test shall be continued by stabilizing the engine at the previous mode for engine temperature conditioning and then initiating measurement with the mode where the engine stalled;
- (f) Post-test procedures according to paragraph 7.3.2. shall be performed.

### 7.8.1.3 Validation criteria

During each mode of the given steady-state test cycle after the initial transition period, the measured speed shall not deviate from the reference speed for more than  $\pm 1$  per cent of rated speed or  $\pm 3 \text{ min}^{-1}$ , whichever is greater except for idle which shall be within the tolerances declared by the manufacturer. The measured torque shall not deviate from the reference torque for more than  $\pm 2$  per cent of the maximum torque at the test speed.

## 7.8.2 Emission test sequence for RMC NRSC

### 7.8.2.1 Engine warming-up

Pre-test procedure according to paragraph 7.3.1. shall be performed, including analyzer calibration. The engine shall be warmed-up using the pre-conditioning sequence in paragraph 7.3.1.1.4. Immediately after this engine conditioning procedure, if the engine speed and torque are not already set for the first mode of the test they shall be changed in a linear ramp of  $20 \pm 1 \text{ s}$  to the first mode of the test. In between 5 to 10 s after the end of the ramp, the test cycle measurement shall start.

### 7.8.2.2 Performing a RMC NRSC

The test shall be performed in the order of mode numbers as set out for the test cycle (see Appendix 2 to Annex XVII.) Where there is no RMC available for the specified NRSC the discrete mode procedure of paragraph 7.8.1 shall be followed.

The engine shall be operated for the prescribed time in each mode. The transition from one mode to the next shall be done linearly in  $20 \text{ s} \pm 1 \text{ s}$  following the tolerances prescribed in paragraph 7.8.2.4.

For ramped modal cycles, reference speed and torque values shall be generated at a minimum frequency of 1 Hz and this sequence of points shall be used to run the cycle. During the transition between modes, the denormalized reference speed and torque values shall be linearly ramped between modes to generate reference points. The normalized reference torque values shall not be linearly ramped between modes and then denormalized. If the speed and torque ramp runs through a point above the engine's torque curve, it shall be continued to command the reference torques and it shall be allowed for the operator demand to go to maximum.

Over the whole RMC test cycle (during each mode and including the ramps between the modes), the concentration of each gaseous pollutant shall be measured and where there is an applicable limit the PM and PN be sampled. The gaseous pollutants may be measured raw or diluted and be recorded continuously; if diluted, they can also be sampled into a sampling bag. The particulate sample shall be diluted with conditioned and clean air. One sample over the complete test procedure shall be taken, and, in the case of PM collected on a single PM sampling filter..

For calculation of the brake specific emissions, the actual cycle work shall be calculated by integrating actual engine power over the complete cycle.



### 7.8.2.3 Emission test sequence

- (a) Execution of the RMC, sampling exhaust gases, recording data, and integrating measured values shall be started simultaneously;
- (b) Speed and torque shall be controlled to the first mode in the test cycle;
- (c) If the engine stalls anywhere during the RMC execution, the test shall be voided. The engine shall be pre-conditioned and the test repeated;
- (d) At the end of the RMC, sampling shall be continued, except for PM sampling, operating all systems to allow system response time to elapse. Then all sampling and recording shall be stopped, including the recording of background samples. Finally, any integrating devices shall be stopped and the end of the test cycle shall be indicated in the recorded data;
- (e) Post-test procedures according to paragraph 7.4. shall be performed.

### 7.8.2.4 Validation criteria

RMC tests shall be validated using the regression analysis as described in paragraphs 7.8.3.3. and 7.8.3.5. The allowed RMC tolerances are given in the following table 6.1. Note that the RMC tolerances are different from the NRTC tolerances of table 6.2. When conducting testing of engines of net power greater than 560 kW the regression line tolerances of table 6.2 and the point deletion of table 6.3 may be used.

Deleted: 7  
 Deleted: 7  
 Deleted: 7  
 Deleted: 7  
 Deleted: 7

Table 6.1

**RMC Regression line tolerances**

	Speed	Torque	Power
Standard error of estimate (SEE) of $y$ on $x$	maximum 1 per cent of rated speed	maximum 2 per cent of maximum engine torque	maximum 2 per cent of maximum engine power
Slope of the regression line, $a_1$	0.99 to 1.01	0.98 - 1.02	0.98 - 1.02
Coefficient of determination, $r^2$	minimum 0.990	minimum 0.950	minimum 0.950
$y$ intercept of the regression line, $a_0$	$\pm 1$ per cent of rated speed	$\pm 20$ Nm or 2 per cent of maximum torque whichever is greater	$\pm 4$ kW or 2 per cent of maximum power whichever is greater

In case of running the RMC test not on a transient test bed, where the second by second speed and torque values are not available, the following validation criteria shall be used.

At each mode the requirements for the speed and torque tolerances are given in paragraph 7.8.1.3. For the 20 s linear speed and linear torque transitions between the RMC steady-state test modes (paragraph 7.4.1.2.) the following tolerances for speed and load shall be applied for the ramp, the speed shall be held linear within  $\pm 2$  per cent of

rated speed. The torque shall be held linear within  $\pm 5$  per cent of the maximum torque at rated speed.

### 7.8.3 Transient test cycle (NRTC and LSI-NRTC)

Reference speeds and torques commands shall be sequentially executed to perform the transient test cycle. Speed and torque commands shall be issued at a frequency of at least 5 Hz. Because the reference test cycle is specified at 1 Hz, the in between speed and torque commands shall be linearly interpolated from the reference torque values generated from cycle generation.

Small denormalized speed values near warm idle speed may cause low-speed idle governors to activate and the engine torque to exceed the reference torque even though the operator demand is at a minimum. In such cases, it is recommended to control the dynamometer so it gives priority to follow the reference torque instead of the reference speed and let the engine govern the speed.

Under cold-start conditions engines may use an enhanced-idle device to quickly warm up the engine and after-treatment devices. Under these conditions, very low normalized speeds will generate reference speeds below this higher enhanced idle speed. In this case it is recommended controlling the dynamometer so it gives priority to follow the reference torque and let the engine govern the speed when the operator demand is at minimum.

During an emission test, reference speeds and torques and the feedback speeds and torques shall be recorded with a minimum frequency of 1 Hz, but preferably of 5 Hz or even 10 Hz. This larger recording frequency is important as it helps to minimize the biasing effect of the time lag between the reference and the measured feedback speed and torque values.

The reference and feedback speeds and torques maybe recorded at lower frequencies (as low as 1 Hz), if the average values over the time interval between recorded values are recorded. The average values shall be calculated based on feedback values updated at a frequency of at least 5 Hz. These recorded values shall be used to calculate cycle-validation statistics and total work.

#### 7.8.3.1 Performing an NRTC transient cycle test

Deleted: ¶  
¶

Pre-test procedures according to paragraph 7.3.1 shall be performed, including pre-conditioning, cool-down and analyzer calibration.

Testing shall be started as follows:

The test sequence shall commence immediately after the engine has started from cooled down condition specified in paragraph 7.3.1.2 in case of the cold NRTC test or from hot

soak condition in case of the hot NRTC test. The sequence in paragraph 7.4.2.1 shall be followed.

Data logging, sampling of exhaust gases and integrating measured values shall be initiated simultaneously at the start of the engine. The test cycle shall be initiated when the engine starts and shall be executed according to the schedule of Appendix 3 of Annex XX.

At the end of the cycle, sampling shall be continued, operating all systems to allow system response time to elapse. Then all sampling and recording shall be stopped, including the recording of background samples. Finally, any integrating devices shall be stopped and the end of the test cycle shall be indicated in the recorded data.

Post-test procedures according to paragraph 7.3.2 shall be performed.

#### 7.8.3.2 Performing an LSI-NRTC transient cycle test

Pre-test procedures according to paragraph 7.3.1 shall be performed, including pre-conditioning and analyzer calibration.

Testing shall be started as follows:

The test shall commence according to the sequence given in paragraph 7.4.2.2.

Data logging, sampling of exhaust gases and integrating measured values shall be initiated simultaneously with the start of the test cycle at the end of the 30-second idle period specified in paragraph 7.4.2.2(b). The test cycle shall be executed according to the schedule of Appendix 3 of Annex XIX.

At the end of the cycle, sampling shall be continued, operating all systems to allow system response time to elapse. Then all sampling and recording shall be stopped, including the recording of background samples. Finally, any integrating devices shall be stopped and the end of the test cycle shall be indicated in the recorded data.

Post-test procedures according to paragraph 7.3.2 shall be performed.

#### 7.8.3.3 Cycle validation criteria for transient test cycle

Deleted: ¶

In order to check the validity of a test, the cycle-validation criteria in this paragraph shall be applied to the reference and feedback values of speed, torque, power and overall work.

#### 7.8.3.4 Calculation of cycle work

Before calculating the cycle work, any speed and torque values recorded during engine starting shall be omitted. Points with negative torque values have to be accounted for as zero work. The actual cycle work  $W_{act}$  (kWh) shall be calculated based on engine

feedback speed and torque values. The reference cycle work  $W_{ref}$  (kWh) shall be calculated based on engine reference speed and torque values. The actual cycle work  $W_{act}$  is used for comparison to the reference cycle work  $W_{ref}$  and for calculating the brake specific emissions (see paragraph 7.2.)

$W_{act}$  shall be between 85 per cent and 105 per cent of  $W_{ref}$ .

### 7.8.3.5 Validation statistics (see Annex VIII, Appendix 2)

Linear regression between the reference and the feedback values shall be calculated for speed, torque and power.

To minimize the biasing effect of the time lag between the reference and feedback cycle values, the entire engine speed and torque feedback signal sequence may be advanced or delayed in time with respect to the reference speed and torque sequence. If the feedback signals are shifted, both speed and torque shall be shifted by the same amount in the same direction.

The method of least squares shall be used, with the best-fit equation having the form:

$$y = a_1x + a_0$$

(6-18)

Deleted: 7-

Where:

$y$  = feedback value of speed ( $\text{min}^{-1}$ ), torque (Nm), or power (kW)

$a_1$  = slope of the regression line

$x$  = reference value of speed ( $\text{min}^{-1}$ ), torque (Nm), or power

(kW)

$a_0$  = y intercept of the regression line

The standard error of estimate ( $SEE$ ) of  $y$  on  $x$  and the coefficient of determination ( $r^2$ ) shall be calculated for each regression line (Annex VIII, Appendix 2).

It is recommended that this analysis be performed at 1 Hz. For a test to be considered valid, the criteria of table 7.2 of this paragraph shall be met.

Table 6.2

#### Regression line tolerances

	Speed	Torque	Power
Standard error of estimate ( $SEE$ ) of $y$ on $x$	$\leq 5.0$ percent of maximum test speed	$\leq 10.0$ per cent of maximum mapped torque	$\leq 10.0$ per cent of maximum mapped power
Slope of the regression line, $a_1$	0.95 to 1.03	0.83 - 1.03	0.89 - 1.03
Coefficient of determination, $r^2$	minimum 0.970	minimum 0.850	minimum 0.910

Deleted: ¶

Deleted: 7

y intercept of the regression line, $a_0$	$\leq 10$ per cent of idle	$\pm 20$ Nm or $\pm 2$ per cent of maximum torque whichever is greater	$\pm 4$ kW or $\pm 2$ per cent of maximum power whichever is greater
---	----------------------------	--	--

For regression purposes only, point deletions are permitted where noted in table 7.3 of this paragraph before doing the regression calculation. However, those points shall not be deleted for the calculation of cycle work and emissions. An idle point is defined as a point having a normalized reference torque of 0 per cent and a normalized reference speed of 0 per cent. Point deletion may be applied to the whole or to any part of the cycle; points to which the point deletion is applied have to be specified.

Table 6.3

**Permitted point deletions from regression analysis**

Deleted: 7

Event	Conditions ( $n$ = engine speed, $T$ = torque)	Permitted point deletions
Minimum operator demand (idle point)	$n_{ref} = n_{idle}$ and $T_{ref} = 0$ per cent and $T_{act} > (T_{ref} - 0.02 T_{maxmappedtorque})$ and $T_{act} < (T_{ref} + 0.02 T_{maxmappedtorque})$	speed and power
Minimum operator demand	$n_{act} \leq 1.02 n_{ref}$ and $T_{act} > T_{ref}$ or $n_{act} > n_{ref}$ and $T_{act} \leq T_{ref}$ or $n_{act} > 1.02 n_{ref}$ and $T_{ref} < T_{act} \leq (T_{ref} + 0.02 T_{maxmappedtorque})$	power and either torque or speed
Maximum operator demand	$n_{act} < n_{ref}$ and $T_{act} \geq T_{ref}$ or $n_{act} \geq 0.98 n_{ref}$ and $T_{act} < T_{ref}$ or $n_{act} < 0.98 n_{ref}$ and $T_{ref} > T_{act} \geq (T_{ref} - 0.02 T_{maxmappedtorque})$	power and either torque or speed

**8 Measurement procedures**

Deleted: 8. MEASUREMENT PROCEDURES  
¶  
8.1 .

8.1 Calibration and performance checks

8.1.1 Introduction

Deleted: ¶  
8.1.1.

This paragraph describes required calibrations and verifications of measurement systems. See paragraph 9.4 for specifications that apply to individual instruments.

Deleted: ¶

Calibrations or verifications shall be generally performed over the complete measurement chain.

Deleted: .

Deleted:

Deleted:

If a calibration or verification for a portion of a measurement system is not specified, that portion of the system shall be calibrated and its performance verified at a frequency consistent with any recommendations from the measurement system manufacturer and consistent with good engineering judgment.

Deleted:

Internationally recognized-traceable standards shall be used to meet the tolerances specified for calibrations and verifications.

Deleted: ¶

8.1.2 Summary of calibration and verification

Deleted: ¶  
8.1.2.

The table 6.4 summarizes the calibrations and verifications described in paragraph 8, and indicates when these have to be performed.

Deleted: ¶

Deleted: 8.1

Deleted: .

Type of calibration or verification	Minimum frequency <sup>(a)</sup>
8.1.3: accuracy, repeatability and noise	Accuracy: Not required, but recommended for initial installation. Repeatability: Not required, but recommended for initial installation. Noise: Not required, but recommended for initial installation.
8.1.4: linearity verification	Speed: Upon initial installation, within 370 days before testing and after major maintenance. Torque: Upon initial installation, within 370 days before testing and after major maintenance. Intake air, dilution air and diluted exhaust flows and batch sample flow rates: Upon initial installation, within 370 days before testing and after major maintenance, unless flow is verified by propane check or by carbon or oxygen balance. Raw exhaust flow: Upon initial installation, within 185 days before testing and after major maintenance, unless flow is verified by propane check or by carbon or oxygen balance. Gas dividers: Upon initial installation, within 370 days before testing and after major maintenance. Gas analyzers (unless otherwise noted): Upon initial installation, within 35 days before testing and after major maintenance. FTIR analyser: Upon installation, within 370 days before testing and after major maintenance. PM balance: Upon initial installation, within 370 days before testing and after major maintenance. Stand-alone pressure and temperature: Upon initial installation, within 370 days before testing and after major maintenance.
8.1.5: Continuous gas analyzer system response and updating-recording verification – for gas analyzers not continuously compensated for other gas species	Upon initial installation or after system modification that would affect response.

Type of calibration or verification	Minimum frequency <sup>(a)</sup>
8.1.6: Continuous gas analyzer system response and updating-recording verification – for gas analyzers continuously compensated for other gas species	Upon initial installation or after system modification that would affect response.
8.1.7.1: torque	Upon initial installation and after major maintenance.
8.1.7.2: pressure, temperature, dew point	Upon initial installation and after major maintenance.
8.1.8.1: fuel flow	Upon initial installation and after major maintenance.
8.1.8.2: intake flow	Upon initial installation and after major maintenance.
8.1.8.3: exhaust flow	Upon initial installation and after major maintenance.
8.1.8.4: diluted exhaust flow (CVS and PFD)	Upon initial installation and after major maintenance.
8.1.8.5: CVS/PFD and batch sampler verification <sup>(b)</sup>	Upon initial installation, within 35 days before testing, and after major maintenance. (Propane check)
8.1.8.5.8: Sample dryer verification	For thermal chillers: upon installation and after major maintenance. For osmotic membranes: upon installation, within 35 days of testing and after major maintenance
8.1.8.8: vacuum leak	Upon installation of the sampling system. Before each laboratory test according to paragraph 7.1: within 8 hours before the start of the first test interval of each duty cycle sequence and after maintenance such as pre-filter changes.
8.1.9.1: CO <sub>2</sub> NDIR H <sub>2</sub> O interference	Upon initial installation and after major maintenance.
8.1.9.2: CO NDIR CO <sub>2</sub> and H <sub>2</sub> O interference	Upon initial installation and after major maintenance.
8.1.10.1: FID calibration	Calibrate, optimize, and determine CH <sub>4</sub> response: upon initial installation and after major maintenance.
HC FID optimization and HC FID verification	Verify CH <sub>4</sub> response: upon initial installation, within 185 days before testing, and after major maintenance.
8.1.10.2: raw exhaust FID O <sub>2</sub> interference	For all FID analyzers: upon initial installation, and after major maintenance. For THC FID analyzers: upon initial installation, after major maintenance, and after FID optimization according to 8.1.10.1.
8.1.11.1: CLD CO <sub>2</sub> and H <sub>2</sub> O quench	Upon initial installation and after major maintenance.
8.1.11.3: NDUV HC and H <sub>2</sub> O interference	Upon initial installation and after major maintenance.

Deleted: THC

Deleted: THC

Deleted: 8.1.10.3: non-methane cutter penetration

Type of calibration or verification	Minimum frequency <sup>(a)</sup>
8.1.11.4: cooling bath NO <sub>2</sub> penetration (chiller)	Upon initial installation and after major maintenance.
8.1.11.5: NO <sub>2</sub> -to-NO converter conversion	Upon initial installation, within 35 days before testing, and after major maintenance.
8.1.12.1: PM balance and weighing	Independent verification: upon initial installation, within 370 days before testing, and after major maintenance. Zero, span, and reference sample verifications: within 12 hours of weighing, and after major maintenance.
<sup>(a)</sup> Perform calibrations and verifications more frequently, according to measurement system manufacturer instructions and good engineering judgment. <sup>(b)</sup> The CVS verification is not required for systems that agree within ± 2per cent based on a chemical balance of carbon or oxygen of the intake air, fuel, and diluted exhaust.	

Table 6.4 – Summary of Calibration and Verifications

Deleted: 8.1



8.1.3 Verifications for accuracy, repeatability, and noise

Deleted: 8.1.3.

The performance values for individual instruments specified in table 9.3 are the basis for the determination of the accuracy, repeatability, and noise of an instrument.

Deleted: ¶

It is not required to verify instrument accuracy, repeatability, or noise. However, it may be useful to consider these verifications to define a specification for a new instrument, to verify the performance of a new instrument upon delivery, or to troubleshoot an existing instrument.

Deleted: ¶

8.1.4 Linearity verification

Deleted: ¶  
8.1.4.

8.1.4.1 Scope and frequency

Deleted: ¶  
8.1.4.1.

A linearity verification shall be performed on each measurement system listed in table 8.2 at least as frequently as indicated in the table, consistent with measurement system manufacturer recommendations and good engineering judgment. The intent of a linearity verification is to determine that a measurement system responds proportionally over the measurement range of interest. A linearity verification shall consist of introducing a series of at least 10 reference values to a measurement system, unless otherwise specified. The measurement system quantifies each reference value. The measured values shall be collectively compared to the reference values by using a least squares linear regression and the linearity criteria specified in table 8.2 of this paragraph.

Deleted: ¶

Deleted:

Deleted:

8.1.4.2 Performance requirements

Deleted: ¶  
8.1.4.2.

If a measurement system does not meet the applicable linearity criteria in table 8.2, the deficiency shall be corrected by re-calibrating, servicing, or replacing components as needed. The linearity verification shall be repeated after correcting the deficiency to ensure that the measurement system meets the linearity criteria.

Deleted: ¶

8.1.4.3 Procedure

Deleted: ¶  
8.1.4.3.

The following linearity verification protocol shall be used:

Deleted: ¶

- (a) A measurement system shall be operated at its specified temperatures, pressures, and flows;
- (b) The instrument shall be zeroed as it would before an emission test by introducing a zero signal. For gas analyzers, a zero gas shall be used that meets the specifications of paragraph 9.5.1. and it shall be introduced directly at the analyzer port;
- (c) The instrument shall be spanned as it would before an emission test by introducing a span signal. For gas analyzers, a span gas shall be used that meets the specifications of paragraph 9.5.1. and it shall be introduced directly at the analyzer port;
- (d) After spanning the instrument, zero shall be checked with the same signal which has been used in paragraph (b) of this paragraph. Based on the zero

reading, good engineering judgment shall be used to determine whether or not to re-zero and or re-span the instrument before proceeding to the next step;

- (e) For all measured quantities manufacturer recommendations and good engineering judgment shall be used to select the reference values,  $y_{refi}$ , that cover the full range of values that are expected during emission testing, thus avoiding the need of extrapolation beyond these values. A zero reference signal shall be selected as one of the reference values of the linearity verification. For stand-alone pressure and temperature linearity verifications, at least three reference values shall be selected. For all other linearity verifications, at least ten reference values shall be selected;
- (f) Instrument manufacturer recommendations and good engineering judgment shall be used to select the order in which the series of reference values will be introduced;
- (g) Reference quantities shall be generated and introduced as described in paragraph 8.1.4.4. For gas analyzers, gas concentrations known to be within the specifications of paragraph 9.5.1. shall be used and they shall be introduced directly at the analyzer port;
- (h) Time for the instrument to stabilize while it measures the reference value shall be allowed;
- (i) At a recording frequency of at least the minimum frequency, as specified in table 9.2, the reference value shall be measured for 30 s and the arithmetic mean of the recorded values,  $\bar{y}_i$  recorded;
- (j) Steps in paragraphs (g) through (i) of this paragraph shall be repeated until all reference quantities are measured;
- (k) The arithmetic means  $\bar{y}_i$ , and reference values,  $y_{refi}$ , shall be used to calculate least-squares linear regression parameters and statistical values to compare to the minimum performance criteria specified in table 8.2. The calculations described in Annex A.2. shall be used.

#### 8.1.4.4. Reference signals

This paragraph describes recommended methods for generating reference values for the linearity-verification protocol in paragraph 8.1.4.3. of this section. Reference values shall be used that simulate actual values, or an actual value shall be introduced and measured with a reference-measurement system. In the latter case, the reference value is the value reported by the reference-measurement system. Reference values and reference-measurement systems shall be internationally traceable.

For temperature measurement systems with sensors like thermocouples, RTDs, and thermistors, the linearity verification may be performed by removing the sensor from

the system and using a simulator in its place. A simulator that is independently calibrated and cold junction compensated, as necessary shall be used. The internationally traceable simulator uncertainty scaled to temperature shall be less than 0.5 per cent of maximum operating temperature  $T_{\max}$ . If this option is used, it is necessary to use sensors that the supplier states are accurate to better than 0.5 per cent of  $T_{\max}$  compared to their standard calibration curve.

#### 8.1.4.5. Measurement systems that require linearity verification

Table 6.5 indicates measurement systems that require linearity verifications. For this table the following provisions apply.

Deleted: 8.2

- (a) A linearity verification shall be performed more frequently if the instrument manufacturer recommends it or based on good engineering judgment;
- (b) "min" refers to the minimum reference value used during the linearity verification;0;  
Note that this value may be zero or a negative value depending on the signal;
- (c) "max" generally refers to the maximum reference value used during the linearity verification. For example for gas dividers,  $x_{\max}$  is the undivided, undiluted, span gas concentration. The following are special cases where "max" refers to a different value:
  - (i) For PM balance linearity verification,  $m_{\max}$  refers to the typical mass of a PM filter;
  - (ii) For torque linearity verification,  $T_{\max}$  refers to the manufacturer's specified engine torque peak value of the highest torque engine to be tested;
- (d) The specified ranges are inclusive. For example, a specified range of 0.98-1.02 for the slope  $a_1$  means  $0.98 \leq a_1 \leq 1.02$ ;
- (e) These linearity verifications are not required for systems that pass the flow-rate verification for diluted exhaust as described 8.1.8.5. for the propane check or for systems that agree within  $\pm 2$  per cent based on a chemical balance of carbon or oxygen of the intake air, fuel, and exhaust;
- (f)  $a_1$  criteria for these quantities shall be met only if the absolute value of the quantity is required, as opposed to a signal that is only linearly proportional to the actual value;
- (g) Stand-alone temperatures include engine temperatures and ambient conditions used to set or verify engine conditions; temperatures used to set or verify critical conditions in the test system; and temperatures used in emissions calculations:
  - (i) These temperature linearity checks are required. Air intake; aftertreatment bed(s) (for engines tested with aftertreatment devices on

cycles with cold start criteria); dilution air for PM sampling (CVS, double dilution, and partial flow systems); PM sample; and chiller sample (for gaseous sampling systems that use chillers to dry samples);

- (ii) These temperature linearity checks are only required if specified by the engine manufacturer. Fuel inlet; test cell charge air cooler air outlet (for engines tested with a test cell heat exchanger simulating a vehicle/machine charge air cooler); test cell charge air cooler coolant inlet (for engines tested with a test cell heat exchanger simulating a vehicle/machine charge air cooler); and oil in the sump/pan; coolant before the thermostat (for liquid cooled engines);
- (h) Stand-alone pressures include engine pressures and ambient conditions used to set or verify engine conditions; pressures used to set or verify critical conditions in the test system; and pressures used in emissions calculations:
  - (i) Required pressure linearity checks are: air intake restriction; exhaust back pressure; barometer; CVS inlet gage pressure (if measurement using CVS); chiller sample (for gaseous sampling systems that use chillers to dry samples);
  - (ii) Pressure linearity checks that are required only if specified by the engine manufacturer: test cell charge air cooler and interconnecting pipe pressure drop (for turbo-charged engines tested with a test cell heat exchanger simulating a vehicle/machine charge air cooler) fuel inlet; and fuel outlet.

Measurement System	Quantity	Minimum verification frequency	Linearity Criteria			
			$ x_{\min} \cdot (a_1 - 1) + a_0 $	$a$	$SEE$	$r^2$
Engine speed	$n$	Within 370 days before testing	$\leq 0.05 \% n_{\max}$	0.98-1.02	$\leq 2 \% n_{\max}$	$\geq 0.990$
Engine torque	$T$	Within 370 days before testing	$\leq 1 \% T_{\max}$	0.98-1.02	$\leq 2 \% T_{\max}$	$\geq 0.990$
Fuel flow rate	$q_m$	Within 370 days before testing	$\leq 1 \% q_{m, \max}$	0.98-1.02	$\leq 2 \% q_{m, \max}$	$\geq 0.990$
Intake-air flow rate <sup>1</sup>	$q_v$	Within 370 days before testing	$\leq 1 \% q_{v, \max}$	0.98-1.02	$\leq 2 \% q_{v, \max}$	$\geq 0.990$
Dilution air flow rate <sup>1</sup>	$q_v$	Within 370 days before testing	$\leq 1 \% q_{v, \max}$	0.98-1.02	$\leq 2 \% q_{v, \max}$	$\geq 0.990$
Diluted exhaust flow rate <sup>1</sup>	$q_v$	Within 370 days before testing	$\leq 1 \% q_{v, \max}$	0.98-1.02	$\leq 2 \% q_{v, \max}$	$\geq 0.990$
Raw exhaust flow rate <sup>1</sup>	$q_v$	Within 185 days before testing	$\leq 1 \% q_{v, \max}$	0.98-1.02	$\leq 2 \% q_{v, \max}$	$\geq 0.990$

Batch sampler flow rates <sup>1</sup>	$q_v$	Within 370 days before testing	$\leq 1\% q_{v, \max}$	0.98-1.02	$\leq 2\% q_{v, \max}$	$\geq 0.990$
Gas dividers	$x/x_{\text{span}}$	Within 370 days before testing	$\leq 0.5\% x_{\max}$	0.98-1.02	$\leq 2\% x_{\max}$	$\geq 0.990$
Gas analyzers	$x$	Within 35 days before testing	$\leq 0.5\% x_{\max}$	0.99-1.01	$\leq 1\% x_{\max}$	$\geq 0.998$
PM balance	$m$	Within 370 days before testing	$\leq 1\% m_{\max}$	0.99-1.01	$\leq 1\% m_{\max}$	$\geq 0.998$
Stand-alone pressures	$p$	Within 370 days before testing	$\leq 1\% p_{\max}$	0.99-1.01	$\leq 1\% p_{\max}$	$\geq 0.998$
Analog-to-digital conversion of stand-alone temperature signals	$T$	Within 370 days before testing	$\leq 1\% T_{\max}$	0.99-1.01	$\leq 1\% T_{\max}$	$\geq 0.998$

<sup>1</sup> Molar flow rate may be substituted for standard volumetric flow rate as the quantity and maximum molar flow rate may be substituted for the maximum standard volumetric flow rate in the linearity criteria.

Table 6.5 – Measurement systems that require linearity verifications

Deleted: 8.2.

#### 8.1.5. Continuous gas analyser system-response and updating-recording verification

This section describes a general verification procedure for continuous gas analyzer system response and update recording. See paragraph 8.1.6 for verification procedures for compensation type analysers.

Deleted: .

##### 8.1.5.1. Scope and frequency

This verification shall be performed after installing or replacing a gas analyzer that is used for continuous sampling. Also this verification shall be performed if the system is reconfigured in a way that would change system response. This verification is needed for continuous gas analysers used for transient or ramped-modal testing but is not needed for batch gas analyzer systems or for continuous gas analyzer systems used only for discrete-mode testing.

##### 8.1.5.2. Measurement principles

This test verifies that the updating and recording frequencies match the overall system response to a rapid change in the value of concentrations at the sample probe. Gas analyzer systems shall be optimized such that their overall response to a rapid change in concentration is updated and recorded at an appropriate frequency to prevent loss of information. This test also verifies that continuous gas analyzer systems meet a minimum response time.

The system settings for the response time evaluation shall be exactly the same as during measurement of the test run (i.e. pressure, flow rates, filter settings on the analyzers and all other response time influences). The response time determination shall be done with gas switching directly at the inlet of the sample probe. The devices for gas switching shall have a specification to perform the switching in less than 0.1 s. The gases used for the test shall cause a concentration change of at least 60 per cent full scale (FS).

The concentration trace of each single gas component shall be recorded.

#### 8.1.5.3. System requirements

- (a) The system response time shall be  $\leq 10$  s with a rise time of  $\leq 5$  s for all measured components (CO, NO<sub>x</sub>, CO<sub>2</sub> and HC) and all ranges used.

All data (concentration, fuel and air flows) have to be shifted by their measured response times before performing the emission calculations given in Annexes A.7-A.8.

- (b) To demonstrate acceptable updating and recording with respect to the system's overall response, the system shall meet one of the following criteria:

- (i) The product of the mean rise time and the frequency at which the system records an updated concentration shall be at least 5. In any case the mean rise time shall be no more than 10 s;
- (ii) The frequency at which the system records the concentration shall be at least 2 Hz (see also table 9.2).

**Deleted:** When using a NMC for the measurement of NMHC, the system response time may exceed 10 s.

**Deleted:** ¶

**Deleted:** ¶

#### 8.1.5.4. Procedure

The following procedure shall be used to verify the response of each continuous gas analyzer system:

- (a) The analyzer system manufacturer's start-up and operating instructions for the instrument setup shall be followed. The measurement system shall be adjusted as needed to optimize performance. This verification shall be run with the analyzer operating in the same manner as used for emission testing. If the

analyzer shares its sampling system with other analyzers, and if gas flow to the other analyzers will affect the system response time, then the other analyzers shall be started up and operated while running this verification test. This verification test may be run on multiple analyzers sharing the same sampling system at the same time. If analogue or real-time digital filters are used during emission testing, those filters shall be operated in the same manner during this verification;

- (b) For equipment used to validate system response time, minimal gas transfer line lengths between all connections are recommended to be used, a zero-air source shall be connected to one inlet of a fast-acting 3-way valve (2 inlets, 1 outlet) in order to control the flow of zero and blended span gases to the sample system's probe inlet or a tee near the outlet of the probe. Normally the gas flow rate is higher than the probe sample flow rate and the excess is overflowed out the inlet of the probe. If the gas flow rate is lower than the probe flow rate, the gas concentrations shall be adjusted to account for the dilution from ambient air drawn into the probe. Binary or multi-gas span gases may be used. A gas blending or mixing device may be used to blend span gases. A gas blending or mixing device is recommended when blending span gases diluted in N<sub>2</sub> with span gases diluted in air;

Using a gas divider, an NO-CO-CO<sub>2</sub>-C<sub>3</sub>H<sub>8</sub>-CH<sub>4</sub> (balance N<sub>2</sub>) span gas shall be equally blended with a span gas of NO<sub>2</sub>, balance purified synthetic air. Standard binary span gases may be also be used, where applicable, in place of blended NO-CO-CO<sub>2</sub>-C<sub>3</sub>H<sub>8</sub>-CH<sub>4</sub>, balance N<sub>2</sub> span gas; in this case separate response tests shall be run for each analyzer. The gas divider outlet shall be connected to the other inlet of the 3-way valve. The valve outlet shall be connected to an overflow at the gas analyzer system's probe or to an overflow fitting between the probe and transfer line to all the analyzers being verified. A setup that avoids pressure pulsations due to stopping the flow through the gas blending device shall be used. Any of these gas constituents if they are not relevant to the analyzers for this verification shall be omitted. Alternatively the use of gas bottles with single gases and a separate measurement of response times is allowed;

- (c) Data collection shall be done as follows:
- (i) The valve shall be switched to start the flow of zero gas;
  - (ii) Stabilization shall be allowed for, accounting for transport delays and the slowest analyzer's full response;
  - (iii) Data recording shall be started at the frequency used during emission testing. Each recorded value shall be a unique updated concentration measured by the analyzer; interpolation or filtering may not be used to alter recorded values;
  - (iv) The valve shall be switched to allow the blended span gases to flow to the analyzers. This time shall be recorded as  $t_0$ ;

- (v) Transport delays and the slowest analyzer's full response shall be allowed for;
- (vi) The flow shall be switched to allow zero gas to flow to the analyzer. This time shall be recorded as  $t_{100}$ ;
- (vii) Transport delays and the slowest analyzer's full response shall be allowed for;
- (viii) The steps in paragraphs (c)(iv) through (vii) of this paragraph shall be repeated to record seven full cycles, ending with zero gas flowing to the analyzers;
- (ix) Recording shall be stopped.

#### 8.1.5.5. Performance evaluation

The data from paragraph 8.1.5.4.(c) of this section shall be used to calculate the mean rise time,  $T_{10-90}$  for each of the analyzers.

- (a) If it is chosen to demonstrate compliance with paragraph 8.1.5.3.(b)(i) of this section the following procedure has to be applied: The rise times (in s) shall be multiplied by their respective recording frequencies in Hertz (1/s). The value for each result shall be at least 5. If the value is less than 5, the recording frequency shall be increased or the flows adjusted or the design of the sampling system shall be changed to increase the rise time as needed. Also digital filters may be configured to increase rise time;
- (b) If it is chosen to demonstrate compliance with paragraph 8.1.5.3.(b)(ii) of this section, the demonstration of compliance with the requirements of paragraph 8.1.5.3.(b) (ii) is sufficient.

#### 8.1.6. Response time verification for compensation type analysers

##### 8.1.6.1. Scope and frequency

This verification shall be performed to determine a continuous gas analyzer's response, where one analyzer's response is compensated by another's to quantify a gaseous emission. For this check water vapour shall be considered to be a gaseous constituent. This verification is required for continuous gas analyzers used for transient or ramped-modal testing. This verification is not needed for batch gas analyzers or for continuous gas analyzers that are used only for discrete-mode testing. This verification does not apply to correction for water removed from the sample done in post-processing. This verification shall be performed after initial installation (i.e. test cell commissioning). After major maintenance, paragraph 8.1.5.

**Deleted:** and it does not apply to NMHC determination from THC and CH<sub>4</sub> quoted in Annexes A.7. and A.8. concerning the emission calculations.



may be used to verify uniform response provided that any replaced components have gone through a humidified uniform response verification at some point.

#### 8.1.6.2. Measurement principles

This procedure verifies the time-alignment and uniform response of continuously combined gas measurements. For this procedure, it is necessary to ensure that all compensation algorithms and humidity corrections are turned on.

#### 8.1.6.3. System requirements

The general response time and rise time requirement given in 8.1.5.3 (a) is also valid for compensation type analysers. Additionally, if the recording frequency is different than the update frequency of the continuously combined/compensated signal, the lower of these two frequencies shall be used for the verification required by paragraph 8.1.5.3(b)(i).

#### 8.1.6.4. Procedure

All procedures given in paragraph 8.1.5.4.(a) – (c) have to be used. Additionally also the response and rise time of water vapour has to be measured, if a compensation algorithm based on measured water vapour is used. In this case at least one of the used calibration gases (but not NO<sub>2</sub>) has to be humidified as follows:

If the system does not use a sample dryer to remove water from the sample gas, the span gas shall be humidified by flowing the gas mixture through a sealed vessel that humidifies the gas to the highest sample dew point that is estimated during emission sampling by bubbling it through distilled water. If the system uses a sample dryer during testing that has passed the sample dryer verification check, the humidified gas mixture may be introduced downstream of the sample dryer by bubbling it through distilled water in a sealed vessel at (25 ±10 °C), or a temperature greater than the dew point. In all cases, downstream of the vessel, the humidified gas shall be maintained at a temperature of at least 5 °C above its local dew point in the line. Note that it is possible to omit any of these gas constituents if they are not relevant to the analyzers for this verification. If any of the gas constituents are not susceptible to water compensation, the response check for these analyzers may be performed without humidification.

#### 8.1.7. Measurement of engine parameters and ambient conditions

The engine manufacturer shall apply internal quality procedures traceable to recognised national or international standards. Otherwise the following procedures apply.

8.1.7.1. Torque calibration

8.1.7.1.1. Scope and frequency

All torque-measurement systems including dynamometer torque measurement transducers and systems shall be calibrated upon initial installation and after major maintenance using, among others, reference force or lever-arm length coupled with dead weight. Good engineering judgment shall be used to repeat the calibration. The torque transducer manufacturer's instructions shall be followed for linearizing the torque sensor's output. Other calibration methods are permitted.

8.1.7.1.2. Dead-weight calibration

This technique applies a known force by hanging known weights at a known distance along a lever arm. It shall be made sure that the weights' lever arm is perpendicular to gravity (i.e., horizontal) and perpendicular to the dynamometer's rotational axis. At least six calibration-weight combinations shall be applied for each applicable torque-measuring range, spacing the weight quantities about equally over the range. The dynamometer shall be oscillated or rotated during calibration to reduce frictional static hysteresis. Each weight's force shall be determined by multiplying its internationally-traceable mass by the local acceleration of Earth's gravity.

8.1.7.1.3. Strain gage or proving ring calibration

This technique applies force either by hanging weights on a lever arm (these weights and their lever arm length are not used as part of the reference torque determination) or by operating the dynamometer at different torques. At least six force combinations shall be applied for each applicable torque-measuring range, spacing the force quantities about equally over the range. The dynamometer shall be oscillated or rotated during calibration to reduce frictional static hysteresis. In this case, the reference torque is determined by multiplying the force output from the reference meter (such as a strain gage or proving ring) by its effective lever-arm length, which is measured from the point where the force measurement is made to the dynamometer's rotational axis. It shall be made sure that this length is measured perpendicular to the reference meter's measurement axis and perpendicular to the dynamometer's rotational axis.

8.1.7.2. Pressure, temperature, and dew point calibration

Instruments shall be calibrated for measuring pressure, temperature, and dew point upon initial installation. The instrument manufacturer's instructions shall be followed and good engineering judgment shall be used to repeat the calibration.

For temperature measurement systems with thermocouple, RTD, or thermistor sensors, the calibration of the system shall be performed as described in paragraph 8.1.4.4. for linearity verification.

8.1.8. Flow-related measurements

8.1.8.1. Fuel flow calibration

Fuel flow meters shall be calibrated upon initial installation. The instrument manufacturer's instructions shall be followed and good engineering judgment shall be used to repeat the calibration.

8.1.8.2. Intake air flow calibration

Intake air flow meters shall be calibrated upon initial installation. The instrument manufacturer's instructions shall be followed and good engineering judgment shall be used to repeat the calibration.

8.1.8.3. Exhaust flow calibration

Exhaust flow meters shall be calibrated upon initial installation. The instrument manufacturer's instructions shall be followed and good engineering judgment shall be used to repeat the calibration.

8.1.8.4. Diluted exhaust flow (CVS) calibration

8.1.8.4.1. Overview

- (a) This section describes how to calibrate flow meters for diluted exhaust constant-volume sampling (CVS) systems;
- (b) This calibration shall be performed while the flow meter is installed in its permanent position. This calibration shall be performed after any part of the flow configuration upstream or downstream of the flow meter has been changed that may affect the flow-meter calibration. This calibration shall be performed upon initial CVS installation and whenever corrective action does not resolve a failure to meet the diluted exhaust flow verification (*i.e.*, propane check) in paragraph 8.1.8.5;
- (c) A CVS flow meter shall be calibrated using a reference flow meter such as a subsonic venturi flow meter, a long-radius flow nozzle, a smooth approach orifice, a laminar flow element, a set of critical flow venturis, or an ultrasonic flow meter. A reference flow meter shall be used that reports quantities that are internationally-traceable within  $\pm 1$  per cent uncertainty. This reference flow meter's response to flow shall be used as the reference value for CVS flow-meter calibration;
- (d) An upstream screen or other restriction that could affect the flow ahead of the reference flow meter may not be used, unless the flow meter has been calibrated with such a restriction;
- (e) The calibration sequence described under this paragraph 8.1.8.4. refers to the molar based approach. For the corresponding sequence used in the mass based approach, see Annex 8 Appendix 1.
- (f) By the choice of the manufacturer, CFV or SSV may alternatively be removed from its permanent position for calibration as long as the following requirements are met when installed in the CVS:

- (1) Upon installation of the CFV or SSV into the CVS, good engineering judgment shall be applied to verify that you have not introduced any leaks between the CVS inlet and the venturi.
- (2) After ex-situ venturi calibration, all venturi flow combinations must be verified for CFVs or at minimum of 10 flow points for an SSV using the propane check as described in paragraph 8.1.8.5. The result of the propane check for each venturi flow point may not exceed the tolerance in paragraph 8.1.8.5.6.
- (3) In order to verify the ex-situ calibration for a CVS with more than a single CFV, the following check to verify that there are no flow meter entrance effects that can prevent you from passing this verification, shall be performed as follows:
  - (i) A constant flow device like a CFO kit shall be used to deliver a constant flow of propane to the dilution tunnel.
  - (ii) The hydrocarbon concentrations shall be measured at a minimum of 10 separate flow rates for an SSV flow meter, or at all possible flow combinations for a CFV flow meter, while keeping the flow of propane constant.
  - (iii) The concentration of hydrocarbon background in the dilution air shall be measured at the beginning and end of this test. The average background concentration from each measurement at each flow point must be subtracted before performing the regression analysis in paragraph (iv).
  - (iv) A power regression has to be performed using all the paired values of flow rate and corrected concentration to obtain a relationship in the form of  $y = a \cdot x^b$ , using the concentration as the independent variable and the flow rate as the dependent variable. For each data point, the calculation of the difference between the measured flow rate and the value represented by the curve fit is required. The difference at each point must be less than  $\pm 1\%$  of the appropriate regression value. The value of b must be between -1.005 and -0.995. If the results do not meet these limits, corrective actions consistent with paragraph 8.1.8.5.1(a) must be taken.

#### 8.1.8.4.2. PDP calibration

A positive-displacement pump (PDP) shall be calibrated to determine a flow-versus-PDP speed equation that accounts for flow leakage across sealing surfaces in the PDP as a function of PDP inlet pressure. Unique equation coefficients shall be determined for each speed at which the PDP is operated. A PDP flow meter shall be calibrated as follows:

- (a) The system shall be connected as shown in figure 8.1;

- (b) Leaks between the calibration flow meter and the PDP shall be less than 0.3 per cent of the total flow at the lowest calibrated flow point; for example, at the highest restriction and lowest PDP-speed point;
- (c) While the PDP operates, a constant temperature at the PDP inlet shall be maintained within  $\pm 2$  per cent of the mean absolute inlet temperature,  $T_{in}$ ;
- (d) The PDP speed is set to the first speed point at which it is intended to calibrate;
- (e) The variable restrictor is set to its wide-open position;
- (f) The PDP is operated for at least 3 minutes to stabilize the system. Then by continuously operating the PDP, the mean values of at least 30 s of sampled data of each of the following quantities are recorded:
  - (i) The mean flow rate of the reference flow meter,  $\bar{q}_{Vref}$ ;
  - (ii) The mean temperature at the PDP inlet,  $T_{in}$ ;
  - (iii) The mean static absolute pressure at the PDP inlet,  $p_{in}$ ;
  - (iv) The mean static absolute pressure at the PDP outlet,  $p_{out}$ ;
  - (v) The mean PDP speed,  $n_{PDP}$ ;
- (g) The restrictor valve shall be incrementally closed to decrease the absolute pressure at the inlet to the PDP,  $p_{in}$ ;
- (h) The steps in paragraphs (8.1.8.4.2.)(f) and (g) of this section shall be repeated to record data at a minimum of six restrictor positions reflecting the full range of possible in-use pressures at the PDP inlet;
- (i) The PDP shall be calibrated by using the collected data and the equations in Annexes A.7-A.8;
- (j) The steps in paragraphs (f) through (i) of this section shall be repeated for each speed at which the PDP is operated;
- (k) The equations in Annex A.7 (molar based approach) or A.8 (mass based approach) shall be used to determine the PDP flow equation for emission testing;
- (l) The calibration shall be verified by performing a CVS verification (*i.e.*, propane check) as described in paragraph 8.1.8.5;
- (m) The PDP may not be used below the lowest inlet pressure tested during calibration.

#### 8.1.8.4.3. CFV calibration

A critical-flow venturi (CFV) shall be calibrated to verify its discharge coefficient,  $C_d$ , at the lowest expected static differential pressure between the CFV inlet and outlet. A CFV flow meter shall be calibrated as follows:

- (a) The system shall be connected as shown in figure 8.1;
- (b) The blower shall be started downstream of the CFV;

- (c) While the CFV operates, a constant temperature at the CFV inlet shall be maintained within  $\pm 2$  per cent of the mean absolute inlet temperature,  $T_{in}$ ;
- (d) Leaks between the calibration flow meter and the CFV shall be less than 0.3 per cent of the total flow at the highest restriction;
- (e) The variable restrictor shall be set to its wide-open position. In lieu of a variable restrictor the pressure downstream of the CFV may be varied by varying blower speed or by introducing a controlled leak. Note that some blowers have limitations on non-loaded conditions;
- (f) The CFV shall be operated for at least 3 minutes to stabilize the system. The CFV shall continue operating and the mean values of at least 30 s of sampled data of each of the following quantities shall be recorded:
  - (i) The mean flow rate of the reference flow meter,  $\bar{q}_{Vref}$ ;
  - (ii) Optionally, the mean dew point of the calibration air,  $T_{dew}$ . See Annexes A.7 A.8 for permissible assumptions during emission measurements;
  - (iii) The mean temperature at the venturi inlet,  $T_{in}$ ;
  - (iv) The mean static absolute pressure at the venturi inlet,  $p_{in}$ ;
  - (v) The mean static differential pressure between the CFV inlet and the CFV outlet,  $\Delta p_{CFV}$ ;
- (g) The restrictor valve shall be incrementally closed to decrease the absolute pressure at the inlet to the CFV,  $p_{in}$ ;
- (h) The steps in paragraphs (f) and (g) of this paragraph shall be repeated to record mean data at a minimum of ten restrictor positions, such that the fullest practical range of  $\Delta p_{CFV}$  expected during testing is tested. It is not required to remove calibration components or CVS components to calibrate at the lowest possible restrictions;
- (i)  $C_d$  and the highest allowable pressure ratio  $r$  shall be determined as described in Annexes A.7-A.8;
- (j)  $C_d$  shall be used to determine CFV flow during an emission test. The CFV shall not be used above the highest allowed  $r$ , as determined in Annexes A.7-A.8;
- (k) The calibration shall be verified by performing a CVS verification (*i.e.*, propane check) as described in paragraph 8.1.8.5;
- (l) If the CVS is configured to operate more than one CFV at a time in parallel, the CVS shall be calibrated by one of the following:
  - (i) Every combination of CFVs shall be calibrated according to this paragraph and Annexes A.7-A.8. See Annexes A.7-A.8 for instructions on calculating flow rates for this option;

- (ii) Each CFV shall be calibrated according to this paragraph and Annexes A.7-A.8. See Annexes A.7-A.8 for instructions on calculating flow rates for this option.

#### 8.1.8.4.4. SSV calibration

A subsonic venturi (SSV) shall be calibrated to determine its calibration coefficient,  $C_d$ , for the expected range of inlet pressures. An SSV flow meter shall be calibrated as follows:

- (a) The system shall be connected as shown in figure 8.1;
- (b) The blower shall be started downstream of the SSV;
- (c) Leaks between the calibration flow meter and the SSV shall be less than 0.3 per cent of the total flow at the highest restriction;
- (d) While the SSV operates, a constant temperature at the SSV inlet shall be maintained within  $\pm 2$  per cent of the mean absolute inlet temperature,  $T_{in}$ ;
- (e) The variable restrictor or variable-speed blower shall be set to a flow rate greater than the greatest flow rate expected during testing. Flow rates may not be extrapolated beyond calibrated values, so it is recommended that it is made certain that a Reynolds number,  $Re$ , at the SSV throat at the greatest calibrated flow rate is greater than the maximum  $Re$  expected during testing;
- (f) The SSV shall be operated for at least 3 min to stabilize the system. The SSV shall continue operating and the mean of at least 30 s of sampled data of each of the following quantities shall be recorded:
  - (i) The mean flow rate of the reference flow meter,  $\bar{q}_{Vref}$ ;
  - (ii) Optionally, the mean dew point of the calibration air,  $T_{dew}$ . See Annexes A.7-A.8 for permissible assumptions;
  - (iii) The mean temperature at the venturi inlet,  $T_{in}$ ;
  - (iv) The mean static absolute pressure at the venturi inlet,  $p_{in}$ ;
  - (v) Static differential pressure between the static pressure at the venturi inlet and the static pressure at the venturi throat,  $\Delta p_{SSV}$ ;
- (g) The restrictor valve shall be incrementally closed or the blower speed decreased to decrease the flow rate;
- (h) The steps in paragraphs (f) and (g) of this paragraph shall be repeated to record data at a minimum of ten flow rates;
- (i) A functional form of  $C_d$  versus  $Re$  shall be determined by using the collected data and the equations in Annexes A.7-A.8;




- (j) The calibration shall be verified by performing a CVS verification (*i.e.*, propane check) as described in paragraph 8.1.8.5 using the new  $C_d$  versus  $Re$  equation;
- (k) The SSV shall be used only between the minimum and maximum calibrated flow rates;
- (l) The equations in Annex A.7 (molar based approach) or Annex A.8 (mass based approach) shall be used to determine SSV flow during a test.

8.1.8.4.5. Ultrasonic calibration (reserved)



Figure 6.5

## Schematic diagrams for diluted exhaust flow CVS calibration

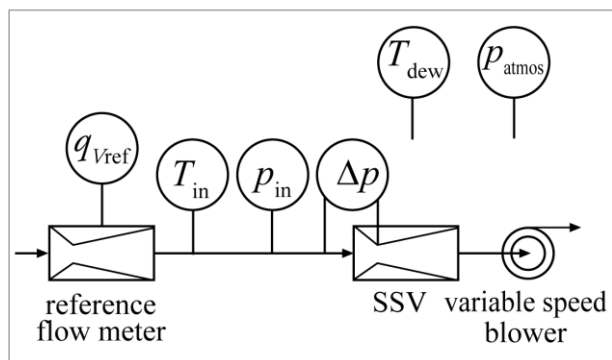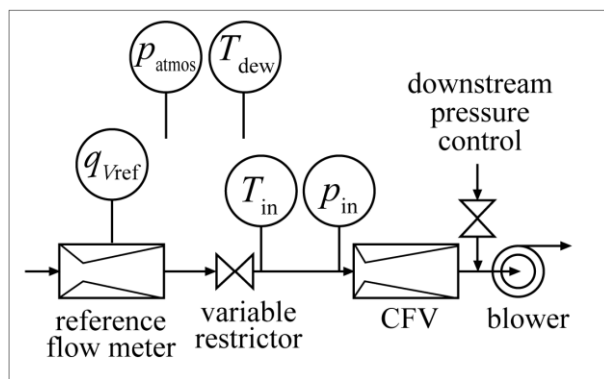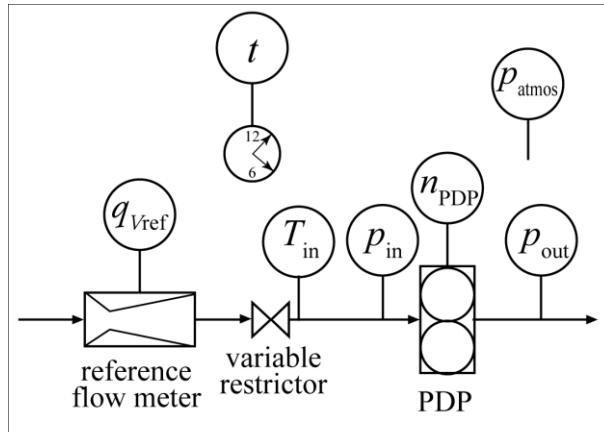

#### 8.1.8.5. CVS and batch sampler verification (propane check)

##### 8.1.8.5.1. Introduction

- (a) A propane check serves as a CVS verification to determine if there is a discrepancy in measured values of diluted exhaust flow. A propane check also serves as a batch-sampler verification to determine if there is a discrepancy in a batch sampling system that extracts a sample from a CVS, as described in paragraph (f) of this paragraph. Using good engineering judgment and safe practices, this check may be performed using a gas other than propane, such as CO<sub>2</sub> or CO. A failed propane check might indicate one or more problems that may require corrective action, as follows:
- (i) Incorrect analyzer calibration. The FID analyzer shall be re-calibrated, repaired, or replaced;
  - (ii) Leak checks shall be performed on CVS tunnel, connections, fasteners, and HC sampling system according to paragraph 8.1.8.7;
  - (iii) The verification for poor mixing shall be performed in accordance with paragraph 9.2.2;
  - (iv) The hydrocarbon contamination verification in the sample system shall be performed as described in paragraph 7.3.1.2;
  - (v) Change in CVS calibration. An in-situ calibration of the CVS flow meter shall be performed as described in paragraph 8.1.8.4;
  - (vi) Other problems with the CVS or sampling verification hardware or software. The CVS system, CVS verification hardware, and software shall be inspected for discrepancies;
- (b) A propane check uses either a reference mass or a reference flow rate of C<sub>3</sub>H<sub>8</sub> as a tracer gas in a CVS. If a reference flow rate is used, any non-ideal gas behaviour of C<sub>3</sub>H<sub>8</sub> in the reference flow meter shall be accounted for. See Annexes A.7. (molar based approach) or A.8. (mass based approach), which describe how to calibrate and use certain flow meters. No ideal gas assumption may be used in paragraph 8.1.8.5. and Annexes A.7. or A.8. The propane check compares the calculated mass of injected C<sub>3</sub>H<sub>8</sub> using HC measurements and CVS flow rate measurements with the reference value.

##### 8.1.8.5.2. Method of introducing a known amount of propane into the CVS system

The total accuracy of the CVS sampling system and analytical system shall be determined by introducing a known mass of a pollutant gas into the system while it is being operated in the normal manner. The pollutant is analyzed, and the mass

calculated according to Annexes A.7-A.8. Either of the following two techniques shall be used.

- (a) Metering by means of a gravimetric technique shall be done as follows: A mass of a small cylinder filled with carbon monoxide or propane shall be determined with a precision of  $\pm 0.01$  g. For about 5 to 10 minutes, the CVS system shall be operated as in a normal exhaust emission test, while carbon monoxide or propane is injected into the system. The quantity of pure gas discharged shall be determined by means of differential weighing. A gas sample shall be analyzed with the usual equipment (sampling bag or integrating method), and the mass of the gas calculated;
- (b) Metering with a critical flow orifice shall be done as follows: A known quantity of pure gas (carbon monoxide or propane) shall be fed into the CVS system through a calibrated critical orifice. If the inlet pressure is high enough, the flow rate, which is adjusted by means of the critical flow orifice, is independent of the orifice outlet pressure (critical flow). The CVS system shall be operated as in a normal exhaust emission test for about 5 to 10 minutes. A gas sample shall be analyzed with the usual equipment (sampling bag or integrating method), and the mass of the gas calculated.

#### 8.1.8.5.3. Preparation of the propane check

The propane check shall be prepared as follows:

- (a) If a reference mass of  $C_3H_8$  is used instead of a reference flow rate, a cylinder charged with  $C_3H_8$  shall be obtained. The reference cylinder's mass of  $C_3H_8$  shall be determined within  $\pm 0.5$  per cent of the amount of  $C_3H_8$  that is expected to be used;
- (b) Appropriate flow rates shall be selected for the CVS and  $C_3H_8$ ;
- (c) A  $C_3H_8$  injection port shall be selected in the CVS. The port location shall be selected to be as close as practical to the location where engine exhaust is introduced into the CVS. The  $C_3H_8$  cylinder shall be connected to the injection system;
- (d) The CVS shall be operated and stabilized;
- (e) Any heat exchangers in the sampling system shall be pre-heated or pre-cooled;
- (f) Heated and cooled components such as sample lines, filters, chillers, and pumps shall be allowed to stabilize at operating temperature;
- (g) If applicable, a vacuum side leak verification of the HC sampling system shall be performed as described in 8.1.8.7.

#### 8.1.8.5.4. Preparation of the HC sampling system for the propane check

Vacuum side leak check verification of the HC sampling system may be performed according to (g) of this paragraph. If this procedure is used, the HC contamination procedure in paragraph 7.3.1.2. may be used. If the vacuum side leak check is not performed according to (g), then the HC sampling system shall be zeroed, spanned, and verified for contamination, as follows:

- (a) The lowest HC analyzer range that can measure the  $C_3H_8$  concentration expected for the CVS and  $C_3H_8$  flow rates shall be selected;
- (b) The HC analyzer shall be zeroed using zero air introduced at the analyzer port;
- (c) The HC analyzer shall be spanned using  $C_3H_8$  span gas introduced at the analyzer port;
- (d) Zero air shall be overflowed at the HC probe or into a fitting between the HC probe and the transfer line;
- (e) The stable HC concentration of the HC sampling system shall be measured as overflow zero air flows. For batch HC measurement, the batch container (such as a bag) shall be filled and the HC overflow concentration measured;
- (f) If the overflow HC concentration exceeds  $2 \mu\text{mol/mol}$ , the procedure may not be advanced until contamination is eliminated. The source of the contamination shall be determined and corrective action taken, such as cleaning the system or replacing contaminated portions;
- (g) When the overflow HC concentration does not exceed  $2 \mu\text{mol/mol}$ , this value shall be recorded as  $x_{HCinit}$  and it shall be used to correct for HC contamination as described in Annex A.7. (molar based approach) or Annex A.8. (mass based approach).

#### 8.1.8.5.5. Propane check performance

- (a) The propane check shall be performed as follows:
  - (i) For batch HC sampling, clean storage media, such as evacuated bags shall be connected;
  - (ii) HC measurement instruments shall be operated according to the instrument manufacturer's instructions;
  - (iii) If correction for dilution air background concentrations of HC is foreseen, background HC in the dilution air shall be measured and recorded;
  - (iv) Any integrating devices shall be zeroed;
  - (v) Sampling shall begin and any flow integrators shall be started;

- (vi)  $C_3H_8$  shall be released at the rate selected. If a reference flow rate of  $C_3H_8$  is used, the integration of this flow rate shall be started;
  - (vii)  $C_3H_8$  shall be continued to be released until at least enough  $C_3H_8$  has been released to ensure accurate quantification of the reference  $C_3H_8$  and the measured  $C_3H_8$ ;
  - (viii) The  $C_3H_8$  cylinder shall be shut off and sampling shall continue until it has been accounted for time delays due to sample transport and analyzer response;
  - (ix) Sampling shall be stopped and any integrators shall be stopped;
- (b) In case the metering with a critical flow orifice is used, the following procedure may be used for the propane check as the alternative method of paragraph 8.1.8.5.5.(a);
- (i) For batch HC sampling, clean storage media, such as evacuated bags shall be connected;
  - (ii) HC measurement instruments shall be operated according to the instrument manufacturer's instructions;
  - (iii) If correction for dilution air background concentrations of HC is foreseen, background HC in the dilution air shall be measured and recorded;
  - (iv) Any integrating devices shall be zeroed;
  - (v) The contents of the  $C_3H_8$  reference cylinder shall be released at the rate selected;
  - (vi) Sampling shall begin, and any flow integrators started after confirming that HC concentration is to be stable;
  - (vii) The cylinder's contents shall be continued to be released until at least enough  $C_3H_8$  has been released to ensure accurate quantification of the reference  $C_3H_8$  and the measured  $C_3H_8$ ;
  - (viii) Any integrators shall be stopped;
  - (ix) The  $C_3H_8$  reference cylinder shall be shut off.

#### 8.1.8.5.6. Evaluation of the propane check

Post-test procedure shall be performed as follows:

- (a) If batch sampling has been used, batch samples shall be analyzed as soon as practical;
- (b) After analyzing HC, contamination and background shall be corrected for;

- (c) Total C<sub>3</sub>H<sub>8</sub> mass based on the CVS and HC data shall be calculated as described in Annexes A.7-A.8, using the molar mass of C<sub>3</sub>H<sub>8</sub>,  $M_{C_3H_8}$ , instead the effective molar mass of HC,  $M_{HC}$ ;
- (d) If a reference mass (gravimetric technique) is used, the cylinder's propane mass shall be determined within  $\pm 0.5$  per cent and the C<sub>3</sub>H<sub>8</sub> reference mass shall be determined by subtracting the empty cylinder propane mass from the full cylinder propane mass. If a critical flow orifice (metering with a critical flow orifice) is used, the propane mass shall be determined as flow rate multiplied by the test time;
- (e) The reference C<sub>3</sub>H<sub>8</sub> mass shall be subtracted from the calculated mass. If this difference is within  $\pm 3.0$  per cent of the reference mass, the CVS passes this verification.

#### 8.1.8.5.7. PM secondary dilution system verification

When the propane check is to be repeated to verify the PM secondary dilution system, the following procedure from (a) to (d) shall be used for this verification:

- (a) The HC sampling system shall be configured to extract a sample near the location of the batch sampler's storage media (such as a PM filter). If the absolute pressure at this location is too low to extract an HC sample, HC may be sampled from the batch sampler pump's exhaust. Caution shall be used when sampling from pump exhaust because an otherwise acceptable pump leak downstream of a batch sampler flow meter will cause a false failure of the propane check;
- (b) The propane check shall be repeated as described in this paragraph, but HC shall be sampled from the batch sampler;
- (c) C<sub>3</sub>H<sub>8</sub> mass shall be calculated, taking into account any secondary dilution from the batch sampler;
- (d) The reference C<sub>3</sub>H<sub>8</sub> mass shall be subtracted from the calculated mass. If this difference is within  $\pm 5$  per cent of the reference mass, the batch sampler passes this verification. If not, corrective action shall be taken.

#### ~~8.1.8.5.8. Sample dryer verification~~

Moved to paragraph 8.1.12.1

#### 8.1.8.6. Periodic calibration of the partial flow PM and associated raw exhaust gas measurement systems

##### 8.1.8.6.1. Specifications for differential flow measurement

For partial flow dilution systems to extract a proportional raw exhaust sample, the accuracy of the sample flow  $q_{mp}$  is of special concern, if not measured directly, but determined by differential flow measurement:

$$q_{mp} = q_{mdew} - q_{mdw}$$

(6-19)

Deleted: 8-1

Where:

- $q_{mp}$  = sample mass flow rate of exhaust gas into partial flow dilution system  
 $q_{mdw}$  = dilution air mass flow rate (on wet basis)  
 $q_{mdew}$  = diluted exhaust gas mass flow rate on wet basis

In this case, the maximum error of the difference shall be such that the accuracy of  $q_{mp}$  is within  $\pm 5$  per cent when the dilution ratio is less than 15. It can be calculated by taking root-mean-square of the errors of each instrument.

Acceptable accuracies of  $q_{mp}$  can be obtained by either of the following methods:

- (a) The absolute accuracies of  $q_{mdew}$  and  $q_{mdw}$  are  $\pm 0.2$  per cent which guarantees an accuracy of  $q_{mp}$  of  $\leq 5$  per cent at a dilution ratio of 15. However, greater errors will occur at higher dilution ratios;
- (b) Calibration of  $q_{mdw}$  relative to  $q_{mdew}$  is carried out such that the same accuracies for  $q_{mp}$  as in (a) are obtained. For details see paragraph 8.1.8.6.2;
- (c) The accuracy of  $q_{mp}$  is determined indirectly from the accuracy of the dilution ratio as determined by a tracer gas, e.g. CO<sub>2</sub>. Accuracies equivalent to method (a) for  $q_{mp}$  are required;
- (d) The absolute accuracy of  $q_{mdew}$  and  $q_{mdw}$  is within  $\pm 2$  per cent of full scale, the maximum error of the difference between  $q_{mdew}$  and  $q_{mdw}$  is within 0.2 per cent and the linearity error is within  $\pm 0.2$  per cent of the highest  $q_{mdew}$  observed during the test.

#### 8.1.8.6.2. Calibration of differential flow measurement

The partial flow dilution system to extract a proportional raw exhaust sample shall be periodically calibrated with an accurate flow meter traceable to international and/or national standards. The flow meter or the flow measurement instrumentation shall be calibrated in one of the following procedures, such that the probe flow  $q_{mp}$  into the tunnel shall fulfil the accuracy requirements of paragraph 8.1.8.6.1.

- (a) The flow meter for  $q_{mdw}$  shall be connected in series to the flow meter for  $q_{mdew}$ , the difference between the two flow meters shall be calibrated for at least 5 set points with flow values equally spaced between the lowest  $q_{mdw}$  value used during the test and the value of  $q_{mdew}$  used during the test. The dilution tunnel may be bypassed;

- (b) A calibrated flow device shall be connected in series to the flowmeter for  $q_{mdew}$  and the accuracy shall be checked for the value used for the test. The calibrated flow device shall be connected in series to the flow meter for  $q_{mdw}$ , and the accuracy shall be checked for at least 5 settings corresponding to dilution ratio between 3 and 15, relative to  $q_{mdew}$  used during the test;
- (c) The transfer line TL (see figure 9.2) shall be disconnected from the exhaust and a calibrated flow measuring device with a suitable range to measure  $q_{mp}$  shall be connected to the transfer line.  $q_{mdew}$  shall be set to the value used during the test, and  $q_{mdw}$  shall be sequentially set to at least 5 values corresponding to dilution ratios between 3 and 15. Alternatively, a special calibration flow path may be provided, in which the tunnel is bypassed, but the total and dilution air flow is passed through the corresponding meters as in the actual test;
- (d) A tracer gas, shall be fed into the exhaust transfer line TL. This tracer gas may be a component of the exhaust gas, like CO<sub>2</sub> or NO<sub>x</sub>. After dilution in the tunnel the tracer gas component shall be measured. This shall be carried out for 5 dilution ratios between 3 and 15. The accuracy of the sample flow shall be determined from the dilution ratio  $r_d$ :

$$q_{mp} = q_{mdew} / r_d$$

(6-20)

Deleted: 8-2

The accuracies of the gas analyzers shall be taken into account to guarantee the accuracy of  $q_{mp}$ .

#### 8.1.8.6.3. Special requirements for differential flow measurement

A carbon flow check using actual exhaust is strongly recommended for detecting measurement and control problems and verifying the proper operation of the partial flow system. The carbon flow check should be run at least each time a new engine is installed, or something significant is changed in the test cell configuration.

The engine shall be operated at peak torque load and speed or any other steady state mode that produces 5 per cent or more of CO<sub>2</sub>. The partial flow sampling system shall be operated with a dilution factor of about 15 to 1.

If a carbon flow check is conducted, the procedure given in Annex A.4 shall be applied. The carbon flow rates shall be calculated according to equations of Annex A.4. All carbon flow rates shall agree to within 5 per cent.

##### 8.1.8.6.3.1. Pre-test check

A pre-test check shall be performed within 2 hours before the test run in the following way.



The accuracy of the flow meters shall be checked by the same method as used for calibration (see paragraph 8.1.8.6.2.) for at least two points, including flow values of  $q_{mdw}$  that correspond to dilution ratios between 5 and 15 for the  $q_{mdew}$  value used during the test.

If it can be demonstrated by records of the calibration procedure under paragraph 8.1.8.6.2. that the flow meter calibration is stable over a longer period of time, the pre-test check may be omitted.

#### 8.1.8.6.3.2. Determination of the transformation time

The system settings for the transformation time evaluation shall be the same as during measurement of the test run. The transformation time, defined in figure 3.1, shall be determined by the following method:

An independent reference flowmeter with a measurement range appropriate for the probe flow shall be put in series with and closely coupled to the probe. This flowmeter shall have a transformation time of less than 100 ms for the flow step size used in the response time measurement, with flow restriction sufficiently low as to not affect the dynamic performance of the partial flow dilution system according to good engineering judgment. A step change shall be introduced to the exhaust flow (or air flow if exhaust flow is calculated) input of the partial flow dilution system, from a low flow to at least 90 per cent of full scale. The trigger for the step change shall be the same one used to start the look-ahead control in actual testing. The exhaust flow step stimulus and the flowmeter response shall be recorded at a sample rate of at least 10 Hz.

From this data, the transformation time shall be determined for the partial flow dilution system, which is the time from the initiation of the step stimulus to the 50 per cent point of the flowmeter response. In a similar manner, the transformation times of the  $q_{mp}$  signal (i.e. sample flow of exhaust gas into partial flow dilution system) and of the  $q_{mew,i}$  signal (i.e. the exhaust gas mass flow rate on wet basis supplied by the exhaust flow meter) shall be determined. These signals are used in the regression checks performed after each test (see paragraph 8.2.1.2.).

The calculation shall be repeated for at least 5 rise and fall stimuli, and the results shall be averaged. The internal transformation time (<100 ms) of the reference flowmeter shall be subtracted from this value. In the case that the system in accordance with paragraph 8.2.1.2. requires the "look-ahead" method, this is the "look-ahead" value of the partial flow dilution system to be applied in accordance with paragraph 8.2.1.2.

#### 8.1.8.7. Vacuum-side leak verification

##### 8.1.8.7.1. Scope and frequency

Upon initial sampling system installation, after major maintenance such as pre-filter changes, and within 8 hours prior to each duty-cycle sequence, it shall be verified that there are no significant vacuum-side leaks using one of the leak tests described in this section. This verification does not apply to any full-flow portion of a CVS dilution system.

##### 8.1.8.7.2. Measurement principles

A leak may be detected either by measuring a small amount of flow when there shall be zero flow, by detecting the dilution of a known concentration of span gas when it flows through the vacuum side of a sampling system or by measuring the pressure increase of an evacuated system.

##### 8.1.8.7.3. Low-flow leak test

A sampling system shall be tested for low-flow leaks as follows:

- (a) The probe end of the system shall be sealed by taking one of the following steps:
  - (i) The end of the sample probe shall be capped or plugged;
  - (ii) The transfer line shall be disconnected at the probe and the transfer line capped or plugged;
  - (iii) A leak-tight valve in-line between a probe and transfer line shall be closed;
- (b) All vacuum pumps shall be operated. After stabilizing, it shall be verified that the flow through the vacuum-side of the sampling system is less than 0.5 per cent of the system's normal in-use flow rate. Typical analyzer and bypass flows may be estimated as an approximation of the system's normal in-use flow rate.

##### 8.1.8.7.4. Dilution-of-span-gas leak test

Any gas analyzer may be used for this test. If a FID is used for this test, any HC contamination in the sampling system shall be corrected [in accordance with sections](#)

**Deleted:** according to Annexes A.7 and A.8

2 or 3 of Annex VII on HC determination. Misleading results shall be avoided by using only analyzers that have a repeatability of 0.5 per cent or better at the span gas concentration used for this test. The vacuum side leak check shall be performed as follows:

Deleted: and NMHC

- (a) A gas analyzer shall be prepared as it would be for emission testing;
- (b) Span gas shall be supplied to the analyzer port and it shall be verified that the span gas concentration is measured within its expected measurement accuracy and repeatability;
- (c) Overflow span gas shall be routed to one of the following locations in the sampling system:
  - (i) The end of the sample probe;
  - (ii) The transfer line shall be disconnected at the probe connection, and the span gas overflowed at the open end of the transfer line;
  - (iii) A three-way valve installed in-line between a probe and its transfer line;
- (d) It shall be verified that the measured overflow span gas concentration is within  $\pm 0.5$  per cent of the span gas concentration. A measured value lower than expected indicates a leak, but a value higher than expected may indicate a problem with the span gas or the analyzer itself. A measured value higher than expected does not indicate a leak.

#### 8.1.8.7.5. Vacuum-decay leak test

To perform this test a vacuum shall be applied to the vacuum-side volume of the sampling system and the leak rate of the system shall be observed as a decay in the applied vacuum. To perform this test the vacuum-side volume of the sampling system shall be known to within  $\pm 10$  per cent of its true volume. For this test measurement instruments that meet the specifications of paragraphs 8.1. and 9.4. shall also be used.

A vacuum-decay leak test shall be performed as follows:

- (a) The probe end of the system shall be sealed as close to the probe opening as possible by taking one of the following steps:
  - (i) The end of the sample probe shall be capped or plugged;
  - (ii) The transfer line at the probe shall be disconnected and the transfer line capped or plugged;
  - (iii) A leak-tight valve in-line between a probe and transfer line shall be closed;

- (b) All vacuum pumps shall be operated. A vacuum shall be drawn that is representative of normal operating conditions. In the case of sample bags, it is recommend that the normal sample bag pump-down procedure be repeated twice to minimize any trapped volumes;
- (c) The sample pumps shall be turned off and the system sealed. The absolute pressure of the trapped gas and optionally the system absolute temperature shall be measured and recorded. Sufficient time shall be allowed for any transients to settle and long enough for a leak at 0.5 per cent to have caused a pressure change of at least 10 times the resolution of the pressure transducer. The pressure and optionally temperature shall be recorded once again;
- (d) The leak flow rate based on an assumed value of zero for pumped-down bag volumes and based on known values for the sample system volume, the initial and final pressures, optional temperatures, and elapsed time shall be calculated. It shall be verified that the vacuum-decay leak flow rate is less than 0.5 per cent of the system's normal in-use flow rate as follows:

$$q_{V\text{leak}} = \frac{V_{\text{vac}}}{R} \frac{\left( \frac{p_2}{T_2} - \frac{p_1}{T_1} \right)}{(t_2 - t_1)} \quad (6-21)$$

Deleted: (8-3)

Where:

- $q_{V\text{leak}}$  = vacuum-decay leak rate [mol/s]
- $V_{\text{vac}}$  = geometric volume of the vacuum-side of the sampling system [m<sup>3</sup>]
- $R$  = molar gas constant [J/(mol·K)]
- $p_2$  = vacuum-side absolute pressure at time  $t_2$  [Pa]
- $T_2$  = vacuum-side absolute temperature at time  $t_2$  [K]
- $p_1$  = vacuum-side absolute pressure at time  $t_1$  [Pa]
- $T_1$  = vacuum-side absolute temperature at time  $t_1$  [K]
- $t_2$  = time at completion of vacuum-decay leak verification test [s]
- $t_1$  = time at start of vacuum-decay leak verification test [s]

8.1.9. CO and CO<sub>2</sub> measurements

8.1.9.1. H<sub>2</sub>O interference verification for CO<sub>2</sub> NDIR analyzers

8.1.9.1.1. Scope and frequency

If CO<sub>2</sub> is measured using an NDIR analyzer, the amount of H<sub>2</sub>O interference shall be verified after initial analyzer installation and after major maintenance.

8.1.9.1.2. Measurement principles

H<sub>2</sub>O can interfere with an NDIR analyzer's response to CO<sub>2</sub>. If the NDIR analyzer uses compensation algorithms that utilize measurements of other gases to meet this interference verification, simultaneously these other measurements shall be conducted to test the compensation algorithms during the analyzer interference verification.

8.1.9.1.3. System requirements

A CO<sub>2</sub> NDIR analyzer shall have an H<sub>2</sub>O interference that is within  $(0.0 \pm 0.4)$  mmol/mol (of the expected mean CO<sub>2</sub> concentration).

8.1.9.1.4. Procedure

The interference verification shall be performed as follows:

- (a) The CO<sub>2</sub> NDIR analyzer shall be started, operated, zeroed, and spanned as it would be before an emission test;
- (b) A humidified test gas shall be created by bubbling zero air that meets the specifications in paragraph 9.5.1 through distilled water in a sealed vessel. If the sample is not passed through a dryer, control the vessel temperature to generate an H<sub>2</sub>O level at least as high as the maximum expected during testing. If the sample is passed through a dryer during testing, control the vessel temperature to generate an H<sub>2</sub>O level at least as high as the level determined in paragraph 9.3.2.3.1;
- (c) The humidified test gas temperature shall be maintained at least 5 °C above its dew point downstream of the vessel;

- (d) The humidified test gas shall be introduced into the sampling system. The humidified test gas may be introduced downstream of any sample dryer, if one is used during testing;
- (e) The water mole fraction,  $x_{\text{H}_2\text{O}}$ , of the humidified test gas shall be measured, as close as possible to the inlet of the analyzer. For example, dew point,  $T_{\text{dew}}$ , and absolute pressure  $p_{\text{total}}$ , shall be measured to calculate  $x_{\text{H}_2\text{O}}$ ;
- (f) Good engineering judgment shall be used to prevent condensation in the transfer lines, fittings, or valves from the point where  $x_{\text{H}_2\text{O}}$  is measured to the analyzer;
- (g) Time shall be allowed for the analyzer response to stabilize. Stabilization time shall include time to purge the transfer line and to account for analyzer response;
- (h) While the analyzer measures the sample's concentration, 30 s of sampled data shall be recorded. The arithmetic mean of this data shall be calculated. The analyzer meets the interference verification if this value is within  $(0.0 \pm 0.4)$  mmol/mol

#### 8.1.9.2. H<sub>2</sub>O and CO<sub>2</sub> interference verification for CO NDIR analyzers

##### 8.1.9.2.1. Scope and frequency

If CO is measured using an NDIR analyzer, the amount of H<sub>2</sub>O and CO<sub>2</sub> interference shall be verified after initial analyzer installation and after major maintenance.

##### 8.1.9.2.2. Measurement principles

H<sub>2</sub>O and CO<sub>2</sub> can positively interfere with an NDIR analyzer by causing a response similar to CO. If the NDIR analyzer uses compensation algorithms that utilize measurements of other gases to meet this interference verification, simultaneously these other measurements shall be conducted to test the compensation algorithms during the analyzer interference verification.

##### 8.1.9.2.3. System requirements

A CO NDIR analyzer shall have combined H<sub>2</sub>O and CO<sub>2</sub> interference that is within  $\pm 2$  per cent of the expected mean concentration of CO.

#### 8.1.9.2.4. Procedure

The interference verification shall be performed as follows:

- (a) The CO NDIR analyzer shall be started, operated, zeroed, and spanned as it would be before an emission test;
- (b) A humidified CO<sub>2</sub> test gas shall be created by bubbling a CO<sub>2</sub> span gas through distilled water in a sealed vessel. If the sample is not passed through a dryer, the vessel temperature shall be controlled to generate an H<sub>2</sub>O level at least as high as the maximum expected during testing. If the sample is passed through a dryer during testing, the vessel temperature shall be controlled to generate an H<sub>2</sub>O level at least as high as the level determined in paragraph 8.1.8.5.8. A CO<sub>2</sub> span gas concentration shall be used at least as high as the maximum expected during testing;
- (c) The humidified CO<sub>2</sub> test gas shall be introduced into the sampling system. The humidified CO<sub>2</sub> test gas may be introduced downstream of any sample dryer, if one is used during testing;
- (d) The water mole fraction,  $x_{\text{H}_2\text{O}}$ , of the humidified test gas shall be measured, as close as possible to the inlet of the analyzer. For example, dew point,  $T_{\text{dew}}$ , and absolute pressure  $p_{\text{total}}$ , shall be measured to calculate  $x_{\text{H}_2\text{O}}$ ;
- (e) Good engineering judgment shall be used to prevent condensation in the transfer lines, fittings, or valves from the point where  $x_{\text{H}_2\text{O}}$  is measured to the analyzer;
- (f) Time shall be allowed for the analyzer response to stabilize;
- (g) While the analyzer measures the sample's concentration, its output shall be recorded for 30 s. The arithmetic mean of this data shall be calculated;
- (h) The analyzer meets the interference verification if the result of paragraph (g) of this section meets the tolerance in paragraph 8.1.9.2.3;
- (i) Interference procedures for CO<sub>2</sub> and H<sub>2</sub>O may be also run separately. If the CO<sub>2</sub> and H<sub>2</sub>O levels used are higher than the maximum levels expected during testing, each observed interference value shall be scaled down by multiplying the observed interference by the ratio of the maximum expected concentration value to the actual value used during this procedure. Separate interference procedures concentrations of H<sub>2</sub>O (down to 0.025 mol/mol H<sub>2</sub>O content) that are lower than the maximum levels expected during testing may be run, but the observed H<sub>2</sub>O interference shall be scaled up by multiplying the observed interference by the ratio of the maximum expected H<sub>2</sub>O concentration value to the actual value used during this procedure. The sum of the two scaled interference values shall meet the tolerance in paragraph 8.1.9.2.3.

## 8.1.10. Hydrocarbon measurements

### 8.1.10.1. FID optimization and verification

#### 8.1.10.1.1. Scope and frequency

For all FID analyzers, the FID shall be calibrated upon initial installation. The calibration shall be repeated as needed using good engineering judgment. The following steps shall be performed for a FID that measures HC:

- (a) A FID's response to various hydrocarbons shall be optimized after initial analyzer installation and after major maintenance. FID response to propylene and toluene shall be between 0.9 and 1.1 relative to propane;
- (b) A FID's methane (CH<sub>4</sub>) response factor shall be determined after initial analyzer installation and after major maintenance as described in paragraph 8.1.10.1.4. of this section;
- (c) Methane (CH<sub>4</sub>) response shall be verified within 185 days before testing.

#### 8.1.10.1.2. Calibration

Good engineering judgment shall be used to develop a calibration procedure, such as one based on the FID-analyzer manufacturer's instructions and recommended frequency for calibrating the FID. For a FID that measures HC, it shall be calibrated using C<sub>3</sub>H<sub>8</sub> calibration gases that meet the specifications of paragraph 9.5.1. For a FID that measures CH<sub>4</sub>, it shall be calibrated using CH<sub>4</sub> calibration gases that meet the specifications of paragraph 9.5.1. Regardless of the calibration gas composition, it shall be calibrated on a carbon number basis of one (C<sub>1</sub>).



### 8.1.10.1.3. HC FID response optimization

This procedure is only for FID analyzers that measure HC.

- (a) Instrument manufacturer requirements and good engineering judgment shall be used for initial instrument start-up and basic operating adjustment using FID fuel and zero air. Heated FIDs shall be within their required operating temperature ranges. FID response shall be optimized to meet the requirement of the hydrocarbon response factors and the oxygen interference check according to paragraphs 8.1.10.1.1. (a) and 8.1.10.2. at the most common analyzer range expected during emission testing. Higher analyzer range may be used according to the instrument manufacturer's recommendation and good engineering judgment in order to optimize FID accurately, if the common analyzer range is lower than the minimum range for the optimization specified by the instrument manufacturer;
- (b) Heated FIDs shall be within their required operating temperature ranges. FID response shall be optimized at the most common analyzer range expected during emission testing. With the fuel and airflow rates set at the manufacturer's recommendations, a span gas shall be introduced to the analyzer;
- (c) The following step from (1) to (4) or the procedure instructed by the instrument manufacturer shall be taken for optimization. The procedures outlined in SAE paper No. 770141 may be optionally used for optimization;
  - (i) The response at a given fuel flow shall be determined from the difference between the span gas response and the zero gas response;
  - (ii) The fuel flow shall be incrementally adjusted above and below the manufacturer's specification. The span and zero response at these fuel flows shall be recorded;
  - (iii) The difference between the span and zero response shall be plotted and the fuel flow adjusted to the rich side of the curve. This is the initial flow rate setting which may need further optimization depending on the results of the hydrocarbon response factors and the oxygen interference check according to paragraphs 8.1.10.1.1.(a) and 8.1.10.2;
  - (iv) If the oxygen interference or the hydrocarbon response factors do not meet the following specifications, the airflow shall be incrementally adjusted above and below the manufacturer's specifications, repeating paragraphs 8.1.10.1.1.(a) and 8.1.10.2. for each flow;
- (d) The optimum flow rates and/or pressures for FID fuel and burner air shall be determined, and they shall be sampled and recorded for future reference.

#### 8.1.10.1.4. HC FID CH<sub>4</sub> response factor determination

Since FID analyzers generally have a different response to CH<sub>4</sub> versus C<sub>3</sub>H<sub>8</sub>, each HC FID analyzer's CH<sub>4</sub> response factor,  $RF_{CH_4[THC-FID]}$  shall be determined, after FID optimization. The most recent  $RF_{CH_4[THC-FID]}$  measured according to this paragraph shall be used in the calculations for HC determination described in Annex A.7. (molar based approach) or Annex A.8. (mass based approach) to compensate for CH<sub>4</sub> response.  $RF_{CH_4[THC-FID]}$  shall be determined as follows, noting that  $RF_{CH_4[THC-FID]}$  is not determined for FIDs that are calibrated and spanned using CH<sub>4</sub> with a non-methane cutter:

**Deleted:** This procedure is only for FID analyzers that measure HC.

**Deleted:** THC

- (a) A C<sub>3</sub>H<sub>8</sub> span gas concentration shall be selected to span the analyzer before emission testing. Only span gases that meets the specifications of paragraph 9.5.1. shall be selected and the C<sub>3</sub>H<sub>8</sub> concentration of the gas shall be recorded;
- (b) A CH<sub>4</sub> span gas that meets the specifications of paragraph 9.5.1. shall be selected and the CH<sub>4</sub> concentration of the gas shall be recorded,
- (c) The FID analyzer shall be operated according to the manufacturer's instructions;
- (d) It shall be confirmed that the FID analyzer has been calibrated using C<sub>3</sub>H<sub>8</sub>. Calibration shall be performed on a carbon number basis of one (C<sub>1</sub>);
- (e) The FID shall be zeroed with a zero gas used for emission testing;
- (f) The FID shall be spanned with the selected C<sub>3</sub>H<sub>8</sub> span gas;
- (g) The selected CH<sub>4</sub> span gas shall be introduced at the sample port of the FID analyzer, the CH<sub>4</sub> span gas that has been selected under paragraph (b) of this paragraph;
- (h) The analyzer response shall be stabilized. Stabilization time may include time to purge the analyzer and to account for its response;
- (i) While the analyzer measures the CH<sub>4</sub> concentration, 30 s of sampled data shall be recorded and the arithmetic mean of these values shall be calculated;
- (j) The mean measured concentration shall be divided by the recorded span concentration of the CH<sub>4</sub> calibration gas. The result is the FID analyzer's response factor for CH<sub>4</sub>,  $RF_{CH_4[THC-FID]}$ .

#### 8.1.10.1.5. HC FID methane (CH<sub>4</sub>) response verification

This procedure is only for FID analyzers that measure HC. If the value of  $RF_{CH_4[THC-FID]}$  from paragraph 8.1.10.1.4. is within  $\pm 5.0$  per cent of its most recent previously determined value, the HC FID passes the methane response verification.

- (a) It shall be first verified that the pressures and / or flow rates of FID fuel, burner air, and sample are each within  $\pm 0.5$  per cent of their most recent previously recorded values, as described in paragraph 8.1.10.1.3. of this section. If these flow rates have to be adjusted, a new  $RF_{CH_4[THC-FID]}$  shall be determined as described in paragraph 8.1.10.1.4. of this section. It should be verified that the value of  $RF_{CH_4[THC-FID]}$  determined is within the tolerance specified in this paragraph 8.1.10.1.5;
- (b) If  $RF_{CH_4[THC-FID]}$  is not within the tolerance specified in this paragraph 8.1.10.1.5., the FID response shall be re-optimized as described in paragraph 8.1.10.1.3. of this section;
- (c) A new  $RF_{CH_4[THC-FID]}$  shall be determined as described in paragraph 8.1.10.1.4. of this section. This new value of  $RF_{CH_4[THC-FID]}$  shall be used in the calculations for HC determination, as described in Annex A.7 (molar based approach) or Annex A.8 (mass based approach).

#### 8.1.10.2. Non-stoichiometric raw exhaust FID O<sub>2</sub> interference verification

##### 8.1.10.2.1. Scope and frequency

If FID analyzers are used for raw exhaust measurements, the amount of FID O<sub>2</sub> interference shall be verified upon initial installation and after major maintenance.

##### 8.1.10.2.2. Measurement principles

Changes in O<sub>2</sub> concentration in raw exhaust can affect FID response by changing FID flame temperature. FID fuel, burner air, and sample flow shall be optimized to meet this verification. FID performance shall be verified with the compensation algorithms for FID O<sub>2</sub> interference that is active during an emission test.

##### 8.1.10.2.3. System requirements

Any FID analyzer used during testing shall meet the FID O<sub>2</sub> interference verification according to the procedure in this section.

##### 8.1.10.2.4. Procedure

FID O<sub>2</sub> interference shall be determined as follows, noting that one or more gas dividers may be used to create reference gas concentrations that are required to perform this verification:

- (a) Three span reference gases shall be selected that meet the specifications in paragraph 9.5.1. and contain C<sub>3</sub>H<sub>8</sub> concentration used to span the analyzers before emissions testing. Only span gases that meet the specifications in paragraph 9.5.1. CH<sub>4</sub> span reference gases may be used for FIDs calibrated on CH<sub>4</sub> with a non-methane cutter. The three balance gas concentrations shall be selected such that the concentrations of O<sub>2</sub> and N<sub>2</sub> represent the minimum and maximum and intermediate O<sub>2</sub> concentrations expected during testing. The requirement for using the average O<sub>2</sub> concentration can be removed if the FID is calibrated with span gas balanced with the average expected oxygen concentration;
- (b) It shall be confirmed that the FID analyzer meets all the specifications of paragraph 8.1.10.1;
- (c) The FID analyzer shall be started and operated as it would be before an emission test. Regardless of the FID burner's air source during testing, zero air shall be used as the FID burner's air source for this verification;
- (d) The analyzer shall be set at zero;
- (e) The analyzer shall be spanned using a span gas that is used during emissions testing;
- (f) The zero response shall be checked by using the zero gas used during emission testing. It shall be proceeded to the next step if the mean zero response of 30 s of sampled data is within  $\pm 0.5$  per cent of the span reference value used in paragraph (e) of this paragraph, otherwise the procedure shall be restarted at paragraph (d) of this paragraph;
- (g) The analyzer response shall be checked using the span gas that has the minimum concentration of O<sub>2</sub> expected during testing. The mean response of 30 s of stabilized sample data shall be recorded as  $x_{O_2\min HC}$ ;
- (h) The zero response of the FID analyzer shall be checked using the zero gas used during emission testing. The next step shall be performed if the mean zero response of 30 s of stabilized sample data is within  $\pm 0.5$  per cent of the span reference value used in paragraph (e) of this paragraph, otherwise the procedure shall be restarted at paragraph (d) of this paragraph;
- (i) The analyzer response shall be checked using the span gas that has the average concentration of O<sub>2</sub> expected during testing. The mean response of 30 s of stabilized sample data shall be recorded as  $x_{O_2\text{avg} HC}$ ;
- (j) The zero response of the FID analyzer shall be checked using the zero gas used during emission testing. The next step shall be performed if the mean zero response of 30 s of stabilized sample data is within  $\pm 0.5$  per cent of the span reference value used in paragraph (e) of this paragraph, otherwise the procedure shall be restarted at paragraph (d) of this paragraph;

- (k) The analyzer response shall be checked using the span gas that has the maximum concentration of O<sub>2</sub> expected during testing. The mean response of 30 s of stabilized sample data shall be recorded as  $x_{O_2\max HC}$ ;
- (l) The zero response of the FID analyzer shall be checked using the zero gas used during emission testing. The next step shall be performed if the mean zero response of 30 s of stabilized sample data is within  $\pm 0.5$  per cent of the span reference value used in paragraph (e) of this paragraph, otherwise the procedure at paragraph (d) of this paragraph shall be restarted;
- (m) The percent difference between  $x_{O_2\max HC}$  and its reference gas concentration shall be calculated. The percent difference between  $x_{O_2\text{avg} HC}$  and its reference gas concentration shall be calculated. The percent difference between  $x_{O_2\min HC}$  and its reference gas concentration shall be calculated. The maximum percent difference of the three shall be determined. This is the O<sub>2</sub> interference;
- (n) If the O<sub>2</sub> interference is within  $\pm 3$  per cent, the FID passes the O<sub>2</sub> interference verification; otherwise one or more of the following need to be performed to address the deficiency:
  - (i) The verification shall be repeated to determine if a mistake was made during the procedure;
  - (ii) The zero and span gases for emission testing shall be selected that contain higher or lower O<sub>2</sub> concentrations and the verification shall be repeated;
  - (iii) The FID burner air, fuel, and sample flow rates shall be adjusted. Note that if these flow rates are adjusted on a THC FID to meet the O<sub>2</sub> interference verification, the  $RF_{CH_4}$  shall be reset for the next  $RF_{CH_4}$  verification. The O<sub>2</sub> interference verification shall be repeated after adjustment and  $RF_{CH_4}$  shall be determined;
  - (iv) The FID shall be repaired or replaced and the O<sub>2</sub> interference verification shall be repeated.

8.1.10.3. Non-methane cutter penetration fractions [\(Reserved\)](#)

8.1.11. NO<sub>x</sub> measurements

8.1.11.1. CLD CO<sub>2</sub> and H<sub>2</sub>O quench verification

8.1.11.1.1. Scope and frequency

If a CLD analyzer is used to measure NO<sub>x</sub>, the amount of H<sub>2</sub>O and CO<sub>2</sub> quench shall be verified after installing the CLD analyzer and after major maintenance.

**Deleted:** ¶  
 8.1.10.3.1. Scope and frequency ¶  
 ¶  
 . If a FID analyzer and a non-methane cutter (NMC) is used to measure methane (CH<sub>4</sub>), the non-methane cutter's conversion efficiencies of methane,  $E_{CH_4}$ , and ethane,  $E_{C_2H_6}$  shall be determined. As detailed in this paragraph, these conversion efficiencies may be determined as a combination of NMC conversion efficiencies and FID analyzer response factors, depending on the particular NMC and FID analyzer configuration. ¶  
 This verification shall be performed after installing the non-methane cutter. This verification shall be repeated within 185 days of testing to verify that the catalytic activity of the cutter has not deteriorated. ¶  
 ¶  
 8.1.10.3.2. . Measurement principles ¶  
 ¶  
 A non-methane cutter is a heated catalyst that removes non-methane hydrocarbons from the exhaust stream before the FID analyzer measures the remaining hydrocarbon concentration. An ideal non-methane cutter would have a methane conversion efficiency  $E_{CH_4}$  [-] of 0 (that is, a methane penetration fraction,  $PF_{CH_4}$ , of 1.000), and the conversion efficiency for all other hydrocarbons would be 1.000, as represented by an ethane conversion efficiency  $E_{C_2H_6}$  [-] of 1 (that is, an ethane penetration fraction  $PF_{C_2H_6}$  [-] of 0). The emission calculations in Annex A.7. or Annex A.8. use this paragraph's measured values of conversion efficiencies  $E_{CH_4}$  and  $E_{C_2H_6}$  to account for less than ideal NMC performance. ¶  
 ¶  
 8.1.10.3.3. . System requirements ¶  
 ¶  
 NMC conversion efficiencies are not limited to a certain range. However, it is recommended that a non-methane cutter is optimized by adjusting its temperature to achieve a  $E_{CH_4} < 0.15$  and a  $E_{C_2H_6} > 0.98$  ( $PF_{CH_4} > 0.85$  and  $PF_{C_2H_6} < 0.02$ ) as determined by paragraph 8.1.10.3.4., as applicable. If adjusting NMC temperature does not result in achieving these specifications, it is recommended that the catalyst material is replaced. The most recently determined conversion values from this section shall be used to calculate HC( ...

**Moved down [2]:** with

**Deleted:** the CH<sub>4</sub> analytical gas mixture instead of C<sub>2</sub>H<sub>6</sub>. The result will be the CH<sub>4</sub> penetration fraction,  $PF_{CH_4[NMC-FID]}$ . This penetration fraction shall be used according to Annexes A.7 and A.8., as applicable.

#### 8.1.11.1.2. Measurement principles

H<sub>2</sub>O and CO<sub>2</sub> can negatively interfere with a CLD's NO<sub>x</sub> response by collisional quenching, which inhibits the chemiluminescent reaction that a CLD utilizes to detect NO<sub>x</sub>. This procedure and the calculations in paragraph 8.1.11.2.3. determine quench and scale the quench results to the maximum mole fraction of H<sub>2</sub>O and the maximum CO<sub>2</sub> concentration expected during emission testing. If the CLD analyzer uses quench compensation algorithms that utilize H<sub>2</sub>O and/or CO<sub>2</sub> measurement instruments, quench shall be evaluated with these instruments active and with the compensation algorithms applied.

#### 8.1.11.1.3. System requirements

For dilute measurement a CLD analyzer shall not exceed a combined H<sub>2</sub>O and CO<sub>2</sub> quench of  $\pm 2$  per cent. For raw measurement a CLD analyzer shall not exceed a combined H<sub>2</sub>O and CO<sub>2</sub> quench of  $\pm 2$  per cent. Combined quench is the sum of the CO<sub>2</sub> quench determined as described in paragraph 8.1.11.1.4. and the H<sub>2</sub>O quench as determined in paragraph 8.1.11.1.5. If these requirements are not met, corrective action shall be taken by repairing or replacing the analyzer. Before running emission tests, it shall be verified that the corrective action have successfully restored the analyzer to proper functioning.

#### 8.1.11.1.4. CO<sub>2</sub> quench verification procedure

The following method or the method prescribed by the instrument manufacturer may be used to determine CO<sub>2</sub> quench by using a gas divider that blends binary span gases with zero gas as the diluent and meets the specifications in paragraph 9.4.5.6., or good engineering judgment shall be used to develop a different protocol:

- (a) PTFE or stainless steel tubing shall be used to make necessary connections;
- (b) The gas divider shall be configured such that nearly equal amounts of the span and diluent gases are blended with each other;
- (c) If the CLD analyzer has an operating mode in which it detects NO-only, as opposed to total NO<sub>x</sub>, the CLD analyzer shall be operated in the NO-only operating mode;
- (d) A CO<sub>2</sub> span gas that meets the specifications of paragraph 9.5.1. and a concentration that is approximately twice the maximum CO<sub>2</sub> concentration expected during emission testing shall be used;

- (e) An NO span gas that meets the specifications of paragraph 9.5.1. and a concentration that is approximately twice the maximum NO concentration expected during emission testing shall be used. Higher concentration may be used according to the instrument manufacturer's recommendation and good engineering judgement in order to obtain accurate verification, if the expected NO concentration is lower than the minimum range for the verification specified by the instrument manufacturer;
- (f) The CLD analyzer shall be zeroed and spanned. The CLD analyzer shall be spanned with the NO span gas from paragraph (e) of this paragraph through the gas divider. The NO span gas shall be connected to the span port of the gas divider; a zero gas shall be connected to the diluent port of the gas divider; the same nominal blend ratio shall be used as selected in paragraph (b) of this paragraph; and the gas divider's output concentration of NO shall be used to span the CLD analyzer. Gas property corrections shall be applied as necessary to ensure accurate gas division;
- (g) The CO<sub>2</sub> span gas shall be connected to the span port of the gas divider;
- (h) The NO span gas shall be connected to the diluents port of the gas divider;
- (i) While flowing NO and CO<sub>2</sub> through the gas divider, the output of the gas divider shall be stabilized. The CO<sub>2</sub> concentration from the gas divider output shall be determined, applying gas property correction as necessary to ensure accurate gas division. This concentration,  $x_{\text{CO}_2\text{act}}$ , shall be recorded and it shall be used in the quench verification calculations in paragraph 8.1.11.2.3. As an alternative to using a gas divider, another simple gas blending device may be used. In this case an analyzer shall be used to determine CO<sub>2</sub> concentration. If a NDIR is used together with a simple gas blending device, it shall meet the requirements of this section and it shall be spanned with the CO<sub>2</sub> span gas from paragraph (d) of this section. The linearity of the NDIR analyzer has to be checked before over the whole range up to twice of the expected maximum CO<sub>2</sub> concentration expected during testing;
- (j) The NO concentration shall be measured downstream of the gas divider with the CLD analyzer. Time shall be allowed for the analyzer response to stabilize. Stabilization time may include time to purge the transfer line and to account for analyzer response. While the analyzer measures the sample's concentration, the analyzer's output shall be recorded for 30 seconds. The arithmetic mean concentration shall be calculated from these data,  $x_{\text{NOmeas}}$ .  $x_{\text{NOmeas}}$  shall be recorded and it shall be used in the quench verification calculations in paragraph 8.1.11.2.3;
- (k) The actual NO concentration shall be calculated at the gas divider's outlet,  $x_{\text{NOact}}$ , based on the span gas concentrations and  $x_{\text{CO}_2\text{act}}$  according to equation (8-5). The calculated value shall be used in the quench verification calculations in equation (8-4);

- (l) The values recorded according to this paragraphs 8.1.11.1.4. and 8.1.11.1.5. of this section shall be used to calculate quench as described in paragraph 8.1.11.2.3.

#### 8.1.11.1.5. H<sub>2</sub>O quench verification procedure

The following method or the method prescribed by the instrument manufacturer may be used to determine H<sub>2</sub>O quench, or good engineering judgment shall be used to develop a different protocol:

- (a) PTFE or stainless steel tubing shall be used to make necessary connections;
- (b) If the CLD analyzer has an operating mode in which it detects NO-only, as opposed to total NO<sub>x</sub>, the CLD analyzer shall be operated in the NO-only operating mode;
- (c) A NO span gas shall be used that meets the specifications of paragraph 9.5.1. and a concentration that is near the maximum concentration expected during emission testing. Higher concentration may be used according to the instrument manufacturer's recommendation and good engineering judgement in order to obtain accurate verification, if the expected NO concentration is lower than the minimum range for the verification specified by the instrument manufacturer;
- (d) The CLD analyzer shall be zeroed and spanned. The CLD analyzer shall be spanned with the NO span gas from paragraph (c) of this paragraph, the span gas concentration shall be recorded as  $x_{\text{NOdry}}$ , and it shall be used in the quench verification calculations in paragraph 8.1.11.2.3;
- (e) The NO span gas shall be humidified by bubbling it through distilled water in a sealed vessel. If the humidified NO span gas sample does not pass through a sample dryer for this verification test, the vessel temperature shall be controlled to generate an H<sub>2</sub>O level approximately equal to the maximum mole fraction of H<sub>2</sub>O expected during emission testing. If the humidified NO span gas sample does not pass through a sample dryer, the quench verification calculations in paragraph 8.1.11.2.3. scale the measured H<sub>2</sub>O quench to the highest mole fraction of H<sub>2</sub>O expected during emission testing. If the humidified NO span gas sample passes through a dryer for this verification test, the vessel temperature shall be controlled to generate an H<sub>2</sub>O level at least as high as the level determined in paragraph 9.3.2.3.1. For this case, the quench verification calculations in paragraph 8.1.11.2.3. do not scale the measured H<sub>2</sub>O quench;
- (f) The humidified NO test gas shall be introduced into the sample system. It may be introduced upstream or downstream of a sample dryer that is used during emission testing. Depending on the point of introduction, the respective calculation method of paragraph (e) shall be selected. Note that the sample dryer shall meet the sample dryer verification check in paragraph 8.1.8.5.8;



- (g) The mole fraction of H<sub>2</sub>O in the humidified NO span gas shall be measured. In case a sample dryer is used, the mole fraction of H<sub>2</sub>O in the humidified NO span gas shall be measured downstream of the sample dryer,  $x_{\text{H}_2\text{O}_{\text{meas}}}$ . It is recommended to measure  $x_{\text{H}_2\text{O}_{\text{meas}}}$  as close as possible to the CLD analyzer inlet.  $x_{\text{H}_2\text{O}_{\text{meas}}}$  may be calculated from measurements of dew point,  $T_{\text{dew}}$ , and absolute pressure,  $p_{\text{total}}$ ;
- (h) Good engineering judgment shall be used to prevent condensation in the transfer lines, fittings, or valves from the point where  $x_{\text{H}_2\text{O}_{\text{meas}}}$  is measured to the analyzer. It is recommended that the system is designed so the wall temperatures in the transfer lines, fittings, and valves from the point where  $x_{\text{H}_2\text{O}_{\text{meas}}}$  is measured to the analyzer are at least 5 °C above the local sample gas dew point;
- (i) The humidified NO span gas concentration shall be measured with the CLD analyzer. Time shall be allowed for the analyzer response to stabilize. Stabilization time may include time to purge the transfer line and to account for analyzer response. While the analyzer measures the sample's concentration, the analyzer's output shall be recorded for 30 seconds. The arithmetic mean shall be calculated of these data,  $x_{\text{NO}_{\text{wet}}}$ .  $x_{\text{NO}_{\text{wet}}}$  shall be recorded and used in the quench verification calculations in paragraph 8.1.11.2.3.

#### 8.1.11.2. CLD quench verification calculations

CLD quench-check calculations shall be performed as described in this paragraph.

##### 8.1.11.2.1. Amount of water expected during testing

The maximum expected mole fraction of water during emission testing,  $x_{\text{H}_2\text{O}_{\text{exp}}}$  shall be estimated. This estimate shall be made where the humidified NO span gas was introduced in paragraph 8.1.11.1.5.(f). When estimating the maximum expected mole fraction of water, the maximum expected water content in combustion air, fuel combustion products, and dilution air (if applicable) shall be considered. If the humidified NO span gas is introduced into the sample system upstream of a sample dryer during the verification test, it is not needed to estimate the maximum expected mole fraction of water and  $x_{\text{H}_2\text{O}_{\text{exp}}}$  shall be set equal to  $x_{\text{H}_2\text{O}_{\text{meas}}}$ .

##### 8.1.11.2.2. Amount of CO<sub>2</sub> expected during testing

The maximum expected CO<sub>2</sub> concentration during emission testing,  $x_{\text{CO}_2_{\text{exp}}}$  shall be estimated. This estimate shall be made at the sample system location where the blended NO and CO<sub>2</sub> span gases are introduced according to paragraph 8.1.11.1.4.(j).

When estimating the maximum expected CO<sub>2</sub> concentration, the maximum expected CO<sub>2</sub> content in fuel combustion products and dilution air shall be considered.

### 8.1.11.2.3. Combined H<sub>2</sub>O and CO<sub>2</sub> quench calculations

Combined H<sub>2</sub>O and CO<sub>2</sub> quench shall be calculated as follows:

$$quench = \left[ \left( \frac{x_{NOwet}}{1 - x_{H_2Omeas}} - 1 \right) \cdot \frac{x_{H_2Oexp}}{x_{H_2Omeas}} + \left( \frac{x_{NOmeas}}{x_{NOact}} - 1 \right) \cdot \frac{x_{CO_2exp}}{x_{CO_2act}} \right] \cdot 100\% \quad (6-22)$$

Deleted: (8-4)

Where:

- quench* = amount of CLD quench
- $x_{NOdry}$  = measured concentration of NO upstream of a bubbler, according to paragraph 8.1.11.1.5.(d)
- $x_{NOwet}$  = measured concentration of NO downstream of a bubbler, according to paragraph 8.1.11.1.5.(i)
- $x_{H_2Oexp}$  = maximum expected mole fraction of water during emission testing according to paragraph 8.1.11.2.1.
- $x_{H_2Omeas}$  = measured mole fraction of water during the quench verification according to paragraph 8.1.11.1.5.(g)
- $x_{NOmeas}$  = measured concentration of NO when NO span gas is blended with CO<sub>2</sub> span gas, according to paragraph 8.1.11.1.4.(j)
- $x_{NOact}$  = actual concentration of NO when NO span gas is blended with CO<sub>2</sub> span gas, according to paragraph 8.1.11.1.4.(k) and calculated according to equation (8-5)
- $x_{CO_2exp}$  = maximum expected concentration of CO<sub>2</sub> during emission testing, according to paragraph 8.1.11.2.2.
- $x_{CO_2act}$  = actual concentration of CO<sub>2</sub> when NO span gas is blended with CO<sub>2</sub> span gas, according to paragraph 8.1.11.1.4.(i)

$$x_{NOact} = \left( 1 - \frac{x_{CO_2act}}{x_{CO_2span}} \right) \cdot x_{NOspan} \quad (6-23)$$

Deleted: (8-5)

Where:

$x_{\text{NOspan}}$  = the NO span gas concentration input to the gas divider, according to paragraph 8.1.11.1.4.(e)

$x_{\text{CO2span}}$  = the CO<sub>2</sub> span gas concentration input to the gas divider, according to paragraph 8.1.11.1.4.(d)

### 8.1.11.3. NDUV analyzer HC and H<sub>2</sub>O interference verification

#### 8.1.11.3.1. Scope and frequency

If NO<sub>x</sub> is measured using an NDUV analyzer, the amount of H<sub>2</sub>O and hydrocarbon interference shall be verified after initial analyzer installation and after major maintenance.

#### 8.1.11.3.2. Measurement principles

Hydrocarbons and H<sub>2</sub>O can positively interfere with a NDUV analyzer by causing a response similar to NO<sub>x</sub>. If the NDUV analyzer uses compensation algorithms that utilize measurements of other gases to meet this interference verification, simultaneously such measurements shall be conducted to test the algorithms during the analyzer interference verification.

#### 8.1.11.3.3. System requirements

A NO<sub>x</sub> NDUV analyzer shall have combined H<sub>2</sub>O and HC interference within ±2 per cent of the mean concentration of NO<sub>x</sub>.

#### 8.1.11.3.4. Procedure

The interference verification shall be performed as follows:

- (a) The NO<sub>x</sub> NDUV analyzer shall be started, operated, zeroed, and spanned according to the instrument manufacturer's instructions;
- (b) It is recommended to extract engine exhaust to perform this verification. A CLD shall be used that meets the specifications of paragraph 9.4. to quantify NO<sub>x</sub> in the exhaust. The CLD response shall be used as the reference value. Also HC shall be measured in the exhaust with a FID analyzer that meets the

specifications of paragraph 9.4. The FID response shall be used as the reference hydrocarbon value;

- (c) Upstream of any sample dryer, if one is used during testing, the engine exhaust shall be introduced into the NDUV analyzer;
- (d) Time shall be allowed for the analyzer response to stabilize. Stabilization time may include time to purge the transfer line and to account for analyzer response;
- (e) While all analyzers measure the sample's concentration, 30 s of sampled data shall be recorded, and the arithmetic means for the three analyzers calculated;
- (f) The CLD mean shall be subtracted from the NDUV mean;
- (g) This difference shall be multiplied by the ratio of the expected mean HC concentration to the HC concentration measured during the verification. The analyzer meets the interference verification of this paragraph if this result is within  $\pm 2$  per cent of the NOx concentration expected at the standard:

$$\left| \bar{x}_{\text{NOx,CLD,meas}} - \bar{x}_{\text{NOx,NDUV,meas}} \right| \cdot \left( \frac{\bar{x}_{\text{HC,exp}}}{\bar{x}_{\text{HC,meas}}} \right) \leq 2\% \cdot (\bar{x}_{\text{NOx,exp}}) \quad (6-24)$$

Deleted: (8-

Where:

- $\bar{x}_{\text{NOx,CLD,meas}}$  = the mean concentration of NOx measured by CLD [ $\mu\text{mol/mol}$ ] or [ppm]
- $\bar{x}_{\text{NOx,NDUV,meas}}$  = the mean concentration of NOx measured by NDUV [ $\mu\text{mol/mol}$ ] or [ppm]
- $\bar{x}_{\text{HC,meas}}$  = the mean concentration of HC measured [ $\mu\text{mol/mol}$ ] or [ppm]
- $\bar{x}_{\text{HC,exp}}$  = the mean concentration of HC expected at the standard [ $\mu\text{mol/mol}$ ] or [ppm]
- $\bar{x}_{\text{NOx,exp}}$  = the mean concentration of NOx expected at the standard [ $\mu\text{mol/mol}$ ] or [ppm]

#### 8.1.11.3.5. Cooling bath (chiller) requirements

Moved to paragraph 8.1.12.2

#### 8.1.11.4. Cooling bath (chiller) NO<sub>2</sub> penetration

Moved to paragraph 8.1.12.3

#### 8.1.11.4. NO<sub>2</sub>-to-NO converter conversion verification

##### 8.1.11.4.1. Scope and frequency

If an analyzer is used that measures only NO to determine NO<sub>x</sub>, an NO<sub>2</sub>-to-NO converter shall be used upstream of the analyzer. This verification shall be performed after installing the converter, after major maintenance and within 35 days before an emission test. This verification shall be repeated at this frequency to verify that the catalytic activity of the NO<sub>2</sub>-to-NO converter has not deteriorated.

##### 8.1.11.4.2. Measurement principles

An NO<sub>2</sub>-to-NO converter allows an analyzer that measures only NO to determine total NO<sub>x</sub> by converting the NO<sub>2</sub> in exhaust to NO.

##### 8.1.11.4.3. System requirements

An NO<sub>2</sub>-to-NO converter shall allow for measuring at least 95 per cent of the total NO<sub>2</sub> at the maximum expected concentration of NO<sub>2</sub>.

##### 8.1.11.4.4 Procedure

The following procedure shall be used to verify the performance of a NO<sub>2</sub>-to-NO converter:

- (a) For the instrument setup the analyzer and NO<sub>2</sub>-to-NO converter manufacturers' start-up and operating instructions shall be followed. The analyzer and converter shall be adjusted as needed to optimize performance;
- (b) An ozonator's inlet shall be connected to a zero-air or oxygen source and its outlet shall be connected to one port of a 3-way tee fitting. An NO span gas shall be connected to another port and the NO<sub>2</sub>-to-NO converter inlet shall be connected to the last port;
- (c) The following steps shall be taken when performing this check:
  - (i) The ozonator air shall be set off and the ozonator power shall be turned off and the NO<sub>2</sub>-to-NO converter shall be set to the bypass mode (i.e.,

- NO mode). Stabilization shall be allowed for, accounting only for transport delays and instrument response;
- (ii) The NO and zero-gas flows shall be adjusted so the NO concentration at the analyzer is near the peak total NO<sub>x</sub> concentration expected during testing. The NO<sub>2</sub> content of the gas mixture shall be less than 5 per cent of the NO concentration. The concentration of NO shall be recorded by calculating the mean of 30 s of sampled data from the analyzer and this value shall be recorded as  $x_{\text{NOref}}$ . Higher concentration may be used according to the instrument manufacturer's recommendation and good engineering judgement in order to obtain accurate verification, if the expected NO concentration is lower than the minimum range for the verification specified by the instrument manufacturer;
  - (iii) The ozonator O<sub>2</sub> supply shall be turned on and the O<sub>2</sub> flow rate adjusted so that the NO indicated by the analyzer is about 10 percent less than  $x_{\text{NOref}}$ . The concentration of NO shall be recorded by calculating the mean of 30 s of sampled data from the analyzer and this value recorded as  $x_{\text{NO+O2mix}}$ ;
  - (iv) The ozonator shall be switched on and the ozone generation rate adjusted so that the NO measured by the analyzer is approximately 20 percent of  $x_{\text{NOref}}$ , while maintaining at least 10 per cent unreacted NO. The concentration of NO shall be recorded by calculating the mean of 30 s of sampled data from the analyzer and this value shall be recorded as  $x_{\text{NOmeas}}$ ;
  - (v) The NO<sub>x</sub> analyzer shall be switched to NO<sub>x</sub> mode and total NO<sub>x</sub> measured. The concentration of NO<sub>x</sub> shall be recorded by calculating the mean of 30 s of sampled data from the analyzer and this value shall be recorded as  $x_{\text{NOxmeas}}$ ;
  - (vi) The ozonator shall be switched off but gas flow through the system shall be maintained. The NO<sub>x</sub> analyzer will indicate the NO<sub>x</sub> in the NO + O<sub>2</sub> mixture. The concentration of NO<sub>x</sub> shall be recorded by calculating the mean of 30 s of sampled data from the analyzer and this value shall be recorded as  $x_{\text{NOx+O2mix}}$ ;
  - (vii) O<sub>2</sub> supply shall be turned off. The NO<sub>x</sub> analyzer will indicate the NO<sub>x</sub> in the original NO-in-N<sub>2</sub> mixture. The concentration of NO<sub>x</sub> shall be recorded by calculating the mean of 30 s of sampled data from the analyzer and this value shall be recorded as  $x_{\text{NOxref}}$ . This value shall be no more than 5 per cent above the  $x_{\text{NOref}}$  value;
- (d) Performance evaluation. The efficiency of the NO<sub>x</sub> converter shall be calculated by substituting the concentrations obtained into the following equation:

$$Efficiency[\%] = \left( 1 + \frac{x_{NO_xmeas} - x_{NO_x+O_2mix}}{x_{NO+O_2mix} - x_{NOmeas}} \right) \times 100 \quad (6-25)$$

- (e) If the result is less than 95 per cent, the NO<sub>2</sub>-to-NO converter shall be repaired or replaced.

#### 8.1.12 Sample dryer / cooling bath /chiller requirements

One of the following requirements shall be met:

##### 8.1.12.1 Sample dryer verification

If a humidity sensor for continuous monitoring of dew point at the sample dryer outlet is used this check does not apply, as long as it is ensured that the dryer outlet humidity is below the minimum values used for quench, interference, and compensation checks.

- (a) If a sample dryer is used as allowed in paragraph 9.3.2.3.1. to remove water from the sample gas, the performance shall be verified upon installation, after major maintenance, for thermal chiller. For osmotic membrane dryers, the performance shall be verified upon installation, after major maintenance, and within 35 days of testing;
- (b) Water can inhibit an analyzer's ability to properly measure the exhaust component of interest and thus is sometimes removed before the sample gas reaches the analyzer. For example water can negatively interfere with a CLD's NO<sub>x</sub> response through collisional quenching and can positively interfere with an NDIR analyzer by causing a response similar to CO;
- (c) The sample dryer shall meet the specifications as determined in paragraph 9.3.2.3.1. for dew point,  $T_{dew}$ , and absolute pressure,  $p_{total}$ , downstream of the osmotic-membrane dryer or thermal chiller;
- (d) The following sample dryer verification procedure method shall be used to determine sample dryer performance, or good engineering judgment shall be used to develop a different protocol:
  - (i) PTFE or stainless steel tubing shall be used to make necessary connections;
  - (ii) N<sub>2</sub> or purified air shall be humidified by bubbling it through distilled water in a sealed vessel that humidifies the gas to the highest sample dew point that is estimated during emission sampling;
  - (iii) The humidified gas shall be introduced upstream of the sample dryer;
  - (iv) The humidified gas temperature downstream of the vessel shall be maintained at least 5 °C above its dew point;
  - (v) The humidified gas dew point,  $T_{dew}$ , and pressure,  $p_{total}$ , shall be measured as close as possible to the inlet of the sample dryer to verify that the dew point is the highest that was estimated during emission sampling;

- (vi) The humidified gas dew point,  $T_{\text{dew}}$ , and pressure,  $p_{\text{total}}$ , shall be measured as close as possible to the outlet of the sample dryer;
- (vii) The sample dryer meets the verification if the result of paragraph (d)(vi) of this paragraph is less than the dew point corresponding to the sample dryer specifications as determined in paragraph 9.3.2.3.1. plus 2 °C or if the mol fraction from (d)(vi) is less than the corresponding sample dryer specifications plus 0.002 mol/mol or 0.2 volume per cent. Note for this verification, sample dew point is expressed in absolute temperature, Kelvin.

#### 8.1.12.2 Cooling bath (chiller) requirements

It shall be demonstrated that for the highest expected water vapour concentration  $H_m$ , the water removal technique maintains CLD humidity at  $\leq 5$  g water/kg dry air (or about 0.8 volume per cent H<sub>2</sub>O), which is 100 per cent relative humidity at 3.9 °C and 101.3 kPa. This humidity specification is also equivalent to about 25 per cent relative humidity at 25 °C and 101.3 kPa. This may be demonstrated by measuring the temperature at the outlet of a thermal dehumidifier, or by measuring humidity at a point just upstream of the CLD.

#### 8.1.12.3. Cooling bath (chiller) NO<sub>2</sub> penetration

##### 8.1.12.3.1. Scope and frequency

If a cooling bath (chiller) is used to dry a sample upstream of a NO<sub>x</sub> measurement instrument, but no NO<sub>2</sub>-to-NO converter is used upstream of the cooling bath, this verification shall be performed for cooling bath NO<sub>2</sub> penetration. This verification shall be performed after initial installation and after major maintenance.

##### 8.1.12.3.2. Measurement principles

A cooling bath (chiller) removes water, which can otherwise interfere with a NO<sub>x</sub> measurement. However, liquid water remaining in an improperly designed cooling bath can remove NO<sub>2</sub> from the sample. If a cooling bath is used without an NO<sub>2</sub>-to-NO converter upstream, it could therefore remove NO<sub>2</sub> from the sample prior NO<sub>x</sub> measurement.

##### 8.1.12.3.3. System requirements

The chiller shall allow for measuring at least 95 per cent of the total NO<sub>2</sub> at the maximum expected concentration of NO<sub>2</sub>.

##### 8.1.12.3.4. Procedure

The following procedure shall be used to verify chiller performance:

- (a) Instrument setup. The analyzer and chiller manufacturers' start-up and operating instructions shall be followed. The analyzer and chiller shall be adjusted as needed to optimize performance;
- (b) Equipment setup and data collection.
  - (i) The total NO<sub>x</sub> gas analyzer(s) shall be zeroed and spanned as it would be before emission testing;



- (ii) NO<sub>2</sub> calibration gas (balance gas of dry air) that has an NO<sub>2</sub> concentration that is near the maximum expected during testing shall be selected. Higher concentration may be used according to the instrument manufacturer's recommendation and good engineering judgement in order to obtain accurate verification, if the expected NO<sub>2</sub> concentration is lower than the minimum range for the verification specified by the instrument manufacturer;
- (iii) This calibration gas shall be overflowed at the gas sampling system's probe or overflow fitting. Time shall be allowed for stabilization of the total NO<sub>x</sub> response, accounting only for transport delays and instrument response;
- (iv) The mean of 30 s of recorded total NO<sub>x</sub> data shall be calculated and this value recorded as  $x_{\text{NO}_x\text{ref}}$ ;
- (v) The flowing the NO<sub>2</sub> calibration gas shall be stopped;
- (vi) Next the sampling system shall be saturated by overflowing a dew point generator's output, set at a dew point of 50 °C, to the gas sampling system's probe or overflow fitting. The dew point generator's output shall be sampled through the sampling system and chiller for at least 10 minutes until the chiller is expected to be removing a constant rate of water;
- (vii) It shall be immediately switched back to overflowing the NO<sub>2</sub> calibration gas used to establish  $x_{\text{NO}_x\text{ref}}$ . It shall be allowed for stabilization of the total NO<sub>x</sub> response, accounting only for transport delays and instrument response. The mean of 30 s of recorded total NO<sub>x</sub> data shall be calculated and this value recorded as  $x_{\text{NO}_x\text{meas}}$ ;
- (viii)  $x_{\text{NO}_x\text{meas}}$  shall be corrected to  $x_{\text{NO}_x\text{dry}}$  based upon the residual water vapour that passed through the chiller at the chiller's outlet temperature and pressure;
- (c) Performance evaluation. If  $x_{\text{NO}_x\text{dry}}$  is less than 95 per cent of  $x_{\text{NO}_x\text{ref}}$ , the chiller shall be repaired or replaced .

#### 8.1.13. PM measurements

##### 8.1.13.1. PM balance verifications and weighing process verification

###### 8.1.13.1.1. Scope and frequency

This paragraph describes three verifications.

- (a) Independent verification of PM balance performance within 370 days prior to weighing any filter;
- (b) Zero and span of the balance within 12 h prior to weighing any filter;
- (c) Verification that the mass determination of reference filters before and after a filter weighing session be less than a specified tolerance.

#### 8.1.13.1.2. Independent verification

The balance manufacturer (or a representative approved by the balance manufacturer) shall verify the balance performance within 370 days of testing in accordance with internal audit procedures.

#### 8.1.13.1.3. Zeroing and spanning

Balance performance shall be verified by zeroing and spanning it with at least one calibration weight, and any weights that are used shall meet the specifications in paragraph 9.5.2. to perform this verification. A manual or automated procedure shall be used:

- (a) A manual procedure requires that the balance shall be used in which the balance shall be zeroed and spanned with at least one calibration weight. If normally mean values are obtained by repeating the weighing process to improve the accuracy and precision of PM measurements, the same process shall be used to verify balance performance;
- (b) An automated procedure is carried out with internal calibration weights that are used automatically to verify balance performance. These internal calibration weights shall meet the specifications in paragraph 9.5.2. to perform this verification.

#### 8.1.13.1.4. Reference sample weighing

All mass readings during a weighing session shall be verified by weighing reference PM sample media (e.g. filters) before and after a weighing session. A weighing session may be as short as desired, but no longer than 80 hours, and may include both pre- and post-test mass readings. Successive mass determinations of each reference PM sample media shall return the same value within  $\pm 10 \mu\text{g}$  or  $\pm 10$  per cent of the expected total PM mass, whichever is higher. Should successive PM sample filter weighing events fail this criterion, all individual test filter mass readings shall be invalidated. These filters may be re-weighed in another weighing session. Should a post-test filter be invalidated then the test interval is void. This verification shall be performed as follows:

- (a) At least two samples of unused PM sample media shall be kept in the PM-stabilization environment. These shall be used as references. Unused filters of the same material and size shall be selected for use as references;
- (b) References shall be stabilized in the PM stabilization environment. References shall be considered stabilized if they have been in the PM-stabilization

environment for a minimum of 30 min, and the PM-stabilization environment has been within the specifications of paragraph 9.3.4.4. for at least the preceding 60 min;

- (c) The balance shall be exercised several times with a reference sample without recording the values;
- (d) The balance shall be zeroed and spanned. A test mass shall be placed on the balance (e.g. calibration weight) and then removed ensuring that the balance returns to an acceptable zero reading within the normal stabilization time;
- (e) Each of the reference media (e.g. filters) shall be weighed and their masses recorded. If normally mean values are obtained by repeating the weighing process to improve the accuracy and precision of reference media (e.g. filters) masses, the same process shall be used to measure mean values of sample media (e.g. filters) masses;
- (f) The balance environment dew point, ambient temperature, and atmospheric pressure shall be recorded;
- (g) The recorded ambient conditions shall be used to correct results for buoyancy as described in paragraph 8.1.13.2. The buoyancy-corrected mass of each of the references shall be recorded;
- (h) Each of the reference media's (e.g. filter's) buoyancy-corrected reference mass shall be subtracted from its previously measured and recorded buoyancy-corrected mass;
- (i) If any of the reference filters' observed mass changes by more than that allowed under this paragraph, all PM mass determinations made since the last successful reference media (e.g. filter) mass validation shall be invalidated. Reference PM filters may be discarded if only one of the filters mass has changed by more than the allowable amount and a special cause for that filter's mass change can be positively identified which would not have affected other in-process filters. Thus the validation can be considered a success. In this case, the contaminated reference media shall not be included when determining compliance with paragraph (j) of this paragraph, but the affected reference filter shall be discarded and replaced;
- (j) If any of the reference masses change by more than that allowed under this paragraph 8.1.13.1.4., all PM results that were determined between the two times that the reference masses were determined shall be invalidated. If reference PM sample media is discarded according to paragraph (i) of this paragraph, at least one reference mass difference that meets the criteria in this paragraph 8.1.13.1.4. shall be available. Otherwise, all PM results that were determined between the two times that the reference media (e.g. filters) masses were determined shall be invalidated.

## 8.1.13.2. PM sample filter buoyancy correction

### 8.1.13.2.1. General

PM sample filter shall be corrected for their buoyancy in air. The buoyancy correction depends on the sample media density, the density of air, and the density of the calibration weight used to calibrate the balance. The buoyancy correction does not account for the buoyancy of the PM itself, because the mass of PM typically accounts for only (0.01 to 0.10) per cent of the total weight. A correction to this small fraction of mass would be at the most 0.010 per cent. The buoyancy-corrected values are the tare masses of the PM samples. These buoyancy-corrected values of the pre-test filter weighing are subsequently subtracted from the buoyancy-corrected values of the post-test weighing of the corresponding filter to determine the mass of PM emitted during the test.

### 8.1.13.2.2. PM sample filter density

Different PM sample filter have different densities. The known density of the sample media shall be used, or one of the densities for some common sampling media shall be used, as follows:

- (a) For PTFE-coated borosilicate glass, a sample media density of  $2300 \text{ kg/m}^3$  shall be used;
- (b) For PTFE membrane (film) media with an integral support ring of polymethylpentene that accounts for 95 per cent of the media mass, a sample media density of  $920 \text{ kg/m}^3$  shall be used;
- (c) For PTFE membrane (film) media with an integral support ring of PTFE, a sample media density of  $2144 \text{ kg/m}^3$  shall be used.

### 8.1.13.2.3. Air density

Because a PM balance environment shall be tightly controlled to an ambient temperature of  $(22 \pm 1) \text{ }^\circ\text{C}$  and a dew point of  $(9.5 \pm 1) \text{ }^\circ\text{C}$ , air density is primarily function of atmospheric pressure. Therefore a buoyancy correction is specified that is only a function of atmospheric pressure.

### 8.1.13.2.4. Calibration weight density

The stated density of the material of the metal calibration weight shall be used.

#### 8.1.13.2.5. Correction calculation

The PM sample filter shall be corrected for buoyancy using the following equations:

$$m_{\text{cor}} = m_{\text{uncor}} \cdot \left( \frac{1 - \frac{\rho_{\text{air}}}{\rho_{\text{weight}}}}{1 - \frac{\rho_{\text{air}}}{\rho_{\text{media}}}} \right) \quad (6-26)$$

Deleted: (8-8)

Where:

- $m_{\text{cor}}$  = PM sample filter mass corrected for buoyancy
- $m_{\text{uncor}}$  = PM sample filter mass uncorrected for buoyancy
- $\rho_{\text{air}}$  = density of air in balance environment
- $\rho_{\text{weight}}$  = density of calibration weight used to span balance
- $\rho_{\text{media}}$  = density of PM sample filter

$$\rho_{\text{air}} = \frac{p_{\text{abs}} \cdot M_{\text{mix}}}{R \cdot T_{\text{amb}}} \quad (6-27)$$

Deleted: (8-9)

Where:

- $p_{\text{abs}}$  = absolute pressure in balance environment
- $M_{\text{mix}}$  = molar mass of air in balance environment
- $R$  = molar gas constant.
- $T_{\text{amb}}$  = absolute ambient temperature of balance environment

## 8.2. Instrument validation for test

### 8.2.1. Validation of proportional flow control for batch sampling and minimum dilution ratio for PM batch sampling

#### 8.2.1.1. Proportionality criteria for CVS

#### 8.2.1.1.1. Proportional flows

For any pair of flow meters, the recorded sample and total flow rates or their 1 Hz means shall be used with the statistical calculations in Annex A.2.9. The standard error of the estimate, *SEE*, of the sample flow rate versus the total flow rate shall be determined. For each test interval, it shall be demonstrated that *SEE* was less than or equal to 3.5 per cent of the mean sample flow rate.

#### 8.2.1.1.2. Constant flows

For any pair of flow meters, the recorded sample and total flow rates or their 1 Hz means shall be used to demonstrate that each flow rate was constant within  $\pm 2.5$  per cent of its respective mean or target flow rate. The following options may be used instead of recording the respective flow rate of each type of meter:

- (a) Critical-flow venturi option. For critical-flow venturis, the recorded venturi-inlet conditions or their 1 Hz means shall be used. It shall be demonstrated that the flow density at the venturi inlet was constant within  $\pm 2.5$  per cent of the mean or target density over each test interval. For a CVS critical-flow venturi, this may be demonstrated by showing that the absolute temperature at the venturi inlet was constant within  $\pm 4$  per cent of the mean or target absolute temperature over each test interval;
- (b) Positive-displacement pump option. The recorded pump-inlet conditions or their 1 Hz means shall be used. It shall be demonstrated that the flow density at the pump inlet was constant within  $\pm 2.5$  per cent of the mean or target density over each test interval. For a CVS pump, this may be demonstrated by showing that the absolute temperature at the pump inlet was constant within  $\pm 2$  per cent of the mean or target absolute temperature over each test interval.

#### 8.2.1.1.3. Demonstration of proportional sampling

For any proportional batch sample such as a bag or PM filter, it shall be demonstrated that proportional sampling was maintained using one of the following, noting that up to 5 per cent of the total number of data points may be omitted as outliers.

Using good engineering judgment, it shall be demonstrated with an engineering analysis that the proportional-flow control system inherently ensures proportional sampling under all circumstances expected during testing. For example, CFVs may be used for both sample flow and total flow if it is demonstrated that they always have the same inlet pressures and temperatures and that they always operate under critical-flow conditions.

Measured or calculated flows and/or tracer gas concentrations (e.g. CO<sub>2</sub>) shall be used to determine the minimum dilution ratio for PM batch sampling over the test interval.

#### 8.2.1.2. Partial flow dilution system validation

For the control of a partial flow dilution system to extract a proportional raw exhaust sample, a fast system response is required; this is identified by the promptness of the partial flow dilution system. The transformation time for the system shall be determined by the procedure in paragraph 8.1.8.6. and the related figure 3.1. The actual control of the partial flow dilution system shall be based on the current measured conditions. If the combined transformation time of the exhaust flow measurement and the partial flow system is  $\leq 0.3$  s, online control shall be used. If the transformation time exceeds 0.3 s, look-ahead control based on a pre-recorded test run shall be used. In this case, the combined rise time shall be  $\leq 1$  s and the combined delay time  $\leq 10$  s. The total system response shall be designed as to ensure a representative sample of the particulates,  $q_{mp,i}$  (sample flow of exhaust gas into partial flow dilution system), proportional to the exhaust mass flow. To determine the proportionality, a regression analysis of  $q_{mp,i}$  versus  $q_{mew,i}$  (exhaust gas mass flow rate on wet basis) shall be conducted on a minimum 5 Hz data acquisition rate, and the following criteria shall be met:

- (a) The correlation coefficient  $r^2$  of the linear regression between  $q_{mp,i}$  and  $q_{mew,i}$  shall not be less than 0.95;
- (b) The standard error of estimate of  $q_{mp,i}$  on  $q_{mew,i}$  shall not exceed 5 per cent of  $q_{mp}$  maximum;
- (c)  $q_{mp}$  intercept of the regression line shall not exceed  $\pm 2$  per cent of  $q_{mp}$  maximum.

Look-ahead control is required if the combined transformation times of the particulate system,  $t_{50,P}$  and of the exhaust mass flow signal,  $t_{50,F}$  are  $> 0.3$  s. In this case, a pre-test shall be run and the exhaust mass flow signal of the pre-test be used for controlling the sample flow into the particulate system. A correct control of the partial dilution system is obtained, if the time trace of  $q_{mew,pre}$  of the pre-test, which controls  $q_{mp}$ , is shifted by a "look-ahead" time of  $t_{50,P} + t_{50,F}$ .

For establishing the correlation between  $q_{mp,i}$  and  $q_{mew,i}$  the data taken during the actual test shall be used, with  $q_{mew,i}$  time aligned by  $t_{50,F}$  relative to  $q_{mp,i}$  (no contribution from  $t_{50,P}$  to the time alignment). The time shift between  $q_{mew}$  and  $q_{mp}$  is the difference between their transformation times that were determined in paragraph 8.1.8.6.3.2.

#### 8.2.2. Gas analyzer range validation, drift validation and drift correction

##### 8.2.2.1. Range validation

If an analyzer operated above 100 per cent of its range at any time during the test, the following steps shall be performed:

##### 8.2.2.1.1. Batch sampling

For batch sampling, the sample shall be re-analyzed using the lowest analyzer range that results in a maximum instrument response below 100 per cent. The result shall be reported from the lowest range from which the analyzer operates below 100 per cent of its range for the entire test.

#### 8.2.2.1.2. Continuous sampling

For continuous sampling, the entire test shall be repeated using the next higher analyzer range. If the analyzer again operates above 100 per cent of its range, the test shall be repeated using the next higher range. The test shall be continued to be repeated until the analyzer always operates at less than 100 per cent of its range for the entire test.

#### 8.2.2.2. Drift validation and drift correction

If the drift is within  $\pm 1$  per cent, the data can be either accepted without any correction or accepted after correction. If the drift is greater than  $\pm 1$  per cent, two sets of brake specific emission results shall be calculated for each pollutant with a brake-specific limit value and for CO<sub>2</sub>, or the test shall be voided. One set shall be calculated using data before drift correction and another set of data calculated after correcting all the data for drift according to Appendix 2 of Annexes A.7. or A.8. The comparison shall be made as a percentage of the uncorrected results. The difference between the uncorrected and the corrected brake-specific emission values shall be within  $\pm 4$  per cent of either the uncorrected brake-specific emission values or the emission limit value, whichever is greater. If not, the entire test is void.

#### 8.2.3. PM sampling media (e.g. filters) preconditioning and tare weighing

Before an emission test, the following steps shall be taken to prepare PM sample filter media and equipment for PM measurements:

##### 8.2.3.1. Periodic verifications

It shall be made sure that the balance and PM-stabilization environments meet the periodic verifications in paragraph 8.1.12. The reference filter shall be weighed just before weighing test filters to establish an appropriate reference point (see section details of the procedure in paragraph 8.1.12.1.). The verification of the stability of the reference filters shall occur after the post-test stabilisation period, immediately before the post-test weighing.

##### 8.2.3.2. Visual Inspection

The unused sample filter media shall be visually inspected for defects, defective filters shall be discarded.

##### 8.2.3.3. Grounding

Electrically grounded tweezers or a grounding strap shall be used to handle PM filters as described in paragraph 9.3.4.

##### 8.2.3.4. Unused sample media



Unused sample media shall be placed in one or more containers that are open to the PM-stabilization environment. If filters are used, they may be placed in the bottom half of a filter cassette.

#### 8.2.3.5. Stabilization

Sample media shall be stabilized in the PM-stabilization environment. An unused sample medium can be considered stabilized as long as it has been in the PM-stabilization environment for a minimum of 30 min, during which the PM-stabilization environment has been within the specifications of paragraph 9.3.4. However, if a mass of 400 µg or more is expected, then the sample media shall be stabilised for at least 60 min.

#### 8.2.3.6. Weighing

The sample media shall be weighed automatically or manually, as follows:

- (a) For automatic weighing, the automation system manufacturer's instructions shall be followed to prepare samples for weighing; this may include placing the samples in a special container;
- (b) For manual weighing, good engineering judgment shall be used;
- (c) Optionally, substitution weighing is permitted (see paragraph 8.2.3.10);
- (d) Once a filter is weighed it shall be returned to the Petri dish and covered.

#### 8.2.3.7. Buoyancy correction

The measured weight shall be corrected for buoyancy as described in paragraph 8.1.13.2.

#### 8.2.3.8. Repetition

The filter mass measurements may be repeated to determine the average mass of the filter using good engineering judgement and to exclude outliers from the calculation of the average.

#### 8.2.3.9. Tare-weighing

Unused filters that have been tare-weighed shall be loaded into clean filter cassettes and the loaded cassettes shall be placed in a covered or sealed container before they are taken to the test cell for sampling.

#### 8.2.3.10. Substitution weighing

Substitution weighing is an option and, if used, involves measurement of a reference weight before and after each weighing of a PM sampling medium (e.g. filter). While substitution weighing requires more measurements, it corrects for a balance's zero-drift and it relies on balance linearity only over a small range. This is most appropriate when quantifying total PM masses that are less than 0.1 per cent of the sample medium's mass. However, it may not be appropriate when total PM masses exceed 1 per cent of the sample medium's mass. If substitution weighing is used, it shall be used for both pre-test and post-test weighing. The same substitution weight shall be used for both pre-test and post-test weighing. The mass of the substitution

weight shall be corrected for buoyancy if the density of the substitution weight is less than 2.0 g/cm<sup>3</sup>. The following steps are an example of substitution weighing:

- (a) Electrically grounded tweezers or a grounding strap shall be used, as described in paragraph 9.3.4.6;
- (b) A static neutralizer shall be used as described in paragraph 9.3.4.6 to minimize static electric charge on any object before it is placed on the balance pan;
- (c) A substitution weight shall be selected that meets the specifications for calibration weights in paragraph 9.5.2. The substitution weight shall also have the same density as the weight that is used to span the microbalance, and shall be similar in mass to an unused sample medium (e.g. filter). If filters are used, the weight's mass should be about (80 to 100) mg for typical 47 mm diameter filters;
- (d) The stable balance reading shall be recorded and then the calibration weight shall be removed;
- (e) An unused sampling medium (e.g. a new filter) shall be weighed, the stable balance reading recorded and the balance environment's dew point, ambient temperature, and atmospheric pressure recorded;
- (f) The calibration weight shall be reweighed and the stable balance reading recorded;
- (g) The arithmetic mean of the two calibration-weight readings that were recorded immediately before and after weighing the unused sample shall be calculated. That mean value shall be subtracted from the unused sample reading, then the true mass of the calibration weight as stated on the calibration-weight certificate shall be added. This result shall be recorded. This is the unused sample's tare weight without correcting for buoyancy;
- (h) These substitution-weighing steps shall be repeated for the remainder of the unused sample media;
- (i) The instructions given in paragraphs 8.2.3.7. through 8.2.3.9. of this section shall be followed once weighing is completed.

#### 8.2.4. Post-test PM sample conditioning and weighing

Used PM sample filters shall be placed into covered or sealed containers or the filter holders shall be closed, in order to protect the sample filters against ambient contamination. Thus protected, the loaded filters have to be returned to the PM-filter conditioning chamber or room. Then the PM sample filters shall be conditioned and weighted accordingly.

##### 8.2.4.1. Periodic verification

It shall be assured that the weighing and PM-stabilization environments have met the periodic verifications in paragraph 8.1.13.1. After testing is complete, the filters shall be returned to the weighing and PM-stabilisation environment. The weighing and PM-stabilisation environment shall meet the ambient conditions requirements in

paragraph 9.3.4.4., otherwise the test filters shall be left covered until proper conditions have been met.

8.2.4.2. Removal from sealed containers

In the PM-stabilization environment, the PM samples shall be removed from the sealed containers. Filters may be removed from their cassettes before or after stabilization. When a filter is removed from a cassette, the top half of the cassette shall be separated from the bottom half using a cassette separator designed for this purpose.

8.2.4.3. Electrical grounding

To handle PM samples, electrically grounded tweezers or a grounding strap shall be used, as described in paragraph 9.3.4.5.

8.2.4.4. Visual inspection

The collected PM samples and the associated filter media shall be inspected visually. If the conditions of either the filter or the collected PM sample appear to have been compromised, or if the particulate matter contacts any surface other than the filter, the sample may not be used to determine particulate emissions. In the case of contact with another surface; the affected surface shall be cleaned before proceeding.

8.2.4.5. Stabilisation of PM samples

To stabilise PM samples, they shall be placed in one or more containers that are open to the PM-stabilization environment, which is described in paragraph 9.3.4.3. A PM sample is stabilized as long as it has been in the PM-stabilization environment for one of the following durations, during which the stabilization environment has been within the specifications of paragraph 9.3.4.3.:

- (a) If it is expected that a filter's total surface concentration of PM will be greater than  $0.353 \mu\text{g}/\text{mm}^2$ , assuming a  $400 \mu\text{g}$  loading on a 38 mm diameter filter stain area, the filter shall be exposed to the stabilization environment for at least 60 minutes before weighing;
- (b) If it is expected that a filter's total surface concentration of PM will be less than  $0.353 \mu\text{g}/\text{mm}^2$ , the filter shall be exposed to the stabilization environment for at least 30 minutes before weighing;
- (c) If a filter's total surface concentration of PM to be expected during the test is unknown, the filter shall be exposed to the stabilization environment for at least 60 minutes before weighing.

8.2.4.6. Determination of post-test filter mass

The procedures in paragraph 8.2.3. shall be repeated (paragraphs 8.2.3.6. through 8.2.3.9.) to determine the post-test filter mass.

#### 8.2.4.7. Total mass

Each buoyancy-corrected filter tare mass shall be subtracted from its respective buoyancy-corrected post-test filter mass. The result is the total mass,  $m_{\text{total}}$ , which shall be used in emission calculations in Annexes A.7. and A.8.

### 9. MEASUREMENT EQUIPMENT

#### 9.1. Engine dynamometer specification

##### 9.1.1. Shaft work

An engine dynamometer shall be used that has adequate characteristics to perform the applicable duty cycle including the ability to meet appropriate cycle validation criteria. The following dynamometers may be used:

- (a) Eddy-current or water-brake dynamometers;
- (b) Alternating-current or direct-current motoring dynamometers;
- (c) One or more dynamometers.

##### 9.1.2. Transient cycle

Load cell or in-line torque meter may be used for torque measurements.

When using a load cell, the torque signal shall be transferred to the engine axis and the inertia of the dynamometer shall be considered. The actual engine torque is the torque read on the load cell plus the moment of inertia of the brake multiplied by the angular acceleration. The control system has to perform such a calculation in real time.

##### 9.1.3. Engine accessories

The work of engine accessories required to fuel, lubricate, or heat the engine, circulate liquid coolant to the engine, or to operate after-treatment devices shall be accounted for and they shall be installed in accordance with paragraph 6.3.

9.2. Dilution procedure (if applicable)

9.2.1. Diluent conditions and background concentrations

Gaseous constituents may be measured raw or dilute whereas PM measurement generally requires dilution. Dilution may be accomplished by a full flow or partial flow dilution system. When dilution is applied then the exhaust may be diluted with ambient air, synthetic air, or nitrogen. For gaseous emissions measurement the diluent shall be at least 15 °C. For PM sampling the temperature of the diluent is specified in paragraphs 9.2.2. for CVS and 9.2.3. for PFD with varying dilution ratio. The flow capacity of the dilution system shall be large enough to completely eliminate water condensation in the dilution and sampling systems. De-humidifying the dilution air before entering the dilution system is permitted, if the air humidity is high. The dilution tunnel walls may be heated or insulated as well as the bulk stream tubing downstream of the tunnel to prevent aqueous condensation.

Before a diluent is mixed with exhaust, it may be preconditioned by increasing or decreasing its temperature or humidity. Constituents may be removed from the diluent to reduce their background concentrations. The following provisions apply to removing constituents or accounting for background concentrations:

- (a) Constituent concentrations in the diluent may be measured and compensated for background effects on test results. See Annexes A.7-A.8 for calculations that compensate for background concentrations;
- (b) To account for background PM the following options are available:
  - (i) For removing background PM, the diluent shall be filtered with high-efficiency particulate air (HEPA) filters that have an initial minimum collection efficiency specification of 99.97 per cent (see 3.1. for procedures related to HEPA-filtration efficiencies);
  - (ii) For correcting for background PM without HEPA filtration, the background PM shall not contribute more than 50 per cent of the net PM collected on the sample filter;
  - (iii) Background correction of net PM with HEPA filtration is permitted without restriction.

9.2.2. Full flow system

Full-flow dilution; constant-volume sampling (CVS). The full flow of raw exhaust is diluted in a dilution tunnel. Constant flow may be maintained by maintaining the temperature and pressure at the flow meter within the limits. For non constant flow the flow shall be measured directly to allow for proportional sampling. The system shall be designed as follows (see figure 6.6):

Deleted: 9.1

- (a) A tunnel with inside surfaces of stainless steel shall be used. The entire dilution tunnel shall be electrically grounded. Alternatively non-conductive materials may be used for engine categories neither subject to PM nor PN limits;
- (b) The exhaust system backpressure shall not be artificially lowered by the dilution air inlet system. The static pressure at the location where raw exhaust is introduced into the tunnel shall be maintained within  $\pm 1.2$  kPa of atmospheric pressure;
- (c) To support mixing the raw exhaust shall be introduced into the tunnel by directing it downstream along the centreline of the tunnel. A fraction of dilution air maybe introduced radially from the tunnel's inner surface to minimize exhaust interaction with the tunnel walls;
- (d) Diluent. For PM sampling the temperature of the diluents (ambient air, synthetic air, or nitrogen as quoted in paragraph 9.2.1.) shall be maintained between 293 and 325 K (20 to 52°C) in close proximity to the entrance into the dilution tunnel;
- (e) The Reynolds number,  $Re$ , shall be at least 4000 for the diluted exhaust stream, where  $Re$  is based on the inside diameter of the dilution tunnel.  $Re$  is defined in Annexes A.7-A.8. Verification of adequate mixing shall be performed while traversing a sampling probe across the tunnel's diameter, vertically and horizontally. If the analyzer response indicates any deviation exceeding  $\pm 2$  per cent of the mean measured concentration, the CVS shall be operated at a higher flow rate or a mixing plate or orifice shall be installed to improve mixing;
- (f) Flow measurement preconditioning. The diluted exhaust may be conditioned before measuring its flow rate, as long as this conditioning takes place downstream of heated HC or PM sample probes, as follows:
  - (i) Flow straighteners, pulsation dampeners, or both of these maybe used;
  - (ii) A filter maybe used;
  - (iii) A heat exchanger maybe used to control the temperature upstream of any flow meter but steps shall be taken to prevent aqueous condensation;
- (g) Aqueous condensation. To ensure that a flow is measured that corresponds to a measured concentration, either aqueous condensation shall be prevented between the sample probe location and the flow meter inlet in the dilution tunnel or aqueous condensation shall be allowed to occur and humidity at the

flow meter inlet measured. The dilution tunnel walls or bulk stream tubing downstream of the tunnel may be heated or insulated to prevent aqueous condensation. Aqueous condensation shall be prevented throughout the dilution tunnel. Certain exhaust components can be diluted or eliminated by the presence of moisture;

For PM sampling, the already proportional flow coming from CVS goes through secondary dilution (one or more) to achieve the requested overall dilution ratio as shown in figure 9.2 and mentioned in paragraph 9.2.3.2;

- (h) The minimum overall dilution ratio shall be within the range of 5:1 to 7:1 and at least 2:1 for the primary dilution stage based on the maximum engine exhaust flow rate during the test cycle or test interval;
- (i) The overall residence time in the system shall be between 0.5 and 5 seconds, as measured from the point of diluent introduction to the filter holder(s);
- (j) The residence time in the secondary dilution system, if present, shall be at least 0.5 seconds, as measured from the point of secondary diluent introduction to the filter holder(s).

To determine the mass of the particulates, a particulate sampling system, a particulate sampling filter, a gravimetric balance, and a temperature and humidity controlled weighing chamber, are required.

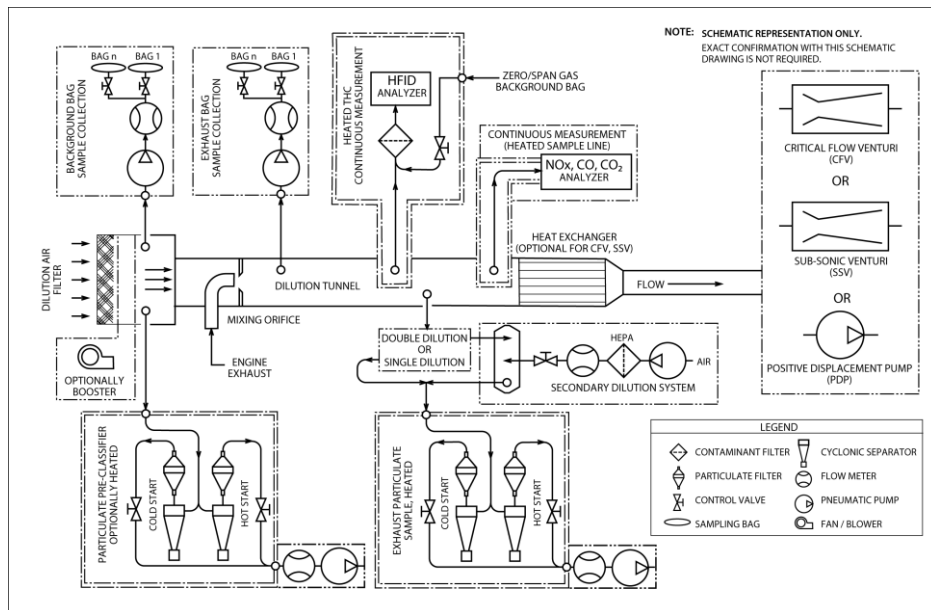


Figure 6.6 – Examples of full-flow dilution sampling configurations.

Deleted: 9.1

### 9.2.3. Partial flow dilution (PFD) system


#### 9.2.3.1. Description of partial flow system

A schematic of a PFD system is shown in figure 6.7. It is a general schematic showing principles of sample extraction, dilution and PM sampling. It is not meant to indicate that all the components described in the figure are necessary for other possible sampling systems that satisfy the intent of sample collection. Other configurations which do not match these schematics are allowed under the condition that they serve the same purpose of sample collection, dilution, and PM sampling. These need to satisfy other criteria such as in paragraphs 8.1.8.6. (periodic calibration) and 8.2.1.2. (validation) for varying dilution PFD, and paragraph 8.1.4.5 as well as table 8.2 (linearity verification) and paragraph 8.1.8.5.7. (verification) for constant dilution PFD.

Deleted: 9.2

As shown in figure 9.2, the raw exhaust gas or the primary diluted flow is transferred from the exhaust pipe EP or from CVS respectively to the dilution tunnel DT through the sampling probe SP and the transfer line TL. The total flow through the tunnel is adjusted with a flow controller and the sampling pump P of the particulate sampling system (PSS). For proportional raw exhaust sampling, the dilution air flow is controlled by the flow controller FC1, which may use  $q_{mew}$  (exhaust gas mass flow rate on wet basis) or  $q_{maw}$  (intake air mass flow rate on wet basis) and  $q_{mf}$  (fuel mass flow rate) as command signals, for the desired exhaust split. The sample flow into the dilution tunnel DT is the difference of the total flow and the dilution air flow. The dilution air flow rate is measured with the flow measurement device FM1, the total flow rate with the flow measurement device of the particulate sampling system. The dilution ratio is calculated from these two flow rates. For sampling with a constant dilution ratio of raw or diluted exhaust versus exhaust flow (e.g.: secondary dilution for PM sampling), the dilution air flow rate is usually constant and controlled by the flow controller FC1 or dilution air pump.



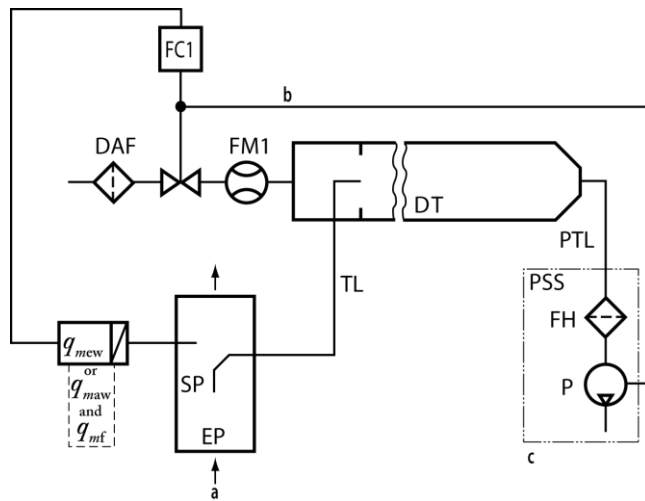

a = engine exhaust or primary diluted flow      b = optional      c = PM sampling

Figure 6.7 – Schematic of partial flow dilution system (total sampling type).

Deleted: 9.2.

Components of figure 6.7:

Deleted: 9.2

DAF = Dilution air filter – The dilution air (ambient air, synthetic air, or nitrogen) shall be filtered with a high-efficiency PM air (HEPA) filter.

DT = Dilution tunnel or secondary dilution system

EP = Exhaust pipe or primary dilution system

FC1 = Flow controller

FH = Filter holder

FM1 = Flow measurement device measuring the dilution air flow rate

P = Sampling pump

PSS = PM sampling system

PTL = PM transfer line

SP = Raw or dilute exhaust gas sampling probe

TL = Transfer line

Mass flow rates applicable only for proportional raw exhaust sampling PFD:

$q_{mew}$  = Exhaust gas mass gas flow rate on wet basis

$q_{maw}$  = Intake air mass flow rate on wet basis

$q_{mf}$  = Fuel mass flow rate

#### 9.2.3.2. Dilution

The temperature of the diluents (ambient air, synthetic air, or nitrogen as quoted in paragraph 9.2.1.) shall be maintained between 293 and 325 K (20 to 52°C) in close proximity to the entrance into the dilution tunnel.

De-humidifying the dilution air before entering the dilution system is permitted. The partial flow dilution system has to be designed to extract a proportional raw exhaust sample from the engine exhaust stream, thus responding to excursions in the exhaust stream flow rate, and introduce dilution air to this sample to achieve a temperature at the test filter as prescribed by paragraph 9.3.3.4.3. For this it is essential that the dilution ratio be determined such that the accuracy requirements of paragraph 8.1.8.6.1. are fulfilled.

To ensure that a flow is measured that corresponds to a measured concentration, either aqueous condensation shall be prevented between the sample probe location and the flow meter inlet in the dilution tunnel or aqueous condensation shall be allowed to occur and humidity at the flow meter inlet measured. The PFD system may be heated or insulated to prevent aqueous condensation. Aqueous condensation shall be prevented throughout the dilution tunnel.

The minimum dilution ratio shall be within the range of 5:1 to 7:1 based on the maximum engine exhaust flow rate during the test cycle or test interval.

The residence time in the system shall be between 0.5 and 5 s, as measured from the point of diluent introduction to the filter holder(s).

To determine the mass of the particulates, a particulate sampling system, a particulate sampling filter, a gravimetric balance, and a temperature and humidity controlled weighing chamber, are required.

#### 9.2.3.3. Applicability

PFD may be used to extract a proportional raw exhaust sample for any batch or continuous PM and gaseous emission sampling over any transient duty cycle, any steady-state duty cycle or any ramped-modal duty cycle.

The system may be used also for a previously diluted exhaust where, via a constant dilution-ratio, an already proportional flow is diluted (see figure 9.2). This is the way of performing secondary dilution from a CVS tunnel to achieve the necessary overall dilution ratio for PM sampling.

#### 9.2.3.4. Calibration

The calibration of the PFD to extract a proportional raw exhaust sample is considered in paragraph 8.1.8.6.

### 9.3. Sampling procedures

#### 9.3.1 General sampling requirements

##### 9.3.1.1. Probe design and construction

A probe is the first fitting in a sampling system. It protrudes into a raw or diluted exhaust stream to extract a sample, such that its inside and outside surfaces are in contact with the exhaust. A sample is transported out of a probe into a transfer line.

Sample probes shall be made with inside surfaces of stainless steel or, for raw exhaust sampling, with any non-reactive material capable of withstanding raw exhaust temperatures. Sample probes shall be located where constituents are mixed to their mean sample concentration and where interference with other probes is minimised. It is recommended that all probes remain free from influences of boundary layers, wakes, and eddies – especially near the outlet of a raw-exhaust tailpipe where unintended dilution might occur. Purging or back-flushing of a probe shall not influence another probe during testing. A single probe to extract a sample of more than one constituent may be used as long as the probe meets all the specifications for each constituent.

##### 9.3.1.2. Transfer lines

Transfer lines that transport an extracted sample from a probe to an analyzer, storage medium, or dilution system shall be minimized in length by locating analyzers, storage media, and dilution systems as close to the probes as practical. The number of bends in transfer lines shall be minimized and that the radius of any unavoidable bend shall be maximized.

### 9.3.1.3. Sampling methods

For continuous and batch sampling, introduced in paragraph 7.2., the following conditions apply:

- (a) When extracting from a constant flow rate, the sample shall also be carried out at a constant flow rate;
- (b) When extracting from a varying flow rate, the sample flow rate shall be varied in proportion to the varying flow rate;
- (c) Proportional sampling shall be validated as described in paragraph 8.2.1.

### 9.3.2. Gas sampling

#### 9.3.2.1. Sampling probes

Either single-port or multi-port probes are used for sampling gaseous emissions. The probes may be oriented in any direction relative to the raw or diluted exhaust flow. For some probes, the sample temperatures shall be controlled, as follows:

- (a) For probes that extract NO<sub>x</sub> from diluted exhaust, the probe's wall temperature shall be controlled to prevent aqueous condensation;
- (b) For probes that extract hydrocarbons from the diluted exhaust, a probe wall temperature is recommended to be controlled approximately 191 °C to minimise contamination.

#### 9.3.2.2. Transfer lines

Transfer lines with inside surfaces of stainless steel, PTFE, Viton<sup>TM</sup>, or any other material that has better properties for emission sampling shall be used. A non-reactive material capable of withstanding exhaust temperatures shall be used. In-line filters may be used if the filter and its housing meet the same temperature requirements as the transfer lines, as follows:

- (a) For NO<sub>x</sub> transfer lines upstream of either an NO<sub>2</sub>-to-NO converter that meets the specifications of paragraph 8.1.11.5. or a chiller that meets the specifications of paragraph 8.1.11.4. a sample temperature that prevents aqueous condensation shall be maintained;
- (b) For THC transfer lines a wall temperature tolerance throughout the entire line of (191 ±11) °C shall be maintained. If sampled from raw exhaust, an unheated, insulated transfer line may be connected directly to a probe. The length and insulation of the transfer line shall be designed to cool the highest expected raw exhaust temperature to no lower than 191 °C, as measured at the

transfer line outlet. For dilute sampling a transition zone between the probe and transfer line of up to 0.92 m in length is allowed to transition the wall temperature to  $(191 \pm 11)$  °C.

### 9.3.2.3 Sample-conditioning components

#### 9.3.2.3.1. Sample dryers

Sample dryers may be used for removing moisture from the sample in order to decrease the effect of water on gaseous emissions measurement. Sample dryers shall meet the requirements in paragraph 9.3.2.3.1.1 and paragraph 9.3.2.3.1.2.

##### 9.3.2.3.1.1. Requirements

The instrument shall meet the requirements specified in paragraph 8.1.12. The moisture content of 0.8 volume per cent H<sub>2</sub>O is used in equation (A.8-14).

##### 9.3.2.3.1.2. Type of sample dryers allowed and procedure to estimate moisture content after the dryer

Either type of sample dryer described in this paragraph may be used.

- (a) If an osmotic-membrane dryer upstream of any gaseous analyzer or storage medium is used, it shall meet the temperature specifications in paragraph 9.3.2.2. The dew point,  $T_{\text{dew}}$ , and absolute pressure,  $p_{\text{total}}$ , downstream of an osmotic-membrane dryer shall be monitored. The amount of water shall be calculated as specified in Annexes A.7-A.8 by using continuously recorded values of  $T_{\text{dew}}$  and  $p_{\text{total}}$  or their peak values observed during a test or their alarm set points. Lacking a direct measurement, the nominal  $p_{\text{total}}$  is given by the dryer's lowest absolute pressure expected during testing.
- (b) A thermal chiller upstream of a THC measurement system for compression-ignition engines may not be used. If a thermal chiller upstream of an NO<sub>2</sub>-to-NO converter or in a sampling system without an NO<sub>2</sub>-to-NO converter is used, the chiller shall meet the NO<sub>2</sub> loss-performance check specified in paragraph 8.1.11.4. The dew point,  $T_{\text{dew}}$ , and absolute pressure,  $p_{\text{total}}$ , downstream of a thermal chiller shall be monitored. The amount of water shall be calculated as specified in Annexes A.7.-A.8 by using continuously recorded values of  $T_{\text{dew}}$  and  $p_{\text{total}}$  or their peak values observed during a test or their alarm set points. Lacking a direct measurement, the nominal  $p_{\text{total}}$  is given by the thermal chiller's lowest absolute pressure expected during testing. If it is valid to assume the degree of saturation in the thermal chiller,  $T_{\text{dew}}$  based on the known chiller efficiency and continuous monitoring of chiller temperature,  $T_{\text{chiller}}$  may be calculated. If values of  $T_{\text{chiller}}$  are not continuously recorded, its

peak value observed during a test, or its alarm setpoint, may be used as a constant value to determine a constant amount of water according to Annexes A.7-A.8. If it is valid to assume that  $T_{\text{chiller}}$  is equal to  $T_{\text{dew}}$ ,  $T_{\text{chiller}}$  may be used in lieu of  $T_{\text{dew}}$  according to Annexes A.7-A.8. If it is valid to assume a constant temperature offset between  $T_{\text{chiller}}$  and  $T_{\text{dew}}$ , due to a known and fixed amount of sample reheat between the chiller outlet and the temperature measurement location, this assumed temperature offset value may be factored in into emission calculations. The validity of any assumptions allowed by this paragraph shall be shown by engineering analysis or by data.

#### 9.3.2.3.2. Sample pumps

Sample pumps upstream of an analyzer or storage medium for any gas shall be used. Sample pumps with inside surfaces of stainless steel, PTFE, or any other material having better properties for emission sampling shall be used. For some sample pumps, temperatures shall be controlled, as follows:

- (a) If a  $\text{NO}_x$  sample pump upstream of either an  $\text{NO}_2$ -to- $\text{NO}$  converter that meets paragraph 8.1.11.5. or a chiller that meets paragraph 8.1.11.4. is used, it shall be heated to prevent aqueous condensation;
- (b) If a THC sample pump upstream of a THC analyzer or storage medium is used, its inner surfaces shall be heated to a tolerance of  $(191 \pm 11)^\circ\text{C}$ .

#### 9.3.2.3.3. Ammonia scrubbers

Ammonia scrubbers may be used for any or all gaseous sampling systems to prevent  $\text{NH}_3$  interference, poisoning of  $\text{NO}_2$ -to- $\text{NO}$  converter, and deposits in the sampling system or analysers. Installation of the ammonia scrubber shall follow the manufacturer's recommendations.

#### 9.3.2.4. Sample storage media

In the case of bag sampling, gas volumes shall be stored in sufficiently clean containers that minimally off-gas or allow permeation of gases. Good engineering judgment shall be used to determine acceptable thresholds of storage media cleanliness and permeation. To clean a container, it may be repeatedly purged and evacuated and may be heated. A flexible container (such as a bag) within a temperature-controlled environment, or a temperature controlled rigid container that is initially evacuated or has a volume that can be displaced, such as a piston and cylinder arrangement, shall be used. Containers meeting the specifications in the following table [6.6](#) shall be used.

Deleted: 9.1

Table [6.6](#)

Deleted: 9.1

#### **Gaseous Batch Sampling Container Materials**

CO, CO <sub>2</sub> , O <sub>2</sub> , CH <sub>4</sub> , C <sub>2</sub> H <sub>6</sub> , C <sub>3</sub> H <sub>8</sub> , NO, NO <sub>2</sub> <sup>1</sup>	polyvinyl fluoride (PVF) <sup>2</sup> for example Tedlar™, polyvinylidene fluoride <sup>2</sup> for example Kynar™, polytetrafluoroethylene <sup>3</sup> for example Teflon™, or stainless steel <sup>3</sup>
<u>HC</u>	polytetrafluoroethylene <sup>4</sup> or stainless steel <sup>4</sup>

Deleted: THC, NMHC

<sup>1</sup> As long as aqueous condensation in storage container is prevented.

<sup>2</sup> Up to 40 °C.

<sup>3</sup> Up to 202 °C.

<sup>4</sup> At (191 ±11) °C.

### 9.3.3. PM sampling

#### 9.3.3.1. Sampling probes

PM probes with a single opening at the end shall be used. PM probes shall be oriented to face directly upstream.

The PM probe may be shielded with a hat that conforms with the requirements in figure 6.8. In this case the pre-classifier described in paragraph 9.3.3.3. shall not be used.

Deleted: 9.3

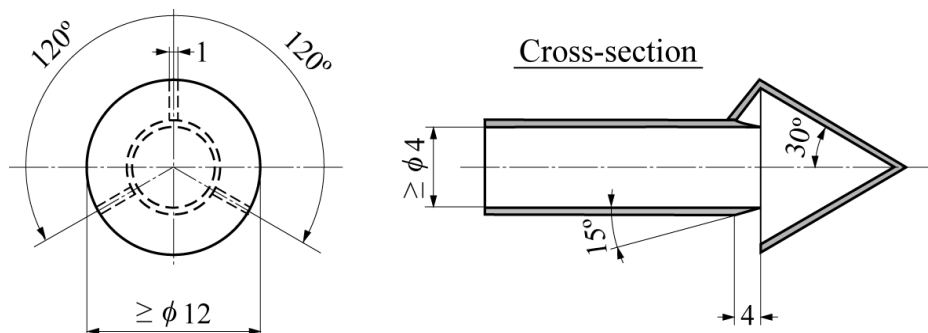


Figure 6.8 – Scheme of a sampling probe with a hat-shaped pre-classifier

Deleted: 9.3

#### 9.3.3.2. Transfer lines

Insulated or heated transfer lines or a heated enclosure are recommended to minimize temperature differences between transfer lines and exhaust constituents. Transfer lines that are inert with respect to PM and are electrically conductive on the inside surfaces shall be used. It is recommended using PM transfer lines made of stainless steel; any material other than stainless steel will be required to meet the same sampling performance as stainless steel. The inside surface of PM transfer lines shall be electrically grounded.

#### 9.3.3.3. Pre-classifier

The use of a PM pre-classifier to remove large-diameter particles is permitted that is installed in the dilution system directly before the filter holder. Only one pre-classifier is permitted. If a hat shaped probe is used (see figure 9.3), the use of a pre-classifier is prohibited.

The PM pre-classifier may be either an inertial impactor or a cyclonic separator. It shall be constructed of stainless steel. The pre-classifier shall be rated to remove at least 50 per cent of PM at an aerodynamic diameter of 10  $\mu\text{m}$  and no more than 1 per cent of PM at an aerodynamic diameter of 1  $\mu\text{m}$  over the range of flow rates for which it is used. The pre-classifier outlet shall be configured with a means of bypassing any PM sample filter so that the pre-classifier flow can be stabilized before starting a test. PM sample filter shall be located within 75 cm downstream of the pre-classifier's exit.

#### 9.3.3.4. Sample filter

The diluted exhaust shall be sampled by a filter that meets the requirements of paragraphs 9.3.3.4.1. to 9.3.3.4.4. during the test sequence.

##### 9.3.3.4.1. Filter specification

All filter types shall have a collection efficiency of at least 99.7 per cent. The sample filter manufacturer's measurements reflected in their product ratings may be used to show this requirement. The filter material shall be either:

- (a) Fluorocarbon (PTFE) coated glass fibre; or
- (b) Fluorocarbon (PTFE) membrane.



If the expected net PM mass on the filter exceeds 400 µg, a filter with a minimum initial collection efficiency of 98 per cent may be used.

#### 9.3.3.4.2. Filter size

The nominal filter size shall be 46.50 mm ± 0.6 mm diameter (at least 37 mm stain diameter). Larger diameter filters may be used with prior agreement of the Approval Authority. Proportionality between filter and stain area is recommended.

#### 9.3.3.4.3. Dilution and temperature control of PM samples

PM samples shall be diluted at least once upstream of transfer lines in case of a CVS system and downstream in case of PFD system (see 9.3.3.2. relating to transfer lines). Sample temperature shall be controlled to a  $320 \pm 5$  K ( $47 \pm 5$  °C) tolerance, as measured anywhere within 200 mm upstream or 200 mm downstream of the PM storage media. The PM sample is intended to be heated or cooled primarily by dilution conditions as specified in paragraph 9.2.1.(a).

#### 9.3.3.4.4. Filter face velocity

A filter face velocity shall be between 0.90 and 1.00 m/s with less than 5 per cent of the recorded flow values exceeding this range. If the total PM mass exceeds 400 µg, the filter face velocity may be reduced. The face velocity shall be measured as the volumetric flow rate of the sample at the pressure upstream of the filter and temperature of the filter face, divided by the filter's exposed area. The exhaust stack or CVS tunnel pressure shall be used for the upstream pressure if the pressure drop through the PM sampler up to the filter is less than 2 kPa.

#### 9.3.3.4.5 Filter holder

To minimize turbulent deposition and to deposit PM evenly on a filter, a 12.5° (from centre) divergent cone angle to transition from the transfer-line inside diameter to the exposed diameter of the filter face shall be used. Stainless steel for this transition shall be used.

9.3.4. PM-stabilization and weighing environments for gravimetric analysis

9.3.4.1. Environment for gravimetric analysis

This section describes the two environments required to stabilize and weigh PM for gravimetric analysis: the PM stabilization environment, where filters are stored before weighing; and the weighing environment, where the balance is located. The two environments may share a common space.

Both the stabilization and the weighing environments shall be kept free of ambient contaminants, such as dust, aerosols, or semi-volatile material that could contaminate PM samples.

9.3.4.2. Cleanliness

The cleanliness of the PM-stabilization environment using reference filters shall be verified, as described in paragraph 8.1.12.1.4.

9.3.4.3. Temperature of the chamber

The temperature of the chamber (or room) in which the particulate filters are conditioned and weighed shall be maintained to within  $295 \pm 1$  K ( $22 \text{ }^\circ\text{C} \pm 1 \text{ }^\circ\text{C}$ ) during all filter conditioning and weighing. The humidity shall be maintained to a dew point of  $282.5 \pm 1$  K ( $9.5 \text{ }^\circ\text{C} \pm 1 \text{ }^\circ\text{C}$ ) and a relative humidity of 45 per cent  $\pm 8$  per cent. If the stabilization and weighing environments are separate, the stabilization environment shall be maintained at a tolerance of  $295 \pm 3$  K ( $22 \text{ }^\circ\text{C} \pm 3 \text{ }^\circ\text{C}$ ).

9.3.4.4. Verification of ambient conditions

When using measurement instruments that meet the specifications in paragraph 9.4 the following ambient conditions shall be verified:

- (a) Dew point and ambient temperature shall be recorded. These values shall be used to determine if the stabilization and weighing environments have remained within the tolerances specified in paragraph 9.3.4.3. of this section for at least 60 min before weighing filters;

- (b) Atmospheric pressure shall be continuously recorded within the weighing environment. An acceptable alternative is to use a barometer that measures atmospheric pressure outside the weighing environment, as long as it can be ensured that the atmospheric pressure at the balance is always at the balance within  $\pm 100$  Pa of the shared atmospheric pressure. A means to record the most recent atmospheric pressure shall be provided when each PM sample is weighed. This value shall be used to calculate the PM buoyancy correction in paragraph 8.1.12.2.

#### 9.3.4.5. Installation of balance

The balance shall be installed as follows:

- (a) Installed on a vibration-isolation platform to isolate it from external noise and vibration;
- (b) Shielded from convective airflow with a static-dissipating draft shield that is electrically grounded.

#### 9.3.4.6. Static electric charge

Static electric charge shall be minimized in the balance environment, as follows:

- (a) The balance is electrically grounded;
- (b) Stainless steel tweezers shall be used if PM samples shall be handled manually;
- (c) Tweezers shall be grounded with a grounding strap, or a grounding strap shall be provided for the operator such that the grounding strap shares a common ground with the balance;
- (d) A static-electricity neutralizer shall be provided that is electrically grounded in common with the balance to remove static charge from PM samples.

### 9.4. Measurement instruments

#### 9.4.1. Introduction

##### 9.4.1.1. Scope

This paragraph specifies measurement instruments and associated system requirements related to emission testing. This includes laboratory instruments for

measuring engine parameters, ambient conditions, flow-related parameters, and emission concentrations (raw or diluted).

#### 9.4.1.2. Instrument types

Any instrument mentioned in this gtr shall be used as described in the gtr itself (see Table 8.2 for measurement quantities provided by these instruments). Whenever an instrument mentioned in this gtr is used in a way that is not specified, or another instrument is used in its place, the requirements for equivalency provisions shall apply as specified in paragraph 5.1.3. Where more than one instrument for a particular measurement is specified, one of them will be identified by the type approval or certifying authority upon application as the reference for showing that an alternative procedure is equivalent to the specified procedure.

#### 9.4.1.3. Redundant systems

Data from multiple instruments to calculate test results for a single test may be used for all measurement instruments described in this paragraph, with prior approval of the type approval or certification authority. Results from all measurements shall be recorded and the raw data shall be retained, as described in paragraph 5.3. This requirement applies whether or not the measurements are actually used in the calculations.

#### 9.4.2. Data recording and control

The test system shall be able to update data, record data and control systems related to operator demand, the dynamometer, sampling equipment, and measurement instruments. Data acquisition and control systems shall be used that can record at the specified minimum frequencies, as shown in table [6.7](#) (this table does not apply to discrete mode testing).

Deleted: 9.2

Applicable Test Protocol Section	Measured Values	Minimum Command and Control Frequency	Minimum Recording Frequency
7.6.	Speed and torque during an engine step-map	1 Hz	1 mean value per step
7.6.	Speed and torque during an engine sweep-map	5 Hz	1 Hz means
7.8.3.	Transient duty cycle reference and feedback speeds and torques	5 Hz	1 Hz means
7.8.2.	Steady-state and ramped-modal duty cycle reference and feedback speeds and torques	1 Hz	1 Hz
7.3.	Continuous concentrations of raw analyzers	N/A	1 Hz
7.3.	Continuous concentrations of dilute analyzers	N/A	1 Hz
7.3.	Batch concentrations of raw or dilute analyzers	N/A	1 mean value per test interval
7.6. 8.2.1.	Diluted exhaust flow rate from a CVS with a heat exchanger upstream of the flow measurement	N/A	1 Hz
7.6. 8.2.1.	Diluted exhaust flow rate from a CVS without a heat exchanger upstream of the flow measurement	5 Hz	1 Hz means
7.6. 8.2.1.	Intake-air or exhaust flow rate (for raw transient measurement)	N/A	1 Hz means
7.6. 8.2.1.	Dilution air if actively controlled	5 Hz	1 Hz means
7.6. 8.2.1.	Sample flow from a CVS with a heat exchanger	1 Hz	1 Hz
7.6. 8.2.1.	Sample flow from a CVS without a heat exchanger	5 Hz	1 Hz mean

Table 6.7 – Data recording and control minimum frequencies

Deleted: 9.2

#### 9.4.3. Performance specifications for measurement instruments

##### 9.4.3.1. Overview

The test system as a whole shall meet all the applicable calibrations, verifications, and test-validation criteria specified in paragraphs 8.1., including the requirements of the linearity check of paragraphs 8.1.4. and 8.2. Instruments shall meet the specifications in table 9.2 for all ranges to be used for testing. Furthermore, any

documentation received from instrument manufacturers showing that instruments meet the specifications in table 9.2 shall be kept.

#### 9.4.3.2. Component requirements

Table [6.8](#) shows the specifications of transducers of torque, speed, and pressure, sensors of temperature and dew point, and other instruments. The overall system for measuring the given physical and/or chemical quantity shall meet the linearity verification in paragraph 8.1.4. For gaseous emissions measurements, analyzers may be used, that have compensation algorithms that are functions of other measured gaseous components, and of the fuel properties for the specific engine test. Any compensation algorithm shall only provide offset compensation without affecting any gain (that is no bias).

Deleted: 9.3

Measurement Instrument	Measured quantity symbol	Complete System Rise time	Recording update frequency	Accuracy <sup>(a)</sup>	Repeatability <sup>(a)</sup>
Engine speed transducer	<i>n</i>	1 s	1 Hz means	2.0 % of pt. or 0.5 % of max	1.0 % of pt. or 0.25 % of max
Engine torque transducer	<i>T</i>	1 s	1 Hz means	2.0 % of pt. or 1.0 % of max	1.0 % of pt. or 0.5 % of max
Fuel flow meter (Fuel totalizer)		5 s (N/A)	1 Hz (N/A)	2.0 % of pt. or 1.5 % of max	1.0 % of pt. or 0.75 % of max
Total diluted exhaust meter (CVS) (With heat exchanger before meter)		1 s (5 s)	1 Hz means (1 Hz)	2.0 % of pt. or 1.5 % of max	1.0 % of pt. or 0.75 % of max
Dilution air, inlet air, exhaust, and sample flow meters		1 s	1 Hz means of 5 Hz samples	2.5 % of pt. or 1.5 % of max	1.25 % of pt. or 0.75 % of max
Continuous gas analyzer raw	<i>x</i>	5 s	2 Hz	2.0 % of pt. or 2.0 % of meas.	1.0 % of pt. or 1.0 % of meas.
Continuous gas analyzer dilute	<i>x</i>	5 s	1 Hz	2.0 % of pt. or 2.0 % of meas.	1.0 % of pt. or 1.0 % of meas.
Continuous gas analyzer	<i>x</i>	5 s	1 Hz	2.0 % of pt. or 2.0 % of meas.	1.0 % of pt. or 1.0 % of meas.

Batch gas analyzer	$x$	N/A	N/A	2.0 % of pt. or 2.0 % of meas.	1.0 % of pt. or 1.0 % of meas.
Gravimetric PM balance	$m_{PM}$	N/A	N/A	See 9.4.11.	0.5 $\mu$ g
Inertial PM balance	$m_{PM}$	5 s	1 Hz	2.0 % of pt. or 2.0 % of meas.	1.0 % of pt. or 1.0 % of meas.
<sup>(a)</sup> Accuracy and repeatability are all determined with the same collected data, as described in §9.4.3., and based on absolute values. "pt." refers to the overall mean value expected at the emission limit ; "max." refers to the peak value expected at the emission limit over the duty cycle , not the maximum of the instrument's range; "meas." refers to the actual mean measured over the duty cycle .					

Table 6.8 – Recommended performance specifications for measurement instruments

Deleted: 9.3



#### 9.4.4. Measurement of engine parameters & ambient conditions

##### 9.4.4.1. Speed and torque sensors

###### 9.4.4.1.1. Application

Measurement instruments for work inputs and outputs during engine operation shall meet the specifications in this paragraph. Sensors, transducers, and meters meeting the specifications in table 9.3 are recommended. Overall systems for measuring work inputs and outputs shall meet the linearity verifications in paragraph 8.1.4.

###### 9.4.4.1.2. Shaft work

Work and power shall be calculated from outputs of speed and torque transducers according to paragraph 9.4.4.1. Overall systems for measuring speed and torque shall meet the calibration and verifications in paragraphs 8.1.7. and 8.1.4.

Torque induced by the inertia of accelerating and decelerating components connected to the flywheel, such as the drive shaft and dynamometer rotor, shall be compensated for as needed, based on good engineering judgment.

##### 9.4.4.2. Pressure transducers, temperature sensors, and dew point sensors

Overall systems for measuring pressure, temperature, and dew point shall meet the calibration in paragraph 8.1.7.

Pressure transducers shall be located in a temperature-controlled environment, or they shall compensate for temperature changes over their expected operating range. Transducer materials shall be compatible with the fluid being measured.

##### 9.4.5. Flow-related measurements

For any type of flow meter (of fuel, intake-air, raw exhaust, diluted exhaust, sample), the flow shall be conditioned as needed to prevent wakes, eddies, circulating flows, or flow pulsations from affecting the accuracy or repeatability of the meter. For some meters, this may be accomplished by using a sufficient length of straight tubing (such as a length equal to at least 10 pipe diameters) or by using specially designed tubing bends, straightening fins, orifice plates (or

pneumatic pulsation dampeners for the fuel flow meter) to establish a steady and predictable velocity profile upstream of the meter.

#### 9.4.5.1 Fuel flow meter

Overall system for measuring fuel flow shall meet the calibration in paragraph 8.1.8.1. In any fuel flow measurement it shall be accounted for any fuel that bypasses the engine or returns from the engine to the fuel storage tank.

#### 9.4.5.2. Intake-air flow meter

Overall system for measuring intake-air flow shall meet the calibration in paragraph 8.1.8.2.

#### 9.4.5.3. Raw exhaust flow meter

##### 9.4.5.3.1. Component requirements

The overall system for measuring raw exhaust flow shall meet the linearity requirements in paragraph 8.1.4. Any raw-exhaust meter shall be designed to appropriately compensate for changes in the raw exhaust's thermodynamic, fluid, and compositional states.

##### 9.4.5.3.2. Flow meter response time

For the purpose of controlling of a partial flow dilution system to extract a proportional raw exhaust sample, a flow meter response time faster than indicated in table 9.3 is required. For partial flow dilution systems with online control, the flow meter response time shall meet the specifications of paragraph 8.2.1.2.

##### 9.4.5.3.3. Exhaust cooling

This paragraph does not apply to cooling of the exhaust gas due to the design of the engine, including, but not limited to, water-cooled exhaust manifolds or turbochargers.

Exhaust cooling upstream of the flow meter is permitted with the following restrictions:

- (a) PM shall not be sampled downstream of the cooling;

- (b) If cooling causes exhaust temperatures above 202 °C to decrease to below 180 °C, HC shall not be sampled downstream of the cooling;
- (c) If cooling causes aqueous condensation, NO<sub>x</sub> shall not be sampled downstream of the cooling unless the cooler meets the performance verification in paragraph 8.1.11.4;
- (d) If cooling causes aqueous condensation before the flow reaches a flow meter,  $T_{\text{dew}}$  and pressure  $p_{\text{total}}$  shall be measured at the flow meter inlet. These values shall be used in emission calculations according to Annexes A.7-A.8.

Deleted: NMHC

#### 9.4.5.4. Dilution air and diluted exhaust flow meters

##### 9.4.5.4.1. Application

Instantaneous diluted exhaust flow rates or total diluted exhaust flow over a test interval shall be determined by using a diluted exhaust flow meter. Raw exhaust flow rates or total raw exhaust flow over a test interval may be calculated from the difference between a diluted exhaust flow meter and a dilution air meter.

##### 9.4.5.4.2. Component requirements

The overall system for measuring diluted exhaust flow shall meet the calibration and verifications in paragraphs 8.1.8.4. and 8.1.8.5. The following meters may be used:

- (a) For constant-volume sampling (CVS) of the total flow of diluted exhaust, a critical-flow venturi (CFV) or multiple critical-flow venturis arranged in parallel, a positive-displacement pump (PDP), a subsonic venturi (SSV), or an ultrasonic flow meter (UFM) may be used. Combined with an upstream heat exchanger, either a CFV or a PDP will also function as a passive flow controller by keeping the diluted exhaust temperature constant in a CVS system;
- (b) For the Partial Flow Dilution (PFD) system the combination of any flow meter with any active flow control system to maintain proportional sampling of exhaust constituents may be used. The total flow of diluted exhaust, or one or more sample flows, or a combination of these flow controls may be controlled to maintain proportional sampling.

For any other dilution system, a laminar flow element, an ultrasonic flow meter, a subsonic venturi, a critical-flow venturi or multiple critical-flow venturis arranged in parallel, a positive-displacement meter, a thermal-mass meter, an averaging Pitot tube, or a hot-wire anemometer may be used.

#### 9.4.5.4.3. Exhaust cooling

Diluted exhaust upstream of a dilute flow meter may be cooled, as long as all the following provisions are observed:

- (a) PM shall not be sampled downstream of the cooling;
- (b) If cooling causes exhaust temperatures above 202 °C to decrease to below 180 °C, HC shall not be sampled downstream of the cooling;
- (c) If cooling causes aqueous condensation, NO<sub>x</sub> shall not be sampled downstream of the cooling unless the cooler meets the performance verification in paragraph 8.1.11.4;
- (d) If cooling causes aqueous condensation before the flow reaches a flow meter, dew point,  $T_{\text{dew}}$  and pressure  $p_{\text{total}}$  shall be measured at the flow meter inlet. These values shall be used in emission calculations according Annexes A.7-A.8.

Deleted: NMHC

#### 9.4.5.5. Sample flow meter for batch sampling

A sample flow meter shall be used to determine sample flow rates or total flow sampled into a batch sampling system over a test interval. The difference between two flow meters may be used to calculate sample flow into a dilution tunnel e.g. for partial flow dilution PM measurement and secondary dilution flow PM measurement. Specifications for differential flow measurement to extract a proportional raw exhaust sample is given in paragraph 8.1.8.6.1. and the calibration of differential flow measurement is given in paragraph 8.1.8.6.2.

Overall system for the sample flow meter shall meet the calibration in paragraph 8.1.8.

#### 9.4.5.6. Gas divider

A gas divider may be used to blend calibration gases.

A gas divider shall be used that blends gases to the specifications of paragraph 9.5.1. and to the concentrations expected during testing. Critical-flow gas dividers, capillary-tube gas dividers, or thermal-mass-meter gas dividers may be used. Viscosity corrections shall be applied as necessary (if not done by gas divider internal software) to appropriately ensure correct gas division. The gas-divider system shall meet the linearity verification in paragraph 8.1.4.5. Optionally, the blending device may be checked with an instrument which by nature is linear, e.g. using NO gas with a CLD. The span value of the instrument shall be adjusted with the span gas directly connected to the instrument. The gas

divider shall be checked at the settings used and the nominal value shall be compared to the measured concentration of the instrument.

#### 9.4.6. CO and CO<sub>2</sub> measurements

A Non-dispersive infrared (NDIR) analyzer shall be used to measure CO and CO<sub>2</sub> concentrations in raw or diluted exhaust for either batch or continuous sampling.

The NDIR-based system shall meet the calibration and verifications in paragraph 8.1.8.1.

#### 9.4.7. Hydrocarbon measurements

##### 9.4.7.1. Flame-ionization detector

###### 9.4.7.1.1. Application

A heated flame-ionization detector (FID) analyzer shall be used to measure hydrocarbon concentrations in raw or diluted exhaust for either batch or continuous sampling. Hydrocarbon concentrations shall be determined on a carbon number basis of one, C<sub>1</sub>. Methane and non-methane hydrocarbon values shall be determined as described in paragraph 9.4.7.1.4. Heated FID analyzers shall maintain all surfaces that are exposed to emissions at a temperature of 191 ±11 °C.

###### 9.4.7.1.2. Component requirements

The FID-based system for measuring THC or CH<sub>4</sub> shall meet all of the verifications for hydrocarbon measurement in paragraph 8.1.10.

###### 9.4.7.1.3. FID fuel and burner air

FID fuel and burner air shall meet the specifications of paragraph 9.5.1. The FID fuel and burner air shall not mix before entering the FID analyzer to ensure that the FID analyzer operates with a diffusion flame and not a premixed flame.

###### 9.4.7.1.4. [Reserved](#)

###### 9.4.7.1.5. [Reserved](#)

**Deleted:** Methane

**Deleted:** ¶

FID analyzers measure total hydrocarbons (THC). To determine non-methane hydrocarbons (NMHC), methane, CH<sub>4</sub>, shall be quantified either with a non-methane cutter and a FID analyzer as described in paragraph 9.4.7.2., or

**Moved down [3]:** with

**Deleted:** a gas chromatograph as described in paragraph 9.4.7.3. For a FID analyzer used to determine NMHC, its response factor to CH<sub>4</sub>, *RF*<sub>CH<sub>4</sub></sub>, shall be determined as described in paragraph 8.1.10.1. NMHC-related calculations are described in Annexes A.7-A.8.¶

**Deleted:** Assumption on methane

**Deleted:** ¶

. Instead of measuring methane, it is allowed for diesel engines to assume that 2 per cent of measured total hydrocarbons is methane, as described in Annexes A.7-A.8.¶

This paragraph does not apply for spark ignition engines and engines operated on natural gas or bio-methane.¶

9.4.7.2. [Reserved](#)

**Deleted:** Non-methane cutter

9.4.8. NO<sub>x</sub> measurements

Two measurement instruments are specified for NO<sub>x</sub> measurement and either instrument may be used provided it meets the criteria specified in paragraph 9.4.8.1. or 9.4.8.2., respectively. The chemiluminescent detector shall be used as the reference procedure for comparison with any proposed alternate measurement procedure under paragraph 5.3.

9.4.8.1. Chemiluminescent detector

9.4.8.1.1. Application

A chemiluminescent detector (CLD) coupled with an NO<sub>2</sub>-to-NO converter is used to measure NO<sub>x</sub> concentration in raw or diluted exhaust for batch or continuous sampling.

9.4.8.1.2. Component requirements

The CLD-based system shall meet the quench verification in paragraph 8.1.11.1. A heated or unheated CLD may be used, and a CLD that operates at atmospheric pressure or under a vacuum may be used.

9.4.8.1.3. NO<sub>2</sub>-to-NO converter

An internal or external NO<sub>2</sub>-to-NO converter that meets the verification in paragraph 8.1.11.5. shall be placed upstream of the CLD, while the converter shall be configured with a bypass to facilitate this verification.

9.4.8.1.4. Humidity effects

All CLD temperatures shall be maintained to prevent aqueous condensation. To remove humidity from a sample upstream of a CLD, one of the following configurations shall be used:

- (a) A CLD connected downstream of any dryer or chiller that is downstream of an NO<sub>2</sub>-to-NO converter that meets the verification in paragraph 8.1.11.5;

**Deleted:** ¶  
9.4.7.2.1. Application ¶  
¶  
. A non-methane cutter may be used to measure CH<sub>4</sub> with a FID analyzer. A non-methane cutter oxidizes all non-methane hydrocarbons to CO<sub>2</sub> and H<sub>2</sub>O. A non-methane cutter may be used for raw or diluted exhaust for batch or continuous sampling. ¶  
¶  
9.4.7.2.2. System performance ¶  
¶  
. Non-methane-cutter performance shall be determined as described in paragraph 8.1.10.3. and the results shall be used to calculate NMHC emission in A.7. and A.8. ¶  
¶  
9.4.7.2.3. Configuration ¶  
¶  
. The non-methane cutter shall be configured with a bypass line for the verification described in paragraph 8.1.10.3. ¶  
¶  
9.4.7.2.4. Optimization ¶  
¶  
. A non-methane cutter may be optimised to maximize the penetration of CH<sub>4</sub> and the oxidation of all other hydrocarbons. A sample may be humidified and a sample may be diluted with purified air or oxygen (O<sub>2</sub>) upstream of non-methane cutter to optimize its performance. Any sample humidification and dilution shall be accounted for in emission calculations. ¶  
¶  
9.4.7.3. Gas chromatograph ¶  
¶  
. Application: A gas chromatograph may be used to measure CH<sub>4</sub> concentrations of diluted exhaust for batch sampling. While also a non-methane cutter may be used to measure CH<sub>4</sub>, as described in paragraph 9.4.7.2. a reference procedure based on a gas chromatograph shall be used for comparison with any proposed alternate measurement procedure under paragraph 5.1.3.

- (b) A CLD connected downstream of any dryer or thermal chiller that meets the verification in paragraph 8.1.11.4.

#### 9.4.8.1.5. Response time

A heated CLD may be used to improve CLD response time.

#### 9.4.8.2. Non-dispersive ultraviolet analyzer

##### 9.4.8.2.1. Application

A non-dispersive ultraviolet (NDUV) analyzer is used to measure NO<sub>x</sub> concentration in raw or diluted exhaust for batch or continuous sampling.

##### 9.4.8.2.2. Component requirements

The NDUV-based system shall meet the verifications in paragraph 8.1.11.3.

##### 9.4.8.2.3. NO<sub>2</sub>-to-NO converter

If the NDUV analyzer measures only NO, an internal or external NO<sub>2</sub>-to-NO converter that meets the verification in paragraph 8.1.11.5, shall be placed upstream of the NDUV analyzer. The converter shall be configured with a bypass to facilitate this verification.

Deleted: .

##### 9.4.8.2.4. Humidity effects

The NDUV temperature shall be maintained to prevent aqueous condensation, unless one of the following configurations is used:

- (a) An NDUV shall be connected downstream of any dryer or chiller that is downstream of an NO<sub>2</sub>-to-NO converter that meets the verification in paragraph 8.1.11.5;
- (b) An NDUV shall be connected downstream of any dryer or thermal chiller that meets the verification in paragraph 8.1.11.4.

#### 9.4.9. O<sub>2</sub> measurements

A paramagnetic detection (PMD) or magneto pneumatic detection (MPD) analyzer shall be used to measure O<sub>2</sub> concentration in raw or diluted exhaust for batch or continuous sampling.

9.4.10. Air-to-fuel ratio measurements

A Zirconia (ZrO<sub>2</sub>) analyser may be used to measure air-to-fuel ratio in raw exhaust for continuous sampling. O<sub>2</sub> measurements with intake air or fuel flow measurements may be used to calculate exhaust flow rate according to Annexes A.7-A.8.

9.4.11. PM measurements with gravimetric balance

A balance shall be used to weigh net PM collected on sample filter media.

The minimum requirement on the balance resolution shall be equal or lower than the repeatability of 0.5 microgram recommended in table 9.3. If the balance uses internal calibration weights for routine spanning and linearity verifications, the calibration weights shall meet the specifications in paragraph 9.5.2.

The balance shall be configured for optimum settling time and stability at its location.

9.4.12. Ammonia (NH<sub>3</sub>) measurements

A FTIR (Fourier transform infrared) analyser, NDUV or laser infrared analyser may be used in accordance with the instrument supplier's instructions.

9.5. Analytical gases and mass standards

9.5.1. Analytical gases

Analytical gases shall meet the accuracy and purity specifications of this section.

9.5.1.1. Gas specifications

The following gas specifications shall be considered:

- (a) Purified gases shall be used to zero measurement instruments and to blend with calibration gases. Gases with contamination no higher than the highest



of the following values in the gas cylinder or at the outlet of a zero-gas generator shall be used:

- (i) 2 per cent contamination, measured relative to the mean concentration expected at the standard. For example, if a CO concentration of 100.0  $\mu\text{mol/mol}$  is expected, then it would be allowed to use a zero gas with CO contamination less than or equal to 2.000  $\mu\text{mol/mol}$ ;
- (ii) Contamination as specified in table [6.9](#), applicable for raw or dilute measurements;
- (iii) Contamination as specified in table [6.10](#), applicable for raw measurements

**Deleted:** .4

**Deleted:** 9.5

Table 6.9

Deleted: .4

**Contamination limits, applicable for raw or dilute measurements [ $\mu\text{mol/mol} = \text{ppm}$  (3.2.)]**

<i>Constituent</i>	<i>Purified Synthetic Air</i> <sup>a</sup>	<i>Purified N<sub>2</sub></i> <sup>a</sup>
THC (C <sub>1</sub> equivalent)	$\leq 0.05 \mu\text{mol/mol}$	$\leq 0.05 \mu\text{mol/mol}$
CO	$\leq 1 \mu\text{mol/mol}$	$\leq 1 \mu\text{mol/mol}$
CO <sub>2</sub>	$\leq 10 \mu\text{mol/mol}$	$\leq 10 \mu\text{mol/mol}$
O <sub>2</sub>	0.205 to 0.215 mol/mol	$\leq 2 \mu\text{mol/mol}$
NO <sub>x</sub>	$\leq 0.02 \mu\text{mol/mol}$	$\leq 0.02 \mu\text{mol/mol}$

<sup>a</sup> It is not required that these levels of purity are internationally and/or nationally recognized standards traceable."

Table 6.10

Deleted: 9.5

**Contamination limits applicable for raw measurements [ $\mu\text{mol/mol} = \text{ppm}$  (3.2.)]**

Deleted: Table 9.5:

<i>Constituent</i>	<i>Purified Synthetic Air</i> <sup>a</sup>	<i>Purified N<sub>2</sub></i> <sup>a</sup>
THC (C <sub>1</sub> equivalent)	$\leq 1 \mu\text{mol/mol}$	$\leq 1 \mu\text{mol/mol}$
CO	$\leq 1 \mu\text{mol/mol}$	$\leq 1 \mu\text{mol/mol}$
CO <sub>2</sub>	$\leq 400 \mu\text{mol/mol}$	$\leq 400 \mu\text{mol/mol}$
O <sub>2</sub>	0.18 to 0.21 mol/mol	-
NO <sub>x</sub>	$\leq 0.1 \mu\text{mol/mol}$	$\leq 0.1 \mu\text{mol/mol}$

<sup>a</sup> It is not required that these levels of purity are international and/or national recognized standards traceable.

<sup>a</sup> It is not required that these levels of purity are international and/or national recognized standards traceable.

- (b) The following gases shall be used with a FID analyzer:
- (i) FID fuel shall be used with an H<sub>2</sub> concentration of (0.39 to 0.41) mol/mol, balance He or N<sub>2</sub>. The mixture shall not contain more than 0.05  $\mu\text{mol/mol}$  THC;
  - (ii) FID burner air shall be used that meets the specifications of purified air in paragraph (a) of this paragraph;
  - (iii) FID zero gas. Flame-ionization detectors shall be zeroed with purified gas that meets the specifications in paragraph (a) of this paragraph, except that the purified gas O<sub>2</sub> concentration may be any value;

- (iv) FID propane span gas. The THC FID shall be spanned and calibrated with span concentrations of propane, C<sub>3</sub>H<sub>8</sub>. It shall be calibrated on a carbon number basis of one (C<sub>1</sub>);
- (v) FID methane span gas. If a CH<sub>4</sub> FID is always spanned and calibrated with a non-methane cutter, then the FID shall be spanned and calibrated with span concentrations of methane, CH<sub>4</sub>. It shall be calibrated on a carbon number basis of one (C<sub>1</sub>);
- (c) The following gas mixtures shall be used, with gases traceable within ±1.0 per cent of the international and/or national recognized standards true value or of other gas standards that are approved:
  - (i) CH<sub>4</sub>, balance purified synthetic air and/or N<sub>2</sub> (as applicable);
  - (ii) C<sub>2</sub>H<sub>6</sub>, balance purified synthetic air and/or N<sub>2</sub> (as applicable);
  - (iii) C<sub>3</sub>H<sub>8</sub>, balance purified synthetic air and/or N<sub>2</sub> (as applicable);
  - (iv) CO, balance purified N<sub>2</sub>;
  - (v) CO<sub>2</sub>, balance purified N<sub>2</sub>;
  - (vi) NO, balance purified N<sub>2</sub>;
  - (vii) NO<sub>2</sub>, balance purified synthetic air;
  - (viii) O<sub>2</sub>, balance purified N<sub>2</sub>;
  - (ix) C<sub>3</sub>H<sub>8</sub>, CO, CO<sub>2</sub>, NO, balance purified N<sub>2</sub>;
  - (x) C<sub>3</sub>H<sub>8</sub>, CH<sub>4</sub>, CO, CO<sub>2</sub>, NO, balance purified N<sub>2</sub>.
- (d) Gases for species other than those listed in paragraph (c) of this paragraph may be used (such as methanol in air, which may be used to determine response factors), as long as they are traceable to within ±3.0 per cent of the international and/or national recognized standards true value, and meet the stability requirements of paragraph 9.5.1.2;
- (e) Own calibration gases may be generated using a precision blending device, such as a gas divider, to dilute gases with purified N<sub>2</sub> or purified synthetic air. If the gas dividers meet the specifications in paragraph 9.4.5.6, and the gases being blended meet the requirements of paragraphs (a) and (c) of this paragraph, the resulting blends are considered to meet the requirements of this paragraph 9.5.1.1.

#### 9.5.1.2. Concentration and expiration date

The concentration of any calibration gas standard and its expiration date specified by the gas supplier shall be recorded.

- (a) No calibration gas standard may be used after its expiration date, except as allowed by paragraph (b) of this paragraph.
- (b) Calibration gases may be relabelled and used after their expiration date if it is approved in advance by type approval or certification authority.

9.5.1.3. Gas transfer

Gases shall be transferred from their source to analyzers using components that are dedicated to controlling and transferring only those gases.

The shelf life of all calibration gases shall be respected. The expiration date of the calibration gases stated by the manufacturer shall be recorded.

9.5.2. Mass standards

PM balance calibration weights that are certified as international and/or national recognized standards-traceable within 0.1 per cent uncertainty shall be used. Calibration weights may be certified by any calibration lab that maintains international and/or national recognized standards-traceability. It shall be made sure that the lowest calibration weight has no greater than ten times the mass of an unused PM-sample medium. The calibration report shall also state the density of the weights.

## Appendix 1

### Particle number emissions measurement equipment

#### 1 Measurement test procedure

##### 1.1 Sampling

Deleted: 8.3.1.

Particle number emissions shall be measured by continuous sampling from either a partial flow dilution system, as described in paragraph 9.2.3 of Annex VI or a full flow dilution system as described in paragraph 9.2.2 of Annex VI.

Deleted: Appendix 2 to this annex,

Deleted: A

Deleted: 2.1. and A.2.2.2.

Deleted: Appendix 2 to this annex,

Deleted: A

Deleted: .3. and A.2.2.4

Deleted: 10.1.1. .

Deleted: Appendix 2 to this annex, paragraphs A.2.2.2. or A.2.2.4.

##### 1.1.1 Diluent filtration

Diluent used for both the primary and, where applicable, secondary dilution of the exhaust in the dilution system shall be passed through filters meeting the High-Efficiency Particulate Air (HEPA) filter requirements defined in Article 2(31). The diluent may optionally be charcoal scrubbed before being passed to the HEPA filter to reduce and stabilize the hydrocarbon concentrations in the diluent. It is recommended that an additional coarse particle filter is situated before the HEPA filter and after the charcoal scrubber, if used.

##### 1.2 Compensating for particle number sample flow – full flow dilution systems

Deleted: 10.2.

To compensate for the mass flow extracted from the dilution system for particle number sampling the extracted mass flow (filtered) shall be returned to the dilution system. Alternatively, the total mass flow in the dilution system may be mathematically corrected for the particle number sample flow extracted. Where the total mass flow extracted from the dilution system for the sum of particle number sampling and particulate mass sampling is less than 0.5 per cent of the total dilute exhaust gas flow in the dilution tunnel (med) this correction, or flow return, may be neglected.

##### 1.3 Compensating for particle number sample flow – partial flow dilution systems

Deleted: 10.3. .

Deleted: 10.3.1.

1.3.1 For partial flow dilution systems the mass flow extracted from the dilution system for particle number sampling shall be accounted for in controlling the proportionality of sampling. This shall be achieved either by feeding the particle number sample flow back into the dilution system upstream of the flow measuring device or by mathematical correction as outlined in paragraph 1.3.2. In the case of total sampling type partial flow dilution systems, the mass flow extracted for particle number sampling shall also be corrected for in the particulate mass calculation as outlined in paragraph 1.3.3.

Deleted: 10

Deleted: 10

Deleted: 10.3.2. .

1.3.2 The instantaneous exhaust gas flow rate into the dilution system ( $q_{mp}$ ), used for controlling the proportionality of sampling, shall be corrected according to one of the following methods:

(a) In the case where the extracted particle number sample flow is discarded, equation 83 in paragraph 9.4.6.2, shall be replaced by the following:

$$q_{mp} = q_{mdew} - q_{mdw} + q_{ex} \quad (6-28)$$

Deleted: .

Deleted: (92

Where:

Deleted: .

$q_{mdew}$  is the diluted exhaust mass flow rate, kg/s,

$q_{mdw}$  is the dilution air mass flow rate, kg/s,

$q_{ex}$  is the particle number sample mass flow rate, kg/s.

Deleted:  $q_{mp}$  = sample flow of exhaust gas into partial flow dilution system, kg/s,¶

Deleted: = .

Deleted: =

Deleted: = .

Deleted:

The  $q_{ex}$  signal sent to the partial flow system controller shall be accurate to within 0.1 per cent of  $q_{mdew}$  at all times and should be sent with frequency of at least 1 Hz.

(b) In the case where the extracted particle number sample flow is fully or partially discarded, but an equivalent flow is fed back to the dilution system upstream of the flow measurement device, equation 83 in paragraph 9.4.6.2, shall be replaced by the following:

$$q_{mp} = q_{mdew} - q_{mdw} + q_{ex} - q_{sw} \quad (6-29)$$

Deleted: .

Deleted: (93)

Where:

$q_{mdew}$  is the diluted exhaust mass flow rate, kg/s,

$q_{mdw}$  is the dilution air mass flow rate, kg/s,

$q_{ex}$  is the particle number sample mass flow rate, kg/s,

$q_{sw}$  is the mass flow rate fed back into dilution tunnel to compensate for particle number sample extraction, kg/s.

Deleted:  $q_{mp}$  = sample flow of exhaust gas into partial flow dilution system, kg/s,¶

Deleted: =

Deleted: = .

Deleted: =

Deleted: .

Deleted: =

The difference between  $q_{ex}$  and  $q_{sw}$  sent to the partial flow system controller shall be accurate to within 0.1 per cent of  $q_{mdew}$  at all times. The signal (or signals) should be sent with frequency of at least 1 Hz.

### 1.3.3 Correction of PM measurement

Deleted: 10.3.3 .

When a particle number sample flow is extracted from a total sampling partial flow dilution system, the mass of particulates ( $m_{PM}$ ) calculated in paragraph 8.4.3.2.1, or 8.4.3.2.2, shall be corrected as follows to account for the flow extracted. This correction is required even where filtered extracted flow is fed back into the partial flow dilution systems.

$$m_{PM,corr} = m_{PM} \times \frac{m_{sed}}{(m_{sed} - m_{ex})} \quad (6-30)$$

Deleted: .

Deleted: .

Deleted: (94)

Where:

$m_{PM}$  is the mass of particulates determined according to paragraph 8.4.3.2.1. or 8.4.3.2.2., g/test,

$m_{sed}$  is the total mass of diluted exhaust gas passing through the dilution tunnel, kg,

$m_{ex}$  is the total mass of diluted exhaust gas extracted from the dilution tunnel for particle number sampling, kg.

Deleted:

Deleted:  $m_{corr}$  = mass of particulates corrected for extraction of particle number sample flow, g/test,¶  
 $m_{PM}$  = .

Deleted:

Deleted: = .

Deleted:

Deleted: = .

Deleted: 10.3.4.

### 1.3.4 Proportionality of partial flow dilution sampling

For particle number measurement, exhaust mass flow rate, determined according to any of the methods described in paragraphs 8.4.1.3, to 8.4.1.7, is used for controlling the partial flow dilution system to take a sample proportional to the

Deleted: .

Deleted: .

exhaust mass flow rate. The quality of proportionality shall be checked by applying a regression analysis between sample and exhaust flow in accordance with paragraph 9.4.6.1.

### 1.3.5 Particle number calculation

Determination and calculation of PN are laid down in Appendix 5 to Annex VII.

## 2 Measurement equipment

### 2.1 Specification

#### 2.1.1 System overview

2.1.1.1 The particle sampling system shall consist of a probe or sampling point extracting a sample from a homogeneously mixed flow in a dilution system as described in paragraph 9.2.2 or 9.2.3, a volatile particle remover (VPR) upstream of a particle number counter (PNC) and suitable transfer tubing.

2.1.1.2 It is recommended that a particle size pre-classifier (e.g. cyclone, impactor, etc.) be located prior to the inlet of the VPR. However, a sample probe acting as an appropriate size-classification device, such as that shown in figure 6-8, is an acceptable alternative to the use of a particle size pre-classifier. In the case of partial flow dilution systems it is acceptable to use the same pre-classifier for particulate mass and particle number sampling, extracting the particle number sample from the dilution system downstream of the pre-classifier. Alternatively separate pre-classifiers may be used, extracting the particle number sample from the dilution system upstream of the particulate mass pre-classifier.

#### 2.1.2 General requirements

2.1.2.1 The particle sampling point shall be located within a dilution system.

The sampling probe tip or particle sampling point and particle transfer tube (PTT) together comprise the particle transfer system (PTS). The PTS conducts the sample from the dilution tunnel to the entrance of the VPR. The PTS shall meet the following conditions:

In the case of full flow dilution systems and partial flow dilution systems of the fractional sampling type (as described in paragraph 9.2.3) the sampling probe shall be installed near the tunnel centre line, 10 to 20 tunnel diameters downstream of the gas inlet, facing upstream into the tunnel gas flow with its axis at the tip parallel to that of the dilution tunnel. The sampling probe shall be positioned within the dilution tract so that the sample is taken from a homogeneous diluent/exhaust mixture.

In the case of partial flow dilution systems of the total sampling type (as described in paragraph 9.2.3) the particle sampling point or sampling probe shall be located in the particulate transfer tube, upstream of the particulate filter holder, flow measurement device and any sample/bypass bifurcation point. The sampling point or sampling probe shall be positioned so that the sample is taken from a homogeneous diluent/exhaust mixture. The dimensions of the particle sampling probe should be sized not to interfere with the operation of the partial flow dilution system.

Deleted: 10.4.

Deleted: particle numbers¶

Moved down [4]: Time alignment¶

Deleted: the particle number sampl¶

Moved down [20]:  $\dot{N}_i =$  ¶

Moved down [21]: ¶

Moved down [22]:  $WF_i$  ¶

Moved down [24]: <#>Rounding ¶

Moved down [25]: The final NRT¶

Deleted: <#>10.4.2. ¶

Moved down [5]: <#>Determinati¶

Moved down [6]: calibration¶

Deleted:  $\bar{c}_s =$  . average ¶

Moved down [7]: Where:¶

Moved down [19]: <#>Calculatio¶

Moved down [13]: ¶

Moved down [8]: <#>Determinati¶

Moved down [9]: ¶

Moved down [23]: Where:¶

Moved down [14]: <#>Weighted¶

Moved down [10]: calibrati¶

Moved down [11]: Where:¶

Moved down [12]: <#>Calculatio¶

Moved down [16]: ¶

Moved down [17]: Where:¶

Moved down [18]: or in the¶

Moved down [26]: <#>Determina¶

Moved down [27]: <#>At the eng¶

Moved down [28]: <#>Subtractio¶

Deleted: Where particle number¶

Deleted:  $c_{s,i} =$  a discrete ¶

Deleted: Where particle number¶

Deleted: = number of particles ¶

Deleted:  $\bar{c}_s =$  . average ¶

Deleted:  $c_{s,i} =$  a discrete ¶

Deleted:  $e = \frac{N}{W_{act}}$  .(99) ¶

Deleted:  $e =$  . is the number of ¶

Deleted:  $e = k_r \left( \frac{0.1 \times N_{cold}}{0.1 \times W_{act}} \right)$  ¶

Deleted:  $e = k_r + \left( \frac{0.1 \times N_c}{0.1 \times W} \right)$  ¶

Deleted:  $N_{cold} =$  . is the total ¶

Deleted: <#>10.4.4.2. ¶

Deleted: The specific emissions  $e$  ¶

Deleted: ¶

Deleted:  $P_i =$  engine power f¶

Deleted:  $\bar{N} =$  . mean emission ¶

Deleted:  $N_i =$  . number of partic¶

Deleted: ¶

Deleted: <#>10.5. ¶

Deleted: <#>10.5.1. ¶

Sample gas drawn through the PTS shall meet the following conditions:

In the case of full flow dilution systems, it shall have a flow Reynolds number (Re) of < 1700;

Deleted: 1,700

In the case of partial flow dilution systems, it shall have a flow Reynolds number (Re) of < 1700 in the PTT i.e. downstream of the sampling probe or point;

Deleted: 1,700

It shall have a residence time in the PTS of  $\leq 3$  seconds.

Deleted:

Any other sampling configuration for the PTS for which equivalent particle penetration at 30 nm can be demonstrated will be considered acceptable.

The outlet tube (OT) conducting the diluted sample from the VPR to the inlet of the PNC shall have the following properties:

It shall have an internal diameter of  $\geq 4$  mm;

Sample Gas flow through the OT shall have a residence time of  $\leq 0.8$  second.

Any other sampling configuration for the OT for which equivalent particle penetration at 30 nm can be demonstrated will be considered acceptable.

2.1.2.2 The VPR shall include devices for sample dilution and for volatile particle removal.

Deleted: A.8.1.2.2 .

Deleted: A.8.1.2.3.

2.1.2.3 All parts of the dilution system and the sampling system from the exhaust pipe up to the PNC, which are in contact with raw and diluted exhaust gas, shall be designed to minimize deposition of the particles. All parts shall be made of electrically conductive materials that do not react with exhaust gas components, and shall be electrically grounded to prevent electrostatic effects.

2.1.2.4 The particle sampling system shall incorporate good aerosol sampling practice that includes the avoidance of sharp bends and abrupt changes in cross-section, the use of smooth internal surfaces and the minimisation of the length of the sampling line. Gradual changes in the cross-section are permissible.

Deleted: A.8.1.2.4 .

### 2.1.3 Specific requirements

Deleted: A.8.1.3.

2.1.3.1 The particle sample shall not pass through a pump before passing through the PNC.

Deleted: A.8.1.3.1 .

2.1.3.2 A sample pre-classifier is recommended.

Deleted: A.8.1.3.2.

2.1.3.3 The sample preconditioning unit shall:

Deleted: A.8.1.3.3 .

2.1.3.3.1 Be capable of diluting the sample in one or more stages to achieve a particle number concentration below the upper threshold of the single particle count mode of the PNC and a gas temperature below 35 °C at the inlet to the PNC;

Deleted: A.8.1.3.3.1.

2.1.3.3.2 Include an initial heated dilution stage which outputs a sample at a temperature of  $\geq 150$  °C and  $\leq 400$  °C, and dilutes by a factor of at least 10;

Deleted: A.8.1.3.3.2 .

2.1.3.3.3 Control heated stages to constant nominal operating temperatures, within the range specified in paragraph 2.1.4.3.2, to a tolerance of  $\pm 10$  °C. Provide an indication of whether or not heated stages are at their correct operating temperatures;

Deleted: A.8.1.3.3.3.

Deleted: A.8

Deleted: 3.

2.1.3.3.4 Achieve a particle concentration reduction factor ( $f_r(d_i)$ ), as defined in paragraph 2.2.2.2 below, for particles of 30 nm and 50 nm electrical mobility diameters, that is no more than 30 per cent and 20 per cent respectively higher, and

Deleted: ..

Deleted: A.8.1.3.3.4 .

Deleted: A.8.



no more than 5 per cent lower than that for particles of 100 nm electrical mobility diameter for the VPR as a whole;

2.1.3.3.5 Also achieve > 99.0 per cent vaporisation of 30 nm tetracontane ( $\text{CH}_3(\text{CH}_2)_{38}\text{CH}_3$ ) particles, with an inlet concentration of  $\geq 10000 \text{ cm}^{-3}$ , by means of heating and reduction of partial pressures of the tetracontane.

Deleted: A.8.1.3.3.5.

Deleted: 10,000

2.1.3.4 The PNC shall:

Deleted: A.8.1.3.4. .

2.1.3.4.1 Operate under full flow operating conditions;

Deleted: A.8.1.3.4.1.

Deleted: A.8.1.3.4.2. .

2.1.3.4.2 Have a counting accuracy of  $\pm 10$  per cent across the range  $1 \text{ cm}^{-3}$  to the upper threshold of the single particle count mode of the PNC against a traceable standard. At concentrations below  $100 \text{ cm}^{-3}$  measurements averaged over extended sampling periods may be required to demonstrate the accuracy of the PNC with a high degree of statistical confidence;

2.1.3.4.3 Have a readability of at least  $0.1 \text{ particle cm}^{-3}$  at concentrations below  $100 \text{ cm}^{-3}$ ;

Deleted: A.8.1.3.4.3.

2.1.3.4.4 Have a linear response to particle concentrations over the full measurement range in single particle count mode;

Deleted: A.8.1.3.4.4. .

2.1.3.4.5 Have a data reporting frequency equal to or greater than 0.5 Hz;

Deleted: A.8.1.3.4.5.

2.1.3.4.6 Have a  $t_{90}$  response time over the measured concentration range of less than 5 s;

Deleted: A.8.1.3.4.6. .

2.1.3.4.7 Incorporate a coincidence correction function up to a maximum 10 per cent correction, and may make use of an internal calibration factor as determined in paragraph 2.2.1.3, but shall not make use of any other algorithm to correct for or define the counting efficiency;

Deleted: A.8.1.3.4.7.

Deleted: A.8

Deleted: ..

Deleted: A.8.1.3.4.8. .

2.1.3.4.8 Have counting efficiencies at particle sizes of 23 nm ( $\pm 1$  nm) and 41 nm ( $\pm 1$  nm) electrical mobility diameter of 50 per cent ( $\pm 12$  per cent) and > 90 per cent respectively. These counting efficiencies may be achieved by internal (for example; control of instrument design) or external (for example; size pre-classification) means;

2.1.3.4.9 If the PNC makes use of a working liquid, it shall be replaced at the frequency specified by the instrument manufacturer.

Deleted: A.8.1.3.4.9.

2.1.3.5 Where they are not held at a known constant level at the point at which PNC flow rate is controlled, the pressure and/or temperature at inlet to the PNC shall be measured and reported for the purposes of correcting particle concentration measurements to standard conditions.

Deleted: A.8.1.3.5. .

2.1.3.6 The sum of the residence time of the PTS, VPR and OT plus the  $t_{90}$  response time of the PNC shall be no greater than 20 s.

Deleted: A.8.1.3.6.

2.1.3.7 The transformation time of the entire particle number sampling system (PTS, VPR, OT and PNC) shall be determined by aerosol switching directly at the inlet of the

Deleted: A.8.1.3.7. .

PTS. The aerosol switching shall be done in less than 0.1 s. The aerosol used for the test shall cause a concentration change of at least 60 per cent full scale (FS).

Deleted:

The concentration trace shall be recorded. For time alignment of the particle number concentration and exhaust flow signals, the transformation time is defined as the time from the change ( $t_0$ ) until the response is 50 per cent of the final reading ( $t_{50}$ ).

Deleted: A.8.1.4. .

#### 2.1.4 Recommended system description

The following paragraph contains the recommended practice for measurement of particle number. However, any system meeting the performance specifications in paragraphs 2.1.2 and 2.1.3 is acceptable.

Figures 6.9 and 6.10 are schematic drawings of the recommended particle sampling system configures for partial and full flow dilution systems respectively.

Deleted: A.8

Deleted: .

Deleted: A.8

Deleted: .


Deleted: 19

Deleted: 20

Deleted: 19

Figure 6.9


Schematic of recommended particle sampling system – Partial flow sampling

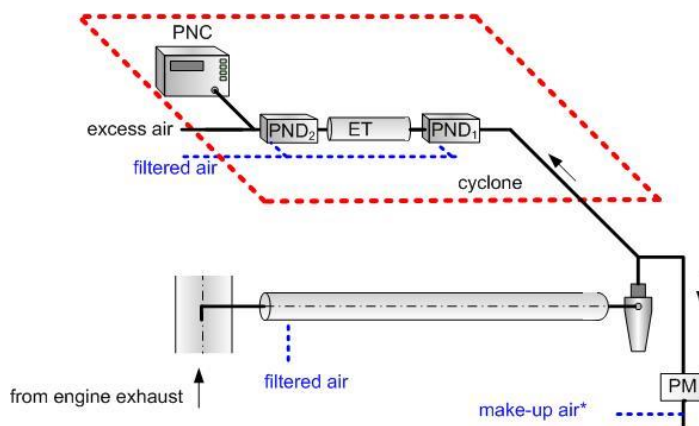

\* Alternatively, the control software might account for the flow removed by the PN system

**Figure 6.10**  
**Schematic of recommended particle sampling system – Full flow sampling**

Deleted: 20

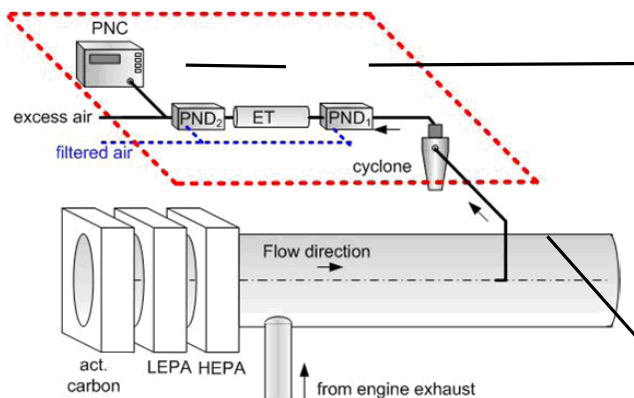

2.1.4.1 Sampling system description

Deleted: A.8.1.4.1.

The particle sampling system shall consist of a sampling probe tip or particle sampling point in the dilution system, a particle transfer tube (PTT), a particle pre-classifier (PCF) and a volatile particle remover (VPR) upstream of the particle number concentration measurement (PNC) unit. The VPR shall include devices for sample dilution (particle number diluters: PND<sub>1</sub> and PND<sub>2</sub>) and particle evaporation (Evaporation tube, ET). The sampling probe or sampling point for the test gas flow shall be so arranged within the dilution tract that a representative sample gas flow is taken from a homogeneous diluent/exhaust mixture. The sum of the residence time of the system plus the t<sub>90</sub> response time of the PNC shall be no greater than 20 s.

2.1.4.2 Particle transfer system

Deleted: A.8.1.4.2. .

The sampling probe tip or particle sampling point and Particle Transfer Tube (PTT) together comprise the Particle Transfer System (PTS). The PTS conducts the sample from the dilution tunnel to the entrance to the first particle number diluter. The PTS shall meet the following conditions:

In the case of full flow dilution systems and partial flow dilution systems of the fractional sampling type (as described in paragraph 9.2.3 of Annex VI) the sampling probe shall be installed near the tunnel centre line, 10 to 20 tunnel diameters downstream of the gas inlet, facing upstream into the tunnel gas flow with its axis at the tip parallel to that of the dilution tunnel. The sampling probe shall be positioned within the dilution tract so that the sample is taken from a homogeneous diluent/exhaust mixture.

Moved down [29]: Appendix 2

Deleted: to this annex,

Deleted: A

Deleted: 2.1.)

In the case of partial flow dilution systems of the total sampling type (as described in paragraph 9.2.3 of Annex VI) the particle sampling point shall be located in the particulate transfer tube, upstream of the particulate filter holder, flow measurement device and any sample/bypass bifurcation point. The sampling point or sampling probe shall be positioned so that the sample is taken from a homogeneous diluent/exhaust mixture.

Deleted: Appendix 2 to this annex,

Deleted: A

Deleted: 2.1.)

Sample gas drawn through the PTS shall meet the following conditions:

It shall have a flow Reynolds number (Re) of < 1700;

Deleted: 1,700

It shall have a residence time in the PTS of  $\leq 3$  seconds.

Any other sampling configuration for the PTS for which equivalent particle penetration for particles of 30 nm electrical mobility diameter can be demonstrated will be considered acceptable.

The outlet tube (OT) conducting the diluted sample from the VPR to the inlet of the PNC shall have the following properties:

It shall have an internal diameter of  $\geq 4$  mm;

Sample gas flow through the POT shall have a residence time of  $\leq 0.8$  second.

Any other sampling configuration for the OT for which equivalent particle penetration for particles of 30 nm electrical mobility diameter can be demonstrated will be considered acceptable.

#### 2.1.4.3 Particle pre-classifier

Deleted: A.8.1.4.3.

The recommended particle pre-classifier shall be located upstream of the VPR. The pre-classifier 50 per cent cut point particle diameter shall be between 2.5  $\mu\text{m}$  and 10  $\mu\text{m}$  at the volumetric flow rate selected for sampling particle number emissions. The pre-classifier shall allow at least 99 per cent of the mass concentration of 1  $\mu\text{m}$  particles entering the pre-classifier to pass through the exit of the pre-classifier at the volumetric flow rate selected for sampling particle number emissions. In the case of partial flow dilution systems, it is acceptable to use the same pre-classifier for particulate mass and particle number sampling, extracting the particle number sample from the dilution system downstream of the pre-classifier. Alternatively separate pre-classifiers may be used, extracting the particle number sample from the dilution system upstream of the particulate mass pre-classifier.

#### 2.1.4.4 Volatile particle remover (VPR)

Deleted: A.8.1.4.4.

The VPR shall comprise one particle number diluter (PND<sub>1</sub>), an evaporation tube and a second diluter (PND<sub>2</sub>) in series. This dilution function is to reduce the number concentration of the sample entering the particle concentration measurement unit to less than the upper threshold of the single particle count mode of the PNC and to suppress nucleation within the sample. The VPR shall provide an indication of whether or not PND<sub>1</sub> and the evaporation tube are at their correct operating temperatures.

The VPR shall achieve > 99.0 per cent vaporisation of 30 nm tetracontane (CH<sub>3</sub>(CH<sub>2</sub>)<sub>38</sub>CH<sub>3</sub>) particles, with an inlet concentration of  $\geq 10000$  cm<sup>-3</sup>, by means of heating and reduction of partial pressures of the tetracontane. It shall also achieve a particle concentration reduction factor (f<sub>r</sub>) for particles of 30 nm and 50 nm electrical mobility diameters, that is no more than 30 per cent and 20 per cent respectively higher, and no more than 5 per cent lower than that for particles of 100 nm electrical mobility diameter for the VPR as a whole.

Deleted: 10,000

##### 2.1.4.4.1 First particle number dilution device (PND1)

Deleted: A.8.1.4.4.1.

The first particle number dilution device shall be specifically designed to dilute particle number concentration and operate at a (wall) temperature of 150 °C to 400 °C. The wall temperature setpoint should be held at a constant nominal operating temperature, within this range, to a tolerance of ±10 °C and not exceed the wall temperature of the ET (paragraph 2.1.4.4.2). The diluter should be supplied with HEPA filtered dilution air and be capable of a dilution factor of 10 to 200 times.

Deleted: A.8

Deleted: .).

#### 2.1.4.4.2 Evaporation Tube (ET)

Deleted: A.8.1.4.4.2.

The entire length of the ET shall be controlled to a wall temperature greater than or equal to that of the first particle number dilution device and the wall temperature held at a fixed nominal operating temperature between 300 °C and 400 °C, to a tolerance of ±10 °C.

#### 2.1.4.4.3 Second particle number dilution device (PND<sub>2</sub>)

Deleted: A.8.1.4.4.3. .

PND<sub>2</sub> shall be specifically designed to dilute particle number concentration. The diluter shall be supplied with HEPA filtered dilution air and be capable of maintaining a single dilution factor within a range of 10 to 30 times. The dilution factor of PND<sub>2</sub> shall be selected in the range between 10 and 15 such that particle number concentration downstream of the second diluter is less than the upper threshold of the single particle count mode of the PNC and the gas temperature prior to entry to the PNC is < 35 °C.

#### 2.1.4.5 Particle number counter (PNC)

Deleted: A.8.1.4.5.

The PNC shall meet the requirements of paragraph 2.1.3.4.

Deleted: A.8

Deleted: A.8.2. .

### 2.2 Calibration/Validation of the particle sampling system<sup>3</sup>

Deleted: A.8.2.1.

#### 2.2.1 Calibration of the particle number counter

2.2.1.1 The Technical Service shall ensure the existence of a calibration certificate for the PNC demonstrating compliance with a traceable standard within a 12-month period prior to the emissions test.

Deleted: A.8.2.1.1. .

2.2.1.2 The PNC shall also be recalibrated and a new calibration certificate issued following any major maintenance.

Deleted: A.8.2.1.2.

2.2.1.3 Calibration shall be traceable to a standard calibration method:

Deleted: A.8.2.1.3. .

(a) By comparison of the response of the PNC under calibration with that of a calibrated aerosol electrometer when simultaneously sampling electrostatically classified calibration particles; or

(b) By comparison of the response of the PNC under calibration with that of a second PNC which has been directly calibrated by the above method.

<sup>3</sup> Example calibration/validation methods are available at:  
[www.unece.org/es/trans/main/wp29/wp29wgs/wp29grpe/pmpfcp](http://www.unece.org/es/trans/main/wp29/wp29wgs/wp29grpe/pmpfcp)

In the electrometer case, calibration shall be undertaken using at least six standard concentrations spaced as uniformly as possible across the PNC's measurement range. These points will include a nominal zero concentration point produced by attaching HEPA filters of at least class H13 of EN 1822:2008, or equivalent performance, to the inlet of each instrument. With no calibration factor applied to the PNC under calibration, measured concentrations shall be within  $\pm 10$  per cent of the standard concentration for each concentration used, with the exception of the zero point, otherwise the PNC under calibration shall be rejected. The gradient from a linear regression of the two data sets shall be calculated and recorded. A calibration factor equal to the reciprocal of the gradient shall be applied to the PNC under calibration. Linearity of response is calculated as the square of the Pearson product moment correlation coefficient ( $R^2$ ) of the two data sets and shall be equal to or greater than 0.97. In calculating both the gradient and  $R^2$  the linear regression shall be forced through the origin (zero concentration on both instruments).

In the reference PNC case, calibration shall be undertaken using at least six standard concentrations across the PNC's measurement range. At least 3 points shall be at concentrations below  $1000 \text{ cm}^{-3}$ , the remaining concentrations shall be linearly spaced between  $1000 \text{ cm}^{-3}$  and the maximum of the PNC's range in single particle count mode. These points will include a nominal zero concentration point produced by attaching HEPA filters of at least class H13 of EN 1822:2008, or equivalent performance, to the inlet of each instrument. With no calibration factor applied to the PNC under calibration, measured concentrations shall be within  $\pm 10$  per cent of the standard concentration for each concentration, with the exception of the zero point, otherwise the PNC under calibration shall be rejected. The gradient from a linear regression of the two data sets shall be calculated and recorded. A calibration factor equal to the reciprocal of the gradient shall be applied to the PNC under calibration. Linearity of response is calculated as the square of the Pearson product moment correlation coefficient ( $R^2$ ) of the two data sets and shall be equal to or greater than 0.97. In calculating both the gradient and  $R^2$  the linear regression shall be forced through the origin (zero concentration on both instruments).

Deleted: 1,000  
Deleted: 1,000

2.2.1.4 Calibration shall also include a check, against the requirements in paragraph 2.1.3.4.8, on the PNC's detection efficiency with particles of 23 nm electrical mobility diameter. A check of the counting efficiency with 41 nm particles is not required.

Deleted: A.8.2.1.4.  
Deleted: A.8  
Deleted: ..

2.2.2 Calibration/Validation of the volatile particle remover

Deleted: A.8.2.2. .

2.2.2.1 Calibration of the VPR's particle concentration reduction factors across its full range of dilution settings, at the instrument's fixed nominal operating temperatures, shall be required when the unit is new and following any major maintenance. The periodic validation requirement for the VPR's particle concentration reduction factor is limited to a check at a single setting, typical of that used for measurement on diesel particulate filter equipped vehicles. The Technical Service shall ensure the existence of a calibration or validation certificate for the volatile particle remover within a 6-month period prior to the emissions test. If the volatile particle remover incorporates temperature monitoring alarms a 12 month validation interval shall be permissible.

Deleted: A.8.2.2.1.

Deleted: ..

The VPR shall be characterised for particle concentration reduction factor with solid particles of 30 nm, 50 nm and 100 nm electrical mobility diameter. Particle concentration reduction factors ( $f_r(d)$ ) for particles of 30 nm and 50 nm electrical mobility diameters shall be no more than 30 per cent and 20 per cent higher respectively, and no more than 5 per cent lower than that for particles of 100 nm electrical mobility diameter. For the purposes of validation, the mean particle concentration reduction factor shall be within  $\pm 10$  per cent of the mean particle concentration reduction factor ( $\bar{f}_r$ ) determined during the primary calibration of the VPR.

2.2.2.2 The test aerosol for these measurements shall be solid particles of 30, 50 and 100 nm electrical mobility diameter and a minimum concentration of 5000 particles  $\text{cm}^{-3}$  at the VPR inlet. Particle concentrations shall be measured upstream and downstream of the components.

Deleted: A.8.2.2.2.

Deleted: 5,000

The particle concentration reduction factor at each particle size ( $f_r(d_i)$ ) shall be calculated as follows:

Deleted: )

$$f_r(d_i) = \frac{N_{in}(d_i)}{N_{out}(d_i)}$$

(6-31)

Deleted: . (117

Where:

$N_{in}(d_i)$  = upstream particle number concentration for particles of diameter  $d_i$

$N_{out}(d_i)$  = downstream particle number concentration for particles of diameter  $d_i$   
and

$d_i$  = particle electrical mobility diameter (30, 50 or 100 nm)

$N_{in}(d_i)$  and  $N_{out}(d_i)$  shall be corrected to the same conditions.

The mean particle concentration reduction ( $\bar{f}_r$ ) at a given dilution setting shall be calculated as follows:

$$\bar{f}_r = \frac{f_r(30nm) + f_r(50nm) + f_r(100nm)}{3}$$

(6-32)

Deleted: 118

It is recommended that the VPR is calibrated and validated as a complete unit.

2.2.2.3 The Technical Service shall ensure the existence of a validation certificate for the VPR demonstrating effective volatile particle removal efficiency within a 6 month period prior to the emissions test. If the volatile particle remover incorporates temperature monitoring alarms a 12 month validation interval shall be permissible. The VPR shall demonstrate greater than 99.0 per cent removal of tetracontane ( $\text{CH}_3(\text{CH}_2)_{38}\text{CH}_3$ ) particles of at least 30 nm electrical mobility diameter with an inlet concentration of  $\geq$  10000  $\text{cm}^{-3}$  when operated at its minimum dilution setting and manufacturers recommended operating temperature.

Deleted: A.8.2.2.3.

Deleted: 10,000

Deleted: A.8.2.3. .

2.2.3 Particle number system check procedures

2.2.3.1 Prior to each test, the particle counter shall report a measured concentration of less than 0.5 particles  $\text{cm}^{-3}$  when a HEPA filter of at least class H13 of EN 1822:2008, or equivalent performance, is attached to the inlet of the entire particle sampling system (VPR and PNC).

Deleted: A.8.2.3.1.

- 2.2.3.2 On a monthly basis, the flow into the particle counter shall report a measured value within 5 per cent of the particle counter nominal flow rate when checked with a calibrated flow meter. Deleted: A.8.2.3.2.
- 2.2.3.3 Each day, following the application of a HEPA filter of at least class H13 of EN 1822:2008, or equivalent performance, to the inlet of the particle counter, the particle counter shall report a concentration of  $\leq 0.2 \text{ cm}^{-3}$ . Upon removal of this filter, the particle counter shall show an increase in measured concentration to at least 100 particles  $\text{cm}^{-3}$  when challenged with ambient air and a return to  $\leq 0.2 \text{ cm}^{-3}$  on replacement of the HEPA filter. Deleted: A.8.2.3.3. .
- 2.2.3.4 Prior to the start of each test it shall be confirmed that the measurement system indicates that the evaporation tube, where featured in the system, has reached its correct operating temperature. Deleted: A.8.2.3.4.
- 2.2.3.5 Prior to the start of each test it shall be confirmed that the measurement system indicates that the diluter PND<sub>1</sub> has reached its correct operating temperature. Deleted: A.8.2.3.5. .



**Appendix 2**  
**Installation requirements for equipment and auxiliaries**

<i>Number</i>	<i>Equipment and auxiliaries</i>	<i>Fitted for emission test</i>
1	Inlet system Inlet manifold Crankcase emission control system Air flow meter Air filter Inlet silencer	Yes Yes Yes Yes <sup>(a)</sup> Yes <sup>(a)</sup>
2	Exhaust system Exhaust aftertreatment Exhaust manifold Connecting pipes Silencer Tail pipe Exhaust brake Pressure charging device	Yes Yes Yes <sup>(b)</sup> Yes <sup>(b)</sup> Yes <sup>(b)</sup> No <sup>(c)</sup> Yes
3	Fuel supply pump	Yes <sup>(d)</sup>
4	Fuel injection equipment Prefilter Filter Pump	Yes Yes Yes
5	High-pressure pipe Injector Electronic control unit, sensors, etc. Governor/control system Automatic full-load stop for the control rack depending on atmospheric conditions	Yes Yes Yes Yes Yes

6	Liquid-cooling equipment Radiator Fan Fan cowl Water pump Thermostat	No No No Yes <sup>(e)</sup> Yes <sup>(f)</sup>
7	Air cooling Cowl Fan or Blower Temperature-regulating device	No <sup>(g)</sup> No <sup>(g)</sup> No
8	Pressure charging equipment Compressor driven either directly by the engine and/or by the exhaust gases Charge air cooler Coolant pump or fan (engine-driven) Coolant flow control device	Yes Yes <sup>(g)(h)</sup> No <sup>(g)</sup> Yes
9	Auxiliary test-bed fan	Yes, if necessary
10	Anti-pollution device	Yes
11	Starting equipment	Yes or test bed equipment <sup>(i)</sup>
12	Lubricating oil pump	Yes
13	Certain auxiliaries whose definition is linked with the operation of the machine and which may be mounted on the engine shall be removed for the test.  The following non-exhaustive list is given as an example: (i) air compressor for brakes (ii) power steering compressor (iii) suspension compressor (iv) air-conditioning system.	No
<p>(a) The complete inlet system shall be fitted as provided for the intended application:</p> <p>(i) where there is a risk of an appreciable effect on the engine power;</p> <p>(ii) when the manufacturer requests that this should be done.</p> <p>In other cases, an equivalent system may be used and a check should be made to ascertain that the intake pressure does not differ by more than 100 Pa from the upper limit specified by the manufacturer for a clean air filter.</p> <p>(b) The complete exhaust system shall be fitted as provided for the intended application:</p> <p>(i) where there is a risk of an appreciable effect on the engine power;</p>		

(ii) when the manufacturer requests that this should be done.

In other cases, an equivalent system may be installed provided the pressure measured does not differ by more than 1,000 Pa from the upper limit specified by the manufacturer.

- (c) If an exhaust brake is incorporated in the engine, the throttle valve shall be fixed in the fully open position.
- (d) The fuel feed pressure may be adjusted, if necessary, to reproduce the pressure existing in the particular engine application (particularly when a "fuel return" system is used).
- (e) The cooling-liquid circulation shall be operated by the engine water pump only. Cooling of the liquid may be produced by an external circuit, such that the pressure loss of this circuit and the pressure at the pump inlet remain substantially the same as those of the engine cooling system.
- (f) The thermostat may be fixed in the fully open position.
- (g) When the cooling fan or blower is fitted for the test, the power absorbed shall be added to the results, except for cooling fans of air cooled engines directly fitted on the crankshaft. The fan or blower power shall be determined at the speeds used for the test either by calculation from standard characteristics or by practical tests.
- (h) Charge air-cooled engines shall be tested with charge air cooling, whether liquid - or air-cooled, but if the manufacturer prefers, a test bench system may replace the air cooler. In either case, the measurement of power at each speed shall be made with the maximum pressure drop and the minimum temperature drop of the engine air across the charge air cooler on the test bench system as those specified by the manufacturer.
- (i) The power for electrical or other starting systems shall be provided from the test bed.

**ANNEX VII**  
**Method for data evaluation and calculation**

**1 General requirements**

Calculation of emissions shall be performed according to either [section 2](#) (mass based calculations) or [section 3](#) (molar based calculations). Mixture between the two methods is not permitted. It shall not be required to perform the calculations according to both [section 2](#) and [section 3](#).

The specific requirements for particle number (PN) measurement, where applicable, are laid down in Appendix 5 to this Annex.

Deleted: paragraph

Deleted: paragraph

Deleted: paragraph

Deleted: paragraph

**1.1 General symbols**

<a href="#">Section 2</a>	<a href="#">Section 3</a>	Unit	Quantity
	A	m <sup>2</sup>	Area
	A <sub>t</sub>	m <sup>2</sup>	Venturi throat cross-sectional area
b, D <sub>0</sub>	a <sub>0</sub>	t.b.d. <sup>3</sup>	y intercept of the regression line
A/F <sub>st</sub>		-	Stoichiometric air to fuel ratio
	C	-	Coefficient
C <sub>d</sub>	C <sub>d</sub>	-	Discharge coefficient
	C <sub>f</sub>	-	Flow coefficient
c	x	ppm, % vol	Concentration/mole fraction (μmol/mol = ppm)
c <sub>d</sub>	<sup>1</sup>	ppm, % vol	Concentration on dry basis
c <sub>w</sub>	<sup>1</sup>	ppm, % vol	Concentration on wet basis
c <sub>b</sub>	<sup>1</sup>	ppm, % vol	Background concentration
D	x <sub>dil</sub>	-	Dilution factor <sup>(2)</sup>
D <sub>0</sub>		m <sup>3</sup> /rev	PDP calibration intercept
d	d	m	Diameter
d <sub>v</sub>		m	Throat diameter of venturi
e	e	g/kWh	Brake specific basis
e <sub>gas</sub>	e <sub>gas</sub>	g/kWh	Specific emission of gaseous components
e <sub>PM</sub>	e <sub>PM</sub>	g/kWh	Specific emission of particulates

Deleted: Paragraph

Deleted: Paragraph

<u>Section 2</u>	<u>Section 3</u>	<i>Unit</i>	<i>Quantity</i>
$E$	$1 - PF$	per cent	Conversion efficiency ( $PF$ = Penetration fraction)
$F_s$		-	Stoichiometric factor
	$f$	Hz	Frequency
$f_c$		-	Carbon factor
	$\gamma$	-	Ratio of specific heats
$H$		g/kg	Absolute humidity
	$K$	-	Correction factor
$K_V$		$[(\sqrt{K} \cdot m^4 \cdot s)/kg]$	FV calibration function
$k_f$		$m^3/kg$ fuel	Fuel specific factor
$k_h$		-	Humidity correction factor for $NO_x$ , diesel engines
$k_{Dr}$	$k_{Dr}$	-	Downward adjustment factor
$k_r$	$k_r$	-	Multiplicative regeneration factor
$k_{Ur}$	$k_{Ur}$	-	Upward adjustment factor
$k_{w,a}$		-	Dry to wet correction factor for the intake air
$k_{w,d}$		-	Dry to wet correction factor for the dilution air
$k_{w,e}$		-	Dry to wet correction factor for the diluted exhaust gas
$k_{w,r}$		-	Dry to wet correction factor for the raw exhaust gas
$\mu$	$\mu$	kg/(m·s)	Dynamic viscosity
$M$	$M$	g/mol	Molar mass <sup>(3)</sup>
$M_a$	1	g/mol	Molar mass of the intake air
$M_e$	$v$	g/mol	Molar mass of the exhaust
$M_{gas}$	$M_{gas}$	g/mol	Molar mass of gaseous components
$m$	$m$	kg	Mass
$m$	$a_1$	t.b.d. <sup>3</sup>	Slope of the regression line
	$\nu$	$m^2/s$	Kinematic viscosity

Deleted: Paragraph

Deleted: Paragraph

<i>Section 2</i>	<i>Section 3</i>	<i>Unit</i>	<i>Quantity</i>
$m_d$	v	kg	Mass of the dilution air sample passed through the particulate sampling filters
$m_{ed}$	1	kg	Total diluted exhaust mass over the cycle
$m_{edf}$	1	kg	Mass of equivalent diluted exhaust gas over the test cycle
$m_{ew}$	1	kg	Total exhaust mass over the cycle
$m_f$	1	mg	Particulate sample mass collected
$m_{f,d}$	1	mg	Particulate sample mass of the dilution air collected
$m_{gas}$	$m_{gas}$	g	Mass of gaseous emissions over the test cycle
$m_{PM}$	$m_{PM}$	g	Mass of particulate emissions over the test cycle
$m_{se}$	1	kg	Exhaust sample mass over the test cycle
$m_{sed}$	1	kg	Mass of diluted exhaust gas passing the dilution tunnel
$m_{sep}$	1	kg	Mass of diluted exhaust gas passing the particulate collection filters
$m_{ssd}$		kg	Mass of secondary dilution air
	N	-	Total number of a series
	$n$	mol	Amount of substance
	$\dot{n}$	mol/s	Amount of substance rate
$n$	$f_n$	min <sup>-1</sup>	Engine rotational speed
$n_p$		r/s	PDP pump speed
$P$	$P$	kW	Power
$p$	$p$	kPa	Pressure
$p_a$		kPa	Dry atmospheric pressure
$p_b$		kPa	Total atmospheric pressure
$p_d$		kPa	Saturation vapour pressure of the dilution air
$p_p$	$p_{abs}$	kPa	Absolute pressure
$p_r$	$p_{H_2O}$	kPa	Water vapour pressure
$p_s$		kPa	Dry atmospheric pressure

Deleted: Paragraph

Deleted: Paragraph

<i>Section 2</i>	<i>Section 3</i>	<i>Unit</i>	<i>Quantity</i>
$1 - E$	$PF$	per cent	Penetration fraction
$q_m$	$\dot{m}$	kg/s	Mass rate
$q_{mad}$	$\dot{m}^1$	kg/s	Intake air mass flow rate on dry basis
$q_{maw}$	$^1$	kg/s	Intake air mass flow rate on wet basis
$q_{mCe}$	$^1$	kg/s	Carbon mass flow rate in the raw exhaust gas
$q_{mCf}$	$^1$	kg/s	Carbon mass flow rate into the engine
$q_{mCp}$	$^1$	kg/s	Carbon mass flow rate in the partial flow dilution system
$q_{mdew}$	$^1$	kg/s	Diluted exhaust gas mass flow rate on wet basis
$q_{mdw}$	$^1$	kg/s	Dilution air mass flow rate on wet basis
$q_{medf}$	$^1$	kg/s	Equivalent diluted exhaust gas mass flow rate on wet basis
$q_{mew}$	$^1$	kg/s	Exhaust gas mass flow rate on wet basis
$q_{mex}$	$^1$	kg/s	Sample mass flow rate extracted from dilution tunnel
$q_{mf}$	$^1$	kg/s	Fuel mass flow rate
$q_{mp}$	$^1$	kg/s	Sample flow of exhaust gas into partial flow dilution system
$q_v$	$\dot{V}$	m <sup>3</sup> /s	Volume flow rate
$q_{VCVS}$	$^1$	m <sup>3</sup> /s	CVS volume rate
$q_{Vs}$	$^1$	dm <sup>3</sup> /min	System flow rate of exhaust analyzer system
$q_{Vt}$	$^1$	cm <sup>3</sup> /min	Tracer gas flow rate
$\rho$	$\rho$	kg/m <sup>3</sup>	Mass density
$\rho_e$		kg/m <sup>3</sup>	Exhaust gas density
	$r$	-	Ratio of pressures
$r_d$	$DR$	-	Dilution ratio <sup>2</sup>
	$Ra$	μm	Average surface roughness
$RH$		per cent	Relative humidity
$r_D$	$\beta$	m/m	Ratio of diameters (CVS systems)
$r_p$		-	Pressure ratio of SSV

Deleted: Paragraph

Deleted: Paragraph

<u>Section 2</u>	<u>Section 3</u>	Unit	Quantity
$Re$	$Re^{\#}$	-	Reynolds number
	$S$	K	Sutherland constant
$\sigma$	$\sigma$	-	Standard deviation
$T$	$T$	°C	Temperature
	$T$	Nm	Engine torque
$T_a$		K	Absolute temperature
$t$	$t$	s	Time
$\Delta t$	$\Delta t$	s	Time interval
$u$		-	Ratio between densities of gas component and exhaust gas
$V$	$V$	m <sup>3</sup>	Volume
$q_v$	$\dot{V}$	m <sup>3</sup> /s	Volume rate
$V_0$		m <sup>3</sup> /r	PDP gas volume pumped per revolution
$W$	$W$	kWh	Work
$W_{act}$	$W_{act}$	kWh	Actual cycle work of the test cycle
$WF$	$WF$	-	Weighting factor
$w$	$w$	g/g	Mass fraction
	$\bar{x}$	mol/mol	Flow-weighted mean concentration
$X_0$	$K_s$	s/rev	PDP calibration function
	$y$	-	Generic variable
$\bar{y}$	$\bar{y}$		Arithmetic mean
	$Z$	-	Compressibility factor

Deleted: Paragraph

Deleted: Paragraph

1 See subscripts; e.g.:  $\dot{m}_{air}$  for mass rate of dry air,  $\dot{m}_{fuel}$  for fuel mass rate, etc.

2 Dilution ratio  $r_d$  in [section 2](#) and  $DR$  in [section 3](#): different symbols but same meaning and same equations. Dilution factor  $D$  in [section 2](#) and  $x_{dil}$  in [section 3](#): different symbols but same physical meaning; equation (A.7-47) shows the relationship between  $x_{dil}$  and  $DR$ .

3 t.b.d.= to be defined

Deleted: Annex 8

Deleted: Annex 7

Deleted: Annex 8

Deleted: Annex 7



## 1.2 Subscripts

Section 2 <sup>(1)</sup>	Section 3	Quantity
act	act	Actual quantity
<i>i</i>		Instantaneous measurement (e.g.: 1 Hz)
	<i>i</i>	An individual of a series

Deleted: Paragraph

Deleted: Paragraph

Deleted: paragraph

- (2) In [section 2](#) the meaning of subscript is determined by the associated quantity; for example, the subscript "d" can indicate a dry basis as in " $c_d$  = concentration on dry basis", dilution air as in " $p_d$  = saturation vapour pressure of the dilution air" or " $k_{w,d}$  = dry to wet correction factor for the dilution air", dilution ratio as in " $r_d$ ".

## 1.3 Symbols and abbreviations for the chemical components (used also as a subscript)

Paragraph 2	Paragraph 3	Quantity
Ar	Ar	Argon
C1	C1	Carbon 1 equivalent hydrocarbon
CH <sub>4</sub>	CH <sub>4</sub>	Methane
C <sub>2</sub> H <sub>6</sub>	C <sub>2</sub> H <sub>6</sub>	Ethane
C <sub>3</sub> H <sub>8</sub>	C <sub>3</sub> H <sub>8</sub>	Propane
CO	CO	Carbon monoxide
CO <sub>2</sub>	CO <sub>2</sub>	Carbon dioxide
	H	Atomic hydrogen
	H <sub>2</sub>	Molecular hydrogen
HC	HC	Hydrocarbon
H <sub>2</sub> O	H <sub>2</sub> O	Water
	He	Helium
	N	Atomic nitrogen
	N <sub>2</sub>	Molecular nitrogen
NO <sub>x</sub>	NO <sub>x</sub>	Oxides of nitrogen
NO	NO	Nitric oxide
NO <sub>2</sub>	NO <sub>2</sub>	Nitrogen dioxide
	O	Atomic oxygen
PM	PM	Particulate matter
S	S	Sulphur

Deleted: NMHC

...

## 1.4 Symbols and abbreviations for the fuel composition

Paragraph 2 <sup>(1)</sup>	Paragraph 3 <sup>(2)</sup>	Quantity
$w_C^{(4)}$	$w_C^{(4)}$	Carbon content of fuel, mass fraction [g/g] or [per cent mass]
$w_H$	$w_H$	Hydrogen content of fuel, mass fraction [g/g] or [per cent mass]
$w_N$	$w_N$	Nitrogen content of fuel, mass fraction [g/g] or [per cent mass]
$w_O$	$w_O$	Oxygen content of fuel, mass fraction [g/g] or [per cent mass]
$w_S$	$w_S$	Sulphur content of fuel, mass fraction [g/g] or [per cent mass]
$\alpha$	$\alpha$	Atomic hydrogen-to-carbon ratio (H/C)
$\varepsilon$	$\beta$	Atomic oxygen-to-carbon ratio (O/C) <sup>(3)</sup>
$\gamma$	$\gamma$	Atomic sulphur-to-carbon ratio (S/C)
$\delta$	$\delta$	Atomic nitrogen-to-carbon ratio (N/C)

- (1) Referred to a fuel with chemical formula  $CH_\alpha O_\varepsilon N_\delta S_\gamma$
- (2) Referred to a fuel with chemical formula  $CH_\alpha O_\beta S_\gamma N_\delta$
- (3) Attention should be paid to the different meaning of symbol  $\beta$  in the two emissions calculation sections: in section 2 it refers to a fuel having the chemical formula  $CH_\alpha S_\gamma N_\delta O_\varepsilon$  (i.e. the formula  $C_\beta H_\alpha S_\gamma N_\delta O_\varepsilon$  where  $\beta = 1$ , assuming one carbon atom per molecule), while in section 3 it refers to the oxygen-to-carbon ratio with  $CH_\alpha O_\beta S_\gamma N_\delta$ . Then  $\beta$  of section 3 corresponds to  $\varepsilon$  of section 2.
- (4) Mass fraction  $w$  accompanied by the symbol of the chemical component as a subscript.

## 2 Mass based emissions calculations

### 2.1 Raw gaseous emissions

#### 2.1.1 Discrete mode tests

The emission rate of a gaseous emission  $q_{m\text{gas},i}$  [g/h] for each mode  $i$  of the steady state test shall be calculated by multiplying the concentration of the gaseous emission with its respective flow, as follows:

$$q_{m\text{gas},i} = k_h \cdot k \cdot u_{\text{gas}} \cdot q_{mew,i} \cdot c_{\text{gas},i} \cdot 3600 \quad (7-1)$$

where:

$k$  = 1 for  $c_{\text{gasr},w,i}$  in [ppm] and  $k = 10,000$  for  $c_{\text{gasr},w,i}$  in [per cent vol]

$k_h$  =  $NO_x$  correction factor [-], for  $NO_x$  emission calculation (see paragraph 2.1.4)

$u_{\text{gas}}$  = component specific factor or ratio between densities of gas component and exhaust gas [-]

$q_{mew,i}$  = exhaust gas mass flow rate in mode  $i$  on a wet basis [kg/s]

**Deleted:** annexes

**Deleted:** Annex 8

**Deleted:** Annex 7

**Deleted:** Annex 7

**Deleted:** Annex 8

**Deleted:** <#>Basic Parameters¶

A.8.1.1. Determination of methane and non-methane HC concentration¶

The calculation of NMHC and  $CH_4$  depends on the calibration method used. The FID for the measurement without NMC, shall be calibrated with propane. For the calibration of the FID in series with NMC, the following methods are permitted.¶

(a) calibration gas – propane; propane bypasses NMC,¶

(b) calibration gas – methane; methane passes through NMC¶

The concentration of NMHC ( $c_{\text{NMHC}}$  [-]) and  $CH_4$  ( $c_{\text{CH}_4}$  [-]) shall be calculated as follows for (a):¶

(A.8-1a)¶

(A.8-2a)¶

The concentration of NMHC and  $CH_4$  shall be calculated as follows for (b):¶

(A.8-1b)¶

**Moved down [30]:** . Where:¶

**Deleted:**  $c_{\text{HC}(w/\text{NMC})}$  = . HC concentration with sample gas ¶

**Deleted:** A.8.2.1. Gaseous emissions¶

**Deleted:** ¶

**Deleted:** .

**Deleted:** shall be multiplied by

**Deleted:** ¶  
(A.8-3)¶

**Deleted:**

**Deleted:** only to be applied

**Deleted:** the

**Deleted:** A.8.

**Deleted:** 2.)

**Deleted:** [-]; to be calculated with equations (A.8-12) or (A.8-13)¶

$c_{\text{gas},i}$  = emission concentration in the raw exhaust gas in mode  $i$ , on a wet basis [ppm] or [per cent vol]

### 2.1.2 Transient and ramped modal cycles tests

Deleted: A.8.2.1.2.

The total mass per test of a gaseous emission  $m_{\text{gas}}$  [g/test] shall be calculated by multiplication of the time aligned instantaneous concentrations and exhaust gas flows and integration over the test cycle according to the following equation:

Deleted: ¶

$$m_{\text{gas}} = \frac{1}{f} \cdot k_h \cdot k \cdot u_{\text{gas}} \cdot \sum_{i=1}^N (q_{\text{mew},i} \cdot c_{\text{gas},i}) \quad (7-2)$$

Deleted: ¶

Deleted: (A.8-4)

where:

$f$  = data sampling rate [Hz]

$k_h$  = NO<sub>x</sub> correction factor [-], only to be applied for the NO<sub>x</sub> emission calculation

$k$  = 1 for  $c_{\text{gasr},w,i}$  in [ppm] and  $k = 10,000$  for  $c_{\text{gasr},w,i}$  in [per cent vol]

$u_{\text{gas}}$  = component specific factor [-] (see paragraph 2.1.5)

Deleted: A.8.

$N$  = number of measurements [-]

Deleted: 4.)

$q_{\text{mew},i}$  = instantaneous exhaust gas mass flow rate on a wet basis [kg/s]

$c_{\text{gas},i}$  = instantaneous emission concentration in the raw exhaust gas, on a wet basis [ppm] or [per cent vol]

### 2.1.3 Dry-to-wet concentration conversion

If the emissions are measured on a dry basis, the measured concentration  $c_d$  on dry basis shall be converted to the concentration  $c_w$  on a wet basis according to the following general equation:

Deleted: The following chapters show how the needed quantities ( $c_{\text{gas},i}$ ,  $u_{\text{gas}}$  and  $q_{\text{mew},i}$ ) shall be calculated. ¶  
A.8.2.2. .

$$c_w = k_w \cdot c_d \quad (7-3)$$

Deleted:

Deleted: ¶

where:

Deleted: ¶

$k_w$  = dry-to-wet conversion factor [-]

Deleted: (A.8-5)

$c_d$  = emission concentration on a dry basis [ppm] or [per cent vol]

Deleted: ¶

For complete combustion, the dry-to-wet conversion factor for raw exhaust gas is written as  $k_{w,a}$  [-] and shall be calculated as follows:

Deleted: ¶

$$k_{w,a} = \frac{\left( 1 - \frac{1.2442 \cdot H_a + 111.19 \cdot w_H \cdot \frac{q_{mf,i}}{q_{mad,i}}}{773.4 + 1.2442 \cdot H_a + \frac{q_{mf,i}}{q_{mad,i}} \cdot k_f \cdot 1000} \right)}{\left( 1 - \frac{p_r}{p_b} \right)} \quad (7-4)$$

Deleted: (A.8-6)

where:

- $H_a$  = intake air humidity [g H<sub>2</sub>O/kg dry air]
- $q_{mf,i}$  = instantaneous fuel flow rate [kg/s]
- $q_{mad,i}$  = instantaneous dry intake air flow rate [kg/s]
- $p_r$  = water pressure after cooler [kPa]
- $p_b$  = total barometric pressure [kPa]
- $w_H$  = hydrogen content of the fuel [per cent mass]
- $k_f$  = combustion additional volume [m<sup>3</sup>/kg fuel]

with:

$$k_f = 0.055594 \cdot w_H + 0.0080021 \cdot w_N + 0.0070046 \cdot w_O \quad (7-5)$$

where:

- $w_H$  = hydrogen content of fuel [per cent mass]
- $w_N$  = nitrogen content of fuel [per cent mass]
- $w_O$  = oxygen content of fuel [per cent mass]

In equation (7-4), the ratio  $p_r/p_b$  may be assumed:

$$\frac{1}{\left( 1 - \frac{p_r}{p_b} \right)} = 1.008 \quad (7-6)$$

For incomplete combustion (rich fuel air mixtures) and also for emission tests without direct air flow measurements, a second method of  $k_{w,a}$  calculation is preferred:

Deleted: ¶

Deleted: ¶

Deleted: (A.8-

Deleted: ¶

Deleted: ¶

Deleted: the

Deleted: A.8-6

Deleted: ¶

Deleted: (A.8-8

Deleted: ¶

$$k_{w,a} = \frac{1}{1 + \alpha \cdot 0.005 \cdot (c_{CO_2} + c_{CO})} - k_{w1} \quad (7-7)$$

Deleted: (A.8-9)

where:

Deleted: ¶

$c_{CO_2}$  = concentration of CO<sub>2</sub> in the raw exhaust gas, on a dry basis [per cent vol]

$c_{CO}$  = concentration of CO in the raw exhaust gas, on a dry basis [ppm]

$p_r$  = water pressure after cooler [kPa]

Deleted: (see equation (A.8-9))

$p_b$  = total barometric pressure [kPa]

Deleted: (see equation (A.8-9))

$\alpha$  = molar to carbon hydrogen ratio [-]

$k_{w1}$  = intake air moisture [-]

$$k_{w1} = \frac{1.608 \cdot H_a}{1000 + 1.608 \cdot H_a} \quad (7-8)$$

Deleted: (A.

Deleted: -10

#### 2.1.4 NOx correction for humidity and temperature

Deleted: A.8.2.3.

As the NOx emission depends on ambient air conditions, the NOx concentration shall be corrected for ambient air temperature and humidity with the factors  $k_h$  [-] given in the following equation. This factor is valid for a humidity range between 0 and 25 g H<sub>2</sub>O/kg dry air.

(a) for compression-ignition engines

$$k_h = \frac{15.698 \cdot H_a}{1000} + 0.832 \quad (7-9)$$

Deleted: (A.8-11)

(b) for spark ignition engines

(7-10)

Deleted: ¶

where:

$H_a$  = humidity of the intake air [g H<sub>2</sub>O/kg dry air]

#### 2.1.5 Component specific factor u

Deleted: A.8.2.4.

Two calculation procedures are described in paragraphs 2.1.5.1 and 2.1.5.2. The procedure in paragraph 2.1.5.1 is more straightforward, since it uses tabulated u values for the ratio between component and exhaust gas density. The procedure in paragraph

Deleted: A.8.2.4.1. . Tabulated values¶

2.1.5.2 is more accurate for fuel qualities that deviate from the specifications in Annex VIII, but requires elementary analysis of the fuel composition.

### 2.1.5.1 Tabulated values

Applying some simplifications (assumption on the  $\lambda$  value and on intake air conditions as shown in table 7.1) to the equations of paragraph 2.1.5.2, the resulting values for  $u_{\text{gas}}$  are given in table 7.1.

**Table 7.1**

**Raw exhaust gas  $u$  and component densities (for emission concentration expressed in ppm)**

Fuel	$\rho_c$	Gas					
		$NO_x$	$CO$	$HC$	$CO_2$	$O_2$	$CH_4$
		$\rho_{\text{gas}} [\text{kg}/\text{m}^3]$					
		2.053	1.250	<sup>a</sup>	1.9636	1.4277	0.716
$u_{\text{gas}}^b$							
Diesel (non-road gas-oil)	1.2943	0.001586	0.000966	0.000482	0.001517	0.001103	0.000553
Ethanol for dedicated compression ignition engines (ED95)	1.2768	0.001609	0.000980	0.000780	0.001539	0.001119	0.000561
Natural gas / bio-methane <sup>c</sup>	1.2661	0.001621	0.000987	0.000528 <sup>d</sup>	0.001551	0.001128	0.000565
Propane	1.2805	0.001603	0.000976	0.000512	0.001533	0.001115	0.000559
Butane	1.2832	0.001600	0.000974	0.000505	0.001530	0.001113	0.000558
LPG <sup>e</sup>	1.2811	0.001602	0.000976	0.000510	0.001533	0.001115	0.000559
Petrol (E10)	1.2931	0.001587	0.000966	0.000499	0.001518	0.001104	0.000553
Ethanol (E85)	1.2797	0.001604	0.000977	0.000730	0.001534	0.001116	0.000559
<sup>a</sup> depending on fuel <sup>b</sup> at $\lambda = 2$ , dry air, 273 K, 101.3 kPa <sup>c</sup> $u$ accurate within 0.2 % for mass composition of: C = 66 - 76 %; H = 22 - 25 %; N = 0 - 12 % <sup>d</sup> NMHC on the basis of $CH_{2.93}$ (for total HC the $u_{\text{gas}}$ coefficient of $CH_4$ shall be used) <sup>e</sup> $u$ accurate within 0.2 % for mass composition of: C3 = 70 - 90 %; C4 = 10 - 30 %							

**Deleted:** the following

**Deleted:** A.8.

**Deleted:** 4

**Deleted:** . figures

**Deleted:** . can be calculated (see paragraph A.8.2.1.). The  $u_{\text{gas}}$  values

**Deleted:** A.8

**Deleted:** A.8

**Deleted:** the  $u$  figures are calculated

**Deleted:** ¶  
A.8.2.4.2. .

### 2.1.5.2 Calculated values

The component specific factor,  $u_{\text{gas},i}$ , may be calculated by the density ratio of the component and the exhaust or alternatively by the corresponding ratio of molar masses:

$$u_{\text{gas},i} = M_{\text{gas}} / (M_{e,i} \cdot 1000) \quad (7-11)$$

or

$$u_{\text{gas},i} = \rho_{\text{gas}} / (\rho_{e,i} \cdot 1000) \quad (7-12)$$

where:

$M_{\text{gas}}$  = molar mass of the gas component [g/mol]

$M_{e,i}$  = instantaneous molar mass of the wet raw exhaust gas [g/mol]

$\rho_{\text{gas}}$  = density of the gas component [kg/m<sup>3</sup>]

$\rho_{e,i}$  = instantaneous density of the wet raw exhaust gas [kg/m<sup>3</sup>]

The molar mass of the exhaust,  $M_{e,i}$  shall be derived for a general fuel composition  $\text{CH}_\alpha\text{O}_\varepsilon\text{N}_\delta\text{S}_\gamma$  under the assumption of complete combustion, as follows:

$$M_{e,i} = \frac{1 + \frac{q_{mf,i}}{q_{maw,i}}}{\frac{q_{mf,i}}{q_{maw,i}} \cdot \frac{\frac{\alpha}{4} + \frac{\varepsilon}{2} + \frac{\delta}{2}}{12.001 + 1.00794 \cdot \alpha + 15.9994 \cdot \varepsilon + 14.0067 \cdot \delta + 32.0065 \cdot \gamma} + \frac{H_a \cdot 10^{-3}}{1 + H_a \cdot 10^{-3}} + \frac{1}{M_a}} \quad (7-13)$$

Where:

$q_{mf,i}$  = instantaneous fuel mass flow rate on wet basis [kg/s]

$q_{maw,i}$  = instantaneous intake air mass flow rate on wet basis [kg/s]

$\alpha$  = molar hydrogen-to-carbon ratio [-]

$\delta$  = molar nitrogen-to-carbon ratio [-]

$\varepsilon$  = molar oxygen-to-carbon ratio [-]

$\gamma$  = atomic sulphur-to-carbon ratio [-]

$H_a$  = intake air humidity [g H<sub>2</sub>O/kg dry air]

$M_a$  = dry intake air molecular mass = 28.965 g/mol

The instantaneous raw exhaust density  $\rho_{e,i}$  [kg/m<sup>3</sup>] shall be derived as follows:



$$\rho_{e,i} = \frac{1000 + H_a + 1000 \cdot (q_{mf,i} / q_{mad,i})}{773.4 + 1.2434 \cdot H_a + k_f \cdot 1000 \cdot (q_{mf,i} / q_{mad,i})} \quad (7-14)$$

Deleted: (A.8-15)

where:

$q_{mf,i}$  = instantaneous fuel mass flow rate [kg/s]

$q_{mad,i}$  = instantaneous dry intake air mass flow rate [kg/s]

$H_a$  = intake air humidity [g H<sub>2</sub>O/kg dry air]

$k_f$  = combustion additional volume [m<sup>3</sup>/kg fuel] (see equation 7-5)

Deleted: A.8-

## 2.1.6 Mass flow rate of the exhaust gas

Deleted: ¶  
A.8.2.5.

### 2.1.6.1 Air and fuel measurement method

Deleted: A.8.2.5.1.

The method involves measurement of the air flow and the fuel flow with suitable flowmeters. The calculation of the instantaneous exhaust gas flow  $q_{mew,i}$  [kg/s] shall be as follows:

$$q_{mew,i} = q_{maw,i} + q_{mf,i} \quad (7-15)$$

Deleted: ¶

Deleted: (A.8-16)

where:

Deleted: ¶

$q_{maw,i}$  = instantaneous intake air mass flow rate [kg/s]

$q_{mf,i}$  = instantaneous fuel mass flow rate [kg/s]

### 2.1.6.2 Tracer measurement method

Deleted: A.8.2.5.2.

This involves measurement of the concentration of a tracer gas in the exhaust. The calculation of the instantaneous exhaust gas flow  $q_{mew,i}$  [kg/s] shall be as follows:

Deleted: ¶

$$q_{mew,i} = \frac{q_{Vt} \cdot \rho_e}{10^{-6} \cdot (c_{mix,i} - c_b)} \quad (7-16)$$

Deleted: ¶

Deleted: (A.8-17)

where:

Deleted: ¶

$q_{Vt}$  = tracer gas flow rate [m<sup>3</sup>/s]

$c_{mix,i}$  = instantaneous concentration of the tracer gas after mixing [ppm]

$\rho_e$  = density of the raw exhaust gas [kg/m<sup>3</sup>]

$c_b$  = background concentration of the tracer gas in the intake air [ppm]

The background concentration of the tracer gas  $c_b$  may be determined by averaging the background concentration measured immediately before the test run and after the test run. When the background concentration is less than 1 per cent of the concentration of the tracer gas after mixing  $c_{mix,i}$  at maximum exhaust flow, the background concentration may be neglected.

### 2.1.6.3 Air flow and air to fuel ratio measurement method

Deleted: A.8.2.5.3.

This involves exhaust mass calculation from the air flow and the air to fuel ratio. The calculation of the instantaneous exhaust gas mass flow  $q_{mew,i}$  [kg/s] is as follows:

$$q_{mew,i} = q_{maw,i} \cdot \left( 1 + \frac{1}{A/F_{st} \cdot \lambda_i} \right) \quad (7-17)$$

Deleted: (A.8-18)

with:

$$A/F_{st} = \frac{138.0 \cdot \left( 1 + \frac{\alpha}{4} - \frac{\varepsilon}{2} + \gamma \right)}{12.011 + 1.00794 \cdot \alpha + 15.9994 \cdot \varepsilon + 14.0067 \cdot \delta + 32.065 \cdot \gamma} \quad (7-18)$$

$$\lambda_i = \frac{\left( 100 - \frac{c_{COd} \cdot 10^{-4}}{2} - c_{HCw} \cdot 10^{-4} \right) + \left( \frac{\alpha}{4} \cdot \frac{1 - \frac{2 \cdot c_{COd} \cdot 10^{-4}}{3.5 \cdot c_{CO2d}} - \frac{\varepsilon}{2} - \frac{\delta}{2}}{1 + \frac{c_{COd} \cdot 10^{-4}}{3.5 \cdot c_{CO2d}}} \right) \cdot (c_{CO2d} + c_{COd} \cdot 10^{-4})}{4.764 \cdot \left( 1 + \frac{\alpha}{4} - \frac{\varepsilon}{2} + \gamma \right) \cdot (c_{CO2d} + c_{COd} \cdot 10^{-4} + c_{HCw} \cdot 10^{-4})} \quad (7-19)$$

Deleted: (A.8)

Deleted: (A.8-20)

where:

- $q_{maw,i}$  = wet intake air mass flow rate [kg/s]
- $A/F_{st}$  = stoichiometric air-to-fuel ratio [-]
- $\lambda_i$  = instantaneous excess air ratio [-]
- $c_{COd}$  = concentration of CO in the raw exhaust gas on a dry basis [ppm]
- $c_{CO2d}$  = concentration of CO<sub>2</sub> in the raw exhaust gas on a dry basis [per cent]
- $c_{HCw}$  = concentration of HC in the raw exhaust gas on a wet basis [ppm C1]
- $\alpha$  = molar hydrogen-to-carbon ratio [-]
- $\delta$  = molar nitrogen-to-carbon ratio [-]

$\varepsilon =$  molar oxygen-to-carbon ratio [-]

$\gamma =$  atomic sulphur-to-carbon ratio [-]

#### 2.1.6.4 Carbon balance method, 1 step-procedure

Deleted: A.8.2.5.4.

The following 1-step formula can be used for the calculation of the wet exhaust mass flow rate  $q_{mew,i}$  [kg/s]:

$$q_{mew,i} = q_{mf,i} \cdot \left[ \frac{1.4 \cdot w_C^2}{(1.0828 \cdot w_C + k_{fd} \cdot f_c) f_c} \left( 1 + \frac{H_a}{1000} \right) + 1 \right] \quad (7-20)$$

Deleted: . (A.8-21)

with the carbon factor  $f_c$  [-] given by:

$$f_c = 0.5441 \cdot (c_{CO2d} - c_{CO2da}) + \frac{c_{COd}}{18522} + \frac{c_{HCw}}{17355} \quad (7-21)$$

Deleted: (A.8-22)

Where:

$q_{mf,i} =$  instantaneous fuel mass flow rate [kg/s]

$w_C =$  carbon content of fuel [per cent mass]

$H_a =$  intake air humidity [g H<sub>2</sub>O/kg dry air]

$k_{fd} =$  combustion additional volume on a dry basis [m<sup>3</sup>/kg fuel]

$c_{CO2d} =$  dry CO<sub>2</sub> concentration in the raw exhaust [per cent]

$c_{CO2da} =$  dry CO<sub>2</sub> concentration in the ambient air [per cent]

$c_{COd} =$  dry CO concentration in the raw exhaust [ppm]

$c_{HCw} =$  wet HC concentration in the raw exhaust [ppm]

and factor  $k_{fd}$  [m<sup>3</sup>/kg fuel] that is calculated on a dry basis by subtracting the water formed by combustion from  $k_f$ :

$$k_{fd} = k_f - 0.11118 \cdot w_H \quad (7-22)$$

Deleted: ¶

Deleted: . (A.8-23)

where:

$k_f =$  fuel specific factor of equation 7-5 [m<sup>3</sup>/kg fuel]

Deleted: (A.8-

Deleted: )

$w_H =$  hydrogen content of fuel [per cent mass]

2.2 Diluted gaseous emissions

Deleted: A.8.3.

2.2.1 Mass of the gaseous emissions

Deleted: A.8.3.1. .

The exhaust mass flow rate shall be measured with a constant volume sampling (CVS) system, which may use a positive displacement pump (PDP), a critical flow venturi (CFV) or a subsonic venturi (SSV).

Deleted: ¶  
A.8.3.1.1. Full flow dilution measurement (CVS)¶  
¶

For systems with constant mass flow (i.e. with heat exchanger), the mass of the pollutants  $m_{gas}$  [g/test] shall be determined from the following equation:

Deleted: ¶

$$m_{gas} = k_h \cdot k \cdot u_{gas} \cdot c_{gas} \cdot m_{ed} \quad (7-23)$$

Deleted: . (A.8-24)¶

where:

Moved down [31]: ¶  
. Where:¶

$u_{gas}$  is the ratio between density of exhaust component and density of air, as given in table 7.2 or calculated with equation (7-34) [-]

Deleted:

$c_{gas}$  = mean background corrected concentration of the component on a wet basis [ppm] or [per cent vol] respectively

Deleted: = .

Deleted: A.8

Deleted: A.8-35

Deleted:

$k_h$  = NO<sub>x</sub> correction factor [-], only to be applied for the NO<sub>x</sub> emission calculation

Deleted: .

$k = 1$  for  $c_{gasr,w,i}$  in [ppm],  $k = 10,000$  for  $c_{gasr,w,i}$  in [per cent vol]

Deleted: =

Deleted: .

$m_{ed}$  = total diluted exhaust gas mass over the cycle [kg/test]

Deleted:

For systems with flow compensation (without heat exchanger), the mass of the pollutants  $m_{gas}$  [g/test] shall be determined by calculation of the instantaneous mass emissions, by integration and by background correction according to the following equation:

Deleted: .

$$m_{gas} = k_h \cdot k \cdot \left\{ \sum_{i=1}^N \left[ \left( m_{ed,i} \cdot c_e \cdot u_{gas} \right) \right] - \left[ \left( m_{ed} \cdot c_d \cdot \left( 1 - \frac{1}{D} \right) \cdot u_{gas} \right) \right] \right\} \quad (7-24)$$

Deleted: (A.8-25)

Where:

$c_e$  = emission concentration in the diluted exhaust gas, on a wet basis [ppm] or [per cent vol]

$c_d$  = emission concentration in the dilution air, on a wet basis [ppm] or [per cent vol]

$m_{ed,i}$  = mass of the diluted exhaust gas during time interval  $i$  [kg]

$m_{ed}$  = total mass of diluted exhaust gas over the cycle [kg]  
 $u_{gas}$  = tabulated value from table 7.2 [-]  
 $D$  = dilution factor (see equation (7-28) of paragraph 2.2.2.2) [-]  
 $k_h$  = NO<sub>x</sub> correction factor [-], only to be applied for the NO<sub>x</sub> emission calculation  
 $k$  = 1 for  $c$  in [ppm],  $k = 10,000$  for  $c$  in [per cent vol]

Deleted: A.8

Deleted: A.8-29

Deleted: A.8.3.

Deleted: .)

The concentrations  $c_{gas}$ ,  $c_e$  and  $c_d$  can be either values measured in a batch sample (bag, but not allowed for NO<sub>x</sub> and HC) or be averaged by integration from continuous measurements. Also  $m_{ed,i}$  has to be averaged by integration over the test cycle.

The following equations show how the needed quantities ( $c_e$ ,  $u_{gas}$  and  $m_{ed}$ ) shall be calculated.

### 2.2.2 Dry-to-wet concentration conversion

All concentrations in paragraph 2.2.1 measured dry shall be converted to a wet basis using equation (7-3).

Deleted: ¶  
A.8.3.2.

Deleted:

Deleted: ¶

Deleted: A.8.3.

Deleted: A.8-5)().

Deleted: A.8.3.2.1. .

Deleted: ¶  
All

Deleted: measured dry

Deleted: . (A.8-26

#### 2.2.2.1 Diluted exhaust gas

Dry concentrations shall be converted to wet concentrations by one of the following two equations applied to equation:

$$k_{w,e} = \left[ \left( 1 - \frac{\alpha \cdot c_{CO2w}}{200} \right) - k_{w2} \right] \cdot 1.008 \quad (7-25)$$

or

$$k_{w,e} = \left( \frac{1 - k_{w2}}{1 + \frac{\alpha \cdot c_{CO2d}}{200}} \right) \cdot 1.008 \quad (7-26)$$

Deleted: (A.8-27

where:

$\alpha$  = molar hydrogen to carbon ratio of the fuel [-]  
 $c_{CO2w}$  = concentration of CO<sub>2</sub> in the diluted exhaust gas on a wet basis [per cent vol]  
 $c_{CO2d}$  = concentration of CO<sub>2</sub> in the diluted exhaust gas on a dry basis [per cent vol]

Deleted: .  $k_{w,e}$  = dry-to-wet conversion factor for the diluted exhaust gas [-]¶

The dry to wet correction factor  $k_{w2}$  takes into consideration the water content of both intake air and dilution air:

$$k_{w2} = \frac{1.608 \cdot \left[ H_d \cdot \left( 1 - \frac{1}{D} \right) + H_a \cdot \left( \frac{1}{D} \right) \right]}{1000 + \left\{ 1.608 \cdot \left[ H_d \cdot \left( 1 - \frac{1}{D} \right) + H_a \cdot \left( \frac{1}{D} \right) \right] \right\}} \quad (7-27)$$

Deleted: (A.8-28)

Where:

$H_a$  = intake air humidity [g H<sub>2</sub>O/kg dry air]

$H_d$  = dilution air humidity [g H<sub>2</sub>O/kg dry air]

$D$  = dilution factor (see equation (7-28) of paragraph 2.2.2.2) [-]

Deleted: A.8-29

Deleted: A.8.3.

Deleted: .)

Deleted: A.8.3.2.2. .

Deleted: ¶

#### 2.2.2.2 Dilution factor

The dilution factor  $D$  [-] (which is necessary for the background correction and the  $k_{w2}$  calculation) shall be calculated as follows:

$$D = \frac{F_S}{c_{CO_2,e} + (c_{HC,e} + c_{CO,e}) \cdot 10^{-4}} \quad (7-28)$$

Deleted: (A.8-29)

where:

$F_S$  = stoichiometric factor [-]

$c_{CO_2,e}$  = concentration of CO<sub>2</sub> in the diluted exhaust gas on a wet basis [per cent vol]

$c_{HC,e}$  = concentration of HC in the diluted exhaust gas on a wet basis [ppm C1]

$c_{CO,e}$  = concentration of CO in the diluted exhaust gas on a wet basis [ppm]

The stoichiometric factor shall be calculated as follows:

$$F_S = 100 \cdot \frac{1}{1 + \frac{\alpha}{2} + 3.76 \cdot \left( 1 + \frac{\alpha}{4} \right)} \quad (7-29)$$

Deleted: . (A.8-30)

Where:

$\alpha =$  molar hydrogen to carbon ratio in the fuel [-]

Alternatively, if the fuel composition is not known, the following stoichiometric factors may be used:

$$F_S(\text{diesel}) = 13.4$$

$$F_S(\text{LPG}) = 11.6$$

$$F_S(\text{NG}) = 9.5$$

$$F_S(\text{E10}) = 13.3$$

$$F_S(\text{E85}) = 11.5$$

Deleted: ¶

Deleted:  $F_S(\text{diesel}) = 13.4$

If a direct measurement is made of the exhaust gas flow, the dilution factor  $D$  [-] may be calculated as follows:

$$D = \frac{q_{VCVS}}{q_{Vew}} \quad (7-30)$$

Deleted: (A.8-31)

Where:

$q_{VCVS}$  is the volumetric flow rate of diluted exhaust gas [ $\text{m}^3/\text{s}$ ]

$q_{Vew}$  = volumetric flow rate of raw exhaust gas [ $\text{m}^3/\text{s}$ ]

### 2.2.2.3 Dilution air

Deleted: A.8.3.2.3. .

$$k_{w,d} = (1 - k_{w3}) \cdot 1.008$$

(7-31)

Deleted: A.8-32

with

$$k_{w3} = \frac{1.608 \cdot H_d}{1000 + 1.608 \cdot H_d} \quad (7-32)$$

Deleted: (A.8-33)

where:

$H_d$  = dilution air humidity [ $\text{g H}_2\text{O}/\text{kg dry air}$ ]

### 2.2.2.4 Determination of the background corrected concentration

Deleted: A.8.3.2.4. .

The average background concentration of the gaseous pollutants in the dilution air shall be subtracted from measured concentrations to get the net concentrations of the pollutants. The average values of the background concentrations can be determined by the sample bag method or by continuous measurement with integration. The following equation shall be used:

Deleted: ¶

$$c_{\text{gas}} = c_{\text{gas,e}} - c_{\text{d}} \cdot \left(1 - \frac{1}{D}\right) \quad (7-33)$$

Deleted: (A.8-34)

Where:

$c_{\text{gas}}$  = net concentration of the gaseous pollutant [ppm] or [per cent vol]

$c_{\text{gas,e}}$  = emission concentration in the diluted exhaust gas, on a wet basis [ppm] or [per cent vol]

$c_{\text{d}}$  = emission concentration in the dilution air, on a wet basis [ppm] or [per cent vol]

$D$  = dilution factor (see equation (7-28) of paragraph 2.2.2.2) [-]

Deleted: A.8-29

Deleted: A.8.3.

Deleted: .)

Deleted: A.8.3.3. .

Deleted: ¶

Deleted: A.8

Deleted: A.8

### 2.2.3 Component specific factor u

The component specific factor  $u_{\text{gas}}$  of diluted gas can either be calculated by the following equation or be taken from table 7.2; in table 7.2 the density of the diluted exhaust gas has been assumed equal to air density.

$$u = \frac{M_{\text{gas}}}{M_{\text{d,w}} \cdot 1000} = \frac{M_{\text{gas}}}{\left[ M_{\text{da,w}} \cdot \left(1 - \frac{1}{D}\right) + M_{\text{r,w}} \cdot \left(\frac{1}{D}\right) \right] \cdot 1000} \quad (7-34)$$

Deleted: (A.8-35)

Where:

$M_{\text{gas}}$  = molar mass of the gas component [g/mol]

$M_{\text{d,w}}$  = molar mass of diluted exhaust gas [g/mol]

$M_{\text{da,w}}$  = molar mass of dilution air [g/mol]

$M_{\text{r,w}}$  = molar mass of raw exhaust gas [g/mol]

$D$  = dilution factor (see equation (7-28) of paragraph 2.2.2.2) [-]

Deleted: A.8-29

Deleted: A.8.3.

Deleted: .)



**Table 7.2**

**Diluted exhaust gas  $u$  values (for emission concentration expressed in ppm) and component densities**

**Deleted:** A.8

**Deleted:** and component densities (the  $u$  figures are calculated)

Fuel	$\rho_c$	Gas					
		$NO_x$	$CO$	$HC$	$CO_2$	$O_2$	$CH_4$
		$\rho_{gas} [kg/m^3]$					
		2.053	1.250	<sup>a</sup>	1.9636	1.4277	0.716
$u_{gas}^b$							
Diesel (non-road gas-oil)	1.2943	0.001586	0.000966	0.000482	0.001517	0.001103	0.000553
Ethanol for dedicated compression ignition engines (ED95)	1.2768	0.001609	0.000980	0.000780	0.001539	0.001119	0.000561
Natural gas / bio-methane <sup>c</sup>	1.2661	0.001621	0.000987	0.000528 <sup>d</sup>	0.001551	0.001128	0.000565
Propane	1.2805	0.001603	0.000976	0.000512	0.001533	0.001115	0.000559
Butane	1.2832	0.001600	0.000974	0.000505	0.001530	0.001113	0.000558
LPG <sup>e</sup>	1.2811	0.001602	0.000976	0.000510	0.001533	0.001115	0.000559
Petrol (E10)	1.2931	0.001587	0.000966	0.000499	0.001518	0.001104	0.000553
Ethanol (E85)	1.2797	0.001604	0.000977	0.000730	0.001534	0.001116	0.000559
<sup>a</sup> depending on fuel <sup>b</sup> at $\lambda = 2$ , dry air, 273 K, 101.3 kPa <sup>c</sup> $u$ accurate within 0.2 % for mass composition of: C = 66 - 76 %; H = 22 - 25 %; N = 0 - 12 % <sup>d</sup> NMHC on the basis of $CH_{2.93}$ (for total HC the $u_{gas}$ coefficient of $CH_4$ shall be used) <sup>e</sup> $u$ accurate within 0.2 % for mass composition of: C3 = 70 - 90 %; C4 = 10 - 30 %							

2.2.4 Exhaust gas mass flow calculation

**Deleted:** A.8.3.4.

2.2.4.1 PDP-CVS system

**Deleted:** A.8.3.4.1.

The calculation of the mass of the diluted exhaust [kg/test] over the cycle is as follows, if the temperature of the diluted exhaust  $m_{ed}$  is kept within  $\pm 6$  K over the cycle by using a heat exchanger:

$$m_{\text{ed}} = 1.293 \cdot V_0 \cdot n_p \cdot \frac{p_p}{101.325} \cdot \frac{273.15}{T} \quad (7-35)$$

Deleted: (A.8-36)

where:

- $V_0$  = volume of gas pumped per revolution under test conditions [m<sup>3</sup>/rev]
- $n_p$  = total revolutions of pump per test [rev/test]
- $p_p$  = absolute pressure at pump inlet [kPa]
- $\bar{T}$  = average temperature of the diluted exhaust gas at pump inlet [K]
- 1.293 kg/m<sup>3</sup> = air density at 273.15 K and 101.325 kPa

If a system with flow compensation is used (i.e. without heat exchanger), the mass of the diluted exhaust gas  $m_{\text{ed},i}$  [kg] during the time interval shall be calculated as follows:

$$m_{\text{ed},i} = 1.293 \cdot V_0 \cdot n_{p,i} \cdot \frac{p_p}{101.325} \cdot \frac{273.15}{T} \quad (7-36)$$

Deleted: (A.8-37)

where:

- $V_0$  = volume of gas pumped per revolution under test conditions [m<sup>3</sup>/rev]
- $p_p$  = absolute pressure at pump inlet [kPa]
- $n_{p,i}$  = total revolutions of pump per time interval  $i$  [rev/ $\Delta t$ ]
- $\bar{T}$  = average temperature of the diluted exhaust gas at pump inlet [K]
- 1.293 kg/m<sup>3</sup> = air density at 273.15 K and 101.325 kPa

#### 2.2.4.2 CFV-CVS system

Deleted: A.8.3.4.2.

The calculation of the mass flow over the cycle  $m_{ed}$  [g/test] is as follows, if the temperature of the diluted exhaust is kept within  $\pm 11$  K over the cycle by using a heat exchanger:

$$m_{ed} = \frac{1.293 \cdot t \cdot K_V \cdot p_p}{T^{0.5}} \quad (7-37)$$

Deleted: (A.8-38)

Moved (insertion) [21]

Where:

- $t$  = cycle time [s]
- $K_V$  = calibration coefficient of the critical flow venturi for standard conditions  $\left[ (\sqrt{K} \cdot m^4 \cdot s) / kg \right]$
- $p_p$  = absolute pressure at venturi inlet [kPa]
- $T$  = absolute temperature at venturi inlet [K]
- $1.293 \text{ kg/m}^3$  = air density at 273.15 K and 101.325 kPa

Moved down [32]: Where:¶

Deleted: ¶

If a system with flow compensation is used (i.e. without heat exchanger), the mass of the diluted exhaust gas  $m_{ed,i}$  [kg] during the time interval shall be calculated as follows:

$$m_{ed,i} = \frac{1.293 \cdot \Delta t_i \cdot K_V \cdot p_p}{T^{0.5}} \quad (7-38)$$

Deleted: (A.8-39)

where:

- $\Delta t_i$  = time interval of the test [s]
- $K_V$  = calibration coefficient of the critical flow venturi for standard conditions  $\left[ (\sqrt{K} \cdot m^4 \cdot s) / kg \right]$
- $p_p$  = absolute pressure at venturi inlet [kPa]
- $T$  = absolute temperature at venturi inlet [K]
- $1.293 \text{ kg/m}^3$  = air density at 273.15 K and 101.325 kPa

2.2.4.3 SSV-CVS system

Deleted: A.8.3.4.3 .

The calculation of the diluted exhaust gas mass over the cycle  $m_{ed}$  [kg/test] shall be as follows, if the temperature of the diluted exhaust is kept within  $\pm 11\text{K}$  over the cycle by using a heat exchanger:

$$m_{ed} = 1.293 \cdot q_{vSSV} \cdot \Delta t \quad (7-39)$$

Deleted: (A.8-40)

Where:

$1.293 \text{ kg/m}^3$  = air density at 273.15 K and 101.325 kPa

$\Delta t$  = cycle time [s]

$q_{vSSV}$  = air flow rate at standard conditions (101.325 kPa, 273.15 K) [ $\text{m}^3/\text{s}$ ]

with

$$q_{vSSV} = \frac{A_0}{60} d_v^2 C_d p_p \sqrt{\left[ \frac{1}{T} (r_p^{1.4286} - r_p^{1.7143}) \cdot \left( \frac{1}{1 - r_D^4 r_p^{1.4286}} \right) \right]} \quad (7-40)$$

Deleted: (A.8-41)

Where:

$A_0$  = collection of constants and units conversions =  
 $0.0056940 \left[ \frac{\text{m}^3 \cdot \text{K}^{\frac{1}{2}} \cdot 1}{\text{min} \cdot \text{kPa} \cdot \text{mm}^2} \right]$

$d_v$  = diameter of the SSV throat [mm]

$C_d$  = discharge coefficient of the SSV [-]

$p_p$  = absolute pressure at venturi inlet [kPa]

$T_{in}$  = temperature at the venturi inlet [K]

$r_p$  = ratio of the SSV throat to inlet absolute static pressure,  
 $\left( 1 - \frac{\Delta p}{p_a} \right)$  [-]

$r_D$  = ratio of the SSV throat diameter to the inlet pipe inner diameter  $\frac{d}{D}$  [-]

If a system with flow compensation is used (i.e. without heat exchanger), the mass of the diluted exhaust gas  $m_{ed,i}$  [kg] during the time interval shall be calculated as follows:

$$m_{ed,i} = 1.293 \cdot q_{vSSV} \cdot \Delta t_i \quad (7-41)$$

**Deleted:** (A.8-42)

Where:

1.293 kg/m<sup>3</sup> = air density at 273.15 K and 101.325 kPa

$\Delta t_i$  = time interval [s]

$q_{vSSV}$  = volumetric flow rate of the SSV [m<sup>3</sup>/s]

### 2.3 Calculation of particulate emission

**Deleted:** A.8.3.5. .

**Deleted:** particulates

#### 2.3.1 Transient and ramped modal cycles

**Deleted:** A.8.3.5.1.

The particulate mass shall be calculated after buoyancy correction of the particulate sample mass according to paragraph 8.1.12.2.5.

**Deleted:** ¶

#### 2.3.1.1 Partial flow dilution system

**Deleted:** A.8.3.5.1.1. .

##### 2.3.1.1.1 Calculation based on sample ratio

**Deleted:** ¶  
The calculation for double dilution system is shown in paragraph A.8.3.5.1.2. ¶  
¶  
A.8.3.5.1.1.1. .

The particulate emission over the cycle  $m_{PM}$  [g] shall be calculated with the following equation:

**Deleted:** ¶

$$m_{PM} = \frac{m_f}{r_s \cdot 1000} \quad (7-42)$$

**Deleted:** (A.8-43)

where:

$m_f$  = particulate mass sampled over the cycle [mg]

$r_s$  = average sample ratio over the test cycle [-]

with:

$$r_s = \frac{m_{se}}{m_{ew}} \cdot \frac{m_{sep}}{m_{sed}} \quad (7-43)$$

**Deleted:** . (A.8-44)

Where:

- $m_{se}$  = sample mass of raw exhaust over the cycle [kg]
- $m_{ew}$  = total mass of raw exhaust over the cycle [kg]
- $m_{sep}$  = mass of diluted exhaust gas passing the particulate collection filters [kg]
- $m_{sed}$  = mass of diluted exhaust gas passing the dilution tunnel [kg]

In case of the total sampling type system,  $m_{sep}$  and  $m_{sed}$  are identical.

2.3.1.1.2 Calculation based on dilution ratio

Deleted: A.8.3.5.1.1.2.

The particulate emission over the cycle  $m_{PM}$  [g] shall be calculated with the following equation:

$$m_{PM} = \frac{m_f}{m_{sep}} \cdot \frac{m_{edf}}{1000} \quad (7-44)$$

Deleted: (A.8-45)

Where:

- $m_f$  = particulate mass sampled over the cycle [mg]
- $m_{sep}$  = mass of diluted exhaust gas passing the particulate collection filters [kg]
- $m_{edf}$  = mass of equivalent diluted exhaust gas over the cycle [kg]

The total mass of equivalent diluted exhaust gas mass over the cycle  $m_{edf}$  [kg] shall be determined as follows:

$$m_{edf} = \frac{1}{f} \cdot \sum_{i=1}^N q_{medf,i} \quad (7-45)$$

Deleted: (A.8-46)

With:

$$q_{medf,i} = q_{mew,i} \cdot r_{d,i} \quad (7-46)$$

$$r_{d,i} = \frac{q_{mdew,i}}{q_{mdew,i} - q_{mdw,i}} \quad (7-47)$$

Deleted: (A.8)

Deleted: ¶  
(A.8-48)¶

Where:

- $q_{medf,i}$  = instantaneous equivalent diluted exhaust mass flow rate [kg/s]
- $q_{mew,i}$  = instantaneous exhaust mass flow rate on a wet basis [kg/s]
- $r_{d,i}$  = instantaneous dilution ratio [-]
- $q_{mdew,i}$  = instantaneous diluted exhaust mass flow rate on a wet basis [kg/s]
- $q_{mdw,i}$  = instantaneous dilution air mass flow rate [kg/s]
- $f$  = data sampling rate [Hz]
- $N$  = number of measurements [-]

### 2.3.1.2 Full flow dilution system

Deleted: A.8.3.5.1.2.

The mass emission shall be calculated as follows:

Deleted: ¶

$$m_{PM} = \frac{m_f}{m_{sep}} \cdot \frac{m_{ed}}{1000} \quad (7-48)$$

Deleted: . (A.8-49)¶

Moved down [33]: ¶  
. Where:¶

Deleted:

where:

$m_f$  is the particulate mass sampled over the cycle [mg]

Deleted: = .

$m_{sep}$  is the mass of diluted exhaust gas passing the particulate collection filters [kg]

Deleted:

Deleted: = .

$m_{ed}$  is the mass of diluted exhaust gas over the cycle [kg]

Deleted: ¶

Deleted:

Deleted: = .

with

$$m_{sep} = m_{set} - m_{ssd} \quad (7-49)$$

Deleted: (A.8-50)

Where:

- $m_{set}$  = mass of double diluted exhaust gas through particulate filter [kg]
- $m_{ssd}$  = mass of secondary dilution air [kg]

### 2.3.1.2.1 Background correction

Deleted: A.8.3.5.1.3.

The particulate mass  $m_{PM,c}$  [g] may be background corrected as follows:

$$m_{PM,c} = \left\{ \frac{m_f}{m_{sep}} - \left[ \frac{m_b}{m_{sd}} \cdot \left( 1 - \frac{1}{D} \right) \right] \right\} \cdot \frac{m_{ed}}{1000} \quad (7-50)$$

Deleted: (A.8-51)

Where:

$m_f$  = particulate mass sampled over the cycle [mg]

$m_{sep}$  = mass of diluted exhaust gas passing the particulate collection filters [kg]

$m_{sd}$  = mass of dilution air sampled by background particulate sampler [kg]

$m_b$  = mass of collected background particulates of dilution air [mg]

$m_{ed}$  = mass of diluted exhaust gas over the cycle [kg]

$D$  = dilution factor (see equation (7-28) of paragraph 2.2.2.2) [-]

Deleted: A.8-29

Deleted: A.8.3.

Deleted: .)

Deleted: A.8.3.5.2. .

### 2.3.2 Calculation for steady-state discrete-mode cycles

#### 2.3.2.1 Dilution system

Deleted: A.8.3.5.2.1.

All calculations shall be based upon the average values of the individual modes  $i$  during the sampling period.

- (a) For partial-flow dilution, the equivalent mass flow of diluted exhaust gas shall be determined by means of the system with flow measurement shown in figure 9.2:

$$q_{medf} = q_{mew} \cdot r_d \quad (7-51)$$

Deleted: . (A.8-52)

$$r_d = \frac{q_{mdew}}{q_{mdew} - q_{mdw}} \quad (7-52)$$

Deleted: (A.8-53)

Where:

$q_{medf}$  = equivalent diluted exhaust mass flow rate [kg/s]



- $q_{mew}$  = exhaust mass flow rate on a wet basis [kg/s]
- $r_d$  = dilution ratio [-]
- $q_{mdew}$  = diluted exhaust mass flow rate on a wet basis [kg/s]
- $q_{mdw}$  = dilution air mass flow rate [kg/s]

(b) For full-flow dilution systems  $q_{mdew}$  is used as  $q_{medf}$ .

### 2.3.2.2 Calculation of the particulate mass flow rate

Deleted: A.8.3.5.2.2.

The particulate emission flow rate over the cycle  $q_{mPM}$  [g/h] shall be calculated as follows:

(a) For the single-filter method

$$q_{mPM} = \frac{m_f}{m_{sep}} \cdot \overline{q_{medf}} \cdot \frac{3600}{1000} \quad (7-53)$$

Deleted: (A.8-54)

$$\overline{q_{medf}} = \sum_{i=1}^N q_{medfi} \cdot WF_i \quad (7-54)$$

$$m_{sep} = \sum_{i=1}^N m_{sepi} \quad (7-55)$$

Deleted: (A.8)

Deleted: ¶  
(A.8-56)¶

Where:

- $q_{mPM}$  = particulate mass flow rate [g/h]
- $m_f$  = particulate mass sampled over the cycle [mg]
- $\overline{q_{medf}}$  = average equivalent diluted exhaust gas mass flow rate on wet basis [kg/s]
- $q_{medfi}$  = equivalent diluted exhaust gas mass flow rate on wet basis at mode  $i$  [kg/s]
- $WF_i$  = weighting factor for the mode  $i$  [-]
- $m_{sep}$  = mass of diluted exhaust gas passing the particulate collection

$m_{\text{sepi}}$  = mass of diluted exhaust sample passed through the particulate sampling filter at mode  $i$  [kg]  
 $N$  = number of measurements [-]

(b) For the multiple-filter method

$$q_{mPMi} = \frac{m_{fi}}{m_{\text{sepi}}} \cdot q_{medfi} \cdot \frac{3600}{1000} \quad (7-56)$$

Deleted: (A.8-57)

Where:

$q_{mPMi}$  = particulate mass flow rate for the mode  $i$  [g/h]  
 $m_{fi}$  = particulate sample mass collected at mode  $i$  [mg]  
 $q_{medfi}$  = equivalent diluted exhaust gas mass flow rate on wet basis at mode  $i$  [kg/s]  
 $m_{\text{sepi}}$  = mass of diluted exhaust sample passed through the particulate sampling filter at mode  $i$  [kg]

The PM mass is determined over the test cycle by summation of the average values of the individual modes  $i$  during the sampling period.

The particulate mass flow rate  $q_{mPM}$  [g/h] or  $q_{mPMi}$  [g/h] may be background corrected as follows:

(c) For the single-filter method

$$q_{mPM} = \left\{ \frac{m_f}{m_{\text{sep}}} - \left[ \frac{m_{f,d}}{m_d} \cdot \sum_{i=1}^N \left( 1 - \frac{1}{D_i} \right) \cdot WF_i \right] \right\} \cdot q_{medf} \cdot \frac{3600}{1000} \quad (7-57)$$

Deleted: (A.8-58)

Where:

$q_{mPM}$  = particulate mass flow rate [g/h]  
 $m_f$  = particulate sample mass collected [mg]

- $m_{sep}$  = mass of diluted exhaust sample passed through the particulate sampling filter [kg]
- $m_{f,d}$  = particulate sample mass of the dilution air collected [mg]
- $m_d$  = mass of the dilution air sample passed through the particulate sampling filters [kg]
- $D_i$  = dilution factor at mode  $i$  (see equation (7-28) of paragraph 2.2.2.2) [-]
- $WF_i$  = weighting factor for the mode  $i$  [-]
- $\overline{q_{medf}}$  = average equivalent diluted exhaust gas mass flow rate on wet basis [kg/s]

Deleted: A.8-29

Deleted: A.8.3.

Deleted: .)

(d) For the multiple-filter method

$$q_{mPMi} = \left\{ \frac{m_{fi}}{m_{sepi}} - \left[ \frac{m_{f,d}}{m_d} \cdot \left( 1 - \frac{1}{D} \right) \right] \right\} \cdot q_{medfi} \cdot \frac{3600}{1000} \quad (7-58)$$

Deleted: (A.8-59)

Where:

- $q_{mPMi}$  = particulate mass flow rate at mode  $i$  [g/h]
- $m_{fi}$  = particulate sample mass collected at mode  $i$  [mg]
- $m_{sepi}$  = mass of diluted exhaust sample passed through the particulate sampling filter at mode  $i$  [kg]
- $m_{f,d}$  = particulate sample mass of the dilution air collected [mg]
- $m_d$  = mass of the dilution air sample passed through the particulate sampling filters [kg]
- $D$  = dilution factor (see equation (7-28) of paragraph 2.2.2.2) [-]
- $q_{medfi}$  = equivalent diluted exhaust gas mass flow rate on wet basis at mode  $i$  [kg/s]

Deleted: A.8-29

Deleted: A.8.3.

Deleted: .)

If more than one measurement is made,  $m_{f,d}/m_d$  shall be replaced with  $\overline{m_{f,d}/m_d}$ .

## 2.4 Cycle work and specific emissions

Deleted: A.8.4. .)

### 2.4.1 Gaseous emissions

Deleted: A.8.4.1.

#### 2.4.1.1 Transient and ramped modal cycles

Deleted: A.8.4.1.1. .)

Reference is made to paragraphs 2.1. and 2.2 for raw and diluted exhaust respectively. The resulting values for power  $P$  [kW] shall be integrated over a test interval. The total work  $W_{act}$  [kWh] is calculated as follows:

Deleted: A.8.

Deleted: A.8.3.1.

$$W_{act} = \sum_{i=1}^N P_i \cdot \Delta t_i = \frac{1}{f} \cdot \frac{1}{3600} \cdot \frac{1}{10^3} \frac{2 \cdot \pi}{60} \sum_{i=1}^N (n_i \cdot T_i) \quad (7-59)$$

Deleted: (A.8-60)

Where:

$P_i$  = instantaneous engine power [kW]

$n_i$  = instantaneous engine speed [rpm]

$T_i$  = instantaneous engine torque [Nm]

$W_{act}$  = actual cycle work [kWh]

$f$  = data sampling rate [Hz]

$N$  = number of measurements [-]

Where auxiliaries were fitted in accordance with Appendix 2 to Annex VI of this regulation there shall be no adjustment to the instantaneous engine torque in equation 7-59. Where, according to paragraphs 6.3.2 or 6.3.3 of Annex VI to this regulation necessary auxiliaries that should have been fitted for the test are not installed, or auxiliaries that should have been removed for the test are installed, the value of  $T_i$  used in equation 7-59 shall be adjusted as follows:

Deleted: 1

Deleted: A.8-60

Deleted: [

Deleted: ]

Deleted: [

Deleted: ]

Deleted: A.8-60

Deleted: A.8-61

$$T_i = T_{i,meas} + T_{i,AUX} \quad (7-60)$$

Where:

$T_{i,meas}$  = measured value of instantaneous engine torque

$T_{i,AUX}$  = corresponding value of torque required to drive auxiliaries determined according to paragraph 7.7.2.3.2 of Annex VI to this regulation.

Deleted: [

Deleted: .1]

Deleted: VIII

Deleted: ¶

The specific emissions  $e_{gas}$  [g/kWh] shall be calculated in the following ways depending on the type of test cycle.

$$e_{gas} = \frac{m_{gas}}{W_{act}} \quad (7-61)$$

Deleted: . (A.8)

Where:

$m_{gas}$  = total mass of emission [g/test]

$W_{act}$  = cycle work [kWh]

In case of the NRTC, the final test result  $e_{\text{gas}}$  [g/kWh] shall be a weighted average from cold start test and hot start test by using:

$$e_{\text{gas}} = \frac{(0.1 \cdot m_{\text{cold}}) + (0.9 \cdot m_{\text{hot}})}{(0.1 \cdot W_{\text{act,cold}}) + (0.9 \cdot W_{\text{act,hot}})} \quad (7-62)$$

Deleted: (A.8)

In case of an engine with infrequent (periodic) exhaust regeneration (see paragraph 6.6.2 of Annex VI), the specific emissions shall be corrected with the two separate pairs of multiplicative adjustment factors  $k_{Ur}$  (upward factor of equation 6-10) and  $k_{Dr}$  (downward factor of equation 6-11) or with the two separate pairs of adjustment additive factors  $k_{Ur}$  (upward factor of equation 6-12) and  $k_{Dr}$  (downward factor of equation 6-13).

Deleted: ),

Deleted:  $k_r$  (

Deleted: (

Deleted: 4))

Deleted: (6-5) and  $k_{Dr}$  (downward factor of equation (

Deleted: ).

Deleted: A.8.4.1.2. .

#### 2.4.1.2 Steady-state discrete-mode cycle

The specific emissions  $e_{\text{gas}}$  [g/kWh] are calculated as follows:

$$e_{\text{gas}} = \frac{\sum_{i=1}^{N_{\text{mode}}} (q_{m\text{gas},i} \cdot WF_i)}{\sum_{i=1}^{N_{\text{mode}}} (P_i \cdot WF_i)} \quad (7-63)$$

Deleted: (A.8)

where:

$q_{m\text{gas},i}$  = mean emission mass flow rate for the mode  $i$  [g/h]

$P_i$  = engine power for the mode  $i$  [kW] with  $P_i = P_{\text{max},i} + P_{\text{aux},i}$  (see paragraphs 6.3 and 7.7.1.3)

$WF_i$  = weighting factor for the mode  $i$  [-]

Deleted: 2. and 6.

Deleted: )

#### 2.4.2 Particulate emissions

Deleted: A.8.4.2. .

##### 2.4.2.1 Transient and ramped modal cycles

Deleted: A.8.4.2.1.

The particulate specific emissions shall be calculated with equation 7.64 where  $e_{\text{gas}}$  [g/kWh] and  $m_{\text{gas}}$  [g/test] are substituted by  $e_{\text{PM}}$  [g/kWh] and  $m_{\text{PM}}$  [g/test] respectively:

Deleted: (A.8-61)

$$e_{\text{PM}} = \frac{m_{\text{PM}}}{W_{\text{act}}} \quad (7-64)$$

Deleted: (A.8)

where:

$m_{\text{PM}}$  = total mass of particulates emission, calculated in accordance with paragraph 2.3.1.1 or 2.3.1.2 [g/test]

Deleted: according to .

Deleted: A.8

$W_{\text{act}}$  = cycle work [kWh]

Deleted: 5.

The emissions on the transient composite cycle (i.e. cold phase and hot phase) shall be calculated as shown in paragraph 2.4.1.1.

Deleted: A.8

#### 2.4.2.2 Steady state discrete-mode cycle

Deleted: A.8.4.2.2 .

The particulate specific emission  $e_{\text{PM}}$  [g/kWh] shall be calculated in the following way:

Deleted: ¶

(a) For the single-filter method

$$e_{\text{PM}} = \frac{q_{m\text{PM}}}{\sum_{i=1}^N (P_i \cdot WF_i)} \quad (7-64)$$

Deleted: (A.8-65)

where:

Deleted: ¶

$P_i$  = engine power for the mode  $i$  [kW] with  $P_i = P_{\text{max}i} + P_{\text{aux}i}$   
(see paragraphs 6.3 and 7.7.1.3 of Annex VI)

Deleted: 2. and 6.3.)

$WF_i$  = weighting factor for the mode  $i$  [-]

$q_{m\text{PM}}$  = particulate mass flow rate [g/h]

(b) For the multiple-filter method

$$e_{PM} = \frac{\sum_{i=1}^N (q_{mPMi} \cdot WF_i)}{\sum_{i=1}^N (P_i \cdot WF_i)} \quad (7-65)$$

Deleted: (A.8-66)

Moved (insertion) [31]

Where:

$P_i =$  engine power for the mode  $i$  [kW] with  $P_i = P_{maxi} + P_{auxi}$

Moved down [34]: Where:¶

Deleted: ¶

(see paragraphs [6.3](#) and [7.7.1.3](#))

Deleted: 2. and 6.

$WF_i =$  weighting factor for the mode  $i$  [-]

Deleted: .)

$q_{mPMi} =$  particulate mass flow rate at mode  $i$  [g/h]

For the single-filter method, the effective weighting factor,  $WF_{ei}$ , for each mode shall be calculated in the following way:

$$WF_{ei} = \frac{m_{sepi} \cdot \overline{q_{medf}}}{m_{sep} \cdot q_{medfi}} \quad (7-66)$$

Deleted: (A.8-67)

Where:

$m_{sepi} =$  mass of the diluted exhaust sample passed through the particulate sampling filters at mode  $i$  [kg]

$\overline{q_{medf}} =$  average equivalent diluted exhaust gas mass flow rate [kg/s]

$q_{medfi} =$  equivalent diluted exhaust gas mass flow rate at mode  $i$  [kg/s]

$m_{sep} =$  mass of the diluted exhaust sample passed through the particulate sampling filters [kg]

The value of the effective weighting factors shall be within  $\pm 0.005$  (absolute value) of the weighting factors listed in [Appendix 1 to Annex XVII](#).

Deleted: A.1

2.5 Diluted Exhaust Flow (CVS) Calibration, and Related Calculations

The CVS system shall be calibrated by using an accurate flowmeter and a restricting device. The flow through the system shall be measured at different restriction settings, and the control parameters of the system shall be measured and related to the flow.

Deleted: Appendix 1

Deleted: A.8.5. Calibration

Deleted: of CVS system

Various types of flowmeters may be used, e.g. calibrated venturi, calibrated laminar flowmeter, calibrated turbine meter.

Deleted:

2.5.1 Positive displacement pump (PDP)

All the parameters related to the pump shall be simultaneously measured along with the parameters related to a calibration venturi which is connected in series with the pump. The calculated flow rate (in m<sup>3</sup>/s at pump inlet, absolute pressure and temperature) shall be plotted versus a correlation function which is the value of a specific combination of pump parameters. The linear equation which relates the pump flow and the correlation function shall be determined. If a CVS has a multiple speed drive, the calibration shall be performed for each range used.

Deleted: A.8.5.1.

Deleted:

Temperature stability shall be maintained during calibration.

Deleted:

Leaks in all the connections and ducting between the calibration venturi and the CVS pump shall be maintained lower than 0.3 per cent of the lowest flow point (highest restriction and lowest PDP speed point).

Deleted:

The airflow rate ( $q_{VCVS}$ ) at each restriction setting (minimum 6 settings) shall be calculated in standard m<sup>3</sup>/s from the flowmeter data using the manufacturer's prescribed method. The airflow rate shall then be converted to pump flow ( $V_0$ ) in m<sup>3</sup>/rev at absolute pump inlet temperature and pressure as follows:

Deleted:

$$V_0 = \frac{q_{VCVS}}{n} \cdot \frac{T}{273.15} \cdot \frac{101.325}{p_p} \quad (7-67)$$

Deleted: (A.8-68)

where:

- $q_{VCVS}$  = airflow rate at standard conditions (101.325 kPa, 273.15 K) [m<sup>3</sup>/s]
- $T$  = temperature at pump inlet [K]
- $p_p$  = absolute pressure at pump inlet [kPa]
- $n$  = pump speed [rev/s]

To account for the interaction of pressure variations at the pump and the pump slip rate, the correlation function ( $X_0$ ) [s/rev] between pump speed, pressure differential



from pump inlet to pump outlet and absolute pump outlet pressure shall be calculated as follows:

$$X_0 = \frac{1}{n} \cdot \sqrt{\frac{\Delta p_p}{p_p}} \quad (7.68)$$

Deleted: (A.8-69)

Where:

$\Delta p_p$  = pressure differential from pump inlet to pump outlet [kPa]

$p_p$  = absolute outlet pressure at pump outlet [kPa]

$n$  = pump speed [rev/s]

A linear least-square fit shall be performed to generate the calibration equation as follows:

$$V_0 = D_0 - m \cdot X_0 \quad (7.69)$$

Deleted: ¶

Deleted: (A.8-70)

with  $D_0$  [ $\text{m}^3/\text{rev}$ ] and  $m$  [ $\text{m}^3/\text{s}$ ], intercept and slope respectively, describing the regression line.

Deleted: ¶

For a CVS system with multiple speeds, the calibration curves generated for the different pump flow ranges shall be approximately parallel, and the intercept values ( $D_0$ ) shall increase as the pump flow range decreases.

Deleted: ¶

The calculated values from the equation shall be within  $\pm 0.5$  per cent of the measured value of  $V_0$ . Values of  $m$  will vary from one pump to another. Particulate influx over time will cause the pump slip to decrease, as reflected by lower values for  $m$ . Therefore, calibration shall be performed at pump start-up, after major maintenance, and if the total system verification indicates a change of the slip rate.

Deleted: ¶

## 2.5.2 Critical flow venturi (CFV)

Deleted: A.8.5.2.

Calibration of the CFV is based upon the flow equation for a critical venturi. Gas flow is a function of venturi inlet pressure and temperature.

To determine the range of critical flow,  $K_V$  shall be plotted as a function of venturi inlet pressure. For critical (choked) flow,  $K_V$  will have a relatively constant value. As pressure decreases (vacuum increases), the venturi becomes unchoked and  $K_V$  decreases, which indicates that the CFV is operated outside the permissible range.

The airflow rate ( $q_{VCVS}$ ) at each restriction setting (minimum 8 settings) shall be calculated in standard  $\text{m}^3/\text{s}$  from the flowmeter data using the manufacturer's

Deleted: ¶

prescribed method. The calibration coefficient  $K_V$   $\left[\left(\sqrt{\text{K}} \cdot \text{m}^4 \cdot \text{s}\right) / \text{kg}\right]$  shall be calculated from the calibration data for each setting as follows:

$$K_V = \frac{q_{VCVS} \cdot \sqrt{T}}{p_p} \quad (7-70)$$

Deleted: (A.8-71)

Where:

- $q_{VSSV}$  = air flow rate at standard conditions (101.325 kPa, 273.15 K) [m<sup>3</sup>/s]  
 $T$  = temperature at the venturi inlet [K]  
 $p_p$  = absolute pressure at venturi inlet [kPa]

The average  $K_V$  and the standard deviation shall be calculated. The standard deviation shall not exceed  $\pm 0.3$  per cent of the average  $K_V$ .

### 2.5.3 Subsonic venturi (SSV)

Deleted: A.8.5.3. .

Calibration of the SSV is based upon the flow equation for a subsonic venturi. Gas flow is a function of inlet pressure and temperature, pressure drop between the SSV inlet and throat, as shown in equation 7-40.

Deleted: ¶

The airflow rate ( $q_{VSSV}$ ) at each restriction setting (minimum 16 settings) shall be calculated in standard m<sup>3</sup>/s from the flowmeter data using the manufacturer's prescribed method. The discharge coefficient shall be calculated from the calibration data for each setting as follows:

Deleted: (A.8-41).

Deleted: ¶

$$C_d = \frac{q_{VSSV}}{\frac{A_0}{60} d_v^2 p_p \sqrt{\left[ \frac{1}{T_{in,V}} \left( r_p^{1.4286} - r_p^{1.7143} \right) \left( \frac{1}{1 - r_D^4 r_p^{1.4286}} \right) \right]}} \quad (7-71)$$

Deleted: (A.8-72)

Where:

- $A_0$  = collection of constants and units conversions = 0.0056940  
 $\left[ \frac{\text{m}^3}{\text{min}} \cdot \frac{\text{K}^{\frac{1}{2}}}{\text{kPa}} \cdot \frac{1}{\text{mm}^2} \right]$   
 $q_{VSSV}$  = air flow rate at standard conditions (101.325 kPa, 273.15 K) [m<sup>3</sup>/s]

- $T_{in,v}$  = temperature at the venturi inlet [K]  
 $d_v$  = diameter of the SSV throat [mm]  
 $r_p$  = ratio of the SSV throat to inlet absolute static pressure =  $1 - \Delta p / p_p$  [-]  
 $r_D$  = ratio of the SSV throat diameter,  $d_v$ , to the inlet pipe inner diameter  $D$  [-]

To determine the range of subsonic flow,  $C_d$  shall be plotted as a function of Reynolds number  $Re$ , at the SSV throat. The  $Re$  at the SSV throat shall be calculated with the following equation:

$$Re = A_1 \cdot 60 \cdot \frac{q_{vSSV}}{d_v \cdot \mu} \quad (7-72)$$

Deleted: ¶

Deleted: (A.8-73)

with

$$\mu = \frac{b \times T^{1.5}}{S + T} \quad (7-73)$$

Deleted: (A.8-74)

Where:

- $A_1$  = collection of constants and units conversions = 27.43831  
 $\left[ \frac{\text{Kg} \cdot \text{min} \cdot \text{mm}}{\text{m}^3 \cdot \text{s} \cdot \text{m}} \right]$   
 $q_{vSSV}$  = air flow rate at standard conditions (101.325 kPa, 273.15 K) [m<sup>3</sup>/s]  
 $d_v$  = diameter of the SSV throat [mm]  
 $\mu$  = absolute or dynamic viscosity of the gas [kg/(m · s)]  
 $b$  =  $1.458 \times 10^6$  (empirical constant) [kg/(m · s · K<sup>0.5</sup>)]  
 $S$  = 110.4 (empirical constant) [K]

Because  $q_{vSSV}$  is an input to the  $Re$  equation, the calculations shall be started with an initial guess for  $q_{vSSV}$  or  $C_d$  of the calibration venturi, and repeated until  $q_{vSSV}$  converges. The convergence method shall be accurate to 0.1 per cent of point or better.

Deleted: ¶

For a minimum of sixteen points in the region of subsonic flow, the calculated values of  $C_d$  from the resulting calibration curve fit equation shall be within  $\pm 0.5$  per cent of the measured  $C_d$  for each calibration point.

Deleted: ¶

## 2.6 Drift Correction

### 2.6.1 General procedure

The calculations in this section shall be performed to determine if gas analyzer drift invalidates the results of a test interval. If drift does not invalidate the results of a test interval, the test interval's gas analyzer responses shall be corrected for drift in accordance with paragraph 2.6.2. The drift-corrected gas analyzer responses shall be used in all subsequent emission calculations. The acceptable threshold for gas analyzer drift over a test interval is specified in paragraph 8.2.2.2 of Annex VI.

The general test procedure shall follow the provisions specified in Appendix 1 to this Annex with concentrations  $x_i$  or  $\bar{x}$  being replaced by concentrations  $c_i$  or  $\bar{c}$ .

### 2.6.2 Calculation procedure

The drift correction shall be calculated, as follows :

$$c_{\text{idriftcor}} = c_{\text{refzero}} + (c_{\text{refspan}} - c_{\text{refzero}}) \frac{2c_i - (c_{\text{prezero}} + c_{\text{postzero}})}{(c_{\text{prespan}} + c_{\text{postspan}}) - (c_{\text{prezero}} + c_{\text{postzero}})} \quad (7-74)$$

Where:

- $c_{\text{idriftcor}}$  = concentration corrected for drift [ppm]
- $c_{\text{refzero}}$  = reference concentration of the zero gas, which is usually zero unless known to be otherwise [ppm]
- $c_{\text{refspan}}$  = reference concentration of the span gas [ppm]
- $c_{\text{prespan}}$  = pre-test interval gas analyzer response to the span gas concentration [ppm]
- $c_{\text{postspan}}$  = post-test interval gas analyzer response to the span gas concentration [ppm]
- $c_i$  or  $\bar{c}$  = concentration recorded, i.e. measured, during test, before drift correction [ppm]
- $c_{\text{prezero}}$  = pre-test interval gas analyzer response to the zero gas concentration [ppm]
- $c_{\text{postzero}}$  = post-test interval gas analyzer response to the zero gas concentration [ppm]

**Deleted:** Annex A.8 – Appendix 2¶

¶ DRIFT CORRECTION¶

¶ A.8.6. Calculations in this appendix are performed as described in Appendix 2 to Annex A.7.¶

¶ (A.8-75)

### 3 Molar based emissions calculation

#### 3.1 Subscripts

	Quantity
abs	Absolute quantity
act	Actual quantity
air	Air, dry
atmos	Atmospheric
bkgnd	Background
C	Carbon
cal	Calibration quantity
CFV	Critical flow venturi
cor	Corrected quantity
dil	Dilution air
dexh	Diluted exhaust
dry	Dry quantity
exh	Raw exhaust
exp	Expected quantity
eq	Equivalent quantity
fuel	Fuel
	Instantaneous measurement (e.g.: 1 Hz)
<i>i</i>	An individual of a series
idle	Condition at idle
in	Quantity in
init	Initial quantity, typically before an emission test
max	Maximum (i.e. peak) value
meas	Measured quantity
min	Minimum value
mix	Molar mass of air
out	Quantity out
part	Partial quantity
PDP	Positive displacement pump
raw	Raw exhaust
ref	Reference quantity
rev	Revolution
sat	Saturated condition

slip	PDP slip
smpl	Sampling
span	Span quantity
SSV	Subsonic venturi
std	Standard quantity
test	Test quantity
total	Total quantity
uncor	Uncorrected quantity
vac	Vacuum quantity
weight	Calibration weight
wet	Wet quantity
zero	Zero quantity

### 3.2 Symbols for chemical balance

$x_{\text{dil/exh}}$  = Amount of dilution gas or excess air per mole of exhaust

$x_{\text{H}_2\text{Oexh}}$  = Amount of water in exhaust per mole of exhaust

$x_{\text{Ccombdry}}$  = Amount of carbon from fuel in the exhaust per mole of dry exhaust

$x_{\text{H}_2\text{Oexhdry}}$  = Amount of water in exhaust per dry mole of dry exhaust

$x_{\text{prod/intdry}}$  = Amount of dry stoichiometric products per dry mole of intake air

$x_{\text{dil/exhdry}}$  = Amount of dilution gas and/or excess air per mole of dry exhaust

$x_{\text{int/exhdry}}$  = Amount of intake air required to produce actual combustion products per mole of dry (raw or diluted) exhaust

$x_{\text{raw/exhdry}}$  = Amount of undiluted exhaust, without excess air, per mole of dry (raw or diluted) exhaust

$x_{\text{O}_2\text{intdry}}$  = Amount of intake air  $\text{O}_2$  per mole of dry intake air

$x_{\text{CO}_2\text{intdry}}$  = Amount of intake air  $\text{CO}_2$  per mole of dry intake air

$x_{\text{H}_2\text{Ointdry}}$  = Amount of intake air  $\text{H}_2\text{O}$  per mole of dry intake air

$x_{\text{CO}_2\text{int}}$  = Amount of intake air  $\text{CO}_2$  per mole of intake air

$x_{\text{CO}_2\text{dil}}$  = Amount of dilution gas  $\text{CO}_2$  per mole of dilution gas

$x_{\text{CO}_2\text{dildry}}$  = Amount of dilution gas  $\text{CO}_2$  per mole of dry dilution gas

$x_{\text{H}_2\text{Odildry}}$  = Amount of dilution gas  $\text{H}_2\text{O}$  per mole of dry dilution gas

$x_{\text{H}_2\text{Odil}}$  = Amount of dilution gas  $\text{H}_2\text{O}$  per mole of dilution gas

$x_{[\text{emission}]_{\text{meas}}}$  = Amount of measured emission in the sample at the respective gas analyzer

Deleted: ¶

$x_{\text{[emission]dry}}$  = Amount of emission per dry mole of dry sample

$x_{\text{H}_2\text{O[emission]meas}}$  = Amount of water in sample at emission-detection location

$x_{\text{H}_2\text{Oint}}$  = Amount of water in the intake air, based on a humidity measurement of intake air

### 3.3 Basic parameters and relationships

#### 3.3.1 Dry air and chemical species

This section uses the following values for dry air composition:

$$x_{\text{O}_2\text{airdry}} = 0.209445 \text{ mol/mol}$$

$$x_{\text{Arairdry}} = 0.00934 \text{ mol/mol}$$

$$x_{\text{N}_2\text{airdry}} = 0.78084 \text{ mol/mol}$$

$$x_{\text{CO}_2\text{airdry}} = 375 \text{ }\mu\text{mol/mol}$$

This section uses the following molar masses or effective molar masses of chemical species:

$$M_{\text{air}} = 28.96559 \text{ g/mol (dry air)}$$

$$M_{\text{Ar}} = 39.948 \text{ g/mol (argon)}$$

$$M_{\text{C}} = 12.0107 \text{ g/mol (carbon)}$$

$$M_{\text{CO}} = 28.0101 \text{ g/mol (carbon monoxide)}$$

$$M_{\text{CO}_2} = 44.0095 \text{ g/mol (carbon dioxide)}$$

$$M_{\text{H}} = 1.00794 \text{ g/mol (atomic hydrogen)}$$

$$M_{\text{H}_2} = 2.01588 \text{ g/mol (molecular hydrogen)}$$

$$M_{\text{H}_2\text{O}} = 18.01528 \text{ g/mol (water)}$$

$$M_{\text{He}} = 4.002602 \text{ g/mol (helium)}$$

$$M_{\text{N}} = 14.0067 \text{ g/mol (atomic nitrogen)}$$

$$M_{\text{N}_2} = 28.0134 \text{ g/mol (molecular nitrogen)}$$

$$M_{\text{NO}_x} = 46.0055 \text{ g/mol (oxides of nitrogen}^{(b)})}$$

$$M_{\text{O}} = 15.9994 \text{ g/mol (atomic oxygen)}$$

$$M_{\text{O}_2} = 31.9988 \text{ g/mol (molecular oxygen)}$$

$$M_{\text{C}_3\text{H}_8} = 44.09562 \text{ g/mol (propane)}$$

$$M_{\text{S}} = 32.065 \text{ g/mol (sulphur)}$$

$$M_{\text{HC}} = 13.875389 \text{ g/mol (total hydrocarbon}^{(a)})}$$

(a) The effective molar mass of HC is defined by an atomic hydrogen-to-carbon ratio,  $\alpha$ , of 1.85:

Deleted: ¶

Deleted: ¶

Deleted: ¶

Deleted: annex

Deleted: ¶

Deleted: paragraph 3

Deleted:  $M_{\text{NMHC}} = 13.875389 \text{ g/mol}$  (non-methane hydrocarbon<sup>(b)</sup>)¶

Deleted:  $M_{\text{THC}}$

Deleted: masses

Deleted: THC and NMHC are

(b) The effective molar mass of NO<sub>x</sub> is defined by the molar mass of nitrogen dioxide, NO<sub>2</sub>.

This section uses the following molar gas constant  $R$  for ideal gases:

Deleted: ¶

Deleted: annex

$$R = 8.314472 \text{ J}/(\text{mol} \cdot \text{K})$$

This section uses the following ratios of specific heats  $\gamma$  [J/(kg·K)]/[J/(kg·K)]

Deleted: ¶

Deleted: annex

for dilution air and diluted exhaust:

$$\gamma_{\text{air}} = 1.399 \text{ (ratio of specific heats for intake air or dilution air)}$$

Deleted: ¶

$$\gamma_{\text{dil}} = 1.399 \text{ (ratio of specific heats for diluted exhaust)}$$

Deleted: ¶

$$\gamma_{\text{exh}} = 1.385 \text{ (ratio of specific heats for raw exhaust)}$$

Deleted: ¶

### 3.3.2 Wet air

Deleted: A.7.1.2.

This section describes how to determine the amount of water in an ideal gas:

Deleted: ¶

#### 3.3.2.1 Vapour pressure of water

Deleted: A.7.1.2.1. .

The vapour pressure of water  $p_{\text{H}_2\text{O}}$  [kPa] for a given saturation temperature condition,  $T_{\text{sat}}$  [K], shall be calculated as follows:

- (a) For humidity measurements made at ambient temperatures from 0 to 100 °C or for humidity measurements made over super-cooled water at ambient temperatures from - 50 to 0 °C:

$$\log_{10}(p_{\text{H}_2\text{O}}) = 10.79574 \cdot \left(1 - \frac{273.16}{T_{\text{sat}}}\right) - 5.02800 \cdot \log_{10}\left(\frac{T_{\text{sat}}}{273.16}\right) + \\ + 1.50475 \cdot 10^{-4} \cdot \left(1 - 10^{-\frac{8.2969}{\left(\frac{T_{\text{sat}}}{273.16} - 1\right)}}\right) + 0.42873 \cdot 10^{-3} \cdot \left(10^{\frac{4.76955}{\left(1 - \frac{273.16}{T_{\text{sat}}}\right)} - 1}\right) - 0.2138602$$

(7-75)

Deleted: A.

Deleted: 1

Where:

$p_{\text{H}_2\text{O}}$  = vapour pressure of water at saturation temperature condition [kPa]

$T_{\text{sat}}$  = saturation temperature of water at measured condition [K]

- (b) For humidity measurements made over ice at ambient temperatures from (-100 to 0) °C:



$$\log_{10}(p_{\text{H}_2\text{O}}) = -9.096853 \cdot \left( \frac{273.16}{T_{\text{sat}}} - 1 \right) - 3.566506 \cdot \log_{10} \left( \frac{273.16}{T_{\text{sat}}} \right) + 0.876812 \cdot \left( 1 - \frac{T_{\text{sat}}}{273.16} \right) - 0.2138602$$

(7-76)

Deleted: (A.

Deleted: 2

Where:

$T_{\text{sat}}$  = saturation temperature of water at measured condition [K]

### 3.3.2.2 Dew point

Deleted: A.7.1.2.2. .

If humidity is measured as a dew point, the amount of water in an ideal gas  $x_{\text{H}_2\text{O}}$  [mol/mol] shall be obtained as follows:

$$x_{\text{H}_2\text{O}} = \frac{p_{\text{H}_2\text{O}}}{p_{\text{abs}}} \quad (7-77)$$

Deleted: (A.

Deleted: 3

Where:

$x_{\text{H}_2\text{O}}$  = amount of water in an ideal gas [mol/mol]

$p_{\text{H}_2\text{O}}$  = vapour pressure of water at the measured dew point,  $T_{\text{sat}} = T_{\text{dew}}$  [kPa]

$p_{\text{abs}}$  = wet static absolute pressure at the location of dew point measurement [kPa]

### 3.3.2.3 Relative humidity

Deleted: A.7.1.2.3. .

If humidity is measured as a relative humidity  $RH\%$ , the amount of water of an ideal gas  $x_{\text{H}_2\text{O}}$  [mol/mol] is calculated as follows:

$$x_{\text{H}_2\text{O}} = \frac{RH\%}{100} \cdot \frac{p_{\text{H}_2\text{O}}}{p_{\text{abs}}} \quad (7-78)$$

Deleted: (A.

Deleted: 4

Where:

$RH\%$  = relative humidity [per cent]

$p_{H_2O}$  = water vapour pressure at 100 per cent relative humidity at the location of relative humidity measurement,  $T_{sat}=T_{amb}$  [kPa]

$p_{abs}$  = wet static absolute pressure at the location of relative humidity measurement [kPa]

Deleted: A.7.1.2.4

### 3.3.2.4 Dew point determination from relative humidity and dry bulb temperature

If humidity is measured as a relative humidity,  $RH\%$ , the dew point,  $T_{dew}$ , shall be determined from  $RH\%$  and dry bulb temperature as follows:

$$T_{dew} = \frac{2.0798233 \cdot 10^2 - 2.0156028 \cdot 10^1 \cdot \ln(p_{H_2O}) + 4.6778925 \cdot 10^{-1} \cdot \ln(p_{H_2O})^2 - 9.2288067 \cdot 10^{-6} \cdot \ln(p_{H_2O})^3}{1 - 1.3319669 \cdot 10^{-1} \cdot \ln(p_{H_2O}) + 5.6577518 \cdot 10^{-3} \cdot \ln(p_{H_2O})^2 - 7.517286510 \cdot 10^{-5} \cdot \ln(p_{H_2O})^3}$$

(7-79)

Deleted: A.

Deleted: 5

Where

$p_{H_2O}$  = water vapor pressure scaled to the relative humidity at the location of relative humidity measurement,  $T_{sat} = T_{amb}$

$T_{dew}$  = dew point as determined from relative humidity and dry bulb temperature measurements

### 3.3.3 Fuel properties

Deleted: A.7.1.3.

The general chemical formula of fuel is  $CH_\alpha O_\beta S_\gamma N_\delta$  with  $\alpha$  atomic hydrogen-to-carbon ratio (H/C),  $\beta$  atomic oxygen-to-carbon ratio (O/C),  $\gamma$  atomic sulphur-to-carbon ratio (S/C) and  $\delta$  atomic nitrogen-to-carbon ratio (N/C). Based on this formula the carbon mass fraction of fuel  $w_C$  can be calculated. In case of diesel fuel the simple formula  $CH_\alpha O_\beta$  may be used. Default values for fuel composition may be derived from table 7.3:

Deleted: A.

Deleted: 1

**Table 7.3 - Default values of atomic hydrogen-to-carbon ratio,  $\alpha$ , atomic oxygen-to-carbon ratio,  $\beta$ , atomic sulphur-to-carbon ratio,  $\gamma$ , atomic nitrogen-to-carbon ratio,  $\delta$ , and carbon mass fraction of fuel,  $w_C$  for reference fuels**

Fuel	Atomic hydrogen, oxygen, sulphur and nitrogen-to-carbon ratios $CH_\alpha O_\beta S_\gamma N_\delta$	Carbon mass concentration, $w_C$ [g/g]
Diesel (non-road gas-oil)	$CH_{1.80}O_0S_0N_0$	0.869
Ethanol for dedicated compression ignition engines (ED95)		
Petrol (E10)	$CH_{1.92}O_{0.03}S_0N_0$	0.833
Petrol (E0)	$CH_{1.85}O_0S_0N_0$	0.866
Ethanol (E85)	$CH_{2.73}O_{0.36}S_0N_0$	0.576
LPG	$CH_{2.64}O_0S_0N_0$	0.819
Natural Gas/Biomethane	$CH_{3.78}O_{0.016}S_0N_0$	0.747

### 3.3.3.1 Calculation of carbon mass concentration $w_C$

As an alternative to the default values in table 7.3 or where default values are not given for the reference fuel being used the carbon mass concentration  $w_C$  may be calculated from measured fuel properties using equation 7-80. Values for  $\alpha$  and  $\beta$  shall be determined for the fuel and inserted into the equation in all cases, but  $\gamma$  and  $\delta$  may optionally be set to zero if they are zero in the corresponding line of table 7.3:

$$w_C = \frac{1 \cdot M_C}{1 \cdot M_C + \alpha \cdot M_H + \beta \cdot M_O + \gamma \cdot M_S + \delta \cdot M_N} \quad (7-80)$$

where:

$M_C$  = molar mass of carbon.

$\alpha$  = atomic hydrogen-to-carbon ratio of the mixture of fuel(s) being combusted, weighted by molar consumption.

$M_H$  = molar mass of hydrogen.

**Deleted:** Table A.7.1 - Default values of atomic hydrogen-to-carbon ratio,  $\alpha$ , atomic oxygen-to-carbon ratio,  $\beta$ , atomic sulphur-to-carbon ratio,  $\gamma$ , atomic nitrogen-to-carbon ratio,  $\delta$ , and carbon mass fraction of fuel,  $w_C$  for reference fuels¶  
¶ A.7.1.3.1. .

**Deleted:** A.

**Deleted:** -1

**Deleted:** A.

**Deleted:** 6

**Deleted:** A.

**Deleted:** 1

**Deleted:** A.

**Deleted:** 6

**Deleted:** ¶  
 $w_C$  = carbon mass concentration of fuel.¶

- $\beta$  = atomic oxygen-to-carbon ratio of the mixture of fuel(s) being combusted, weighted by molar consumption.
- $M_O$  = molar mass of oxygen.
- $\gamma$  = atomic sulphur-to-carbon ratio of the mixture of fuel(s) being combusted, weighted by molar consumption.
- $M_S$  = molar mass of sulphur.
- $\delta$  = atomic nitrogen-to-carbon ratio of the mixture of fuel(s) being combusted, weighted by molar consumption.
- $M_N$  = molar mass of nitrogen.

3.3.4 Total HC (THC) concentration initial contamination correction

For HC measurement,  $x_{\text{THC}[\text{THC-FID}]}$  shall be calculated by using the initial THC contamination concentration  $x_{\text{THC}[\text{THC-FID}]\text{init}}$  from paragraph 7.3.1.2. as follows:

$$x_{\text{THC}[\text{THC-FID}]\text{cor}} = x_{\text{THC}[\text{THC-FID}]\text{uncorr}} - x_{\text{THC}[\text{THC-FID}]\text{init}} \quad (7-81)$$

Where:

$x_{\text{THC}[\text{THC-FID}]\text{cor}}$  = THC concentration corrected for contamination [mol/mol]

$x_{\text{THC}[\text{THC-FID}]\text{uncorr}}$  = THC uncorrected concentration [mol/mol]

$x_{\text{THC}[\text{THC-FID}]\text{init}}$  = initial THC contamination concentration [mol/mol]

3.3.5 Flow-weighted mean concentration

In some paragraphs of this section, it may be necessary to calculate a flow-weighted mean concentration to determine the applicability of certain provisions. A flow-weighted mean is the mean of a quantity after it is weighted proportional to a corresponding flow rate. For example, if a gas concentration is measured continuously from the raw exhaust of an engine, its flow-weighted mean concentration is the sum of the products of each recorded concentration times its respective exhaust molar flow rate, divided by the sum of the recorded flow rate values. As another example, the bag concentration from a CVS system is the same as the flow-weighted mean concentration because the CVS system itself flow-weights the bag concentration. A certain flow-weighted mean concentration of an emission at its standard might be already expected based on previous testing with similar engines or testing with similar equipment and instruments.

**Deleted:** A.7.1.4.

**Deleted:** and non-methane HC

**Deleted:** ¶  
¶  
A.7.1.4.1. . THC determination and THC/CH<sub>4</sub>

**Deleted:** corrections

**Deleted:** (a) . If THC emissions are required to be determined

**Deleted:** A.

**Deleted:** 5

**Deleted:** (b) . For the NMHC determination described in paragraph A.7.1.4.2.,  $x_{\text{THC}[\text{THC-FID}]}$  shall be corrected for initial HC contamination using equation (A.7-5). The initial contamination of the CH<sub>4</sub> sample train may be corrected using equation (A.7-5), substituting in CH<sub>4</sub> concentrations for THC.¶  
¶

**Moved down [35]:** ¶  
Where

**Deleted:** :¶  
 $x_{\text{NMHC}}$  . = concentration of NMHC¶  
¶

**Moved down [36]:** ¶  
Where:¶

**Deleted:**  $x_{\text{NMHC}}$  . = concentration of NMHC¶  
¶

**Moved down [37]:** W here:

**Deleted:** ¶  
¶

**Moved down [38]:** W here:

**Deleted:** ¶  
 $x_{\text{NMHC}}$  . = concentration of NMHC¶  
¶

**Deleted:** ¶

**Deleted:** annex

### 3.4 Chemical balances of fuel, intake air, and exhaust

Deleted: A.7.2.

#### 3.4.1 General

Deleted: A.7.2.1.

Chemical balances of fuel, intake air and exhaust may be used to calculate flows, the amount of water in their flows, and the wet concentration of constituents in their flows. With one flow rate of either fuel, intake air or exhaust, chemical balances may be used to determine the flows of the other two. For example, chemical balances along with either intake air or fuel flow to determine raw exhaust flow may be used.

#### 3.4.2 Procedures that require chemical balances

Deleted: A.7.2.2.

Chemical balances are required to determine the following:

Deleted: ¶

- The amount of water in a raw or diluted exhaust flow,  $x_{H_2O_{exh}}$ , when the amount of water to correct for the amount of water removed by a sampling system is not measured;
- The flow-weighted mean fraction of dilution air in diluted exhaust,  $x_{dil/exh}$ , when dilution air flow is not measured to correct for background emissions. It has to be noted that if chemical balances are used for this purpose, the exhaust is assumed to be stoichiometric, even if it is not.

#### 3.4.3 Chemical balance procedure

Deleted: A.7.2.3.

The calculations for a chemical balance involve a system of equations that require iteration. The initial values of up to three quantities shall be guessed: the amount of water in the measured flow,  $x_{H_2O_{exh}}$ , fraction of dilution air in diluted exhaust (or excess air in the raw exhaust),  $x_{dil/exh}$ , and the amount of products on a C1 basis per dry mole of dry measured flow,  $x_{C_{combdry}}$ . Time-weighted mean values of combustion air humidity and dilution air humidity in the chemical balance may be used; as long as combustion air and dilution air humidity remain within tolerances of  $\pm 0.0025$  mol/mol of their respective mean values over the test interval. For each emission concentration,  $x$ , and amount of water  $x_{H_2O_{exh}}$ , their completely dry concentrations,  $x_{dry}$  and  $x_{H_2O_{exhdry}}$  shall be determined. The fuel atomic hydrogen-to-carbon ratio,  $\alpha$ , oxygen-to-carbon ratio,  $\beta$  and carbon mass fraction of fuel,  $w_C$  shall also be used. For the test fuel,  $\alpha$  and  $\beta$  or the default values in table 7.3 may be used.

Deleted: ¶

Use the following steps to complete a chemical balance:

Deleted: 1

- Measured concentrations such as,  $x_{CO_2_{meas}}$ ,  $x_{NO_{meas}}$ , and  $x_{H_2O_{int}}$ , shall be converted to dry concentrations by dividing them by one minus the amount of water present during their respective measurements; for example:  $x_{H_2O \times CO_2_{meas}}$ ,  $x_{H_2O \times NO_{meas}}$ , and  $x_{H_2O_{int}}$ . If the amount of water present during a “wet”

measurement is the same as the unknown amount of water in the exhaust flow,  $x_{H_2O_{exh}}$ , it has to be iteratively solved for that value in the system of equations. If only total NO<sub>x</sub> are measured and not NO and NO<sub>2</sub> separately, good engineering judgement shall be used to estimate a split in the total NO<sub>x</sub> concentration between NO and NO<sub>2</sub> for the chemical balances. The molar concentration of NO<sub>x</sub>,  $x_{NO_x}$ , may be assumed to be 75 per cent NO and 25 per cent NO<sub>2</sub>. For NO<sub>2</sub> storage aftertreatment systems,  $x_{NO_x}$  may be assumed to be 25 per cent NO and 75 per cent NO<sub>2</sub>. For calculating the mass of NO<sub>x</sub> emissions, the molar mass of NO<sub>2</sub> for the effective molar mass of all NO<sub>x</sub> species, regardless of the actual NO<sub>2</sub> fraction of NO<sub>x</sub>, shall be used;

- (b) Equations 7-82 to 7-99 in paragraph (d) of this paragraph 3.4.3 have to be entered into a computer program to iteratively solve for  $x_{H_2O_{exh}}$ ,  $x_{C_{combdry}}$  and  $x_{dil/exh}$ . Good engineering judgment shall be used to guess initial values for  $x_{H_2O_{exh}}$ ,  $x_{C_{combdry}}$ , and  $x_{dil/exh}$ . Guessing an initial amount of water that is about twice the amount of water in the intake or dilution air is recommended. Guessing an initial value of  $x_{C_{combdry}}$  as the sum of the measured CO<sub>2</sub>, CO, and THC values is recommended. Guessing an initial  $x_{dil}$  between 0.75 and 0.95, such as 0.8 is also recommended. Values in the system of equations shall be iterated until the most recently updated guesses are all within  $\pm 1$  per cent of their respective most recently calculated values values;
- (c) The following symbols and subscripts are used in the equation system of paragraph (c) of this paragraph where  $x$  unit is mol/mol:

Deleted: (A.  
Deleted: 10  
Deleted: A.  
Deleted: (26)  
Deleted: A.7.2.  
Deleted: 0.

Symbol	Description
$x_{dil/exh}$	Amount of dilution gas or excess air per mole of exhaust
$x_{H_2O_{exh}}$	Amount of H <sub>2</sub> O in exhaust per mole of exhaust
$x_{C_{combdry}}$	Amount of carbon from fuel in the exhaust per mole of dry exhaust
$x_{H_2O_{exhdry}}$	Amount of water in exhaust per dry mole of dry exhaust
$x_{prod/intdry}$	Amount of dry stoichiometric products per dry mole of intake air
$x_{dil/exhdry}$	Amount of dilution gas and/or excess air per mole of dry exhaust
$x_{int/exhdry}$	Amount of intake air required to produce actual combustion products per mole of dry (raw or diluted) exhaust
$x_{raw/exhdry}$	Amount of undiluted exhaust, without excess air, per mole of dry (raw or diluted) exhaust
$x_{O_2intdry}$	Amount of intake air O <sub>2</sub> per mole of dry intake air; $x_{O_2intdry} = 0.209445$ mol/mol may be assumed
$x_{CO_2intdry}$	Amount of intake air CO <sub>2</sub> per mole of dry intake air. $x_{CO_2intdry} = 375$ $\mu$ mol/mol may be used, but measuring the actual concentration in the intake air is recommended

$x_{\text{H}_2\text{Ointdry}}$	Amount of the intake air H <sub>2</sub> O per mole of dry intake air
$x_{\text{CO}_2\text{int}}$	Amount of intake air CO <sub>2</sub> per mole of intake air
$x_{\text{CO}_2\text{dil}}$	Amount of dilution gas CO <sub>2</sub> per mole of dilution gas
$x_{\text{CO}_2\text{dildry}}$	Amount of dilution gas CO <sub>2</sub> per mole of dry dilution gas. If air is used as diluent, $x_{\text{CO}_2\text{dildry}} = 375 \mu\text{mol/mol}$ may be used, but measuring the actual concentration in the intake air is recommended
$x_{\text{H}_2\text{Odildry}}$	Amount of dilution gas H <sub>2</sub> O per mole of dry dilution gas
$x_{\text{H}_2\text{Odil}}$	Amount of dilution gas H <sub>2</sub> O per mole of dilution gas
$x_{[\text{emission}]_{\text{meas}}}$	Amount of measured emission in the sample at the respective gas analyzer
$x_{[\text{emission}]_{\text{dry}}}$	Amount of emission per dry mole of dry sample
$x_{\text{H}_2\text{O}[\text{emission}]_{\text{meas}}}$	Amount of water in sample at emission-detection location. These values shall be measured or estimated according to paragraph 9.3.2.3.1.
$x_{\text{H}_2\text{Oint}}$	Amount of water in the intake air, based on a humidity measurement of intake air
$K_{\text{H}_2\text{Ogas}}$	Water-gas reaction equilibrium coefficient. You may use 3.5 or calculate your own value using good engineering judgement.
$\alpha$	Atomic hydrogen-to-carbon ratio of the mixture of fuel(s) (CH <sub><math>\alpha</math></sub> O <sub><math>\beta</math></sub> ) being combusted, weighted by molar consumption
$\beta$	Atomic oxygen-to-carbon ratio of the mixture of fuel(s) (CH <sub><math>\alpha</math></sub> O <sub><math>\beta</math></sub> ) being combusted, weighted by molar consumption

- (d) The following equations shall be used to iteratively solve for  $x_{\text{dil/exh}}$ ,  $x_{\text{H}_2\text{Oexh}}$  and  $x_{\text{Ccombdry}}$ :

$$x_{\text{dil/exh}} = 1 - \frac{x_{\text{raw/exhdry}}}{1 + x_{\text{H}_2\text{Oexhdry}}} \quad (7-82)$$

Deleted: (A.

Deleted: 10

$$x_{\text{H}_2\text{Oexh}} = \frac{x_{\text{H}_2\text{Oexhdry}}}{1 + x_{\text{H}_2\text{Oexhdry}}} \quad (7-83)$$

Deleted: (A.

Deleted: 11

$$x_{\text{Ccombdry}} = x_{\text{CO}_2\text{dry}} + x_{\text{COdry}} + x_{\text{THCdry}} - x_{\text{CO}_2\text{dil}} \cdot x_{\text{dil/exhdry}} - x_{\text{CO}_2\text{int}} \cdot x_{\text{int/exhdry}} \quad (7-84)$$

Deleted: (A.

Deleted: 12

$$x_{H2dry} = \frac{x_{COdry} \cdot (x_{H2Oexhdry} - x_{H2Odil} \cdot x_{dil/exhdry})}{K_{H2Ogas} \cdot (x_{CO2dry} - x_{CO2dil} \cdot x_{dil/exhdry})} \quad (7-85)$$

Deleted: (A.

Deleted: 15

$$x_{H2Oexhdry} = \frac{\alpha}{2} (x_{Ccombdry} - x_{THCdry}) + x_{H2Odil} \cdot x_{dil/exhdry} + x_{H2Oint} \cdot x_{int/exhdry} - x_{H2dry} \quad (7-86)$$

Deleted: . (A.

Deleted: 16

$$x_{dil/exhdry} = \frac{x_{dil/exh}}{1 - x_{H2Oexh}} \quad (7-87)$$

Deleted: . (A.

Deleted: 14

$$x_{int/exhdry} = \frac{1}{2 \cdot x_{O2int}} \left[ \left( \frac{\alpha}{2} - \beta + 2 + 2\gamma \right) (x_{Ccombdry} - x_{THCdry}) - (x_{COdry} - x_{NOdry} - 2x_{NO2dry} + x_{H2dry}) \right]$$

(7-88)

Deleted: A.

Deleted: 18

$$x_{raw/exhdry} = \frac{1}{2} \left[ \left( \frac{\alpha}{2} + \beta + \delta \right) (x_{Ccombdry} - x_{THCdry}) + (2x_{THCdry} + x_{COdry} - x_{NO2dry} + x_{H2dry}) \right] + x_{int/exhdry} \quad (7-89)$$

Deleted: (A.

Deleted: 19

$$x_{O2int} = \frac{0.209820 - x_{CO2intdry}}{1 + x_{H2Ointdry}} \quad (7-90)$$

Deleted: (A.

Deleted: 17

$$x_{CO2int} = \frac{x_{CO2intdry}}{1 + x_{H2Ointdry}} \quad (7-91)$$

Deleted: (A.

Deleted: 18

$$x_{H2Ointdry} = \frac{x_{H2Oint}}{1 - x_{H2Oint}} \quad (7-92)$$

Deleted: . (A.

Deleted: 19

$$x_{CO2dil} = \frac{x_{CO2dildry}}{1 + x_{H2Odildry}} \quad (7-93)$$

Deleted: (A.

Deleted: 20



$$x_{\text{H}_2\text{Odry}} = \frac{x_{\text{H}_2\text{Odil}}}{1 - x_{\text{H}_2\text{Odil}}} \quad (7-94)$$

Deleted: (A.

Deleted: 21

$$x_{\text{COdry}} = \frac{x_{\text{COmeas}}}{1 - x_{\text{H}_2\text{OCOmeas}}} \quad (7-95)$$

Deleted: (A.

Deleted: 22

$$x_{\text{CO}_2\text{dry}} = \frac{x_{\text{CO}_2\text{meas}}}{1 - x_{\text{H}_2\text{OCO}_2\text{meas}}} \quad (7-96)$$

Deleted: (A.

Deleted: 23

$$x_{\text{NOdry}} = \frac{x_{\text{NOmeas}}}{1 - x_{\text{H}_2\text{ONOmeas}}} \quad (7-97)$$

Deleted: (A.

Deleted: 24

$$x_{\text{NO}_2\text{dry}} = \frac{x_{\text{NO}_2\text{meas}}}{1 - x_{\text{H}_2\text{ONO}_2\text{meas}}} \quad (7-98)$$

Deleted: (A.

Deleted: 25

$$x_{\text{THCdry}} = \frac{x_{\text{THCmeas}}}{1 - x_{\text{H}_2\text{OTHCmeas}}} \quad (7-99)$$

Deleted: (A.

Deleted: 26

At the end of the chemical balance, the molar flow rate is calculated as specified in paragraphs 3.5.3 and 3.6.3.

Deleted:

Deleted: A.7.

Deleted: .

Deleted: A.7.4.

Deleted: A.7.2.4.

#### 3.4.4 NO<sub>x</sub> correction for humidity

All the NO<sub>x</sub> concentrations, including dilution air background concentrations, shall be corrected for intake-air humidity using one of the following equation:

- (a) For compression-ignition engines

$$x_{\text{NO}_x\text{cor}} = x_{\text{NO}_x\text{uncor}} \cdot (9.953 \cdot x_{\text{H}_2\text{O}} + 0.832) \quad (7-100)$$

Deleted: (A.

Deleted: 27

- (b) For spark-ignition engines

$$x_{\text{NO}_x\text{cor}} = x_{\text{NO}_x\text{uncor}} \cdot (18840 \cdot x_{\text{H}_2\text{O}} + 0.68094) \quad (7-101)$$

Deleted: (A.

Deleted: 31

Where:

$x_{\text{NO}_x\text{uncor}}$  = uncorrected NO<sub>x</sub> molar concentration in the exhaust gas [μmol/mol]

$x_{H_2O}$  = amount of water in the intake air [mol/mol]

### 3.5 Raw gaseous emissions

Deleted: A.7.3.

#### 3.5.1 Mass of gaseous emissions

Deleted: A.7.3.1. .

To calculate the total mass per test of gaseous emission  $m_{gas}$  [g/test], its molar concentration shall be multiplied by its respective molar flow and by exhaust gas molar mass; then integration over test cycle shall be performed:

$$m_{gas} = M_{gas} \cdot \int \dot{n}_{exh} \cdot x_{gas} \cdot dt \quad (7-102)$$

Deleted: (A.

Deleted: 28

Where:

$M_{gas}$  = molar mass of the generic gaseous emission [g/mol]

$\dot{n}_{exh}$  = instantaneous exhaust gas molar flow rate on a wet basis [mol/s]

$x_{gas}$  = instantaneous generic gas molar concentration on a wet basis [mol/mol]

$t$  = time [s]

Since equation 7-102 has to be solved by numerical integration, it is transformed in:

Deleted: (A.

Deleted: 28)

$$m_{gas} = M_{gas} \cdot \int \dot{n}_{exh} \cdot x_{gas} \cdot dt \Rightarrow m_{gas} = \frac{1}{f} \cdot M_{gas} \cdot \sum_{i=1}^N \dot{n}_{exhi} \cdot x_{gasi} \quad (7-103)$$

Deleted: . (A.

Deleted: 29

Where:

$M_{gas}$  = generic emission molar mass [g/mol]

$\dot{n}_{exhi}$  = instantaneous exhaust gas molar flow rate on a wet basis [mol/s]

$x_{gasi}$  = instantaneous generic gas molar concentration on a wet basis [mol/mol]

$f$  = data sampling rate [Hz]

$N$  = number of measurements [-]

General equation may be modified according to which measurement system is used, batch or continuous sampling, and if a varying rather than a constant flow rate is sampled.

- (a) For continuous sampling, in the general case of varying flow rate, the mass of the gaseous emission  $m_{\text{gas}}$  [g/test] shall be calculated by means of the following equation:

$$m_{\text{gas}} = \frac{1}{f} \cdot M_{\text{gas}} \cdot \sum_{i=1}^N \dot{n}_{\text{exhi}} \cdot x_{\text{gasi}} \quad (7-104)$$

Deleted: (A.

Deleted: 30

Where:

$M_{\text{gas}}$  = generic emission molar mass [g/mol]

$\dot{n}_{\text{exhi}}$  = instantaneous exhaust gas molar flow rate on a wet basis [mol/s]

$x_{\text{gasi}}$  = instantaneous gaseous emission molar fraction on a wet basis [mol/mol]

$f$  = data sampling rate [Hz]

$N$  = number of measurements [-]

- (b) Still for continuous sampling but in the particular case of constant flow rate the mass of the gaseous emission  $m_{\text{gas}}$  [g/test] shall be calculated by means of the following equation:

$$m_{\text{gas}} = M_{\text{gas}} \cdot \dot{n}_{\text{exh}} \cdot \bar{x}_{\text{gas}} \cdot \Delta t \quad (7-105)$$

Deleted: (A.

Deleted: 31

Where:

$M_{\text{gas}}$  = generic emission molar mass [g/mol]

$\dot{n}_{\text{exh}}$  = exhaust gas molar flow rate on a wet basis [mol/s]

$\bar{x}_{\text{gas}}$  = mean gaseous emission molar fraction on a wet basis [mol/mol]

$\Delta t$  = time duration of test interval

(c) For the batch sampling, regardless the flow rate is varying or constant, equation 7-104 can be simplified as follows:

$$m_{\text{gas}} = \frac{1}{f} \cdot M_{\text{gas}} \cdot \bar{x}_{\text{gas}} \cdot \sum_{i=1}^N \dot{n}_{\text{exhi}} \quad (7-106)$$

Where:

$M_{\text{gas}}$  = generic emission molar mass [g/mol]

$\dot{n}_{\text{exhi}}$  = instantaneous exhaust gas molar flow rate on a wet basis [mol/s]

$\bar{x}_{\text{gas}}$  = mean gaseous emission molar fraction on a wet basis [mol/mol]

$f$  = data sampling rate [Hz]

$N$  = number of measurements [-]

Deleted: the

Deleted: (A.

Deleted: 30)

Deleted: (A.

Deleted: 32

### 3.5.2 Dry-to-wet concentration conversion

Deleted: A.7.3.2 .

Parameters of this paragraph are obtained from the results of the chemical balance calculated in paragraph 3.4.3. The following relation exists between gas molar concentrations in the measured flow  $x_{\text{gasdry}}$  and  $x_{\text{gas}}$  [mol/mol] expressed on a dry and wet basis respectively:

Deleted: A.7.2

$$x_{\text{gasdry}} = \frac{x_{\text{gas}}}{1 - x_{\text{H}_2\text{O}}} \quad (7-107)$$

Deleted: (A.

Deleted: 33

$$x_{\text{gas}} = \frac{x_{\text{gasdry}}}{1 + x_{\text{H}_2\text{Odry}}} \quad (7-108)$$

Deleted: (A.

Deleted: 34

where:

$x_{\text{H}_2\text{O}}$  = molar fraction of water in the measured flow on a wet basis [mol/mol]

$x_{\text{H}_2\text{Odry}}$  = molar fraction of water in the measured flow on a dry basis [mol/mol]

For gaseous emissions a removed water correction shall be performed for the generic concentration  $x$  [mol/mol] as follows:

$$x = x_{\text{[emission]meas}} \left[ \frac{(1 - x_{\text{H2Oexh}})}{1 - x_{\text{H2O[emission]meas}}} \right] \quad (7-109)$$

Deleted: (A.

Deleted: 35

Where:

$x_{\text{[emission]meas}}$  = molar fraction of emission in the measured flow at measurement location [mol/mol]

$x_{\text{H2O[emission]meas}}$  = amount of water in the measured flow at the concentration measurement [mol/mol]

$x_{\text{H2Oexh}}$  = amount of water at the flowmeter [mol/mol]

Deleted: A.7.3.3.

### 3.5.3 Exhaust gas molar flow rate

The flow rate of the raw exhaust gases can be directly measured or can be calculated based on the chemical balance of paragraph 3.4.3. Calculation of raw exhaust molar flow rate is performed from measured intake air molar flow rate or fuel mass flow rate. The raw exhaust molar flow rate can be calculated from the sampled emissions,  $\dot{n}_{\text{exh}}$ , based on the measured intake air molar flow rate,  $\dot{n}_{\text{int}}$ , or the measured fuel mass flow rate,  $\dot{m}_{\text{fuel}}$ , and the values calculated using the chemical balance in paragraph 3.4.3. It shall be solved for the chemical balance in paragraph 3.4.3 at the same frequency that  $\dot{n}_{\text{int}}$  or  $\dot{m}_{\text{fuel}}$  is updated and recorded.

Deleted: A.7.2

Deleted: A.7.2.

Deleted: A.7.2.

- (a) Crankcase flow rate. The raw exhaust flow can be calculated based on  $\dot{n}_{\text{int}}$  or  $\dot{m}_{\text{fuel}}$  only if at least one of the following is true about crankcase emission flow rate:
- (i) The test engine has a production emission-control system with a closed crankcase that routes crankcase flow back to the intake air, downstream of intake air flow meter;
  - (ii) During emission testing open crankcase flow are routed to the exhaust according to paragraph 6.10;
  - (iii) Open crankcase emissions and flow are measured and added brake-specific emission calculations;
  - (iv) Using emission data or an engineering analysis, it can be demonstrated that neglecting the flow rate of open crankcase emissions does not adversely affect compliance with the applicable standards;
- (b) Molar flow rate calculation based on intake air.

Based on  $\dot{n}_{\text{int}}$ , exhaust gas molar flow rate  $\dot{n}_{\text{exh}}$  [mol/s] shall be calculated as follows:

$$\dot{n}_{\text{exh}} = \frac{\dot{n}_{\text{int}}}{\left[ 1 + \frac{(x_{\text{int/exhdry}} - x_{\text{raw/exhdry}})}{(1 + x_{\text{H2Oexhdry}})} \right]} \quad (7-110)$$

Deleted: (A.

Deleted: 36

Where:

- $\dot{n}_{\text{exh}}$  = raw exhaust molar flow rate from which emissions are measured [mol/s]
- $\dot{n}_{\text{int}}$  = intake air molar flow rate including humidity in intake air [mol/s]
- $x_{\text{int/exhdry}}$  = amount of intake air required to produce actual combustion products per mole of dry (raw or diluted) exhaust [mol/mol]
- $x_{\text{raw/exhdry}}$  = amount of undiluted exhaust, without excess air, per mole of dry (raw or diluted) exhaust [mol/mol]
- $x_{\text{H2Oexhdry}}$  = amount of water in exhaust per mole of dry exhaust [mol/mol]

(c) Molar flow rate calculation based on fuel mass flow rate

Based on  $\dot{m}_{\text{fuel}}$ ,  $\dot{n}_{\text{exh}}$  [mol/s] shall be calculated as follows:

When conducting laboratory testing this calculation may only be used for discrete-mode and ramped-modal steady-state cycles.

$$\dot{n}_{\text{exh}} = \frac{\dot{m}_{\text{fuel}} \cdot w_{\text{C}} \cdot (1 + x_{\text{H2Oexhdry}})}{M_{\text{C}} \cdot x_{\text{Ccombdry}}} \quad (7-111)$$

Deleted: (A.

Deleted: 37

Moved (insertion) [33]

Where:

- $\dot{n}_{\text{exh}}$  = raw exhaust molar flow rate from which emissions are measured
- $\dot{m}_{\text{fuel}}$  = fuel flow rate including humidity in intake air [g/s]
- $w_{\text{C}}$  = carbon mass fraction for the given fuel [g/g]
- $x_{\text{H2Oexhdry}}$  = amount of H<sub>2</sub>O per dry mole of measured flow [mol/mol]

Moved down [39]: ¶  
Where:¶

$M_C$  = molecular mass of carbon 12.0107 g/mol

$x_{C\text{combdry}}$  = amount of carbon from fuel in the exhaust per mole of dry exhaust [mol/mol]

- (d) Exhaust molar flow rate calculation based on measured intake air molar flow rate, dilute exhaust molar flow rate, and dilute chemical balance

Exhaust gas molar flow rate  $\dot{n}_{\text{exh}}$  [mol/s] may be calculated based on the measured intake air molar flow rate,  $\dot{n}_{\text{int}}$ , the measured dilute exhaust molar flow rate,  $\dot{n}_{\text{dexh}}$ , and the values calculated using the chemical balance in paragraph 3.4.3. Note that the chemical balance must be based on dilute exhaust gas concentrations. For continuous-flow calculations, solve for the chemical balance in paragraph 3.4.3 at the same frequency that  $\dot{n}_{\text{int}}$  and  $\dot{n}_{\text{dexh}}$  are updated and recorded. This calculated  $\dot{n}_{\text{dexh}}$  may be used for the PM dilution ratio verification, the calculation of dilution air molar flow rate in the background correction in paragraph 3.6.1 and the calculation of mass of emissions in paragraph 3.5.1 for species that are measured in the raw exhaust.

Deleted: A.7.2

Deleted: A.7.2

Deleted: A.7.4

Deleted: A.7.

Based on dilute exhaust and intake air molar flow rate, exhaust gas molar flow rate,  $\dot{n}_{\text{exh}}$  [mol/s] shall be calculated as follows:

$$\dot{n}_{\text{exh}} = (x_{\text{raw/exhdry}} - x_{\text{int/exhdry}}) \cdot (1 - x_{\text{H}_2\text{Oexh}}) \cdot \dot{n}_{\text{dexh}} + \dot{n}_{\text{int}} \quad (7-112)$$

Deleted: (A.

Deleted: 42

where

$\dot{n}_{\text{exh}}$  = raw exhaust molar flow rate from which emissions are measured [mol/s];

$x_{\text{int/exhdry}}$  = amount of intake air required to produce actual combustion products per mole of dry (raw or diluted) exhaust [mol/mol];

$x_{\text{raw/exhdry}}$  = amount of undiluted exhaust, without excess air, per mole of dry (raw or diluted) exhaust [mol/mol];

$x_{\text{H}_2\text{Oexh}}$  = amount of water in exhaust per mole of exhaust [mol/mol];

$\dot{n}_{\text{dexh}}$  = diluted exhaust molar flow rate from which emissions are measured [mol/s];

$\dot{n}_{\text{int}}$  = intake air molar flow rate including humidity in intake air [mol/s].

### 3.6 Diluted gaseous emissions

Deleted: A.7.4.

#### 3.6.1 Emission mass calculation and background correction

Deleted: A.7.4.1. .

Equations for the calculation of gaseous emissions mass  $m_{\text{gas}}$  [g/test] as a function of molar emissions flow rates are as follows:

(a) Continuous sampling, varying flow rate

$$m_{\text{gas}} = \frac{1}{f} \cdot M_{\text{gas}} \cdot \sum_{i=1}^N \dot{n}_{\text{exhi}} \cdot x_{\text{gasi}}$$

(see 7-103)

Deleted: A.

Deleted: 29

Where:

$M_{\text{gas}}$  = generic emission molar mass [g/mol]

$\dot{n}_{\text{exhi}}$  = instantaneous exhaust gas molar flow rate on a wet basis [mol/s]

$x_{\text{gasi}}$  = instantaneous generic gas molar concentration on a wet basis [mol/mol]

$f$  = data sampling rate [Hz]

$N$  = number of measurements [-]

Continuous sampling, constant flow rate

Deleted: ¶

$$m_{\text{gas}} = M_{\text{gas}} \cdot \dot{n}_{\text{exh}} \cdot \bar{x}_{\text{gas}} \cdot \Delta t$$

(see 7-105)

Deleted: A.

Deleted: 31

Where:

$M_{\text{gas}}$  = generic emission molar mass [g/mol]

$\dot{n}_{\text{exh}}$  = exhaust gas molar flow rate on a wet basis [mol/s]

$\bar{x}_{\text{gas}}$  = mean gaseous emission molar fraction on a wet basis [mol/mol]

$\Delta t$  = time duration of test interval



- (b) Batch sampling, regardless the flow rate is varying or constant, the following equation shall be used:

$$m_{\text{gas}} = \frac{1}{f} \cdot M_{\text{gas}} \cdot \bar{x}_{\text{gas}} \cdot \sum_{i=1}^N \dot{n}_{\text{exhi}}$$

(see 7-106)

Where:

- $M_{\text{gas}}$  = generic emission molar mass [g/mol]  
 $\dot{n}_{\text{exhi}}$  = instantaneous exhaust gas molar flow rate on a wet basis [mol/s]  
 $\bar{x}_{\text{gas}}$  = mean gaseous emission molar fraction on a wet basis [mol/mol]  
 $f$  = data sampling rate [Hz]  
 $N$  = number of measurements [-]

- (c) In case of diluted exhaust gases calculated values for mass of the pollutants shall be corrected by subtracting the mass of background emissions, due to dilution air:

- (i) Firstly, the molar flow rate of dilution air  $\dot{n}_{\text{airdil}}$  [mol/s] shall be determined over the test interval. This may be a measured quantity or a quantity calculated from the diluted exhaust flow and the flow-weighted mean fraction of dilution air in diluted exhaust,  $\bar{x}_{\text{dil/exh}}$ ;
- (ii) The total flow of dilution air  $n_{\text{airdil}}$  [mol] shall be multiplied by the mean concentration of background emission. This may be a time-weighted mean or a flow-weighted mean (e.g., a proportionally sampled background). The product of  $n_{\text{airdil}}$  and the mean concentration of a background emission is the total amount of a background emission;
- (iii) If the result is a molar quantity, it shall be converted to a mass of the background emission  $m_{\text{bkend}}$  [g] by multiplying it by emission molar mass,  $M_{\text{gas}}$  [g/mol];
- (iv) Total background mass shall be subtracted from total mass to correct for background emissions;
- (v) The total flow of dilution air may be determined by a direct flow measurement. In this case, the total mass of background shall be calculated, using the dilution air flow,  $n_{\text{airdil}}$ . The background mass shall

be subtracted from the total mass. The result shall be used in brake-specific emission calculations;

- (vi) The total flow of dilution air may be determined from the total flow of diluted exhaust and a chemical balance of the fuel, intake air, and exhaust as described in paragraph A.7.2. In this case, the total mass of background shall be calculated, using the total flow of diluted exhaust,  $n_{dexh}$ . Then this result shall be multiplied by the flow-weighted mean fraction of dilution air in diluted exhaust,  $\bar{x}_{dil/exh}$ .

Considering the two cases (v) and (vi), the following equations shall be used:

$$m_{bkngnd} = M_{gas} \cdot x_{gasdil} \cdot n_{airdil} \quad \text{or} \quad m_{bkngnd} = M_{gas} \cdot \bar{x}_{dil/exh} \cdot \bar{x}_{bkngnd} \cdot n_{dexh} \quad (7-113)$$

$$m_{gascor} = m_{gas} - m_{bkngnd} \quad (7-114)$$

where:

$m_{gas}$  = total mass of the gaseous emission [g]

$m_{bkngnd}$  = total background masses [g]

$m_{gascor}$  = mass of gas corrected for background emissions [g]

$M_{gas}$  = molecular mass of generic gaseous emission [g/mol]

$x_{gasdil}$  = gaseous emission concentration in dilution air [mol/mol]

$n_{airdil}$  = dilution air molar flow [mol]

$\bar{x}_{dil/exh}$  = flow-weighted mean fraction of dilution air in diluted exhaust [mol/mol]

$\bar{x}_{bkngnd}$  = gas fraction of background [mol/mol]

$n_{dexh}$  = total flow of diluted exhaust [mol]

Deleted: ¶

Deleted: ¶

Deleted: (A.

Deleted: 38

Deleted: ¶

Deleted: (A.

Deleted: 39

Deleted: ¶

Moved down [40]: . Where:¶

### 3.6.2 Dry-to wet concentration conversion

The same relations for raw gases (paragraph 3.5.2) shall be used for dry-to-wet conversion on diluted samples. For dilution air a humidity measurement shall be performed with the aim to calculate its water vapour fraction  $x_{H2Odil}$  [mol/mol]:

$$x_{H2Odil} = \frac{x_{H2Odry}}{1 - x_{H2Odry}}$$

(see 7-94)

Deleted: A.7.4.2.

Deleted: ¶

Deleted: A.7.

Deleted: .)

Deleted: A.

Deleted: 21

Where:

$x_{H_2O_{dil}}$  = water molar fraction in the dilution air flow [mol/mol]

### 3.6.3 Exhaust molar flow rate

Deleted: A.7.4.3.

(a) Calculation via chemical balance;

The molar flow rate  $\dot{n}_{exh}$  [mol/s] can be calculated based on fuel mass flow rate

$\dot{m}_{fuel}$ :

$$\dot{n}_{exh} = \frac{\dot{m}_{fuel} \cdot w_C \cdot (1 + x_{H_2O_{exhdry}})}{M_C \cdot x_{C_{combdry}}}$$

(see 7-111)

Deleted: A.

Deleted: 37

Where:

$\dot{n}_{exh}$  = raw exhaust molar flow rate from which emissions are measured

$\dot{m}_{fuel}$  = fuel flow rate including humidity in intake air [g/s]

$w_C$  = carbon mass fraction for the given fuel [g/g]

$x_{H_2O_{exhdry}}$  = amount of H<sub>2</sub>O per dry mole of measured flow [mol/mol]

$M_C$  = molecular mass of carbon 12.0107 g/mol

$x_{C_{combdry}}$  = amount of carbon from fuel in the exhaust per mole of dry exhaust [mol/mol]

(b) Measurement

Deleted: ¶

The exhaust gas molar flow rate may be measured by means of three systems:

(i) PDP molar flow rate. Based upon the speed at which the Positive Displacement Pump (PDP) operates for a test interval, the corresponding slope  $a_1$ , and intercept,  $a_0$  [-], as calculated with the calibration procedure of Appendix 1 to this annex, shall be used to calculate molar flow rate  $\dot{n}$  [mol/s] as follows:

$$\dot{n} = f_{n,PDP} \cdot \frac{p_{in} \cdot V_{rev}}{R \cdot T_{in}} \quad (7-115)$$

Deleted: . (A.

Deleted: 40

with:

Deleted: Where

$$V_{\text{rev}} = \frac{a_1}{f_{\text{n,PDP}}} \cdot \sqrt{\frac{p_{\text{out}} - p_{\text{in}}}{p_{\text{in}}} + a_0} \quad (7-116)$$

Deleted: (A.

Deleted: 41

where:

$a_1$	=	calibration coefficient [ $\text{m}^3/\text{s}$ ]
$a_0$	=	calibration coefficient [ $\text{m}^3/\text{rev}$ ]
$p_{\text{in}}, p_{\text{out}}$	=	inlet/outlet pressure [Pa]
$R$	=	molar gas constant [J/(mol K)]
$T_{\text{in}}$	=	inlet temperature [K]
$V_{\text{rev}}$	=	PDP pumped volume [ $\text{m}^3/\text{rev}$ ]
$f_{\text{n,PDP}}$	=	PDP speed [rev/s]

- (ii) SSV molar flow rate. Based on the  $C_d$  versus  $Re^{\#}$  equation determined according to Appendix 1 of this annex, the Sub-Sonic Venturi (SSV) molar flow rate during an emission test  $\dot{n}$  [mol/s] shall be calculated as follows:

$$\dot{n} = C_d \cdot C_f \cdot \frac{A_t \cdot p_{\text{in}}}{\sqrt{Z \cdot M_{\text{mix}} \cdot R \cdot T_{\text{in}}}} \quad (7-117)$$

Deleted: (A.

Deleted: 42

Where:

$p_{\text{in}}$	=	inlet pressure [Pa]
$A_t$	=	Venturi throat cross-sectional area [ $\text{m}^2$ ]
$R$	=	molar gas constant [J/(mol K)]
$T_{\text{in}}$	=	inlet temperature [K]
$Z$	=	compressibility factor
$M_{\text{mix}}$	=	molar mass of diluted exhaust [kg/mol]
$C_d$	=	discharge coefficient of the SSV [-]
$C_f$	=	flow coefficient of the SSV [-]

- (iii) CFV molar flow rate. To calculate the molar flow rate through one venturi or one combination of venturis, its respective mean  $C_d$  and other constants, determined according to the Appendix 1 to this annex, shall be used. The calculation of its molar flow rate  $\dot{n}$  [mol/s] during an emission test follows:

$$\dot{n} = C_d \cdot C_f \cdot \frac{A_t \cdot p_{in}}{\sqrt{Z \cdot M_{mix} \cdot R \cdot T_{in}}} \quad (7-118)$$

Where:

$p_{in}$	=	inlet pressure [Pa]
$A_t$	=	Venturi throat cross-sectional area [m <sup>2</sup> ]
$R$	=	molar gas constant [J/(mol K)]
$T_{in}$	=	inlet temperature [K]
$Z$	=	compressibility factor
$M_{mix}$	=	molar mass of diluted exhaust [kg/mol]
$C_d$	=	discharge coefficient of the CFV [-]
$C_f$	=	flow coefficient of the CFV [-]

Deleted: ¶

¶  
¶  
¶

Deleted: (A.

Deleted: 43

### 3.7 Determination of particulates

#### 3.7.1 Sampling

##### (a) Sampling from a varying flow rate:

If a batch sample from a changing exhaust flow rate is collected, a sample proportional to the changing exhaust flow rate shall be extracted. The flow rate shall be integrated over a test interval to determine the total flow. The mean PM concentration  $\bar{M}_{PM}$  (which is already in units of mass per mole of sample) shall be multiplied by the total flow to obtain the total mass of PM  $m_{PM}$  [g]:

$$m_{PM} = \bar{M}_{PM} \cdot \sum_{i=1}^N (\dot{n}_i \cdot \Delta t_i) \quad (7-119)$$

Where:

$\dot{n}_i$	=	instantaneous exhaust molar flow rate [mol/s]
-------------	---	---

Deleted: A.7.4.4. .

Deleted: ¶  
A.7.4.4.1.

Deleted: ¶

Deleted: (A.

Deleted: 44

$\bar{M}_{PM}$  = mean PM concentration [g/mol]

$\Delta t_i$  = sampling interval [s]

(b) Sampling from a constant flow rate

If a batch sample from a constant exhaust flow rate is collected, the mean molar flow rate from which the sample is extracted shall be determined. The mean PM concentration shall be multiplied by the total flow to obtain the total mass of PM  $m_{PM}$ [g]:

$$m_{PM} = \bar{M}_{PM} \cdot \dot{n} \cdot \Delta t \quad (7-120)$$

where:

$\dot{n}$  = exhaust molar flow rate [mol/s]

$\bar{M}_{PM}$  = mean PM concentration [g/mol]

$\Delta t$  = time duration of test interval [s]

Deleted: ¶

Deleted: (A.

Deleted: 45

Deleted: ¶  
Where:¶

For sampling with a constant dilution ratio ( $DR$ ),  $m_{PM}$  [g] shall be calculated using the following equation:

$$m_{PM} = m_{PMdil} \cdot DR \quad (7-121)$$

where:

$m_{PMdil}$  = PM mass in dilution air [g]

$DR$  = dilution ratio [-] defined as the ratio between the mass of the emission  $m$  and the mass of diluted exhaust  $m_{dil/exh}$  ( $DR = m/m_{dil/exh}$ ).

The dilution ratio  $DR$  can be expressed as a function of  $x_{dil/exh}$ :

$$DR = \frac{1}{1 - x_{dil/exh}} \quad (7-122)$$

Deleted: (A.

Deleted: 47

### 3.7.2 Background correction

The same approach as that of paragraph 3.6.1 shall be applied to correct the mass of PM for the background. Multiplying  $\bar{M}_{PMbkgnd}$  by the total flow of dilution air, the total background mass of PM ( $m_{PMbkgnd}$  [g]) is obtained. Subtraction of total background mass from total mass gives background corrected mass of particulates  $m_{PMcor}$  [g]:

Deleted: A.7.4.4.2.

Deleted: ¶

Deleted: A.7.4

Deleted: .

$$m_{PMcor} = m_{PMuncor} - \bar{M}_{PMbknd} \cdot n_{airdil} \quad (7-123)$$

Deleted: ¶  
 Deleted: (A.  
 Deleted: 48  
 Deleted: .

where:

$m_{PMuncor}$  = uncorrected PM mass [g]

$\bar{M}_{PMbknd}$  = mean PM concentration in dilution air [g/mol]

$n_{airdil}$  = dilution air molar flow [mol]

### 3.8 Cycle work and specific emissions

Deleted: A.7.5.

#### 3.8.1 Gaseous emissions

Deleted: A.7.5.1. .

##### 3.8.1.1 Transient and ramped modal cycles

Deleted: A.7.5.1.1.

Deleted: cycle

Reference is made to paragraphs 3.5.1 and 3.6.1 for raw and diluted exhaust respectively. The resulting values for power  $P_i$  [kW] shall be integrated over a test interval. The total work  $W_{act}$  [kWh] is calculated as follows:

Deleted: A.7.

Deleted: .

Deleted: A.7.4

Deleted: .

$$W_{act} = \sum_{i=1}^N P_i \cdot \Delta t_i = \frac{1}{f} \cdot \frac{1}{3600} \cdot \frac{1}{10^3} \cdot \frac{2 \cdot \pi}{60} \sum_{i=1}^N (n_i \cdot T_i) \quad (7-124)$$

Deleted: . (A.

Deleted: 49

Where:

$P_i$  = instantaneous engine power [kW]

$n_i$  = instantaneous engine speed [rpm]

$T_i$  = instantaneous engine torque [N·m]

$W_{act}$  = actual cycle work [kWh]

$f$  = data sampling rate [Hz]

$N$  = number of measurements [-]

Deleted: 1

Deleted: A.

Deleted: 53

Deleted: [

Deleted: ]

Deleted: [

Deleted: ]

Deleted: A.

Deleted: 53

Deleted: A.

Deleted: 55

Where auxiliaries were fitted in accordance with Appendix 2 to Annex VI of this regulation there shall be no adjustment to the instantaneous engine torque in equation 7-124. Where, according to paragraphs 6.3.2 or 6.3.3 of Annex VI to this regulation necessary auxiliaries that should have been fitted for the test are not installed, or auxiliaries that should have been removed for the test are installed, the value of  $T_i$  used in equation 7-124 shall be adjusted as follows:

$$T_i = T_{i,meas} + T_{i,AUX} \quad (7-125)$$

Where:

$T_{i,meas}$  = measured value of instantaneous engine torque

$T_{i,AUX}$  = corresponding value of torque required to drive auxiliaries determined according to paragraph 7.7.2.3.2 of Annex VI to this regulation.

The specific emissions  $e_{gas}$  [g/kWh] shall be calculated in the following ways depending on the type of test cycle.

$$e_{gas} = \frac{m_{gas}}{W_{act}} \quad (7-126)$$

where:

$m_{gas}$  = total mass of emission [g/test]

$W_{act}$  = cycle work [kWh]

In case of the NRTC, the final test result  $e_{gas}$  [g/kWh] shall be a weighted average from cold start test and hot start test by using:

$$e_{gas} = \frac{(0.1 \cdot m_{cold}) + (0.9 \cdot m_{hot})}{(0.1 \cdot W_{actcold}) + (0.9 \cdot W_{acthot})} \quad (7-127)$$

In case of an [engine with](#) infrequent (periodic) exhaust regeneration (see paragraph 6.6.2 of Annex VI), the specific emissions shall be corrected with the [two separate pairs of](#) multiplicative adjustment [factors  \$k\_{Ur}\$  \(upward factor of equation 6-10\) and  \$k\_{Dr}\$  \(downward factor of equation 6-11\)](#) or with the two separate pairs of adjustment additive factors  $k_{Ur}$  (upward factor of equation 6-12) and  $k_{Dr}$  (downward factor of equation 6-13).

### 3.8.1.2 Steady-state discrete-mode [cycles](#)

The specific emissions  $e_{gas}$  [g/kWh] shall be calculated as follows:

$$e_{gas} = \frac{\sum_{i=1}^{N_{mode}} (\dot{m}_{gasi} \cdot WF_i)}{\sum_{i=1}^{N_{mode}} (P_i \cdot WF_i)} \quad (7-128)$$

- Deleted: [
- Deleted: .1]
- Deleted: VIII
- Deleted: ¶
- Deleted: ¶
- Deleted: (A.
- Deleted: 50
- Deleted: ¶

- Deleted: (A.
- Deleted: 51

- Deleted: ),
- Deleted:  $k_r$  (
- Deleted: (
- Deleted: 4)
- Deleted: (6-5) and  $k_{Dr}$  (downward factor of equation (
- Deleted: )),
- Deleted: A.7.5.1.2.
- Deleted: cycle
- Deleted: ¶
- Deleted: are
- Deleted: (A.
- Deleted: 52



where:

$\dot{m}_{\text{gas},i}$  = mean emission mass flow rate for the mode  $i$  [g/h]

$P_i$  = engine power for the mode  $i$  [kW] with  $P_i = P_{\text{max}i} + P_{\text{aux}i}$   
(see paragraphs 6.3 and 7.7.1.3 of Annex VI)

$WF_i$  = weighting factor for the mode  $i$  [-]

### 3.8.2 Particulate emissions

#### 3.8.2.1 Transient and ramped modal cycles

The particulate specific emissions shall be calculated with equation 7-126 where  $e_{\text{gas}}$  [g/kWh] and  $m_{\text{gas}}$  [g/test] are substituted by  $e_{\text{PM}}$  [g/kWh] and  $m_{\text{PM}}$  [g/test] respectively:

$$e_{\text{PM}} = \frac{m_{\text{PM}}}{W_{\text{act}}} \quad (7-129)$$

Where:

$m_{\text{PM}}$  = total mass of particulates emission, calculated according to paragraph 3.7.1 [g/test]

$W_{\text{act}}$  = cycle work [kWh]

The emissions on the transient composite cycle (i.e. cold phase and hot phase) shall be calculated as shown in paragraph 3.8.1.1.

#### 3.8.2.2 Steady state discrete-mode cycles

The particulate specific emission  $e_{\text{PM}}$  [g/kWh] shall be calculated in the following way:

##### 3.8.2.2.1 For the single-filter method

$$e_{\text{PM}} = \frac{m_{\text{PM}}}{\sum_{i=1}^N (P_i \cdot WF_i)} \quad (7-130)$$

Deleted: ¶

Deleted: 7.7.1.2. and

Deleted: .)

Moved down [41]:  $WF_i$  = weighting factor for the mode  $i$  [-]¶

Moved (insertion) [22]

Deleted: ¶

A.7.5.2. .

Deleted: A.7.5.2.1.

Deleted: (A.

Deleted: 50)

Deleted: ¶

Deleted: . (A.

Deleted: 53

Deleted: A.8.

Deleted: 4.

Deleted: A.7.5

Deleted: A.7.5.2.2.

Deleted: cycle

Deleted: ¶

Deleted: A.7.5.2.2.1. .

Deleted: (A.

Deleted: 54

Where:

$P_i$  = engine power for the mode  $i$  [kW] with  $P_i = P_{maxi} + P_{auxi}$   
(see paragraphs 6.3 and 7.7.1.3 of Annex VI)

$WF_i$  = weighting factor for the mode  $i$  [-]

$\dot{m}_{PM}$  = particulate mass flow rate [g/h]

Moved (insertion) [41]

### 3.8.2.2.2 For the multiple-filter method

Moved (insertion) [42]

$$e_{PM} = \frac{\sum_{i=1}^N (\dot{m}_{PMi} \cdot WF_i)}{\sum_{i=1}^N (P_i \cdot WF_i)} \quad (7-131)$$

Where:

$P_i$  = engine power for the mode  $i$  [kW] with  $P_i = P_{maxi} + P_{auxi}$   
(see paragraphs 6.3 and 7.7.1.3 of Annex VI)

$WF_i$  = weighting factor for the mode  $i$  [-]

$\dot{m}_{PMi}$  = particulate mass flow rate at mode  $i$  [g/h]

Deleted: 2. and 6.3.)

Deleted: = particulate mass flow rate [g/h]  
A.7.5.2.2.2. For the

Moved up [42]: multiple-filter method

For the single-filter method, the effective weighting factor,  $WF_{effi}$ , for each mode shall be calculated in the following way:

$$WF_{effi} = \frac{m_{smpldexhi} \cdot \overline{\dot{m}_{eqdexhwet}}}{m_{smpldex} \cdot \dot{m}_{eqdexweti}} \quad (7-132)$$

Where:

$m_{smpldexhi}$  = mass of the diluted exhaust sample passed through the particulate sampling filters at mode  $i$  [kg]

$m_{smpldexh}$  = mass of the diluted exhaust sample passed through the particulate sampling filters [kg]

$\dot{m}_{eqdexhweti}$  = equivalent diluted exhaust gas mass flow rate at mode  $i$  [kg/s]

$\overline{\dot{m}_{eqdexhwet}}$  = average equivalent diluted exhaust gas mass flow rate [kg/s]

Deleted: . (A.7-55)  
Where:  
 $P_i$  = . engine power for the mode  $i$  [kW] with  
(see paragraphs 7.7.1.2. and 6.3.)  
 $WF_i$  = . weighting factor for the mode  $i$  [-]

Deleted: . (A.

Deleted: 56

The value of the effective weighting factors shall be within  $\pm 0.005$  (absolute value) of the weighting factors listed in [Appendix 1 to Annex XVII](#).

**Deleted:**  $\pm$

**Deleted:** Annex A.1.¶

¶

.....Section Break (Next Page).....

Annex A.7. -

### 3.9 Diluted Exhaust Flow (CVS) Calibration [and Related Calculations](#)

This [section](#) describes the calculations for calibrating various flow meters. Paragraph [3.9.1](#) first describes how to convert reference flow meter outputs for use in the calibration equations, which are presented on a molar basis. The remaining paragraphs describe the calibration calculations that are specific to certain types of flow meters.

**Deleted:** A.7.6. Introduction¶

**Deleted:** Appendix 1

**Deleted:** A.7.6.1. of this Appendix

#### 3.9.1 Reference meter conversions

The calibration equations in this section use molar flow rate,  $\dot{n}_{\text{ref}}$ , as a reference quantity. If he adopted reference meter outputs a flow rate in a different quantity, such as standard volume rate,  $\dot{V}_{\text{stdref}}$ , actual volume rate,  $\dot{V}_{\text{actdref}}$ , or mass rate,  $\dot{m}_{\text{ref}}$ , the reference meter output shall be converted to a molar flow rate using the following equations, noting that while values for volume rate, mass rate, pressure, temperature, and molar mass may change during an emission test, they should be kept as constant as practical for each individual set point during a flow meter calibration:

**Deleted:** A.7.6.1. .

**Deleted:** ¶

**Deleted:** ,

$$\dot{n}_{\text{ref}} = \frac{\dot{V}_{\text{stdref}} \cdot p_{\text{std}}}{T_{\text{std}} \cdot R} = \frac{\dot{V}_{\text{actdref}} \cdot p_{\text{act}}}{T_{\text{act}} \cdot R} = \frac{\dot{m}_{\text{ref}}}{M_{\text{mix}}} \quad (7-133)$$

**Deleted:** (A.

**Deleted:** 57

where:

$\dot{n}_{\text{ref}}$  = reference molar flow rate [mol/s]

$\dot{V}_{\text{stdref}}$  = reference volume flow rate, corrected to a standard pressure and a standard temperature [m<sup>3</sup>/s]

$\dot{V}_{\text{actdref}}$  = reference volume flow rate, at the actual pressure and temperature [m<sup>3</sup>/s]

$\dot{m}_{\text{ref}}$  = reference mass flow [g/s]

$p_{\text{std}}$  = standard pressure [Pa]

$p_{\text{act}}$  = actual pressure of the gas [Pa]

$T_{\text{std}}$  = standard temperature [K]

$T_{\text{act}}$  = actual temperature of the gas [K]

$R$  = molar gas constant [J/(mol·K)]

$M_{\text{mix}}$  = molar mass of the gas [g/mol]

Deleted: A.7.6.2.

### 3.9.2 PDP calibration calculations

For each restrictor position, the following values shall be calculated from the mean values determined in paragraph 8.1.8.4 of Annex VI, as follows:

Deleted: ..

(a) PDP volume pumped per revolution,  $V_{\text{rev}}$  ( $\text{m}^3/\text{rev}$ ):

$$V_{\text{rev}} = \frac{\bar{n}_{\text{ref}} \cdot R \cdot \bar{T}_{\text{in}}}{\bar{p}_{\text{in}} \cdot \bar{f}_{\text{nPDP}}} \quad (7-134)$$

Deleted: . (A.

Deleted: 58

where:

$\bar{n}_{\text{ref}}$  = mean value of reference molar flow rate [mol/s]

$R$  = molar gas constant [J/(mol·K)]

$\bar{T}_{\text{in}}$  = mean inlet temperature [K]

$\bar{p}_{\text{in}}$  = mean inlet pressure [Pa]

$\bar{f}_{\text{nPDP}}$  = mean rotational speed [rev/s]

(b) PDP slip correction factor,  $K_s$  [s/rev]:

$$K_s = \frac{1}{\bar{f}_{\text{nPDP}}} \cdot \sqrt{\frac{\bar{p}_{\text{out}} - \bar{p}_{\text{in}}}{\bar{p}_{\text{out}}}} \quad (7-135)$$

Deleted: . (A.

Deleted: 59

Where:

$\bar{n}_{\text{ref}}$  = mean reference molar flow rate [mol/s]

$\bar{T}_{\text{in}}$  = mean inlet temperature [K]

$\bar{p}_{\text{in}}$  = mean inlet pressure [Pa]

$\bar{p}_{\text{out}}$  = mean outlet pressure [Pa]

$\bar{f}_{\text{nPDP}}$  = mean PDP revolution speed [rev/s]

$R$  = molar gas constant [J/(mol·K)]

- (c) A least-squares regression of PDP volume pumped per revolution,  $V_{rev}$ , versus PDP slip correction factor,  $K_s$ , shall be performed by calculating slope,  $a_1$ , and intercept,  $a_0$ , as described in [Appendix 4 to this Annex](#);
- (d) The procedure in subparagraphs (a) through (c) of this paragraph shall be repeated for every speed that PDP is operated;
- (e) The following table illustrates these calculations for different values of  $\bar{f}_{nPDP}$ ;

Deleted: A.2

Deleted: :

**Table 7.4 – Example of PDP calibration data**

$\bar{f}_{nPDP}$ [rev/min]	$\bar{f}_{nPDP}$ [rev/s]	$a_1$ [m <sup>3</sup> /min]	$a_1$ [m <sup>3</sup> /s]	$a_0$ [m <sup>3</sup> /rev]
755.0	12.58	50.43	0.8405	0.056
987.6	16.46	49.86	0.831	-0.013
1254.5	20.9	48.54	0.809	0.028
1401.3	23.355	47.30	0.7883	-0.061

Deleted: Table A.7.2 – Example of PDP calibration data¶

- (f) For each speed at which the PDP is operated, the corresponding slope,  $a_1$ , and intercept,  $a_0$ , shall be used to calculate flow rate during emission testing as described in paragraph [3.6.3 \(b\)](#)

Deleted: A.7.4.

Deleted: .(

Deleted: A.7.6.3.

### 3.9.3 Venturi governing equations and permissible assumptions

This section describes the governing equations and permissible assumptions for calibrating a venturi and calculating flow using a venturi. Because a subsonic venturi (SSV) and a critical-flow venturi (CFV) both operate similarly, their governing equations are nearly the same, except for the equation describing their pressure ratio,  $r$  (i.e.,  $r_{SSV}$  versus  $r_{CFV}$ ). These governing equations assume one-dimensional isentropic inviscid compressible flow of an ideal gas. In paragraph [3.9.3 \(d\)](#), other assumptions that may be made are described. If the assumption of an ideal gas for the measured flow is not allowed, the governing equations include a first-order correction for the behaviour of a real gas; namely, the compressibility factor,  $Z$ . If good engineering judgment dictates using a value other than  $Z = 1$ , an appropriate equation of state to determine values of  $Z$  as a function of measured pressures and temperatures may be used, or specific calibration equations may be developed based on good engineering judgment. It shall be noted that the equation for the flow coefficient,  $C_f$ , is based on the ideal gas assumption that the isentropic exponent,  $\gamma$ , is equal to the ratio of specific heats,  $c_p/c_v$ . If good engineering judgment dictates using a real gas isentropic exponent, an appropriate equation of state to determine values of  $\gamma$  as a function of measured pressures and temperatures may be used, or specific calibration equations may be developed. Molar flow rate,  $\dot{n}$  [mol/s], shall be calculated as follows:

Deleted: A.7.6.

Deleted: .(

$$\dot{n} = C_d \cdot C_f \cdot \frac{A_t \cdot p_{in}}{\sqrt{Z \cdot M_{mix} \cdot R \cdot T_{in}}} \quad (7-136)$$

Deleted: (A.

Deleted: 60

Where:

$C_d$  = Discharge coefficient, as determined in paragraph 3.9.3(a) [-]

Deleted: A.7.6.

$C_f$  = Flow coefficient, as determined in paragraph 3.9.3(b) [-]

Deleted: .(

$A_t$  = Venturi throat cross-sectional area [m<sup>2</sup>]

Deleted: A.7.6.

$p_{in}$  = Venturi inlet absolute static pressure [Pa]

Deleted: .(

$Z$  = Compressibility factor [-]

$M_{mix}$  = Molar mass of gas mixture [kg/mol]

$R$  = Molar gas constant [J/(mol·K)]

$T_{in}$  = Venturi inlet absolute temperature [K]

(a) Using the data collected in paragraph 8.1.8.4 of Annex VI,  $C_d$  is calculated using the following equation:

Deleted: ..

$$C_d = \dot{n}_{ref} \cdot \frac{\sqrt{Z \cdot M_{mix} \cdot R \cdot T_{in}}}{C_f \cdot A_t \cdot p_{in}} \quad (7-137)$$

Deleted: . (A.

Deleted: 61

Where:

$\dot{n}_{ref}$  = reference molar flow rate [mol/s]

Other symbols as per equation (7-136).

Deleted: A.

Deleted: 60

(b)  $C_f$  shall be determined using one of the following methods:

(i) For CFV flow meters only,  $C_{fCFV}$  is derived from the following table based on values for  $\beta$  (ratio of venturi throat to inlet diameters) and  $\gamma$  (ratio of specific heats of the gas mixture), using linear interpolation to find intermediate values:

**Table 7.5**

**$C_{fCFV}$  versus  $\beta$  and  $\gamma$  for CFV flow meters**

$C_{fCFV}$		
$\beta$	$\gamma_{exh}=1.385$	$\gamma_{dexh}=\gamma_{air}=1.399$
0.000	0.6822	0.6846
0.400	0.6857	0.6881
0.500	0.6910	0.6934
0.550	0.6953	0.6977
0.600	0.7011	0.7036
0.625	0.7047	0.7072
0.650	0.7089	0.7114
0.675	0.7137	0.7163
0.700	0.7193	0.7219
0.720	0.7245	0.7271
0.740	0.7303	0.7329
0.760	0.7368	0.7395
0.770	0.7404	0.7431
0.780	0.7442	0.7470
0.790	0.7483	0.7511
0.800	0.7527	0.7555
0.810	0.7573	0.7602
0.820	0.7624	0.7652
0.830	0.7677	0.7707
0.840	0.7735	0.7765
0.850	0.7798	0.7828

**Deleted:** Table A.7.3 –  $C_{fCFV}$  versus  $\beta$  and  $\gamma$  for CFV flow meters ¶

- (ii) For any CFV or SSV flow meter, the following equation may be used to calculate  $C_f$ :



$$C_f = \left[ \frac{2 \cdot \gamma \cdot \left( r^{\frac{\gamma-1}{\gamma}} - 1 \right)}{(\gamma-1) \cdot \left( \beta^4 - r^{\frac{2}{\gamma}} \right)} \right]^{\frac{1}{2}} \quad (7-138)$$

Deleted: (A.

Deleted: 62

Where:

$\gamma$  = isentropic exponent [-]. For an ideal gas, this is the ratio of specific heats of the gas mixture,  $c_p/c_v$

$r$  = pressure ratio, as determined in paragraph (c)(3) of this section

$\beta$  = ratio of venturi throat to inlet diameters

(c) The pressure ratio  $r$  shall be calculated as follows:

(i) For SSV systems only,  $r_{SSV}$  is calculated using the following equation:

$$r_{SSV} = 1 - \frac{\Delta p_{SSV}}{p_{in}} \quad (7-139)$$

Deleted: (A.

Deleted: 63

Where:

$\Delta p_{SSV}$  = differential static pressure; venturi inlet minus venturi throat [Pa]

(ii) For CFV systems only,  $r_{CFV}$  shall be calculated iteratively using the following equation:

$$r_{CFV}^{\frac{1-\gamma}{\gamma}} + \left( \frac{\gamma-1}{2} \right) \cdot \beta^4 \cdot r_{CFV}^{\frac{2}{\gamma}} = \frac{\gamma+1}{2} \quad (7-140)$$

Deleted: (A.

Deleted: 64

(d) Any of the following simplifying assumptions of the governing equations may be made, or good engineering judgment may be used to develop more appropriate values for testing:

- (i) For emission testing over the full ranges of raw exhaust, diluted exhaust and dilution air, the gas mixture may be assumed to behave as an ideal gas:  $Z = 1$ ;
- (ii) For the full range of raw exhaust a constant ratio of specific heats of  $\gamma = 1.385$  may be assumed;
- (iii) For the full range of diluted exhaust and air (e.g., calibration air or dilution air), a constant ratio of specific heats of  $\gamma = 1.399$  may be assumed;
- (iv) For the full range of diluted exhaust and air, the molar mass of the mixture,  $M_{\text{mix}}$  [g/mol], may be considered as a function only of the amount of water in the dilution air or calibration air,  $x_{\text{H}_2\text{O}}$ , determined as described in paragraph 3.3.2, as follows:

$$M_{\text{mix}} = M_{\text{air}} \cdot (1 - x_{\text{H}_2\text{O}}) + M_{\text{H}_2\text{O}} \cdot (x_{\text{H}_2\text{O}}) \quad (7-141)$$

Where:

$$M_{\text{air}} = 28.96559 \text{ g/mol}$$

$$M_{\text{H}_2\text{O}} = 18.01528 \text{ g/mol}$$

$$x_{\text{H}_2\text{O}} = \text{amount of water in the dilution or calibration air [mol/mol]}$$

- (v) For the full range of diluted exhaust and air, a constant molar mass of the mixture,  $M_{\text{mix}}$ , may be assumed for all calibration and all testing as long as assumed molar mass differs no more than  $\pm 1$  per cent from the estimated minimum and maximum molar mass during calibration and testing. This assumption may be made if sufficient control of the amount of water in calibration air and in dilution air is ensured, or if sufficient water is removed from both calibration air and dilution air. The following table gives examples of permissible ranges of dilution air dew point versus calibration air dew point:

Deleted: A.7.1

Deleted: ..

Deleted: (A.

Deleted: 65

**Table 7.6**

**Examples of dilution air and calibration air dew points at which a constant  $M_{\text{mix}}$  may be assumed**

Moved (insertion) [43]

If calibration $T_{\text{dew}}$ (°C) is...	the following constant $M_{\text{mix}}$ (g/mol) is assumed	for the following ranges of $T_{\text{dew}}$ (°C) during emission tests <sup>(a)</sup>
dry	28.96559	dry to 18
0	28.89263	dry to 21
5	28.86148	dry to 22
10	28.81911	dry to 24
15	28.76224	dry to 26
20	28.68685	-8 to 28
25	28.58806	12 to 31
30	28.46005	23 to 34

<sup>(a)</sup> Range valid for all calibration and emission testing over the atmospheric pressure range (80,000 to 103,325) kPa.

### 3.9.4 SSV calibration

(a) Molar based approach. To calibrate an SSV flow meter the following steps shall be performed:

- (i) The Reynolds number,  $Re^{\#}$ , for each reference molar flow rate, shall be calculated using the throat diameter of the venturi,  $d_t$ . Because the dynamic viscosity,  $\mu$ , is needed to compute  $Re^{\#}$ , a specific viscosity model may be used to determine  $\mu$  for calibration gas (usually air), using good engineering judgment. Alternatively, the Sutherland three-coefficient viscosity model may be used to approximate  $\mu$ :

$$Re^{\#} = \frac{4 \cdot M_{\text{mix}} \cdot \dot{n}_{\text{ref}}}{\pi \cdot d_t \cdot \mu} \quad (7-142)$$

Where:

- $d_t$  = diameter of the SSV throat [m]
- $M_{\text{mix}}$  = mixture molar mass [kg/mol]

Deleted: Table A.7.4 –

Moved up [43]: Examples of dilution air and calibration air dew points at which a constant  $M_{\text{mix}}$  may be assumed ¶

Deleted: ¶  
A.7.6.4 .

Deleted: (A.

Deleted: 66

$\dot{n}_{\text{ref}}$  = reference molar flow rate [mol/s]

and, using the Sutherland three-coefficient viscosity model:

$$\mu = \mu_0 \left( \frac{T_{\text{in}}}{T_0} \right)^{\frac{3}{2}} \cdot \left( \frac{T_0 + S}{T_{\text{in}} + S} \right) \quad (7-143)$$

Deleted: (A.

Deleted: 67

Where:

$\mu$  = Dynamic viscosity of calibration gas [kg/(m·s)]

$\mu_0$  = Sutherland reference viscosity [kg/(m·s)]

$S$  = Sutherland constant [K]

$T_0$  = Sutherland reference temperature [K]

$T_{\text{in}}$  = Absolute temperature at the venturi inlet [K]

**Table 7.7**

Deleted: A.

Deleted: 5

**Sutherland three-coefficient viscosity model parameters**

Gas <sup>(a)</sup>	$\mu_0$ kg/(m·s)	$T_0$ K	$S$ K	Temp range within $\pm 2$ per cent error K	Pressure limit kPa
Air	$1.716 \times 10^{-5}$	273	111	170 to 1900	$\leq 1800$
CO <sub>2</sub>	$1.370 \times 10^{-5}$	273	222	190 to 1700	$\leq 3600$
H <sub>2</sub> O	$1.12 \times 10^{-5}$	350	1,064	360 to 1500	$\leq 10000$
O <sub>2</sub>	$1.919 \times 10^{-5}$	273	139	190 to 2000	$\leq 2500$
N <sub>2</sub>	$1.663 \times 10^{-5}$	273	107	100 to 1500	$\leq 1600$

<sup>(a)</sup> Tabulated parameters only for the pure gases, as listed, shall be used. Parameters to calculate viscosities of gas mixtures shall not be combined.

- (ii) An equation for  $C_d$  versus  $Re^\#$  shall be created, using paired values of ( $Re^\#, C_d$ ).  $C_d$  is calculated according to equation 7-137, with  $C_f$  obtained from equation 7-138, or any mathematical expression may be used, including a polynomial or a power series. The following equation is an example of a commonly used mathematical expression for relating  $C_d$  and  $Re^\#$ ;

Deleted: (A.

Deleted: 61),

Deleted: (A.

Deleted: 62),

$$C_d = a_0 - a_1 \cdot \sqrt{\frac{10^6}{Re^\#}} \quad (7-144)$$

Deleted: (A.

Deleted: 68

- (iii) A least-squares regression analysis shall be performed to determine the best-fit coefficients to the equation and calculate the equation's regression statistics, the standard estimate error *SEE* and the coefficient of determination  $r^2$ , [in accordance with Appendix 3 to this Annex](#);
- (iv) If the equation meets the criteria of  $SEE < 0.5\% \cdot \dot{m}_{ref\ max}$  (or  $\dot{m}_{ref\ max}$ ) and  $r^2 \geq 0.995$ , the equation may be used to determine  $C_d$  for emission tests, as described in [paragraph 3.6.3\(b\)](#);
- (v) If the *SEE* and  $r^2$  criteria are not met, good engineering judgment may be used to omit calibration data points to meet the regression statistics. At least seven calibration data points shall be used to meet the criteria;
- (vi) If omitting points does not resolve outliers, corrective action shall be taken. For example, another mathematical expression for the  $C_d$  versus  $Re^\#$  equation shall be selected, leaks are to be checked, or the calibration process has to be repeated. If the process shall be repeated, tighter tolerances shall be applied to measurements and more time for flows to stabilize shall be allowed;
- (vii) Once the equation meets the regression criteria, the equation may be used only to determine flow rates that are within the range of the reference flow rates used to meet the  $C_d$  versus  $Re^\#$  equation's regression criteria.

Deleted: according

Deleted: A.2

Deleted: A.7.4.

Deleted: (

### 3.9.5 CFV calibration

Deleted: A.7.6.5. .

Deleted: Molar based approach.

- (a) Some CFV flow meters consist of a single venturi and some consist of multiple venturis, where different combinations of venturis are used to meter different flow rates. For CFV flow meters that consist of multiple venturis, either calibration of each venturi independently to determine a separate discharge coefficient,  $C_d$ , for each venturi, or calibration of each combination of venturis as one venturi may be performed. In the case where a combination of venturis is calibrated, the sum of the active venturi throat areas is used as  $A_t$ , the square root of the sum of the squares of the active venturi throat diameters as  $d_t$ , and the ratio of the venturi throat to inlet diameters as the ratio of the venturi throat to inlet diameters as the ratio of the square root of the sum of the active venturi throat diameters ( $d_t$ ) to the diameter of the common entrance to all of the venturis ( $D$ ). To determine the  $C_d$  for a single venturi or a single combination of venturis, the following steps shall be performed:

- (i) With the data collected at each calibration set point to an individual  $C_d$  for each point shall be calculated using equation 7-136;
- (ii) The mean and standard deviation of all the  $C_d$  values shall be calculated in accordance with equations 7-152 and 7-153;
- (iii) If the standard deviation of all the  $C_d$  values is less than or equal to 0.3 per cent of the mean  $C_d$ , then the mean  $C_d$  shall be used in equation 7-118, and the CFV shall be used only down to the lowest  $r$  measured during calibration;

Deleted: (A.  
Deleted: 60);  
Deleted: according to  
Deleted: (A.2-1)  
Deleted: (A.2-2);  
Deleted: (A.  
Deleted: 43),

$$r = 1 - (\Delta p / p_m) \quad (7-145)$$

Deleted: (A.  
Deleted: 69

- (iv) If the standard deviation of all the  $C_d$  values exceeds 0.3 per cent of the mean  $C_d$ , the  $C_d$  values corresponding to the data point collected at the lowest  $r$  measured during calibration shall be omitted;
- (v) If the number of remaining data points is less than seven, corrective action shall be taken by checking calibration data or repeating the calibration process. If the calibration process is repeated, checking for leaks, applying tighter tolerances to measurements and allowing more time for flows to stabilize, is recommended;
- (vi) If the number of remaining  $C_d$  values is seven or greater, the mean and standard deviation of the remaining  $C_d$  values shall be recalculated;
- (vii) If the standard deviation of the remaining  $C_d$  values is less than or equal to 0.3 per cent of the mean of the remaining  $C_d$ , that mean  $C_d$  shall be used in equation 7-118 and the CFV values only down to the lowest  $r$  associated with the remaining  $C_d$  shall be used;
- (viii) If the standard deviation of the remaining  $C_d$  still exceeds 0.3 per cent of the mean of the remaining  $C_d$  values, the steps in paragraph (e) (4) through (8) of this section shall be repeated.

Deleted: (A.  
Deleted: 43)

## Appendix 1

### Drift Correction

Deleted: Annex A.7-

Deleted: ¶  
¶  
DRIFT CORRECTION¶  
A.7.7.

Deleted: .

#### 1 Scope and frequency

The calculations in this Appendix 1 shall be performed to determine if gas analyzer drift invalidates the results of a test interval. If drift does not invalidate the results of a test interval, the test interval's gas analyzer responses shall be corrected for drift according to this Appendix 1. The drift-corrected gas analyzer responses shall be used in all subsequent emission calculations. The acceptable threshold for gas analyzer drift over a test interval is specified in paragraph 8.2.2.2 of Annex VI.

Deleted: ¶

Deleted: 2 are

Deleted: 2

#### 2 Correction principles

The calculations in this Appendix 1 utilize a gas analyzer's responses to reference zero and span concentrations of analytical gases, as determined sometime before and after a test interval. The calculations correct the gas analyzer's responses that were recorded during a test interval. The correction is based on an analyzer's mean responses to reference zero and span gases, and it is based on the reference concentrations of the zero and span gases themselves. Validation and correction for drift shall be performed as follows:

Deleted: A.7.7.2. .

Deleted: ¶

Deleted: 2

#### 3 Drift validation

After applying all the other corrections—except drift correction—to all the gas analyzer signals, brake-specific emissions shall be calculated in accordance with section 3.8. Then all gas analyzer signals shall be corrected for drift according to this Appendix 1. Brake-specific emissions shall be recalculated using all of the drift-corrected gas analyzer signals. The brake-specific emission results shall be validated and reported before and after drift correction according to paragraph 8.2.2.2 of Annex VI.

Deleted: A.7.7.3.

Deleted: ¶

Deleted: according to A.7.5.

Deleted: 2

Deleted: A.7.7.4. .

#### 4 Drift correction

All gas analyzer signals shall be corrected as follows:

Deleted: ¶

- (a) Each recorded concentration,  $x_i$ , shall be corrected for continuous sampling or for batch sampling,  $\bar{x}$ ;
- (b) Correction for drift shall be done using the following equation:

$$x_{\text{idriftcor}} = x_{\text{refzero}} + (x_{\text{refspan}} - x_{\text{refzero}}) \frac{2x_i - (x_{\text{prezero}} + x_{\text{postzero}})}{(x_{\text{prespan}} + x_{\text{postspan}}) - (x_{\text{prezero}} + x_{\text{postzero}})} \quad (7-146)$$

Deleted: (A.

Deleted: 70

Where:

- $x_{\text{driftcor}}$  = concentration corrected for drift [ $\mu\text{mol/mol}$ ]
- $x_{\text{refzero}}$  = reference concentration of the zero gas, which is usually zero unless known to be otherwise [ $\mu\text{mol/mol}$ ]
- $x_{\text{refspan}}$  = reference concentration of the span gas [ $\mu\text{mol/mol}$ ]
- $x_{\text{prespan}}$  = pre-test interval gas analyzer response to the span gas concentration [ $\mu\text{mol/mol}$ ]
- $x_{\text{postspan}}$  = post-test interval gas analyzer response to the span gas concentration [ $\mu\text{mol/mol}$ ]
- $x_i$  or  $\bar{x}$  = concentration recorded, i.e. measured, during test, before drift correction [ $\mu\text{mol/mol}$ ]
- $x_{\text{prezero}}$  = pre-test interval gas analyzer response to the zero gas concentration [ $\mu\text{mol/mol}$ ]
- $x_{\text{postzero}}$  = post-test interval gas analyzer response to the zero gas concentration [ $\mu\text{mol/mol}$ ]

- (c) For any pre-test interval concentrations, concentrations determined most recently before the test interval shall be used. For some test intervals, the most recent pre-zero or pre-span might have occurred before one or more previous test intervals;
- (d) For any post-test interval concentrations, concentrations determined most recently after the test interval shall be used. For some test intervals, the most recent post-zero or post-span might have occurred after one or more subsequent test intervals;
- (e) If any pre-test interval analyzer response to the span gas concentration,  $x_{\text{prespan}}$ , is not recorded,  $x_{\text{prespan}}$  shall be set equal to the reference concentration of the span gas:  $x_{\text{prespan}} = x_{\text{refspan}}$ ;
- (f) If any pre-test interval analyzer response to the zero gas concentration,  $x_{\text{prezero}}$ , is not recorded,  $x_{\text{prezero}}$  shall be set equal to the reference concentration of the zero gas:  $x_{\text{prezero}} = x_{\text{refzero}}$ ;
- (g) Usually the reference concentration of the zero gas,  $x_{\text{refzero}}$ , is zero:  $x_{\text{refzero}} = 0 \mu\text{mol/mol}$ . However, in some cases it might be known that  $x_{\text{refzero}}$  has a non-zero concentration. For example, if a  $\text{CO}_2$  analyzer is zeroed using ambient air, the default ambient air concentration of  $\text{CO}_2$ , which is  $375 \mu\text{mol/mol}$ , may be used. In this case,  $x_{\text{refzero}} = 375 \mu\text{mol/mol}$ . When an analyzer is zeroed using a non-zero  $x_{\text{refzero}}$ , the analyzer shall be set to output the actual  $x_{\text{refzero}}$  concentration. For example, if  $x_{\text{refzero}} = 375 \mu\text{mol/mol}$ , the analyzer shall be set to output a value of  $375 \mu\text{mol/mol}$  when the zero gas is flowing to the analyzer.



## Appendix 2

### Carbon Flow Check

#### 1 Introduction


All but a tiny part of the carbon in the exhaust comes from the fuel, and all but a minimal part of this is manifest in the exhaust gas as CO<sub>2</sub>. This is the basis for a system verification check based on CO<sub>2</sub> measurements. In the case of SI engines without control of excess air ratio  $\lambda$  or SI engines operating outside the range  $0.97 \leq \lambda \leq 1.03$ , the procedure shall additionally include measurement of HC and CO.

The flow of carbon into the exhaust measurement systems is determined from the fuel flow rate. The flow of carbon at various sampling points in the emissions and particulate sampling systems is determined from the CO<sub>2</sub> (or CO<sub>2</sub>, HC and CO) concentrations and gas flow rates at those points.

In this sense, the engine provides a known source of carbon flow, and observing the same carbon flow in the exhaust pipe and at the outlet of the partial flow PM sampling system verifies leak integrity and flow measurement accuracy. This check has the advantage that the components are operating under actual engine test conditions of temperature and flow.

Figure 7.1 shows the sampling points at which the carbon flows shall be checked. The specific equations for the carbon flows at each of the sample points are given in the following paragraphs.

**Figure 7.1**  
**Measuring points for carbon flow check**

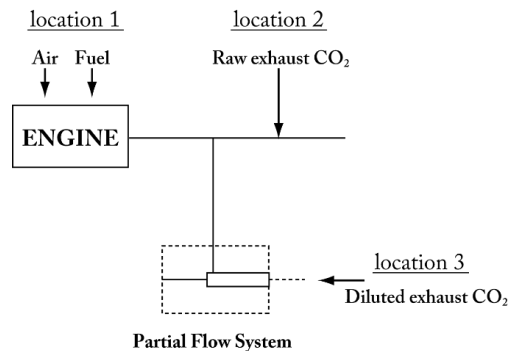

#### 2 Carbon flow rate into the engine (location 1)

The carbon mass flow rate into the engine  $q_{mCf}$  [kg/s] for a fuel CH <sub>$\alpha$</sub> O <sub>$\varepsilon$</sub>  is given by:

$$q_{mCf} = \frac{12.011}{12.011 + \alpha + 15.9994 \cdot \varepsilon} \cdot q_{mf} \quad (7-147)$$

Where:

$q_{mf}$  = fuel mass flow rate [kg/s]

### 3 Carbon flow rate in the raw exhaust (location 2)

#### 3.1 Based on CO<sub>2</sub>

The carbon mass flow rate in the exhaust pipe of the engine  $q_{mCe}$  [kg/s] shall be determined from the raw CO<sub>2</sub> concentration and the exhaust gas mass flow rate:

$$q_{mCe} = \left( \frac{c_{CO_2,r} - c_{CO_2,a}}{100} \right) \cdot q_{mew} \cdot \frac{12.011}{M_e} \quad (7-148)$$

where:

$c_{CO_2,r}$  = wet CO<sub>2</sub> concentration in the raw exhaust gas [per cent]

$c_{CO_2,a}$  = wet CO<sub>2</sub> concentration in the ambient air [per cent]

$q_{mew}$  = exhaust gas mass flow rate on wet basis [kg/s]

$M_e$  = molar mass of exhaust gas [g/mol]

If CO<sub>2</sub> is measured on a dry basis it shall be converted to a wet basis [in accordance with](#) paragraph [2.1.3](#), or [paragraph 3.5.2](#).

#### 3.2 Based on CO<sub>2</sub>, HC and CO

As an alternative to performing the calculation solely based upon CO<sub>2</sub> in paragraph [3.1](#), the carbon mass flow rate in the exhaust pipe of the engine  $q_{mCe}$  [kg/s] shall be determined from the raw CO<sub>2</sub>, HC and CO concentration and the exhaust gas mass flow rate:

$$q_{mCe} = \left( \frac{c_{CO_2,r} - c_{CO_2,a}}{100} + \frac{c_{THC(C1),r} - c_{THC(C1),a}}{100} + \frac{c_{CO,r} - c_{CO,a}}{100} \right) \cdot q_{mew} \cdot \frac{12.011}{M_e} \quad (7-149)$$

Where:

$c_{CO_2,r}$  = wet CO<sub>2</sub> concentration in the raw exhaust gas [per cent]

$c_{CO_2,a}$  = wet CO<sub>2</sub> concentration in the ambient air [per cent]

$c_{THC(C1),r}$  = THC(C1) concentration in the raw exhaust gas [per cent]

$c_{THC(C1),a}$  = THC(C1) concentration in the ambient air [per cent]

$c_{CO,r}$  = wet CO concentration in the raw exhaust gas [per cent]

**Deleted:** A.4.3.

**Deleted:** (A.4-2

**Deleted:** ¶

**Deleted:** according to

**Deleted:** A.7

**Deleted:** .2.

**Deleted:** A.8.2

**Deleted:** A.4.4. Carbon flow rate in the dilution system (location 3)¶

**Moved down [44]:** For the partial flow dilution system, the splitting ratio also needs to be taken into account. The carbon flow rate in an equivalent dilution system  $q_{mCp}$  [kg/s] (with equivalent meaning equivalent to a full flow system where the total flow is diluted) shall be determined from the dilute CO<sub>2</sub> concentration, the exhaust gas mass flow rate and the sample flow rate; the new equation is identical to equation

**Deleted:** A.4-2, being only supplemented by the dilution factor ¶ (A.4-3)¶

**Moved down [45]:** ¶

Where:¶

·  $c_{CO_2,d}$  = wet CO<sub>2</sub> concentration in the dilute exhaust gas at the outlet of the dilution tunnel [per cent]¶

·  $c_{CO_2,a}$  = wet CO<sub>2</sub> concentration in the ambient air [per cent]¶

·  $q_{mdew}$  = diluted sample flow in the partial flow dilution system [kg/s]¶

·  $q_{mew}$  = exhaust gas mass flow rate on wet basis [kg/s]¶

·  $q_{mp}$  = sample flow of exhaust gas into partial flow dilution system [kg/s]¶

·  $M_e$  = molar mass of exhaust gas [g/mol]¶

· If CO<sub>2</sub> is measured on a dry basis it shall be converted to a wet basis

**Deleted:** according to paragraph A.7.3.2. or A.8.2.2.¶ A.4.5. Calculation of the molar mass of the exhaust gas¶

The molar mass of the exhaust gas shall be calculated according to equation (A.8-15) (see paragraph A.8.2.4.2.).¶

**Moved down [46]:** Alternatively, the following exhaust gas molar masses may be used:¶

**Deleted:** A.4.5. Carbon flow rate in the raw exhaust (location 2) including

**Deleted:** ¶

**Deleted:** A.4.

**Deleted:** ¶

**Deleted:** ¶

$c_{CO_2,a}$  = wet CO<sub>2</sub> concentration in the ambient air [per cent]

$q_{mew}$  = exhaust gas mass flow rate on wet basis [kg/s]

$M_e$  = molar mass of exhaust gas [g/mol]

If CO<sub>2</sub> or CO are measured on a dry basis they shall be converted to a wet basis in accordance with paragraph 2.1.3 or paragraph 3.5.2.

Deleted: ¶

Deleted: according to

Deleted: A.7

Deleted: 2.

Deleted: A.8

Deleted: 2.

Deleted: A.4.6.

Moved (insertion) [44]

#### 4 Carbon flow rate in the dilution system (location 3)

##### 4.1 Based on CO<sub>2</sub>

For the partial flow dilution system, the splitting ratio also needs to be taken into account. The carbon flow rate in an equivalent dilution system  $q_{mCp}$  [kg/s] (with equivalent meaning equivalent to a full flow system where the total flow is diluted) shall be determined from the dilute CO<sub>2</sub> concentration, the exhaust gas mass flow rate and the sample flow rate; the new equation is identical to equation 7-148, being only supplemented by the dilution factor  $q_{mdew}/q_{mp}$  :

$$q_{mCp} = \left( \frac{c_{CO_2,d} - c_{CO_2,a}}{100} \right) \cdot q_{mew} \cdot \frac{12.011}{M_e} \cdot \frac{q_{mdew}}{q_{mp}} \quad (7-150)$$

Moved (insertion) [45]

Where:

$c_{CO_2,d}$  = wet CO<sub>2</sub> concentration in the dilute exhaust gas at the outlet of the dilution tunnel [per cent]

$c_{CO_2,a}$  = wet CO<sub>2</sub> concentration in the ambient air [per cent]

$q_{mdew}$  = diluted sample flow in the partial flow dilution system [kg/s]

$q_{mew}$  = exhaust gas mass flow rate on wet basis [kg/s]

$q_{mp}$  = sample flow of exhaust gas into partial flow dilution system [kg/s]

$M_e$  = molar mass of exhaust gas [g/mol]

If CO<sub>2</sub> is measured on a dry basis it shall be converted to a wet basis in accordance with paragraph 2.1.3 or paragraph 3.5.2.

Deleted: including

##### 4.2 Based on CO<sub>2</sub>, HC and CO

For the partial flow dilution system, the splitting ratio also needs to be taken into account. As an alternative to performing the calculation solely based upon CO<sub>2</sub> in paragraph 4.1, the carbon flow rate in an equivalent dilution system  $q_{mCp}$  [kg/s] (with equivalent meaning equivalent to a full flow system where the total flow is diluted) shall be determined from the dilute CO<sub>2</sub>, HC and CO concentrations, the exhaust gas mass flow rate and the sample flow rate; the new equation is identical to equation 7-149, being only supplemented by the dilution factor  $q_{mdew}/q_{mp}$  .

Deleted: ¶

Deleted: A.

Deleted: 3

Deleted: A.4.4

$$q_{mCp} = \left( \frac{c_{CO_2,d} - c_{CO_2,a}}{100} \right) \cdot q_{mew} \cdot \frac{12.011}{M_e} \cdot \frac{q_{mdew}}{q_{mp}}$$

Deleted: ¶

Deleted: (A.4-5)

Deleted: ¶

$$q_{mCe} = \left( \frac{c_{CO_2,d} - c_{CO_2,a}}{100} + \frac{c_{THC(C1),d} - c_{THC(C1),a}}{100} + \frac{c_{CO,d} - c_{CO,a}}{100} \right) \cdot q_{mew} \cdot \frac{12.011}{M_e} \cdot \frac{q_{mdew}}{q_{mp}}$$

(7-151)

Where:

$c_{CO_2,d}$  = wet CO<sub>2</sub> concentration in the dilute exhaust gas at the outlet of the dilution tunnel [per cent]

$c_{CO_2,a}$  = wet CO<sub>2</sub> concentration in the ambient air [per cent]

$c_{THC(C1),d}$  = THC(C1) concentration in the dilute exhaust gas at the outlet of the dilution tunnel [per cent]

$c_{THC(C1),a}$  = THC(C1) concentration in the ambient air [per cent]

$c_{CO,d}$  = wet CO concentration in the dilute exhaust gas at the outlet of the dilution tunnel [per cent]

$c_{CO,a}$  = wet CO concentration in the ambient air [per cent]

$q_{mdew}$  = diluted sample flow in the partial flow dilution system [kg/s]

$q_{mew}$  = exhaust gas mass flow rate on wet basis [kg/s]

$q_{mp}$  = sample flow of exhaust gas into partial flow dilution system [kg/s]

$M_e$  = molar mass of exhaust gas [g/mol]

Deleted: according to

Deleted: A.7

Deleted: .2.

Deleted: A.8

Deleted: .2

Deleted: A.4.7.

Deleted: ¶

Deleted: according to

Deleted: (A.8-15)

Deleted: A.8.

Deleted: 4

Deleted: .).

Moved (insertion) [46]

Deleted: ¶

Alternatively, the following exhaust gas molar masses may be used:¶

¶  
 $M_e$  (diesel) = 28.9 g/mol¶

Deleted: ¶

Page Break

If CO<sub>2</sub> or CO are measured on a dry basis they shall be converted to a wet basis [in accordance with](#) paragraph [2.1.3](#) or [paragraph 3.5.2 of this Annex](#).

## 5 Calculation of the molar mass of the exhaust gas

The molar mass of the exhaust gas shall be calculated [in accordance with](#) equation [7-13](#) (see paragraph [2.1.5.2 of this Annex](#)).

Alternatively, the following exhaust gas molar masses may be used:

$M_e$  (diesel) = 28.9 g/mol

$M_e$  (LPG) = 28.6 g/mol

$M_e$  (Natural gas/biomethane) = 28.3 g/mol

$M_e$  (Petrol) = 29.0 g/mol

## Appendix 3

Deleted: 2

### Statistics

#### 1 Arithmetic mean

Deleted: A.2.1.

The arithmetic mean,  $\bar{y}$ , shall be calculated as follows:

Deleted: .

$$\bar{y} = \frac{\sum_{i=1}^N y_i}{N} \quad (7-152)$$

Deleted: . (A.2-1)

#### 2 Standard deviation

Deleted: A.2.2.

The standard deviation for a non-biased (e.g.,  $N-1$ ) sample,  $\sigma$ , shall be calculated as follows:

$$\sigma_y = \sqrt{\frac{\sum_{i=1}^N (y_i - \bar{y})^2}{(N-1)}} \quad (7-153)$$

Deleted: . (A.2-2)

#### 3 Root mean square

Deleted: A.2.3.

The root mean square,  $rms_y$ , shall be calculated as follows:

$$rms_y = \sqrt{\frac{1}{N} \sum_{i=1}^N y_i^2} \quad (7-154)$$

Deleted: . (A.2-3)

#### 4 t-test

Deleted: A.2.4.

It shall be determined if the data passes a t-test by using the following equations and tables:

(a) For an unpaired  $t$ -test, the  $t$  statistic and its number of degrees of freedom,  $\nu$ , shall be calculated as follows:

$$t = \frac{|\bar{y}_{\text{ref}} - \bar{y}|}{\sqrt{\frac{\sigma_{\text{ref}}^2}{N_{\text{ref}}} + \frac{\sigma_y^2}{N}}} \quad (7-155)$$

Deleted: . (A.2-4)

$$v = \frac{\left( \frac{\sigma_{\text{ref}}^2}{N_{\text{ref}}} + \frac{\sigma_y^2}{N} \right)^2}{\frac{(\sigma_{\text{ref}}^2/N_{\text{ref}})^2}{N_{\text{ref}} - 1} + \frac{(\sigma_y^2/N)^2}{N - 1}} \quad (7-156)$$

Deleted: (A.2-5)

(b) For a paired  $t$ -test, the  $t$  statistic and its number of degrees of freedom,  $v$ , shall be calculated as follows, noting that the  $\varepsilon_i$  are the errors (e.g., differences) between each pair of  $y_{\text{ref}i}$  and  $y_i$ :

$$t = \frac{|\bar{\varepsilon}| \cdot \sqrt{N}}{\sigma_\varepsilon} \quad v = N - 1 \quad (7-157)$$

Deleted: (A.2-6)

(c) Table 7.8 of this paragraph shall be used to compare  $t$  to the  $t_{\text{crit}}$  values tabulated versus the number of degrees of freedom. If  $t$  is less than  $t_{\text{crit}}$ , then  $t$  passes the  $t$ -test.

Deleted: A.2.1

**Table 7.8:**

**Critical  $t$  values versus number of degrees of freedom,  $v$**

Moved (insertion) [47]

$v$	Confidence	
	90 per cent	95 per cent
1	6.314	12.706
2	2.920	4.303
3	2.353	3.182
4	2.132	2.776
5	2.015	2.571
6	1.943	2.447
7	1.895	2.365
8	1.860	2.306
9	1.833	2.262
10	1.812	2.228
11	1.796	2.201
12	1.782	2.179
13	1.771	2.160
14	1.761	2.145
15	1.753	2.131
16	1.746	2.120
18	1.734	2.101
20	1.725	2.086
22	1.717	2.074
24	1.711	2.064
26	1.706	2.056
28	1.701	2.048
30	1.697	2.042
35	1.690	2.030
40	1.684	2.021
50	1.676	2.009
70	1.667	1.994
100	1.660	1.984
1000+	1.645	1.960

Deleted: Table A.2.1:

Moved up [47]: Critical  $t$  values versus number of degrees of freedom,  $v$

Linear interpolation shall be used to establish values not shown here.

## 5 F-test

Deleted: A.2.5.

The  $F$  statistic shall be calculated as follows:

$$F_y = \frac{\sigma_y^2}{\sigma_{\text{ref}}^2} \quad (7-158)$$

Deleted: . (A.2-

- (a) For a 90 per cent confidence  $F$ -test, Table 2 of this paragraph is used to compare  $F$  to the  $F_{\text{cri}90}$  values tabulated versus  $(N-1)$  and  $(N_{\text{ref}}-1)$ . If  $F$  is less than  $F_{\text{cri}90}$ , then  $F$  passes the  $F$ -test at 90 per cent confidence;
- (b) For a 95 per cent confidence  $F$ -test, Table 3 of this paragraph is used to compare  $F$  to the  $F_{\text{cri}95}$  values tabulated versus  $(N-1)$  and  $(N_{\text{ref}}-1)$ . If  $F$  is less than  $F_{\text{cri}95}$ , then  $F$  passes the  $F$ -test at 95 per cent confidence.

## **6 Slope**

The least-squares regression slope,  $a_{1y}$ , shall be calculated as follows:

$$a_{1y} = \frac{\sum_{i=1}^N (y_i - \bar{y}) \cdot (y_{\text{ref}i} - \bar{y}_{\text{ref}})}{\sum_{i=1}^N (y_{\text{ref}i} - \bar{y}_{\text{ref}})^2} \quad (7-159)$$

## **7 Intercept**

The least-squares regression intercept,  $a_{0y}$ , shall be calculated as follows:

$$a_{0y} = \bar{y} - (a_{1y} \cdot \bar{y}_{\text{ref}}) \quad (7-160)$$

## **8 Standard estimate of error**

The standard estimate of error,  $SEE$ , shall be calculated as follows:

$$SEE_y = \sqrt{\frac{\sum_{i=1}^N [y_i - a_{0y} - (a_{1y} \cdot y_{\text{ref}i})]^2}{N - 2}} \quad (7-161)$$

## **9 Coefficient of determination**

The coefficient of determination,  $r^2$ , shall be calculated as follows:

$$r_y^2 = 1 - \frac{\sum_{i=1}^N [y_i - a_{0y} - (a_{1y} \cdot y_{\text{ref}i})]^2}{\sum_{i=1}^N [y_i - \bar{y}]^2} \quad (7-162)$$



#### Appendix 4

Deleted: 3

### 1980 INTERNATIONAL GRAVITY FORMULA

The acceleration of Earth's gravity,  $a_g$ , varies depending on the location and  $a_g$  is calculated for a respective latitude, as follows:

$$a_g = 9.7803267715 \left[ 1 + 5.2790414 \times 10^{-3} \sin^2 \theta + 2.32718 \times 10^{-5} \sin^4 \theta + 1.262 \times 10^{-7} \sin^6 \theta + 7 \times 10^{-10} \sin^8 \theta \right]$$

(7-163)

Deleted: ¶  
(A.3-1)

Where:

$\theta$  = Degrees north or south latitude

**Appendix 5**  
**Particle number calculation**

**1 Determination of particle numbers**

**1.1 Time alignment**

Moved (insertion) [4]

For partial flow dilution systems residence time in the particle number sampling and measurement system shall be accounted for by time aligning the particle number signal with the test cycle and the exhaust gas mass flow rate according to the procedure in paragraph 8.2.1.2. The transformation time of the particle number sampling and measurement system shall be determined in accordance with paragraph 2.1.3.7 of Appendix 1 to Annex VI.

**1.2 Determination of particle numbers with a partial flow dilution system**

Moved (insertion) [5]

Where particle numbers are sampled using a partial flow dilution system according to the specifications set out in paragraph 9.2.3 of Annex VI, the number of particles emitted over the test cycle, or in the case of a discrete mode NRSC test the number of particles emitted over the sampling period for the test mode, shall be calculated by means of the following equation:

$$N = \frac{m_{edf}}{1.293} \cdot k \cdot \bar{c}_s \cdot \bar{f}_r \cdot 10^6 \quad (7-164)$$

Where:

Moved (insertion) [7]

$m_{edf}$  is the mass of equivalent diluted exhaust gas over the cycle, determined in accordance with paragraph 2.3.1.1.2, kg/test, or in the case of a discrete mode NRSC test the mass of equivalent diluted exhaust over the sampling period for the test mode, kg/mode.

$k$  is the calibration factor to correct the particle number counter measurements to the level of the reference instrument where this is not applied internally within the particle number counter. Where the calibration factor is applied internally within the particle number counter, a value of 1 shall be used for  $k$  in the above equation.

Moved (insertion) [6]

$\bar{c}_s$  is the average concentration of particles from the diluted exhaust gas corrected to standard conditions (273.2 K and 101.33 kPa), particles per cubic centimetre.

$\bar{f}_r$  is the mean particle concentration reduction factor of the volatile particle remover specific to the dilution settings used for the test.

with

Moved (insertion) [2]

$$\bar{c}_s = \frac{\sum_{i=1}^{i=n} c_{s,i}}{n} \quad (7-165)$$

Where:

$c_{s,i}$  is a discrete measurement of particle concentration in the diluted gas exhaust from the particle counter, corrected for coincidence and to standard conditions (273.2 K and 101.33 kPa), particles per cubic centimetre,

$n$  is the number of particle concentration measurements taken over the duration of the test or in the case of a discrete mode NRSC test the number of particle concentration measurements taken over the duration of the sampling period for the test mode.

### 1.3 Determination of particle numbers with a full flow dilution system

Moved (insertion) [8]

Where particle numbers are sampled using a full flow dilution system according to the specifications set out in paragraph 9.2.2 of Annex VI, the number of particles emitted over the test cycle, or in the case of a discrete mode NRSC test the number of particles emitted over the sampling period for the test mode, shall be calculated by means of the following equation:

$$N = \frac{m_{edf}}{1.293} \cdot k \cdot \bar{c}_s \cdot \bar{f}_r \cdot 10^6 \quad (7-166)$$

Where:

Moved (insertion) [11]

$N$  is the number of particles emitted over the test cycle, or in the case of a discrete mode NRSC test the number of particles emitted over the sampling period for the test mode.

$m_{ed}$  is the total diluted exhaust gas flow over the cycle calculated according to any one of the methods described in paragraphs 2.2.4.1 to 2.2.4.3, kg/test, or in the case of a discrete mode NRSC test the mass of equivalent diluted exhaust over the sampling period for the test mode, kg/mode.

$k$  is the calibration factor to correct the particle number counter measurements to the level of the reference instrument where this is not applied internally within the particle number counter. Where the calibration factor is applied internally within the particle number counter, a value of 1 shall be used for  $k$  in the above equation.

Moved (insertion) [10]

$\bar{c}_s$  is the average corrected concentration of particles from the diluted exhaust gas corrected to standard conditions (273.2 K and 101.33 kPa), particles per cubic centimetre.

$\bar{f}_r$  is the mean particle concentration reduction factor of the volatile particle remover specific to the dilution settings used for the test.

with

Moved (insertion) [3]

$$\bar{c} = \frac{\sum_{i=1}^{i=n} c_{s,i}}{n} \quad (7-167)$$

Moved (insertion) [13]

Where:

$c_{y,i}$  is a discrete measurement of particle concentration in the diluted gas exhaust from the particle counter, corrected for coincidence and to standard conditions (273.2 K and 101.33 kPa), particles per cubic centimetre.

$n$  is the number of particle concentration measurements taken over the duration of the test or in the case of a discrete mode NRSC test the number of particle concentration measurements taken over the duration of the sampling period for the test mode.

## 2 Test result

### 2.1 Calculation of the specific emissions for transient and ramped modal cycles (RMC)

Moved (insertion) [12]

For each applicable individual RMC NRSC, hot NRTC and cold NRTC the specific emissions in number of particles/kWh shall be calculated as follows:

$$e = \frac{N}{W_{act}} \quad (7-168)$$

Where:

Moved (insertion) [17]

$N$  is the number of particles emitted over the applicable RMC, hot NRTC or cold NRTC.

Moved (insertion) [9]

$W_{act}$  is the actual cycle work in accordance with paragraph 7.8.3.4 of Annex VI, kWh.

For an RMC, in case of an engine with infrequent (periodic) exhaust regeneration (see paragraph 6.6.2 of Annex VI), the specific emissions shall be corrected with the two separate pairs of multiplicative adjustment factors  $k_{Ur}$  (upward factor of equation 6-10) and  $k_{Dr}$  (downward factor of equation 6-11) or with the two separate pairs of adjustment additive factors  $k_{Ur}$  (upward factor of equation 6-12) and  $k_{Dr}$  (downward factor of equation 6-13).

#### 2.1.1 Weighted average NRTC test result

Moved (insertion) [14]

For the NRTC, the final test result shall be a weighted average from cold start and hot start (including periodic regeneration where relevant) tests calculated using one of the following equations:

Moved (insertion) [15]

(a) In the case of multiplicative regeneration adjustment, or engines without periodically regenerating after-treatment

$$e = k_r \left( \frac{(0.1 \times N_{cold}) + (0.9 \times N_{hot})}{(0.1 \times W_{act,cold}) + (0.9 \times W_{act,hot})} \right) \quad (7-169)$$

Moved (insertion) [16]

In the case of additive regeneration adjustment

$$e = k_r + \left( \frac{(0.1 \times N_{cold}) + (0.9 \times N_{hot})}{(0.1 \times W_{act,cold}) + (0.9 \times W_{act,hot})} \right) \quad (7-170)$$

Where:

Moved (insertion) [30]

$N_{cold}$  is the total number of particles emitted over the NRTC cold test cycle.

$N_{hot}$  is the total number of particles emitted over the NRTC hot test cycle,  
 $W_{act,cold}$  is the actual cycle work over the NRTC cold test cycle in accordance with paragraph 7.8.3.4 of Annex VI, in kWh,  
 $W_{act,hot}$  is the actual cycle work over the NRTC hot test cycle in accordance with paragraph 7.8.3.4 of Annex VI, in kWh,  
 $k_r$  is the regeneration adjustment, according to paragraph 6.6.2 of Annex VI, or in the case of engines without periodically regenerating after-treatment  $k_r = 1$

Moved (insertion) [18]

## 2.2 Calculation of the specific emissions for discrete-mode NRSC tests

Moved (insertion) [19]

The specific emissions  $e$  [#kWh] are calculated as follows:

$$e = \frac{\sum_{i=1}^{N_{mode}} (\dot{N}_i \cdot WF_i)}{\sum_{i=1}^{N_{mode}} (P_i \cdot WF_i)} \quad (7-171)$$

Where:

Moved (insertion) [32]

$P_i$  is the engine power for the mode  $i$  [kW] with  $P_i = P_{maxi} + P_{auxi}$

(see paragraphs 6.3 and 7.7.1.3 of Annex VI)

$WF_i$  is the weighting factor for the mode  $i$  [-]

$\dot{N}_i$  is the mean emission number flow rate for the mode  $i$  [#h]

with:

$$\dot{N}_i = \frac{N_i}{t_i} \cdot 3600 \quad (7-172)$$

Moved (insertion) [20]

Where:

Moved (insertion) [23]

$N_i$  is the number of particles emitted over the sampling period for the test mode calculated in accordance with equation 7-164 or 7-166 depending on the dilution method [#]

$t_i$  is the duration of sampling period for the test mode [s]

In case of an engine with infrequent (periodic) exhaust regeneration (see paragraph 6.6.2 of Annex VI), the specific emissions shall be corrected with the two separate pairs of multiplicative adjustment factors  $k_{UR}$  (upward factor of equation 6-10) and  $k_{DR}$  (downward factor of equation 6-11) or with the two separate pairs of adjustment additive factors  $k_{UR}$  (upward factor of equation 6-12) and  $k_{DR}$  (downward factor of equation 6-13).

## 2.3 Rounding of final results

Moved (insertion) [24]

The final NRTC and weighted average NRTC test results shall be rounded in one step to three significant figures in accordance with ASTM E 29-06B. No rounding of intermediate values leading to the final brake specific emission result is permissible.

Moved (insertion) [25]

## 2.4 Determination of particle number background

Moved (insertion) [26]

2.4.1 At the engine manufacturer's request, dilution tunnel background particle number concentrations may be sampled, prior to or after the test, from a point downstream of the particle and hydrocarbon filters into the particle number measurement system, to determine the tunnel background particle concentrations.

Moved (insertion) [27]

2.4.2 Subtraction of particle number tunnel background concentrations shall not be allowed for type approval, but may be used at the manufacturer's request, with the prior approval of the Type Approval Authority, for conformity of production testing, if it can be demonstrated that tunnel background contribution is significant, which can then be subtracted from the values measured in the diluted exhaust.

Moved (insertion) [28]

## ANNEX VIII

### Technical requirements for dual fuel engines

#### 1 Scope

This Annex shall apply for dual-fuel engines as defined in Article 3(12) of Regulation (EU) 2015/XXX when they are being operated simultaneously on both a liquid and a gaseous fuel (dual-fuel mode).

This Annex shall not apply for testing engines, including dual-fuel engines, when they are being operated solely on liquid or solely on gaseous fuels (ie when the GER is either 1 or 0 according to the type of fuel). In this case the requirements are the same as for any single-fuel engine.

Type approval of engines operated simultaneously on a combination of more than one liquid fuel and a gaseous fuel or a liquid fuel and more than one gaseous fuel shall follow the procedure for new technologies or new concepts given in Article 33 of Regulation (EU) 2015/XXX.

#### 2 Definitions and abbreviations

For the purposes of this Annex the following definitions shall apply:

- 2.1 "GER (Gas Energy Ratio)" has the meaning defined in Article 3(16) of Regulation (EU) 2016/XXX based on the lower heating value;
- 2.2 "GER<sub>cycle</sub>" means the average GER when operating the engine on the applicable engine test cycle;
- 2.3 "Dual-fuel Type 1A engine" means either:
  - (a) a dual-fuel engine of a sub-category of NRE  $19 \leq kW \leq 560$ , that operates over the hot part of the NRTC test-cycle with an average gas energy ratio that is not lower than 90 per cent ( $GER_{NRTC, hot} \geq 0.9$ ) and that does not idle using exclusively liquid fuel, and that has no liquid-fuel mode, or;
  - (b) a dual-fuel engine of any (sub-) category other than a sub-category of NRE  $19 \leq kW \leq 560$ , that operates over the NRSC test-cycle with an average gas energy ratio that is not lower than 90 per cent ( $GER_{NRSC} \geq 0.9$ ) and that does not idle using exclusively liquid fuel, and that has no liquid-fuel mode;
- 2.4 "Dual-Fuel Type 1B engine" means either:
  - (a) a dual-fuel engine of a sub-category of NRE  $19 \leq kW \leq 560$ , that operates over the hot part of the NRTC test-cycle with an average gas energy ratio that is not lower than 90 per cent ( $GER_{NRTC, hot} \geq 0.9$ ) and that does not idle using exclusively liquid fuel in dual-fuel mode, and that has a liquid-fuel mode, or;
  - (b) a dual-fuel engine of any (sub-) category other than a sub-category of NRE  $19 \leq kW \leq 560$ , that operates over the NRSC test-cycle with an average gas energy ratio that is not lower than 90 per cent ( $GER_{NRSC} \geq 0.9$ ) and that does not idle using exclusively liquid fuel in dual-fuel mode, and that has a liquid-fuel mode;

2.5 "Dual-Fuel Type 2A engine" means either:

- (a) a dual-fuel engine of a sub-category of NRE  $19 \leq kW \leq 560$ , that operates over the hot part of the NRTC test-cycle with an average gas energy ratio between 10 per cent and 90 per cent ( $0.1 < GER_{NRTC, hot} < 0.9$ ) and that has no liquid-fuel mode or that operates over the hot part of the NRTC test-cycle with an average gas energy ratio that is not lower than 90 per cent ( $GER_{NRTC, hot} \geq 0.9$ ), but that idles using exclusively liquid fuel, and that has no liquid-fuel mode, or;
- (b) a dual-fuel engine of any (sub-) category other than a sub-category of NRE  $19 \leq kW \leq 560$ , that operates over the NRSC test-cycle with an average gas energy ratio between 10 per cent and 90 per cent ( $0.1 < GER_{NRSC} < 0.9$ ), and that has no liquid-fuel mode or that operates over the NRSC test-cycle with an average gas energy ratio that is not lower than 90 per cent ( $GER_{NRSC} \geq 0.9$ ), but that idles using exclusively liquid fuel, and that has no liquid-fuel mode;

2.6 "Dual-Fuel Type 2B engine" means either:

- (a) a dual-fuel engine of a sub-category of NRE  $19 \leq kW \leq 560$ , that operates over the hot part of the NRTC test-cycle with an average gas energy ratio between 10 per cent and 90 per cent ( $0.1 < GER_{NRTC, hot} < 0.9$ ) and that has a liquid-fuel mode or that operates over the hot part of the NRTC test-cycle with an average gas energy ratio that is not lower than 90 per cent ( $GER_{NRTC, hot} \geq 0.9$ ), and that has a liquid-fuel mode but that can idle using exclusively liquid fuel in dual-fuel mode, or;
- (b) a dual-fuel engine of any (sub-) category other than a sub-category of NRE  $19 \leq kW \leq 560$ , that operates over the NRSC test-cycle with an average gas energy ratio between 10 per cent and 90 per cent ( $0.1 < GER_{NRSC} < 0.9$ ), and that has no liquid-fuel mode or that operates over the NRSC test-cycle with an average gas energy ratio that is not lower than 90 per cent ( $GER_{NRSC} \geq 0.9$ ), and that has a liquid-fuel mode but that can idle using exclusively liquid fuel in dual-fuel mode;

2.7 "Dual-Fuel Type 3B engine" means either:

- (a) a dual-fuel engine of a sub-category of NRE  $19 \leq kW \leq 560$ , that operates over the hot part of the NRTC test-cycle with an average gas energy ratio that does not exceed 10 per cent ( $GER_{NRTC, hot} \leq 0.1$ ) and that has a liquid-fuel mode, or;
- (b) a dual-fuel engine of any (sub-) category other than a sub-category of NRE  $19 \leq kW \leq 560$ , that operates over the NRSC test-cycle with an average gas energy ratio that does not exceed 10 per cent ( $GER_{NRSC} \leq 0.1$ ) and that has a liquid-fuel mode;

### 3 Dual-fuel specific additional approval requirements

#### 3.1 Engines with operator-adjustable control of GERcycle

In the case for a given engine type the value of GERcycle can be reduced from the maximum by an operator-adjustable control, the minimum GERcycle shall not be limited but the engine shall be capable of meeting the emission limit values at any value of GERcycle permitted by the manufacturer.



## 4 General requirements

### 4.1. Operating modes of dual-fuel engines

#### 4.1.1. Conditions for a dual-fuel engine to operate in liquid mode

A dual-fuel engine may only operate in liquid-fuel mode if, when operating in liquid-fuel mode, it has been certified according to all the requirements of this Regulation concerning operation solely on the specified liquid fuel.

When a dual-fuel engine is developed from an already certified liquid-fuel engine, then re-certification is required in the liquid-fuel mode.

#### 4.1.2. Conditions for a dual-fuel engine to idle using liquid fuel exclusively

##### 4.1.2.1. Dual-fuel Type 1A engines shall not idle using liquid fuel exclusively except under the conditions defined in section 4.1.3. for warm-up and start.

##### 4.1.2.2. Dual-fuel Type 1B engines shall not idle using liquid fuel exclusively in dual-fuel mode.

##### 4.1.2.3. Dual-fuel Types 2A, 2B and 3B engines may idle using liquid fuel exclusively.

#### 4.1.3. Conditions for a dual-fuel engine to warm-up or start using diesel fuel solely

##### 4.1.3.1. A Type 1B, Type 2B, or Type 3B dual-fuel engine may warm-up or start using liquid fuel solely. In the case that the emission control strategy during warm-up or start-up in dual-fuel mode is the same as the corresponding emission control strategy in liquid-fuel mode the engine may operate in dual-fuel mode during warm-up or start-up. If this condition is not met the engine shall only warm-up or start-up using liquid fuel solely when in liquid-fuel mode.

##### 4.1.3.2. A Type 1A or Type 2A dual-fuel engine may warm-up or start-up using liquid fuel solely. However, in that case, the strategy shall be declared as an AECS and the following additional requirements shall be met:

###### 4.1.3.2.1. The strategy shall cease to be active when the coolant temperature has reached a temperature of 343 K (70 °C), or within 15 minutes after it has been activated, whichever occurs first; and

###### 4.1.3.2.2. The service mode shall be activated while the strategy is active.

### 4.2. Service mode

#### 4.2.1. Conditions for dual-fuel engines to operate in service mode

When an engine is operating in service mode it is subject to an operability restriction and is temporarily exempted from complying with the requirements related to exhaust emissions and NO<sub>x</sub> control described in this Regulation.

#### 4.2.2. Operability restriction in service mode

##### 4.2.2.1. Requirement for engine categories other than IWP, IWA, RLL and RLR

The operability restriction applicable to non-road mobile machinery fitted with a dual-fuel engine of engine categories other than IWP, IWA, RLL and RLR operated in service mode is the one activated by the "severe inducement system" specified in paragraph 5.4 of Annex V of this Regulation.

In order to account for safety concerns and to allow for self-healing diagnostics, use of an inducement override function for releasing full engine

power is permitted according to paragraph 5.5 of Annex V of this Regulation.

The operability restriction shall not otherwise be deactivated by either the activation or deactivation of the warning and inducement systems specified in Annex V.

The activation and the deactivation of the service mode shall not activate or deactivate the warning and inducement systems specified in Annex V.

#### 4.2.2.2. Requirement for engine categories IWP, IWA, RLL and RLR

For engines of category IWP, IWA, RLL and RLR, in order to account for safety concerns operation in service mode shall be permitted without limitation on engine torque or speed. In this case whenever an operability restriction would have been active according to paragraphs 4.2.2.3. the on-board computer log shall record in non-volatile computer memory all incidents of engine operation where the service mode is active in a manner to ensure that the information cannot be intentionally deleted.

It shall be possible for national inspection authorities to read these records with a scan tool.

#### 4.2.2.3. Activation of the operability restriction

The operability restriction shall be automatically activated when the service mode is activated.

In the case where the service mode is activated according to paragraph 4.2.3. because of a malfunction of the gas supply system, the operability restriction shall become active within 30 minutes operating time after the service mode is activated.

In the case where the service mode is activated because of an empty gaseous fuel tank, the operability restriction shall become active as soon as the service mode is activated.

#### 4.2.2.4. Deactivation of the operability restriction

The operability restriction system shall be deactivated when the engine no longer operates in service mode.

#### 4.2.3. Unavailability of gaseous fuel when operating in a dual-fuel mode

In order to permit the non-road mobile machinery to move to a position of safety, upon detection of an empty gaseous fuel tank, or of a malfunctioning gas supply system:

- (a) Dual-fuel engines of Types 1A and 2A shall activate the service mode;
- (b) Dual-fuel engines of Types 1B, 2B and 3B shall operate in diesel mode.

#### 4.2.3.1. Unavailability of gaseous fuel – empty gaseous fuel tank

In the case of an empty gaseous fuel tank, the service mode or, as appropriate according to paragraph 4.2.3., the liquid fuel mode shall be activated as soon as the engine system has detected that the tank is empty.

When the gas availability in the tank again reaches the level that justified the activation of the empty tank warning system specified in paragraph 4.3.2., the service mode may be deactivated, or, when appropriate, the dual-fuel mode may be reactivated.

#### 4.2.3.2. Unavailability of gaseous fuel – malfunctioning gas supply

In the case of a malfunctioning gas supply system that causes the unavailability of gaseous fuel, the service mode or, as appropriate according to paragraph 4.2.3., the liquid fuel mode shall be activated when gaseous fuel supply is not available.

As soon as the gaseous fuel supply becomes available the service mode may be deactivated, or, when appropriate, the dual-fuel mode may be reactivated.

#### 4.3. Dual-fuel indicators

##### 4.3.1. Dual-fuel operating mode indicator

Dual-fuel engines and non-road mobile machinery shall provide to the driver a visual indication of the mode under which the engine operates (dual-fuel mode, diesel mode, or service mode).

The characteristics and the location of this indicator are left to the decision of the manufacturer and may be part of an already existing visual indication system.

This indicator may be completed by a message display. The system used for displaying the messages referred to in this paragraph may be the same as the ones used for NO<sub>x</sub> control diagnostics, or other maintenance purposes.

The visual element of the dual-fuel operating mode indicator shall not be the same as the one used for the purpose of NO<sub>x</sub> control diagnostics, or for other engine maintenance purposes.

Safety alerts always have display priority over the operating mode indication.

4.3.1.1. The dual-fuel mode indicator shall be set to service mode as soon as the service mode is activated (i.e. before it becomes actually active) and the indication shall remain as long as the service mode is active.

4.3.1.2. The dual-fuel mode indicator shall be set for at least one minute on dual-fuel mode or liquid fuel mode as soon as the engine operating mode is changed from liquid fuel to dual-fuel mode or vice-versa. This indication is also required for at least one minute at key-on, or at the request of the manufacturer at engine cranking. The indication shall also be given upon the operator's request.

##### 4.3.2. Empty gaseous fuel tank warning system (dual-fuel warning system)

Non-road mobile machinery fitted with a dual-fuel engine shall be equipped with a dual-fuel warning system that alerts the operator that the gaseous fuel tank will soon become empty.

The dual-fuel warning system shall remain active until the tank is refuelled to a level above which the warning system is activated.

The dual-fuel warning system may be temporarily interrupted by other warning signals providing important safety-related messages.

It shall not be possible to turn off the dual-fuel warning system by means of a scan-tool as long as the cause of the warning activation has not been rectified.

4.3.2.1. Characteristics of the dual-fuel warning system

The dual-fuel warning system shall consist of a visual alert system (icon, pictogram, etc.) left to the choice of the manufacturer.

It may include, at the choice of the manufacturer, an audible component. In that case, the cancelling of that component by the driver is permitted.

The visual element of the dual-fuel warning system shall not be the same as the one used for the purpose of NO<sub>x</sub> control diagnostics, or for other engine maintenance purposes.

In addition the dual-fuel warning system may display short messages, including messages indicating clearly the remaining distance or time before the activation of the operability restriction.

The system used for displaying the warning or messages referred to in this paragraph may be the same as the one used for displaying the warning or messages related the NO<sub>x</sub> control diagnostics, or warning or messages for other maintenance purposes.

A facility to permit the operator to dim the visual alarms provided by the warning system may be provided on non-road mobile machinery for use by the rescue services or on non-road mobile machinery designed and constructed for use by the armed services, civil defense, fire services and forces responsible for maintaining public order.

4.4. Communicated torque

4.4.1. Communicated torque when a dual-fuel engine operates in dual-fuel mode

When a dual-fuel engine operates in dual-fuel mode:

- (a) The reference torque curve retrievable shall be the one obtained when that engine is tested on an engine test bench in the dual-fuel mode;
- (b) The recorded actual torques (indicated torque and friction torque) shall be the result of the dual-fuel combustion and not the one obtained when operating with liquid fuel exclusively.

4.4.2. Communicated torque when a dual-fuel engine operates in liquid fuel mode

When a dual-fuel engine operates in liquid fuel mode, the reference torque curve retrievable shall be the one obtained when the engine is tested on an engine test bench in liquid fuel mode.

4.5. Additional requirements

4.5.1. Where used for a dual-fuel engine, adaptive strategies shall, in addition to satisfying the requirements of Annex IV, additionally comply with the following requirements:

- (a) The engine shall always remain within the dual-fuel engine type (that is Type 1A, Type 2B, etc.) that has been declared for type-approval; and
- (b) In case of a Type 2 engine, the resulting difference between the highest and the lowest maximum GER<sub>cycle</sub> within the family shall never exceed the percentage specified in paragraph 3.1.1., except as permitted by paragraph 3.2.1.

4.6 The type approval shall be conditional upon providing to the OEM and operator, as required by [appropriate sections of IA], instructions for installation and operation of the dual-fuel engine including the service mode

set out in paragraph 4.2 and the dual-fuel indicator system set out in paragraph 4.3;

## 5 Performance requirements

- 5.1. The performance requirements, including emission limit values, and the requirements for type-approval applicable to dual-fuel engines are identical to those of any other engine of the respective engine category as set out in this Regulation and in Regulation (EU) 2016/XXX, except as set out in this Annex.
- 5.2. The hydrocarbon (HC) limit for operation in dual-fuel mode shall be determined using the average gas energy ratio (GER) over the specified test cycle as set out in Annex II of Regulation (EU) 2016/XXX.
- 5.3. The technical requirements on emission control strategies, including documentation required to demonstrate these strategies, technical provisions to resist tampering and the prohibition of defeat devices are identical to those of any other engine of the respective engine category as set out in Annex IV of this Regulation.
- 5.4. The detailed technical requirements on the area associated with the relevant NRSC cycle, within which there is control of the amount that the emissions shall be permitted to exceed the limit values set out in Annex II to Regulation (EU) 2016/XXX are identical to those of any other engine of the respective engine category as set out in Annex IV of this Regulation.

## 6 Demonstration requirements

- 6.1. The demonstration requirements applicable to dual-fuel engines are identical to those of any other engine of the respective engine category as set out in this Regulation and in Regulation (EU) 2016/XXX, except as set out in paragraph 6.
- 6.2. Compliance with the applicable limit values shall be demonstrated in dual-fuel mode.
- 6.3. For dual-fuel engine types with a liquid-fuel mode (i.e. types 1B, 2B, 3B) compliance with the applicable limit values shall additionally be demonstrated in liquid-fuel mode.
- 6.4. Additional demonstration requirements in case of a Type 2 engine
  - 6.4.1 The manufacturer shall present the Type Approval Authority with evidence showing that the  $GER_{cycle}$  span of all members of the dual-fuel engine family remains within the percentage specified in paragraph 3.1.1., or in the case of engines with an operator-adjustable  $GER_{cycle}$  satisfy the requirements of paragraph 6.5. (for example, through algorithms, functional analyses, calculations, simulations, results of previous tests, etc.).
- 6.5. Additional demonstration requirements in case of an engine with an operator-adjustable  $GER_{cycle}$ 
  - 6.5.1 Compliance with the applicable limit values shall be demonstrated at the minimum and maximum value of  $GER_{cycle}$  permitted by the manufacturer.
- 6.6. Requirements for demonstrating the durability of a dual-fuel engine
  - 6.6.1 Provisions of Annex III shall apply.

- 6.7. Demonstration of the dual-fuel indicators, warning and operability restriction
- 6.7.1 As part of the application for type-approval under this Regulation, the manufacturer shall demonstrate the operation of dual-fuel indicators and of the warning and operability restriction in accordance with the provisions of Appendix 1.

## **7 Requirements to ensure the correct operation of NO<sub>x</sub> control measures**

- 7.1. Annex V (on technical requirements on NO<sub>x</sub> control measures) shall apply to dual-fuel engines, whether operating in dual-fuel or liquid mode.
- 7.2. Additional NO<sub>x</sub> control requirements in case of Type 1B, Type 2B and Type 3B dual-fuel engines
- 7.2.1. The torque considered to apply to the severe inducement defined in paragraph 5.4 of Annex V shall be the lowest of the torques obtained in liquid-fuel mode and in dual-fuel mode.
- 7.2.2. A possible influence of the mode of operation on the malfunction detection shall not be used to extend the time until an inducement becomes active.
- 7.2.3. In the case of malfunctions the detection of which does not depend on the operation mode of the engine, the mechanisms specified in Annex V that are associated with the DTC status shall not depend on the operation mode of the engine (for example, if a DTC reached the potential status in dual-fuel mode, it will get the confirmed and active status the next time the failure is detected, even in liquid fuel mode).
- 7.2.4. In the case of malfunctions where the detection depends on the operation mode of the engine, DTCs shall not get a previously active status in a different mode than the mode in which they reached the confirmed and active status.
- 7.2.5. A change of the mode of operation (dual-fuel to liquid fuel or vice-versa) shall not stop nor reset the mechanisms implemented to comply with the specification of Annex V (counters, etc.). However, in the case where one of these mechanisms (for example a diagnostic system) depends on the actual operation mode the counter associated with that mechanism may, at the request of the manufacturer and upon approval of the Type Approval Authority:
- (a) Halt and, when applicable, hold their present value when the operation mode changes;
  - (b) Restart and, when applicable, continue counting from the point at which they have been held when the operation mode changes back to the other operation mode.

## Appendix 1

### Dual-fuel engine dual-fuel indicator, warning system, operability restriction - Demonstration requirements

1	<b>Dual-fuel indicators</b>	Deleted: A.3.1.
1.1	<b>Dual-fuel mode indicator</b> <p>The ability of the engine to command the activation of the dual-fuel mode indicator when operating in dual-fuel mode shall be demonstrated at type-approval.</p>	Deleted: A.3.1.1. .
1.2	<b>Liquid-fuel mode indicator</b> <p>In the case of a Type 1B, Type 2B, or Type 3B dual-fuel engine the ability of the engine to command the activation of the liquid-fuel mode indicator when operating in liquid-fuel mode shall be demonstrated at type-approval.</p>	Deleted: A.3.1.2.
1.3	<b>Service mode indicator</b> <p>The ability of the engine to command the activation of the service mode indicator when operating in service mode shall be demonstrated at type-approval.</p>	Deleted: A.3.1.3. .
1.3.1	<b>When so-equipped it is sufficient to perform the demonstration related to the service mode indicator by activating a service mode activation switch and to present the Type Approval Authority with evidence showing that the activation occurs when the service mode is commanded by the engine system itself (for example, through algorithms, simulations, result of in-house tests, etc. ...).</b>	Deleted: A.3.1.3.1.
2	<b>Warning system</b> <p>The ability of the engine to command the activation of the warning system in the case that the amount of gaseous fuel in the gaseous fuel tank is below the warning level, shall be demonstrated at type-approval. For that purpose the actual amount of gaseous fuel may be simulated.</p>	Deleted: A.3.2. .
3	<b>Operability restriction</b> <p>In the case of a Type 1A or Type 2A dual-fuel engine the ability of the engine to command the activation of the operability restriction upon detection of an empty gaseous fuel tank and of a malfunctioning gas supply system shall be demonstrated at type-approval. For that purpose the empty gaseous fuel tank and the malfunctioning of the gas supply may be simulated.</p>	Deleted: A.3.3.
3.1	<b>It is sufficient to perform the demonstration in a typical use-case selected with the agreement of the Type Approval Authority and to present that authority with evidence showing that the operability restriction occurs in the other possible use-cases (for example, through algorithms, simulations, result of in-house tests, etc).</b>	Deleted: A.3.3.1. .
		Deleted: ¶ ¶

## Appendix 2

### Emission test procedure requirements for dual-fuel engines

#### 1 General

This paragraph defines the additional requirements and exceptions of this Annex to enable emission testing of dual-fuel engines independent whether these emissions are solely exhaust emissions or also crankcase emissions added to the exhaust emissions according to paragraph [6.10 of Annex VI](#). In the case that no additional requirement or exception is listed, the requirements of this Regulation shall apply to dual-fuel engines in the same way as they apply to any other engine type-approved under this Regulation.

Emission testing of a dual-fuel engine is complicated by the fact that the fuel used by the engine can vary between pure liquid fuel and a combination of mainly gaseous fuel with only a small amount of liquid fuel as an ignition source. The ratio between the fuels used by a dual-fuel engine can also change dynamically depending of the operating condition of the engine. As a result special precautions and restrictions are necessary to enable emission testing of these engines.

#### 2 Test conditions

[Section 6 of Annex VI shall apply.](#)

Deleted:

Deleted: Laboratory test conditions ¶  
The parameter  $f_{\text{g}}$  for dual-fuel engines shall be determined with equations and in paragraph to this Regulation. ¶

#### 3 Test procedures

[Section 7 of Annex VI shall apply.](#)

Deleted: A

#### 4 Measurement procedures

[Section 8 of Annex VI shall apply except as set out in this Appendix.](#)

[A full-flow dilution](#) measurement procedure for dual-fuel engines is [illustrated in figure 7.1 of Annex VI](#) (CVS system).

Deleted: described

Deleted: paragraph 8.3.3 of this regulation

Deleted:

This measurement procedure ensures that the variation of the fuel composition during the test will mainly influence the hydrocarbon measurement results. This shall be compensated via one of the methods described in [section 5.1 of this Appendix](#).

Deleted: paragraph .

Raw gaseous/partial flow measurement [illustrated in figure 7.1 of Annex VI](#) may be used with some precautions regarding exhaust mass flow determination and calculation methods.

Deleted: Other measurement methods such as method (a) listed in paragraph 8.3.2 of this regulation (

Deleted: )

Deleted:



**5. Measurement equipment**

Section 9 of Annex VI shall apply.

**6. Particle number emissions measurement**

Appendix 1 of Annex VI shall apply.

**7. Emission calculation**

The emission calculation shall be performed according to Annex VII except as set out in this section. The additional requirements of section 7.1 of this Appendix shall apply for mass-based calculations and the additional requirements of section 7.2 of this Appendix shall apply for molar-based calculations.

The emission calculation requires knowledge of the composition of the fuels being used. When a gaseous fuel is supplied with a certificate confirming the properties of the fuel (e.g. gas from bottles) it is acceptable to use the composition specified by the supplier. Where the composition is not available (e.g. pipeline fuel) the fuel composition shall be analysed at least prior to and after the engine emission test is conducted. More frequent analysis shall be permitted and the results used in the calculation.

**7.1 Mass-based emission calculation**

Annex VII section 2 shall apply except as set out in this section.

**7.1.1 Dry/wet correction**

Deleted:

**7.1.1.1 Raw exhaust gas**

Equations 7-3 and 7-4 of Annex VII shall be used to calculate the dry/wet correction.

Deleted: in paragraph

The fuel specific parameters shall be determined in accordance with paragraph 7.1.5.

Deleted: according to paragraphs .

**7.1.1.2 Diluted exhaust gas**

Equation 7-3 with either equation 7-25 or 7-26 of Annex VII shall be used to calculate the wet/dry correction.

Deleted: Equations) and) in paragraph

The molar hydrogen ratio  $\alpha$  of the combination of the two fuels shall be used for the dry/wet correction. This molar hydrogen ratio shall be calculated from the fuel consumption measurement values of both fuels in accordance with paragraph 7.1.5.

Deleted: according to

Deleted: .

**7.1.2 NOx correction for humidity**

Deleted:

The NOx humidity correction for compression ignition engines as specified in equation 7-9 of Annex VII shall be used.

Deleted: paragraph

Deleted: to determine the NO x humidity correction for dual-fuel engines

**7.1.3 Partial flow dilution (PFS) and raw gaseous measurement**

Deleted:

**7.1.3.1 Determination of exhaust gas mass flow**

The exhaust mass flow shall be determined using a raw exhaust flow meter as described in paragraph 9.4.5.3 of Annex VI.

Deleted: according to the direct measurement method

Deleted: 6

Deleted: .1

Alternatively the airflow and air to fuel ratio measurement method according to equations [7-17 to 7-19 of Annex VII](#) may be used only if  $\alpha$ ,  $\gamma$ ,  $\delta$  and  $\varepsilon$  values are determined according to paragraph [7.1.5.3](#). The use of a zirconia-type sensor to determine the air fuel ratio is not allowed.

**Deleted:** paragraph 6.4.4.4 and (

**Deleted:** to)

**Deleted:** .

**Deleted:**

### 7.1.3.2 Determination of the gaseous components

[Section 2.1 of Annex VII](#) shall apply except as set out in this section.

The possible variation of fuel composition will influence all the  $u_{\text{gas}}$  factors and molar component ratios used in the emission calculations. One of the following approaches shall be used [to determine  \$u\_{\text{gas}}\$  factors and molar component ratios](#) at the choice of the manufacturer.

**Deleted:** regulated u-

**Deleted:** (paragraph.)

(a) The exact equations in paragraph [2.1.5.2](#) or [2.2.3 of Annex VII](#) shall be applied [to calculate instantaneous values of  \$u\_{\text{gas}}\$](#)  using the instantaneous proportions of liquid and gaseous fuel (determined from instantaneous fuel consumption measurements or calculations) and [instantaneous molar component ratios determined in accordance with section 7.1.5 of this Appendix](#); or,

**Deleted:** of the mass based emission calculations in Annex X

**Deleted:** corresponding chemical balance approach provided in the molar based emission calculations in

**Deleted:** X

(b) When the mass-based calculation in [section 2 of Annex VII](#) is used for the specific case of a dual-fuel engine operated on gas and diesel fuel, tabulated values may be used for the molar component ratios and  $u_{\text{gas}}$  values. These tabulated values shall be applied as follows:

**Deleted:** X

**Deleted:** -

i. For engines operated on the applicable test cycle with an average gas energy ratio [greater than or equal to 90 per cent](#) ( $\text{GER} \geq 0.9$ ) the required values shall be [those for the gaseous fuel](#) taken from [tables 7.1 or 7.2 of Annex VII](#).

**Deleted:**  $\geq$

**Deleted:** [table

**Deleted:** gas-only values]

**Deleted:** 9

**Deleted:**  $\leq$

**Deleted:** [table

**Deleted:** diesel-only values]

ii. For engines operated on the applicable test cycle with an average gas energy ratio between 10 per cent and 90 per cent ( $0.1 < \text{GER} < 0.9$ ) the required values shall be assumed to be represented by those for a mixture of 50 per cent gaseous fuel and 50 per cent diesel fuel taken from [Table 8.1](#) and [Table 8.2 of this Appendix](#).

iii. For engines operated on the applicable test cycle with an average gas energy ratio [less than or equal to 10 per cent](#) ( $\text{GER} \leq 0.1$ ) the required values shall be [those for diesel fuel](#) taken from [taken from tables 7.1 or 7.2 of Annex VII](#).

iv. For the calculation of HC emissions the  $u_{\text{gas}}$  value of the gaseous fuel shall be used in all cases irrespective of the average gas energy ratio (GER).

Gaseous Fuel	
CH <sub>4</sub>	
G <sub>R</sub>	
G <sub>23</sub>	
G <sub>25</sub>	
Propane	
Butane	
LPG	
LPG Fuel A	
LPG Fuel B	

**Deleted:**

Gaseous Fuel	$\alpha$	$\gamma$	$\delta$	$\epsilon$
CH <sub>4</sub>	2,8681	0	0	0,0040
G <sub>R</sub>	2,7676	0	0	0,0040
G <sub>23</sub>	2,7986	0	0,0703	0,0043
G <sub>25</sub>	2,7377	0	0,1319	0,0045
Propane	2,2633	0	0	0,0039
Butane	2,1837	0	0	0,0038
LPG	2,1957	0	0	0,0038
LPG Fuel A	2,1740	0	0	0,0038
LPG Fuel B	2,2402	0	0	0,0039

Table 8.1: Molar component ratios for a mixture of 50% gaseous fuel and 50% diesel fuel (mass %)

Deleted: :

Gaseous Fuel	$\rho_a$	Gas					
		NO <sub>x</sub>	CO	HC	CO <sub>2</sub>	O <sub>2</sub>	CH <sub>4</sub>
				$\rho_{\text{gas}}$ [kg/m <sup>3</sup> ]			
		2,053	1,250	(*)	1,9636	1,4277	0,716
				$u_{\text{gas}}$ (†)			
CNG/LNG (‡)	1,2786	0,001606	0,000978	0,000528 (‡)	0,001536	0,001117	0,000560
Propane	1,2869	0,001596	0,000972	0,000510	0,001527	0,001110	0,000556
Butane	1,2883	0,001594	0,000971	0,000503	0,001525	0,001109	0,000556
LPG (†)	1,2881	0,001594	0,000971	0,000506	0,001525	0,001109	0,000556

(\*) depending on fuel

(†) at  $\lambda = 2$ , dry air, 273 K, 101,3 kPa

(‡)  $u$  accurate within 0,2 % for mass composition of: C = 58 - 76 %; H = 19 - 25 %; N = 0 - 14 % (CH<sub>4</sub>, G<sub>20</sub>, G<sub>R</sub>, G<sub>23</sub> and G<sub>25</sub>)

(§) NMHC on the basis of CH<sub>2,93</sub> (for total HC the  $u_{\text{gas}}$  coefficient of CH<sub>4</sub> shall be used)

(¶)  $u$  accurate within 0,2 % for mass composition of: C3 = 27 - 90 %; C4 = 10 - 73 % (LPG Fuels A and B)

Gaseous Fuel	$\rho_a$
CNG/LNG (‡)	1,2786
Propane	1,2869
Butane	1,2883
LPG (†)	1,2881

(\*) depending on fuel

(†) at  $\lambda = 2$ , dry air, 273 K,

(‡)  $u$  accurate within 0,2 % fo

(§) NMHC on the basis of C1

(¶)  $u$  accurate within 0,2 % f

Deleted:

Table 8.2: Raw exhaust gas  $u$  gas values and component densities for a mixture of 50% gaseous fuel and 50% diesel fuel (mass %)

Deleted: :

### 7.1.3.3 Particulate determination

For the determination of particulate emissions with the partial dilution measurement method the calculation shall be performed according to [the equations in paragraph 2.3 of Annex VII](#).

Deleted: .

The requirements of paragraph 8.2.1.2 of Annex VI shall apply for controlling the dilution ratio. In particular, if the combined transformation time of the exhaust flow measurement and the partial flow system exceeds 0.3 s, look-ahead control based on a pre-recorded test run shall be used. In this case, the combined rise time shall be  $\leq 1$  s and the combined delay time  $\leq 10$  s. Except in the case that the exhaust mass flow is measured directly the determination of exhaust mass flow shall use values of  $\alpha$ ,  $\gamma$ ,  $\delta$  and  $\varepsilon$  determined according to paragraph 7.1.5.3.

The quality check according to paragraph 8.2.1.2 of Annex VI shall be performed for each measurement.

#### 7.1.3.4 Additional requirements regarding the exhaust gas mass flow meter

The flow meter referred to in paragraphs 9.4.1.6.3 and 9.4.1.6.3.3 of Annex VI shall not be sensitive to the changes in exhaust gas composition and density. The small errors of e.g. pitot tube or orifice-type of measurement (equivalent with the square root of the exhaust density) may be neglected.

#### 7.1.4 Full flow dilution measurement (CVS)

Section 2.2 of Annex VII shall apply except as set out in this section.

The possible variation of the fuel composition will mainly influence the tabulated hydrocarbon  $u_{gas}$  value. The exact equations shall be applied for the calculation of the hydrocarbon emissions using the molar component ratios determined from the fuel consumption measurements of both fuels according to paragraph 7.1.5.

##### 7.1.4.1 Determination of the background corrected concentrations (paragraph 5.2.5)

To determine the stoichiometric factor, the molar hydrogen ratio  $\alpha$  of the fuel shall be calculated as the average molar hydrogen ratio of the fuel mix during the test according to paragraph 7.1.5.3.

Alternatively the  $F_s$  value of the gaseous fuel may be used in equation 7-28 of Annex VII.

#### 7.1.5 Determination of molar component ratios

##### 7.1.5.1 General

This section shall be used for the determination of molar component ratios when the fuel mix is known (exact method).

##### 7.1.5.2 Calculation of the fuel mixture components

The following equations shall be used to calculate the elemental composition of the fuel mixture:

- Deleted: For
- Deleted: one of
- Deleted: following two methods may
- Deleted: : ¶  
— The direct
- Deleted: measurement as described in paragraph 6.4.3.1. ¶  
— The airflow and air to fuel ratio measurement method according to 6.4.4 and (equations to) may only be used when this
- Deleted: combined with the look ahead method described in paragraph and if
- Deleted: values are
- Deleted: .
- Deleted: paragraph 6
- Deleted: .1
- Deleted: ))
- Deleted: u-
- Deleted: (paragraph,).
- Deleted: mass based
- Deleted: in Annex X paragraph or corresponding chemical balance approach provided in molar based Annex X
- Deleted: .
- Deleted: stoichiometric
- Deleted: .
- Deleted: (see paragraph)
- Deleted: the equations and
- Deleted: <#>Equipment specification and verification ¶  
<#>Oxygen interference check gases ¶  
The oxygen concentrations required for dual-fuel engines are equal to those required for compression ignition engines listed in table 10 in paragraph 9.2.4. ¶  
¶  
<#>Oxygen interference check ¶  
Instruments used to measure dual-fuel engines shall be checked using the same procedures as those used to measure compression ignition engines. ¶  
¶  
<#>Water quench check ¶  
The water quench check in paragraph 9.6.9.1.5 to this regulation shall likewise be performed for dual-fuel engines. ¶
- Deleted: and  $u_{gas}$  values for dual-fuel engines
- Deleted: appendix defines
- Deleted: and  $u_{gas}$  values for the dry-wet factor and emissions calculations for emission testing of dual-fuel engines
- Moved down [48]: . ¶  
¶
- Deleted: the molar component ratios
- Deleted: have to

$$q_{mf} = q_{mf1} + q_{mf2} \quad (8-1)$$

Deleted: . . . . .0 . . . . .

$$w_{ALF} = \frac{w_{ALF1} * q_{mf1} + w_{ALF2} * q_{mf2}}{q_{mf1} + q_{mf2}} \quad (8-2)$$

Deleted:  $w_{ALF} = \frac{w_{ALF1} * q_{mf1} + w_{ALF2} * q_{mf2}}{q_{mf1} + q_{mf2}}$

$$w_{BET} = \frac{w_{BET1} * q_{mf1} + w_{BET2} * q_{mf2}}{q_{mf1} + q_{mf2}} \quad (8-3)$$

Deleted:  $w_{BET} = \frac{w_{BET1} * q_{mf1} + w_{BET2} * q_{mf2}}{q_{mf1} + q_{mf2}}$

$$w_{GAM} = \frac{w_{GAM1} * q_{mf1} + w_{GAM2} * q_{mf2}}{q_{mf1} + q_{mf2}} \quad (8-4)$$

Deleted:  $w_{GAM} = \frac{w_{GAM1} * q_{mf1} + w_{GAM2} * q_{mf2}}{q_{mf1} + q_{mf2}}$

$$w_{DEL} = \frac{w_{DEL1} * q_{mf1} + w_{DEL2} * q_{mf2}}{q_{mf1} + q_{mf2}} \quad (8-5)$$

Deleted:  $w_{DEL} = \frac{w_{DEL1} * q_{mf1} + w_{DEL2} * q_{mf2}}{q_{mf1} + q_{mf2}}$

$$w_{EPS} = \frac{w_{EPS1} * q_{mf1} + w_{EPS2} * q_{mf2}}{q_{mf1} + q_{mf2}} \quad (8-6)$$

Deleted:  $w_{EPS} = \frac{w_{EPS1} * q_{mf1} + w_{EPS2} * q_{mf2}}{q_{mf1} + q_{mf2}}$

where:

Deleted:

- $q_{mf1}$  ≡ fuel mass flow rate of fuel1, kg/s
- $q_{mf2}$  ≡ fuel mass flow rate of fuel2, kg/s
- $w_{ALF}$  ≡ hydrogen content of fuel, per cent mass
- $w_{BET}$  ≡ carbon content of fuel, per cent mass
- $w_{GAM}$  ≡ sulphur content of fuel, per cent mass
- $w_{DEL}$  ≡ nitrogen content of fuel, per cent mass
- $w_{EPS}$  ≡ oxygen content of fuel, per cent mass

### 7.1.5.3 Calculation of the molar ratios of H, C, S, N and O related to C for the fuel mixture

The calculation of the atomic ratios (especially the H/C-ratio  $\alpha$ ) is given in Annex VII as follows:

$$\alpha = 11,9164 * \frac{w_{ALF}}{w_{BET}} \quad (8-7)$$

Deleted:  $\alpha = 11,9164 * \frac{w_{ALF}}{w_{BET}}$

$$\gamma = 0,37464 * \frac{w_{GAM}}{w_{BET}} \quad (8-8)$$

Deleted:  $\gamma = 0,37464 * \frac{w_{GAM}}{w_{BET}}$

Deleted:  $\delta = 0,85752 * \frac{w_{DEL}}{w_{BET}}$

Deleted:  $\epsilon = 0,75072 * \frac{w_{EPS}}{w_{BET}}$

$$\delta = 0,85752 * \frac{W_{DEL}}{W_{BET}} \quad (8-9)$$

$$\varepsilon = 0,75072 * \frac{W_{EPS}}{W_{BET}} \quad (8-10)$$

where:

Deleted:

$w_{ALF}$  ≡ hydrogen content of fuel, per cent mass

$w_{BET}$  ≡ carbon content of fuel, per cent mass

$w_{GAM}$  ≡ sulphur content of fuel, per cent mass

$w_{DEL}$  ≡ nitrogen content of fuel, per cent mass

$w_{EPS}$  ≡ oxygen content of fuel, per cent mass

$\alpha$  ≡ molar hydrogen ratio (H/C)

$\gamma$  ≡ molar sulphur ratio (S/C)

$\delta$  ≡ molar nitrogen ratio (N/C)

$\varepsilon$  ≡ molar oxygen ratio (O/C)

referring to a fuel  $CH_{\alpha}O_{\varepsilon}N_{\delta}S_{\gamma}$

## 7.2 Molar-based emission calculation

Deleted: Calculation of the  $u_{gas}$  values

Annex VII section 3 shall apply except as set out in this section.

### 7.2.1 NO<sub>x</sub> correction for humidity

Equation 7-100 of Annex VII (correction for compression ignition engines) shall be used.

Moved (insertion) [48]

### 7.2.2 Determination of exhaust gas mass flow when not using a raw exhaust flow meter

Equation 7-110 of Annex VII (molar flow rate calculation based on intake air) shall be used. Equation 7-111 of Annex VII (molar flow rate calculation based on fuel mass flow rate) may alternatively be used only when conducting an NRSC test.

Deleted: fuel mixture ¶  
The

Deleted: gas  $u_{gas}$  values for a

### 7.2.3 Molar component ratios for determination of the gaseous components

The exact approach shall be used to determine the molar component ratios using the instantaneous proportions of liquid and gaseous fuel determined from instantaneous fuel consumption measurements or calculations. The instantaneous molar component ratios shall be input in the equations 7-89, 7-87, and 7-92 of Annex VII for the continuous chemical balance.

Deleted: mixture can

The determination of the ratios shall be either performed according to paragraph 7.2.3.1 or paragraph 7.1.5.3.

Gaseous fuels, either blended or sourced from a land line, may contain significant amounts of inert constituents such as CO<sub>2</sub> and N<sub>2</sub>. The manufacturer shall either include these constituents in the atomic ratio calculations described paragraph 7.2.3.1 or paragraph 7.1.5.3 as applicable, or, alternatively, the manufacturer shall exclude the inert constituents from the atomic ratios and allocate them appropriately to the chemical balance intake air parameters  $x_{O_2int}$ ,  $x_{CO_2int}$ , and  $x_{H_2Oint}$  in section 3.4.3 of Annex VII.

#### 7.2.3.1 Determination of molar component ratios

Instantaneous molar component ratios of the number of hydrogen, oxygen, sulphur, and nitrogen atoms to carbons atoms in the mixed fuel for the dual-fuel engines may be calculated using the following equations:

Deleted: with

Deleted: exact

$$\alpha(t) = \frac{\frac{\dot{m}_{liquid}(t) \times w_{H,liquid}}{M_H} + \frac{\dot{m}_{gas}(t) \times w_{H,gas}}{M_H}}{\frac{\dot{m}_{liquid}(t) \times w_{C,liquid}}{M_C} + \frac{\dot{m}_{gas}(t) \times w_{C,gas}}{M_C}} = \frac{M_C \times [(\dot{m}_{liquid}(t) \times w_{H,liquid}) + (\dot{m}_{gas}(t) \times w_{H,gas})]}{M_H \times [(\dot{m}_{liquid}(t) \times w_{C,liquid}) + (\dot{m}_{gas}(t) \times w_{C,gas})]} \quad (8-11)$$

$$\beta(t) = \frac{\frac{\dot{m}_{liquid}(t) \times w_{O,liquid}}{M_O} + \frac{\dot{m}_{gas}(t) \times w_{O,gas}}{M_O}}{\frac{\dot{m}_{liquid}(t) \times w_{C,liquid}}{M_C} + \frac{\dot{m}_{gas}(t) \times w_{C,gas}}{M_C}} = \frac{M_C \times [(\dot{m}_{liquid}(t) \times w_{O,liquid}) + (\dot{m}_{gas}(t) \times w_{O,gas})]}{M_O \times [(\dot{m}_{liquid}(t) \times w_{C,liquid}) + (\dot{m}_{gas}(t) \times w_{C,gas})]} \quad (8-12)$$

$$\gamma(t) = \frac{\frac{\dot{m}_{liquid}(t) \times w_{S,liquid}}{M_S} + \frac{\dot{m}_{gas}(t) \times w_{S,gas}}{M_S}}{\frac{\dot{m}_{liquid}(t) \times w_{C,liquid}}{M_C} + \frac{\dot{m}_{gas}(t) \times w_{C,gas}}{M_C}} = \frac{M_C \times [(\dot{m}_{liquid}(t) \times w_{S,liquid}) + (\dot{m}_{gas}(t) \times w_{S,gas})]}{M_S \times [(\dot{m}_{liquid}(t) \times w_{C,liquid}) + (\dot{m}_{gas}(t) \times w_{C,gas})]} \quad (8-13)$$

$$\delta(t) = \frac{\frac{\dot{m}_{liquid}(t) \times w_{N,liquid}}{M_N} + \frac{\dot{m}_{gas}(t) \times w_{N,gas}}{M_N}}{\frac{\dot{m}_{liquid}(t) \times w_{C,liquid}}{M_C} + \frac{\dot{m}_{gas}(t) \times w_{C,gas}}{M_C}} = \frac{M_C \times [(\dot{m}_{liquid}(t) \times w_{N,liquid}) + (\dot{m}_{gas}(t) \times w_{N,gas})]}{M_N \times [(\dot{m}_{liquid}(t) \times w_{C,liquid}) + (\dot{m}_{gas}(t) \times w_{C,gas})]} \quad (8-14)$$

Where:

Moved (insertion) [34]

$w_{i,fuel}$  = the mass fraction of the element of interest, C, H, O, S, or N, of liquid or gaseous fuel;

Deleted: in paragraph and

Deleted: molar ratios

$\dot{m}_{liquid}(t)$  = the instantaneous mass flow rate of the liquid fuel at time t, [kg/hr];

$\dot{m}_{gas}(t)$  = the instantaneous mass flow rate of the gaseous fuel at time t, [kg/hr];

In cases where exhaust mass flow rate is calculated based on the mixed fuel rate then  $w_C$  in equation 7-111 shall be calculated as:

**Deleted:** according to this paragraph.

$$w_C = \frac{\dot{m}_{liquid} \times w_{C,liquid} + \dot{m}_{gas} \times w_{C,gas}}{\dot{m}_{liquid} + \dot{m}_{gas}} \quad (8-15)$$

**Moved (insertion) [35]**

Where

**Deleted:** For systems with constant mass flow, equation in paragraph is needed to calculate the diluted exhaust gas  $u_{gas}$  values.¶

$w_C$  = the mass fraction of the carbon in the diesel or gaseous fuel;

$\dot{m}_{liquid}$  = the mass flow rate of the liquid fuel, [kg/hr];

$\dot{m}_{gas}$  = the mass flow rate of the gaseous fuel, [kg/hr].



### Appendix 3

#### Types of dual-fuel engines operated on natural gas/biomethane or LPG and a liquid fuel – illustration of the definitions and main requirements

Dual-fuel type	$GER_{cycle}$	Idle on liquid fuel	Warm-up on liquid fuel	Operation on liquid fuel solely	Operation in absence of gas	Comments
1A	$GER_{NRTC, hot} \geq 0.9$ or $GER_{NRSC} \geq 0.9$	NOT allowed	Allowed only on service mode	Allowed only on service mode	Service mode	
1B	$GER_{NRTC, hot} \geq 0.9$ or $GER_{NRSC} \geq 0.9$	Allowed only on liquid-fuel mode	Allowed only on liquid-fuel mode	Allowed only on liquid-fuel and service modes	Liquid-fuel mode	
2A	$0.1 < GER_{NRTC, hot} < 0.9$ or $0.1 < GER_{NRSC} < 0.9$	Allowed	Allowed only on service mode	Allowed only on service mode	Service mode	$GER_{NRTC, hot} \geq 0.9$ or $GER_{NRSC} \geq 0.9$ allowed
2B	$0.1 < GER_{NRTC, hot} < 0.9$ or $0.1 < GER_{NRSC} < 0.9$	Allowed	Allowed	Allowed	Liquid-fuel mode	$GER_{NRTC, hot} \geq 0.9$ or $GER_{NRSC} \geq 0.9$ allowed
3A	Neither defined nor allowed					
3B	$GER_{NRTC, hot} \leq 0.1$ or $GER_{NRSC} \leq 0.1$	Allowed	Allowed	Allowed	Liquid-fuel mode	

**ANNEX IX**  
**Reference Fuels**

1. Technical data on fuels for testing compression-ignition engines

**1 1.1 TYPE: DIESEL (NON-ROAD GAS-OIL)**

<i>Parameter</i>	<i>Unit</i>	<i>Limits<sup>1</sup></i>		<i>Test Method</i>
		<i>minimum</i>	<i>maximum</i>	
Cetane number <sup>2</sup>		45	56.0	EN-ISO 5165
Density at 15 °C	kg/m <sup>3</sup>	833	865	EN-ISO 3675
Distillation:				
50 per cent point	°C	245	-	EN-ISO 3405
95 per cent point	°C	345	350	EN-ISO 3405
- Final boiling point	°C	-	370	EN-ISO 3405
Flash point	°C	55	-	EN 22719
CFPP	°C	-	-5	EN 116
Viscosity at 40 °C	mm <sup>2</sup> /s	2.3	3.3	EN-ISO 3104
Polycyclic aromatic hydrocarbons	per cent m/m	2.0	6.0	IP 391
Sulphur content <sup>3</sup>	mg/kg	-	10	ASTM D 5453
Copper corrosion		-	class 1	EN-ISO 2160
Conradson carbon residue (10 per cent DR)	per cent m/m	-	0.2	EN-ISO 10370
Ash content	per cent m/m	-	0.01	EN-ISO 6245
Total contamination	mg/kg	-	24	EN 12662
Water content	per cent m/m	-	0.02	EN-ISO 12937
Neutralization (strong acid) number	mg KOH/g	-	0.10	ASTM D 974
Oxidation stability <sup>3</sup>	mg/ml	-	0.025	EN-ISO 12205
Lubricity (HFRR wear scar diameter at 60 °C)	µm	-	400	CEC F-06-A-96
Oxidation stability at 110 °C <sup>3</sup>	H	20.0	-	EN 15751
FAME	% v/v	-	7.0	EN 14078

---

<sup>1</sup> The values quoted in the specifications are "true values". In establishment of their limit values the terms of ISO 4259 "Petroleum products – Determination and application of precision data in relation to methods of test" have been applied and in fixing a minimum value, a minimum difference of 2R above zero has been taken into account; in fixing a maximum and minimum value, the minimum difference is 4R (R = reproducibility).

Notwithstanding this measure, which is necessary for technical reasons, the manufacturer of fuels should nevertheless aim at a zero value where the stipulated maximum value is 2R and at the mean value in the case of quotations of maximum and minimum limits. Should it be necessary to clarify the questions as to whether a fuel meets the requirements of the specifications, the terms of ISO 4259 should be applied.

<sup>2</sup> The range for the cetane number is not in accordance with the requirements of a minimum range of 4R. However, in the case of a dispute between fuel supplier and fuel user, the terms of ISO 4259 may be used to resolve such disputes provided replicate measurements, of sufficient number to archive the necessary precision, are made in preference to single determinations.

<sup>3</sup> Even though oxidation stability is controlled, it is likely that shelf life will be limited. Advice should be sought from the supplier as to storage conditions and life.

1.2 Type: Ethanol for dedicated compression ignition engines (ED95)<sup>1</sup>

Parameter	Unit	Limits <sup>2</sup>		Test method <sup>3</sup>
		Minimum	Maximum	
Total alcohol (Ethanol incl. content on higher saturated alcohols)	% m/m	92.4		EN 15721
Other higher saturated mono-alcohols (C3-C5)	% m/m		2.0	EN 15721
Methanol	% m/m		0.3	EN 15721
Density 15°C	kg/m <sup>3</sup>	793.0	815.0	EN ISO 12185
Acidity, calculated as acetic acid	% m/m		0.0025	EN 15491
Appearance		Bright and clear		
Flashpoint	°C	10		EN 3679
Dry residue	mg/kg		15	EN 15691
Water content	% m/m		6.5	EN 15489 <sup>4</sup> EN-ISO 12937 EN15692
Aldehydes calculated as acetaldehyde	% m/m		0.0050	ISO 1388-4
Esters calculated as ethylacetat	% m/m		0.1	ASTM D1617
Sulphur content	mg/kg		10.0	EN 15485 EN 15486
Sulphates	mg/kg		4.0	EN 15492
Particulate contamination	mg/kg		24	EN 12662
Phosphorus	mg/l		0.20	EN 15487
Inorganic chloride	mg/kg		1.0	EN 15484 or EN 15492
Copper	mg/kg		0.100	EN 15488
Electrical Conductivity	µS/cm		2.50	DIN 51627-4 or prEN 15938

*Notes:*

<sup>1</sup> Additives, such as cetane improver as specified by the engine manufacturer, may be added to the ethanol fuel, as long as no negative side effects are known. If these conditions are satisfied, the maximum allowed amount is 10 % m/m.

<sup>2</sup> The values quoted in the specifications are "true values". In establishment of their limit values the terms of ISO 4259 Petroleum products – Determination and application of precision data in relation to methods of test have been applied and in fixing a minimum value, a minimum difference of 2R above zero has been taken into account; in fixing a maximum and minimum value, the minimum difference is 4R (R = reproducibility). Notwithstanding this measure, which is necessary for technical reasons, the manufacturer of fuels shall nevertheless aim at a zero value where the stipulated maximum value is 2R and at the mean value in the case of quotations of maximum and minimum limits. Should it be necessary to clarify whether a fuel meets the requirements of the specifications, the terms of ISO 4259 shall be applied.

<sup>3</sup> Equivalent EN/ISO methods will be adopted when issued for properties listed above.

<sup>4</sup> Should it be necessary to clarify whether a fuel meets the requirements of the specifications, the terms of EN 15489 shall be applied.

2. Technical data on fuels for testing spark ignition engines

2 **2.1 TYPE: PETROL (E10)**

Parameter	Unit	Limits <sup>1</sup>		Test method <sup>2</sup>
		Minimum	Maximum	
Research octane number, RON		91.0	<del>98.0</del>	EN ISO 5164:2005 <sup>3</sup>
Motor octane number, MON		83.0	<del>89.0</del>	EN ISO 5163:2005 <sup>3</sup>
Density at 15 °C	kg/m <sup>3</sup>	743	756	EN ISO 3675 EN ISO 12185
Vapour pressure	kPa	45.0	60.0	EN ISO 13016-1 (DVPE)
Water content			Max 0,05 % v/v Appearance at -7°C: clear and bright	EN 12937
Distillation:				
- evaporated at 70 °C	% v/v	18.0	<del>46.0</del>	EN-ISO 3405
- evaporated at 100 °C	% v/v	46.0	<del>62.0</del>	EN-ISO 3405
- evaporated at 150 °C	% v/v	75.0	<del>94.0</del>	EN-ISO 3405
- final boiling point	°C	<del>170</del>	210	EN-ISO 3405
Residue	% v/v	—	2.0	EN-ISO 3405
Hydrocarbon analysis:				
- olefins	% v/v	3.0	18.0	EN 14517 EN 15553
- aromatics	% v/v	19.5	35.0	EN 14517 EN 15553
- benzene	% v/v	<del>—</del>	1.0	EN 12177 EN 238, EN 14517
- saturates	% v/v	Report		EN 14517 EN 15553
Carbon/hydrogen ratio		Report		
Carbon/oxygen ratio		Report		
Induction period <sup>4</sup>	minutes	480		EN-ISO 7536
Oxygen content <sup>5</sup>	% m/m	3.3 <sup>8</sup>	3.7	EN 1601 EN 13132 EN 14517
Existent gum	mg/ml	—	0.04	EN-ISO 6246
Sulphur content <sup>6</sup>	mg/kg	—	10	EN ISO 20846 EN ISO 20884
Copper corrosion (3h at 50 °C)	rating	—	Class 1	EN-ISO 2160
Lead content	mg/l	—	5	EN 237
Phosphorus content <sup>7</sup>	mg/l	—	1.3	ASTM D 3231
Ethanol <sup>4</sup>	% v/v	9.0 <sup>8</sup>	10.2 <sup>8</sup>	EN 22854

Notes:

<sup>1</sup> The values quoted in the specifications are "true values". In establishment of their limit values the terms of

Deleted: 97

Deleted: 86

Deleted: % v/v

Deleted: 015

Deleted: ASTM E 1064

Deleted: 44

Deleted: 60

Deleted: 90

Deleted: 190

Deleted: 0.4

ISO 4259 Petroleum products - Determination and application of precision data in relation to methods of test have been applied and in fixing a minimum value, a minimum difference of 2R above zero has been taken into account; in fixing a maximum and minimum value, the minimum difference is 4R (R = reproducibility). Notwithstanding this measure, which is necessary for technical reasons, the manufacturer of fuels shall nevertheless aim at a zero value where the stipulated maximum value is 2R and at the mean value in the case of quotations of maximum and minimum limits. Should it be necessary to clarify whether a fuel meets the requirements of the specifications, the terms of ISO 4259 shall be applied.

2 Equivalent EN/ISO methods will be adopted when issued for properties listed above.

3 A correction factor of 0.2 for MON and RON shall be subtracted for the calculation of the final result in accordance with EN 228:2008.

4 The fuel may contain oxidation inhibitors and metal deactivators normally used to stabilise refinery gasoline streams, but detergent/dispersive additives and solvent oils shall not be added.

5 Ethanol meeting the specification of EN 15376 is the only oxygenate that shall be intentionally added to the reference fuel.

6 The actual sulphur content of the fuel used for the Type 1 test shall be reported.

7 There shall be no intentional addition of compounds containing phosphorus, iron, manganese, or lead to this reference fuel.

8 The ethanol content and corresponding oxygen content may be zero for engines of category SMB at the choice of the manufacturer. In this case all testing of the engine family, or engine type where no family exists, shall be conducted using petrol with zero ethanol content.

3 2.2 TYPE: ETHANOL (E85)

Parameter	Unit	Limits <sup>1</sup>		Test method
		Minimum	Maximum	
Research octane number, RON		95.0	—	EN ISO 5164
Motor octane number, MON		85.0	—	EN ISO 5163
Density at 15 °C	kg/m <sup>3</sup>	Report		ISO 3675
Vapour pressure	kPa	40.0	60.0	EN ISO 13016-1 (DVPE)
Sulphur content <sup>2</sup>	mg/kg	—	10	EN 15485 or EN 15486
Oxidation stability	Minutes	360		EN ISO 7536
Existent gum content (solvent washed)	mg/100ml	—	5	EN-ISO 6246
Appearance This shall be determined at ambient temperature or 15°C whichever is higher		Clear and bright, visibly free of suspended or precipitated contaminants		Visual inspection
Ethanol and higher alcohols <sup>3</sup>	% v/v	83	85	EN 1601 EN 13132 EN 14517 E DIN 51627-3
Higher alcohols (C3-C8)	% v/v	—	2.0	E DIN 51627-3
Methanol	% v/v		1.00	E DIN 51627-3
Petrol <sup>4</sup>	% v/v	Balance		EN 228
Phosphorus	mg/l	0.20 <sup>5</sup>		EN 15487
Water content	% v/v		0.300	EN 15489 or EN 15692
Inorganic chloride content	mg/l		1	EN 15492
pHe		6.5	9.0	EN 15490
Copper strip corrosion (3h at 50°C)	Rating	Class 1		EN ISO 2160
Acidity, (as acetic acid CH <sub>3</sub> COOH)	% m/m (mg/l)	—	0.0050 (40)	EN 15491
Electric Conductivity	µS/cm	1.5		DIN 51627-4 or prEN 15938
Carbon/hydrogen ratio		report		
Carbon/oxygen ration		report		

*Notes:*

- 1 The values quoted in the specifications are "true values". In establishment of their limit values the terms of ISO 4259 Petroleum products - Determination and application of precision data in relation to methods of test have been applied and in fixing a minimum value, a minimum difference of 2R above zero has been taken into account; in fixing a maximum and minimum value, the minimum difference is 4R (R = reproducibility). Notwithstanding this measure, which is necessary for technical reasons, the manufacturer of fuels shall nevertheless aim at a zero value where the stipulated maximum value is 2R and at the mean value in the case of quotations of maximum and minimum limits. Should it be necessary to clarify whether a fuel meets the requirements of the specifications, the terms of ISO 4259 shall be applied.
- 2 The actual sulphur content of the fuel used for the emission tests shall be reported.
- 3 Ethanol to meet specification of EN 15376 is the only oxygenate that shall be intentionally added to this reference fuel.
- 4 The unleaded petrol content can be determined as 100 minus the sum of the percentage content of water, alcohols, MTBE and ETBE.
- 5 There shall be no intentional addition of compounds containing phosphorus, iron, manganese, or lead to this reference fuel.



4 **3. TECHNICAL DATA ON GASEOUS FUELS FOR SINGLE-FUEL AND DUAL-FUEL ENGINES**

5 **3.1 TYPE: LPG**

<i>Parameter</i>	<i>Unit</i>	<i>Fuel A</i>	<i>Fuel B</i>	<i>Test method</i>
Composition:				EN 27941
C <sub>3</sub> -content	% v/v	30 ± 2	85 ± 2	
C <sub>4</sub> -content	% v/v	Balance <sup>1</sup>	Balance <sup>1</sup>	
< C <sub>3</sub> , > C <sub>4</sub>	% v/v	Maximum 2	Maximum 2	
Olefins	% v/v	Maximum 12	Maximum 15	
Evaporation residue	mg/kg	Maximum 50	Maximum 50	EN 15470
Water at 0 °C		Free	Free	EN 15469
Total sulphur content including odorant	mg/kg	Maximum 10	Maximum 10	EN 24260, ASTM D 3246, ASTM 6667
Hydrogen sulphide		None	None	EN ISO 8819
Copper strip corrosion (1h at 40 °C)	Rating	Class 1	Class 1	ISO 6251 <sup>2</sup>
Odour		Characteristic	Characteristic	
Motor octane number <sup>3</sup>		Minimum 89.0	Minimum 89.0	EN 589 Annex B
<p><i>Notes:</i></p> <p><sup>1</sup> Balance shall be read as follows: balance = 100 - C<sub>3</sub> - &lt;C<sub>3</sub> - &gt;C<sub>4</sub>.</p> <p><sup>2</sup> This method may not accurately determine the presence of corrosive materials if the sample contains corrosion inhibitors or other chemicals which diminish the corrosivity of the sample to the copper strip. Therefore, the addition of such compounds for the sole purpose of biasing the test method is prohibited.</p> <p><sup>3</sup> At the request of the engine manufacturer, a higher MON could be used to perform the type approval tests.</p>				

### 3.2 TYPE: NATURAL GAS/ BIOMETHANE

3.2.1 Specification for reference fuels supplied with fixed properties (eg from a sealed container)

As an alternative to the reference fuels in this sub-section the equivalent fuels in section 3.2.2 may be used

Characteristics	Units	Basis	Limits		Test method
			minimum	maximum	
<b>Reference fuel G<sub>R</sub></b>					
Composition:					
Methane		87	84	89	
Ethane		13	11	15	
Balance <sup>1</sup>	% mole	—	—	1	ISO 6974
Sulphur content	mg/m <sup>3 2</sup>	—		10	ISO 6326-5
<i>Notes:</i> <sup>1</sup> Inerts + C <sub>2+</sub> <sup>2</sup> Value to be determined at standard conditions 293.2 K (20 °C) and 101.3 kPa.					
<b>Reference fuel G<sub>23</sub></b>					
Composition:					
Methane		92.5	91.5	93.5	
Balance <sup>1</sup>	% mole	—	—	1	ISO 6974
N <sub>2</sub>	% mole	7.5	6.5	8.5	
Sulphur content	mg/m <sup>3 2</sup>	—	—	10	ISO 6326-5
<i>Notes:</i> <sup>1</sup> Inerts (different from N <sub>2</sub> ) + C <sub>2+</sub> C <sub>2+</sub> <sup>2</sup> Value to be determined at 293.2 K (20 °C) and 101.3 kPa.					
<b>Reference fuel G<sub>25</sub></b>					
Composition:					
Methane	% mole	86	84	88	
Balance <sup>1</sup>	% mole	—	—	1	ISO 6974
N <sub>2</sub>	% mole	14	12	16	
Sulphur content	mg/m <sup>3 2</sup>	—	—	10	ISO 6326-5
<i>Notes:</i> <sup>1</sup> Inerts (different from N <sub>2</sub> ) + C <sub>2+</sub> C <sub>2+</sub> <sup>2</sup> Value to be determined at 293.2 K (20 °C) and 101.3 kPa.					

Reference fuel G <sub>20</sub>					
Composition:					
Methane	% mole	100	99	100	ISO 6974
Balance <sup>(1)</sup>	% mole	—	—	1	ISO 6974
N <sub>2</sub>	% mole				ISO 6974
Sulphur content	mg/m <sup>3</sup> <sup>(2)</sup>	—	—	10	ISO 6326-5
Wobbe Index (net)	MJ/m <sup>3</sup> <sup>(3)</sup>	48.2	47.2	49.2	
<sup>(1)</sup> Inerts (different from N <sub>2</sub> ) + C <sub>2</sub> + C <sub>2</sub> +. <sup>(2)</sup> Value to be determined at 293,2 K (20 °C) and 101,3 kPa. <sup>(3)</sup> Value to be determined at 273,2 K (0 °C) and 101,3 kPa.					

### 3.2.2 Specification for reference fuel supplied from a pipeline with admixture of other gases with gas properties determined by on-site measurement

As an alternative to the reference fuels in this paragraph the equivalent reference fuels in section 3.2.1 may be used.

3.2.2.1 The basis of each pipeline reference fuel (GR, G<sub>20</sub>, ...) shall be gas drawn from a utility gas distribution network, blended, where necessary to meet the corresponding lambda-shift (S<sub>λ</sub>) specification in table X, with an admixture of one or more of the following commercially<sup>1</sup> available gases:

- (a) Carbon dioxide;
- (b) Ethane;
- (c) Methane;
- (d) Nitrogen;
- (e) Propane.

<sup>1</sup> The use of calibration gas for this purpose shall not be required

3.2.2.2 The value of S<sub>λ</sub> of the resulting blend of pipeline gas and admixture gas shall be within the range specified in table 9-1 for the specified reference fuel.

Reference fuel	Minimum S <sub>λ</sub>	Maximum S <sub>λ</sub>
G <sub>R</sub> <sup>2</sup>	0.87	0.95
G <sub>20</sub>	0.97	1.03
G <sub>23</sub>	1.05	1.10
G <sub>25</sub>	1.12	1.20
<sup>2</sup> The engine shall not be required to be tested on a gas blend with a Methane Number (MN) less than 70. In the case that the required range of S <sub>λ</sub> for G <sub>R</sub> would result in an MN less than 70 the value of S <sub>λ</sub> for G <sub>R</sub> may be adjusted as necessary until a value of MN no less than 70 is attained.		

Table 9-1 Required range of S<sub>λ</sub> for each reference fuel

3.2.2.3 The engine test report for each test run shall include the following:

- (a) The admixture gas(es) chosen from the list in paragraph 3.2.2.1
- (b) The value of  $S\lambda$  for the resulting fuel blend
- (c) The Methane Number (MN) of the resulting fuel blend

3.2.2.4 The requirements of Appendices 1 and 2 shall be met in respect to determination of the properties of the pipeline and admixture gases, the determination of  $S\lambda$  and MN for the resulting gas blend, and the verification that the blend was maintained during the test.

3.2.2.5 In the case that one or more of the gas streams (pipeline gas or admixture gas(es)) contain CO<sub>2</sub> in greater than a de-minimus proportion, the calculation of specific CO<sub>2</sub> emissions in Annex VII shall be corrected according to Appendix 3.

## Appendix 1

### **Supplementary requirements for conducting emission testing using gaseous reference fuels comprising pipeline gas with admixture of other gases**

1. Method of gas analysis and gas flow measurement
  - 1.1 For the purpose of this Appendix, where required the composition of the gas shall be determined by analysis of the gas using gas chromatography according to EN ISO 6974, or by an alternative technique that achieves at least a similar level of accuracy and repeatability.
  - 1.2 For the purpose of this Appendix, where required the measurement of gas flow shall be performed using a mass-based flowmeter.
2. Analysis and flowrate of incoming utility gas supply
  - 2.1 The composition of the utility gas supply shall be analysed prior to the admixture blending system.
  - 2.2 The flowrate of the utility gas entering the admixture blending system shall be measured.
3. Analysis and flowrate of admixture
  - 3.1 When an applicable certificate of analysis is available for an admixture (for example issued by the gas supplier) this may be used as the source of that admixture composition. In this case the on-site analysis of that admixture composition shall be permitted but shall not be required.
  - 3.2 Where an applicable certificate of analysis is not available for an admixture the composition of that admixture shall be analysed.
  - 3.3 The flowrate of each admixture entering the admixture blending system shall be measured.
4. Analysis of blended gas
  - 4.1 The analysis of the composition of the gas supplied to the engine after leaving the admixture blending system shall be permitted in addition to, or as an alternative to the analysis required by paragraphs 2.1 and 3.1, but shall not be required.
5. Calculation of  $S\lambda$  and MN of the blended gas
  - 5.1 The results of the gas analysis according to paragraph 2.1, paragraph 3.1 or 3.2 and, where applicable, paragraph 4.1, combined with the mass flowrate of gas measured according to paragraphs 2.2 and 3.3, shall be used to calculate the MN according to EN16726:2015. The same set of data shall be used to calculate  $S\lambda$  according to the procedure given in Appendix 2.
6. Control and verification of gas blend during the test
  - 6.1 The control and verification of the gas blend during the test shall be performed using either an open loop or closed loop control system.
  - 6.2 Open loop blend control system
    - 6.2.1 In this case the gas analysis, flow measurements and calculations set out in paragraphs 1, 2, 3 and 4 shall be performed prior to the emission test.

- 6.2.2 The proportion of utility gas and admixture(s) shall be set to ensure that the  $S\lambda$  is within the permitted range for the relevant reference fuel in table 9-1.
- 6.2.3 When the relative proportions have been set they shall be maintained throughout the emission test. Adjustments to individual flow rates to maintain the relative proportions shall be permitted.
- 6.2.4 When the emission test has been completed the analysis of gas composition, flow measurements and calculations set out in paragraphs 2, 3, 4 and 5 shall be repeated. In order for the test to be considered valid the value of  $S\lambda$  shall remain within the specified range for the respective reference fuel given in table 9-1.
- 6.3 Closed loop blend control system
  - 6.3.1 In this case the analysis of gas composition, flow measurements and calculations set out in paragraphs 2, 3, 4 and 5 shall be performed at intervals during the emission test. The intervals shall be chosen taking into consideration the frequency capability of the gas chromatograph and corresponding calculation system.
  - 6.3.2 The results from the periodic measurements and calculations shall be used to adjust the relative proportions of utility gas and admixture in order to maintain the value of  $S\lambda$  within the range specified in table 9-1 for the respective reference fuel. The frequency of adjustment shall not exceed the frequency of measurement.
  - 6.3.3 In order for the test to be considered valid the value of  $S\lambda$  shall be within the range specified in table 9-1 for the respective reference fuel for at least 90 per cent of the measurement points.

## Appendix 2

### Calculation of $\lambda$ -Shift factor ( $S_\lambda$ )

**Deleted:** A.5.5.  $\lambda$ -Shift factor ( $S_\lambda$ )

#### A.5.5.1. Calculation of the $\lambda$ -shift factor ( $S_\lambda$ )<sup>4</sup>

$$S_\lambda = \frac{2}{\left(1 - \frac{\text{inert}\%}{100}\right) \left(n + \frac{m}{4}\right) - \frac{O_2^*}{100}} \quad (9-1)$$

Where:

- $S_\lambda$  =  $\lambda$ -shift factor;
- inert % = per cent by volume of inert gases in the fuel (i.e.  $N_2$ ,  $CO_2$ , He, etc.);
- $O_2^*$  = per cent by volume of original oxygen in the fuel;
- n and m = refer to average  $C_nH_m$  representing the fuel hydrocarbons, i.e:

$$n = \frac{1 \times \left[\frac{CH_4\%}{100}\right] + 2 \times \left[\frac{C_2\%}{100}\right] + 3 \times \left[\frac{C_3\%}{100}\right] + 4 \times \left[\frac{C_4\%}{100}\right] + 5 \times \left[\frac{C_5\%}{100}\right] + \dots}{\frac{1 - \text{diluent}\%}{100}} \quad (9-2)$$

$$m = \frac{4 \times \left[\frac{CH_4\%}{100}\right] + 4 \times \left[\frac{C_2H_4\%}{100}\right] + 6 \times \left[\frac{C_2H_6\%}{100}\right] + \dots + 8 \times \left[\frac{C_3H_8\%}{100}\right] + \dots}{\frac{1 - \text{diluent}\%}{100}} \quad (9-3)$$

Where:

- $CH_4$  = per cent by volume of methane in the fuel;
- $C_2$  = per cent by volume of all  $C_2$  hydrocarbons (e.g.:  $C_2H_6$ ,  $C_2H_4$ , etc.) in the fuel;
- $C_3$  = per cent by volume of all  $C_3$  hydrocarbons (e.g.:  $C_3H_8$ ,  $C_3H_6$ , etc.) in the fuel;
- $C_4$  = per cent by volume of all  $C_4$  hydrocarbons (e.g.:  $C_4H_{10}$ ,  $C_4H_8$ , etc.) in the fuel;
- $C_5$  = per cent by volume of all  $C_5$  hydrocarbons (e.g.:  $C_5H_{12}$ ,  $C_5H_{10}$ , etc.) in the fuel;

<sup>4</sup> Stoichiometric Air/Fuel ratios of automotive fuels - SAE J1829, June 1987. John B. Heywood, Internal combustion engine fundamentals, McGraw-Hill, 1988, Chapter 3.4 "Combustion stoichiometry" (pp. 68 to 72).

diluent = per cent by volume of dilution gases in the fuel (i.e.: O<sub>2</sub>\*, N<sub>2</sub>, CO<sub>2</sub>, He, etc.).

A.5.5.2. Examples for the calculation of the λ-shift factor S<sub>λ</sub>:

Example 1: G25: CH<sub>4</sub> = 86 per cent, N<sub>2</sub> = 14 per cent (by volume)

$$n = \frac{1 \times \left[ \frac{\text{CH}_4 \%}{100} \right] + 2 \times \left[ \frac{\text{C}_2 \%}{100} \right] + \dots}{1 - \frac{\text{diluent \%}}{100}} = \frac{1 \times 0.86}{1 - \frac{14}{100}} = \frac{0.86}{0.86} = 1$$

$$m = \frac{4 \times \left[ \frac{\text{CH}_4 \%}{100} \right] + 4 \times \left[ \frac{\text{C}_2\text{H}_4 \%}{100} \right] + \dots}{1 - \frac{\text{diluent \%}}{100}} = \frac{4 \times 0.86}{0.86} = 4$$

$$S_\lambda = \frac{2}{\left(1 - \frac{\text{inert \%}}{100}\right) \left(n + \frac{m}{4}\right) - \frac{\text{O}_2^*}{100}} = \frac{2}{\left(1 - \frac{14}{100}\right) \times \left(1 + \frac{4}{4}\right)} = 1.16$$

Deleted:

Example 2: G<sub>R</sub>: CH<sub>4</sub> = 87 per cent, C<sub>2</sub>H<sub>6</sub> = 13 per cent (by vol)

$$n = \frac{1 \times \left[ \frac{\text{CH}_4 \%}{100} \right] + 2 \times \left[ \frac{\text{C}_2 \%}{100} \right] + \dots}{1 - \frac{\text{diluent \%}}{100}} = \frac{1 \times 0.87 + 2 \times 0.13}{1 - \frac{0}{100}} = \frac{1.13}{1} = 1.13$$

$$m = \frac{4 \times \left[ \frac{\text{CH}_4 \%}{100} \right] + 4 \times \left[ \frac{\text{C}_2\text{H}_4 \%}{100} \right] + \dots}{1 - \frac{\text{diluent \%}}{100}} = \frac{4 \times 0.87 + 6 \times 0.13}{1} = 4.26$$

$$S_\lambda = \frac{2}{\left(1 - \frac{\text{inert \%}}{100}\right) \left(n + \frac{m}{4}\right) - \frac{\text{O}_2^*}{100}} = \frac{2}{\left(1 - \frac{0}{100}\right) \times \left(1.13 + \frac{4.26}{4}\right)} = 0.911$$

Example 3: USA: CH<sub>4</sub> = 89 per cent, C<sub>2</sub>H<sub>6</sub> = 4.5 per cent, C<sub>3</sub>H<sub>8</sub> = 2.3 per cent, C<sub>6</sub>H<sub>14</sub> = 0.2 per cent, O<sub>2</sub> = 0.6 per cent, N<sub>2</sub> = 4 per cent

$$n = \frac{1 \times \left[ \frac{\text{CH}_4 \%}{100} \right] + 2 \times \left[ \frac{\text{C}_2 \%}{100} \right] + \dots}{1 - \frac{\text{diluent \%}}{100}} = \frac{1 \times 0.89 + 2 \times 0.045 + 3 \times 0.023 + 4 \times 0.002}{1 - \frac{0.64 + 4}{100}} = 1.11$$

$$m = \frac{4 \times \left[ \frac{\text{CH}_4 \%}{100} \right] + 4 \times \left[ \frac{\text{C}_2\text{H}_4 \%}{100} \right] + 6 \times \left[ \frac{\text{C}_2\text{H}_6 \%}{100} \right] + \dots + 8 \times \left[ \frac{\text{C}_3\text{H}_8 \%}{100} \right]}{1 - \frac{\text{diluent \%}}{100}} = \frac{4 \times 0.89 + 4 \times 0.045 + 8 \times 0.023 + 14 \times 0.002}{1 - \frac{0.6 + 4}{100}} = 4.24$$




$$S_\lambda = \frac{2}{\left(1 - \frac{\text{inert}\%}{100}\right) \left(n + \frac{m}{4}\right) - \frac{O_2^*}{100}} = \frac{2}{\left(1 - \frac{4}{100}\right) \times \left(1.11 + \frac{4.24}{4}\right) - \frac{0.6}{100}} = 0.96$$

As an alternative to the above equation,  $S_\lambda$  may be calculated from the ratio of the stoichiometric air demand of pure methane to the stoichiometric air demand of the fuel blend supplied to the engine, as specified below.

Lambda-shift factor ( $S_\lambda$ ) expresses the oxygen demand of any fuel blend in relation to oxygen demand of pure methane. Oxygen demand means the amount of oxygen to oxidise methane in a stoichiometric composition of reaction partners to products of complete combustion (i.e. carbon-dioxide and water).

Deleted: oxydise

For the combustion of pure methane the reaction is:



In this case the ratio of molecules in stoichiometric composition of reaction partners is exactly 2:

$$\frac{n_{O_2}}{n_{CH_4}} = 2$$

Where:

$n_{O_2}$  = number of molecules of oxygen

$n_{CH_4}$  = number of molecules of methane

The oxygen demand for pure methane is therefore:

$$n_{O_2} = 2 \cdot n_{CH_4} \quad \text{with a reference value of } [n_{CH_4}] = 1 \text{ kmol}$$

The value of  $S_\lambda$  may be determined from the ratio of the stoichiometric composition of oxygen and methane to the ratio of the stoichiometric composition of oxygen and the fuel blend supplied to the engine:

$$S_\lambda = \frac{\left(\frac{n_{O_2}}{n_{CH_4}}\right)}{\left(\frac{n_{O_2}}{n_{blend}}\right)} = \frac{2}{(n_{O_2})_{blend}} \quad (9-4)$$

Where:

$n_{blend}$  = number of molecules of the fuel blend

$(n_{O_2})_{blend}$  = the ratio of the molecules in the stoichiometric composition of oxygen and the fuel blend supplied to the engine

Because air contains 21% oxygen the stoichiometric air demand  $L_{st}$  of any fuel will be:

$$L_{st, fuel} = \frac{n_{O_2, fuel}}{0.21} \quad (9-5)$$

Where:

$L_{st, fuel}$  = the stoichiometric air demand for the fuel

$n_{O_2, fuel}$  = the stoichiometric oxygen demand for the fuel

Consequently the value of  $S_\lambda$  may also be determined from the ratio of the stoichiometric composition of air and methane to the ratio of the stoichiometric

composition of air and the fuel blend supplied to the engine, i.e. the ratio of the stoichiometric air demand of methane to that of the fuel blend supplied to the engine:

$$S_\lambda = \frac{\left(\frac{n_{O_2}}{n_{CH_4}}\right)/0.21}{\left(\frac{n_{O_2}}{n_{blend}}\right)/0.21} = \frac{\left(\frac{n_{O_2}}{0.21}\right)_{CH_4}}{\left(\frac{n_{O_2}}{0.21}\right)_{blend}} = \frac{L_{st,CH_4}}{L_{st,blend}} \quad (9-6)$$

Therefore, any calculation that specifies the stoichiometric air demand may be used to express the Lambda-shift factor.

### Appendix 3

#### Correction for CO<sub>2</sub> in the exhaust arising from CO<sub>2</sub> in the gaseous fuel

##### 1. Instantaneous mass flow rate of CO<sub>2</sub> in the gaseous fuel stream

1.1. Gas composition and gas flow shall be determined according to the requirements of sections 1 to 4 of Appendix 1.

1.2 The instantaneous mass flow rate of CO<sub>2</sub> in a stream of gas supplied to the engine shall be calculated according to equation (1).

$$\dot{m}_{\text{CO}_2i} = (M_{\text{CO}_2} / M_{\text{stream}}) * x_{\text{CO}_2i} * \dot{m}_{\text{stream}i} \quad (9-7)$$

Where:

Moved (insertion) [36]

$\dot{m}_{\text{CO}_2i}$  = Instantaneous mass flow rate of CO<sub>2</sub> from the gas stream [g/s]

$\dot{m}_{\text{stream}i}$  = Instantaneous mass flow rate of the gas stream [g/s]

$x_{\text{CO}_2i}$  = Molar fraction of CO<sub>2</sub> in the gaseous stream [-]

$M_{\text{CO}_2}$  = Molar mass of CO<sub>2</sub> [g/mol]

$M_{\text{stream}}$  = Molar mass of gas stream [g/mol]

$M_{\text{stream}}$  shall be calculated from all measured constituents (1, 2, ..., n) according to equation (2).

$$M_{\text{stream}} = x_1 * M_1 + x_2 * M_2 + \dots + x_n * M_n \quad (9-8)$$

Where:

Moved (insertion) [37]

$X_{1, 2, \dots, n}$  = Molar fraction of each measured constituent in the gas stream (CH<sub>4</sub>, CO<sub>2</sub>, ...) [-]

$M_{1, 2, \dots, n}$  = Molar mass of each measured constituent in the gas stream [g/mol]

1.3. In order to determine the total mass flow rate of CO<sub>2</sub> in the gaseous fuel entering the engine the calculation in equation (1) shall be performed for each individual gas stream containing CO<sub>2</sub> that is entering the gas blending system and the result for each gas stream added together, or it shall be performed for the blended gas leaving the blending system and entering the engine.

$$\dot{m}_{\text{CO}_2i, \text{fuel}} = \dot{m}_{\text{CO}_2i, a} + \dot{m}_{\text{CO}_2i, b} + \dots + \dot{m}_{\text{CO}_2i, n} \quad (9-9)$$

Where:

Moved (insertion) [38]

$\dot{m}_{\text{CO}_2i, \text{fuel}}$  = instantaneous combined mass flow rate of CO<sub>2</sub> arising from the CO<sub>2</sub> in the gaseous fuel entering the engine [g/s]

Deleted: ¶

$\dot{m}_{\text{CO}_2, a, b, \dots, n}$  = instantaneous mass flow rate of CO<sub>2</sub> arising from the CO<sub>2</sub> in each individual gas stream a, b, ..., n [g/s]

## 2. Calculation of specific CO<sub>2</sub> emissions for transient and ramped modal cycles

2.1 The total mass per test of CO<sub>2</sub> emission from the CO<sub>2</sub> in the fuel  $m_{\text{CO}_2, \text{fuel}}$  [g/test] shall be calculated by summation of the instantaneous mass flow rate of CO<sub>2</sub> in the gaseous fuel entering the engine  $\dot{m}_{\text{CO}_2, \text{fuel}}$  [g/s] over the test cycle according to the following equation:

$$m_{\text{CO}_2, \text{fuel}} = \frac{1}{f} \cdot \sum_{i=1}^N \dot{m}_{\text{CO}_2, \text{fuel}, i} \quad (9-10)$$

Moved (insertion) [39]

Where:

$f$  = data sampling rate [Hz]

$N$  = number of measurements [-]

2.2 The total mass of CO<sub>2</sub> emission  $m_{\text{CO}_2}$  [g/test] used in equation (A.8-61), (A.8-62), (A.7-50) or (A.7-51) of Annex VII to calculate the specific emissions result  $e_{\text{CO}_2}$  [g/kWh] shall be replaced in those equations by the corrected value  $m_{\text{CO}_2, \text{corr}}$  [g/test] calculated according to equation (5).

$$m_{\text{CO}_2, \text{corr}} = m_{\text{CO}_2} - m_{\text{CO}_2, \text{fuel}} \quad (9-11)$$

## 3. Calculation of specific CO<sub>2</sub> emissions for discrete mode cycles

3.1 The mean mass flow of CO<sub>2</sub> emission from the CO<sub>2</sub> in the fuel per hour  $q_{m\text{CO}_2, \text{fuel}}$  or  $\dot{m}_{\text{CO}_2, \text{fuel}}$  [g/h] shall be calculated for each individual test mode from the measurements of instantaneous mass flow rate of CO<sub>2</sub>  $\dot{m}_{\text{CO}_2, \text{fuel}, i}$  [g/s] given by equation (3) taken during the sampling period of the respective test mode.

$$q_{m\text{CO}_2, \text{fuel}} = \dot{m}_{\text{CO}_2, \text{fuel}} = \frac{1}{3600 \cdot N} \cdot \sum_{i=1}^N \dot{m}_{\text{CO}_2, \text{fuel}, i} \quad (9-12)$$

Where:

$N$  = number of measurements taken during the test mode [-]

Moved (insertion) [40]

3.2 The mean mass flow rate of CO<sub>2</sub> emission  $q_{m\text{CO}_2}$  or  $\dot{m}_{\text{CO}_2}$  [g/h] for each individual test mode used in equation (A.8-63) or (A.7-52) of Annex VII to calculate the specific emissions result  $e_{\text{CO}_2}$  [g/kWh] shall be replaced in those equations by the corrected value  $q_{m\text{CO}_2, \text{corr}}$  or  $\dot{m}_{\text{CO}_2, \text{corr}}$  [g/h] for each individual test mode calculated according to equation (7) or (8).

Deleted: ¶

$$\underline{q_{mCO_2, corr} = q_{mCO_2} - q_{mCO_2, fuel}} \quad (9-13)$$

$$\underline{\dot{m}_{CO_2, corr} = \dot{m}_{CO_2} - \dot{m}_{CO_2, fuel}} \quad (9-14)$$

Deleted: ¶

## ANNEX X

### **Detailed technical specifications and conditions for delivering an engine separately from its exhaust after-treatment**

1. Separate shipment occurs when the manufacturer and the OEM that is installing the engine are separate legal entities and the engine without an after-treatment system that is part of the approved type is **dispatched (delivered)** from one location and the said after-treatment **system** is delivered from separate location **or at different moments in time**.
2. The engine manufacturer shall:
  - 2.1. At all times be responsible for the placing on the market of the engine and ensuring that the engine is brought into conformity with the approved type;
  - 2.2. place all orders for the parts shipped separately before shipping the engine without an after-treatment system that is part of the approved type to the OEM;
  - 2.3. provide instructions to the OEM for installation of the engine including the after-treatment **system**, including the identification marking of the parts shipped separately and any checks necessary to secure proper function of the assembled engine according to the approved type.
  - 2.4. Keep records of:
    - 2.4.1. The instructions given to the OEM;
    - 2.4.2. A list of all parts shipped separately;
    - 2.4.3. The records returned from the OEM confirming that the engines supplied have been brought into conformity as defined in point **3**;
    - 2.4.4. Keep the records for 10 years;
    - 2.4.5. Make the records available to the Type Approval Authority, European Commission or market surveillance authorities upon request.
  - 2.5. Ensure that in addition to the statutory marks required in Article 31 of Regulation (EU) XXX/2015 the engine without after-treatment shall also carry the temporary marks referred to in article 31a(1) of regulation (EU) 2015/XXX with the information according to Annex III of implementing Regulation (EU) 2016/XXX.
  - 2.6. Ensure that the parts shipped separately from the engines shall have identification marking (for example part numbers).
3. The OEM shall:

- 3.1. Provide the manufacturer with conformation that the engine has been brought into conformity with the approved type according to the instructions received and all checks necessary to secure proper function of the assembled engine have been conducted.
- 3.2. Where an OEM or receives a regular supply of engines from a manufacturer the conformation referred to in point 4.1 may be provided at regular intervals agreed between the parties, but not exceeding one year.

## ANNEX XI

### **Detailed technical specifications and conditions for the temporary placing on the market, for the purposes of field testing**

The following conditions shall apply when temporarily placing engines on the market for the purpose of field testing:

1. The ownership of the engine must remain with the manufacturer until one of the actions in point 5 is completed. This does not preclude a financial arrangement with the OEM or end user with which the test is undertaken covering the test period.
2. before placing the engine on the market, the manufacturer shall inform the type approval authority of a member state, indicating his name or trade mark, the unique engine identification number of the engine, the production date of the engine, relevant information on the emission performance of the engine and the economic operator to which the engine is supplied;
3. the engine shall bear the markings identified in [implementing act reference. Note: Include. reference to type approval authority that is informed in markings (e.g. e11)];
4. the engine is supplied together with a statement of conformity of the manufacturer meeting the requirements of annex II of implementing act 2016/XXX. indicating that it is a test engine supplied under the conditions of this paragraph and that it shall not be used for any other purposes;
  - 4.1. Where a test is extended under point 7 a new statement of compliance will be issued for the additional period;
5. when the necessary tests have been completed and in any case after 24 months from the placing on the market of the engine, the manufacturer shall ensure that the engine is either removed from use in the European Union or brought into conformity with the requirements of this Regulation.
6. The manufacturer shall inform the type approval authority defined in point 2 of the action taken in pursuance of point 5
7. Notwithstanding point 5 a manufacturer may make an application to extend the test, for up to a further 24 months, to the type approval authority defined in point 2 with justification for the extension.
  - 7.1. Upon receipt of an application for extension as noted in point 7 the type approval authority will review the circumstances. If the request is considered justified they will give permission for the extension. In this case the actions described in point 5 will be completed by the end of the extension or in any case after 48 months from the placing on the market of the engine.



## ANNEX XII

### **Detailed technical specifications and conditions for the EU type-approval and placing on the market of engines that meet the gaseous and particulate emission limit values for special purpose engines**

The following conditions shall apply when temporarily placing engines on the market meeting the emission limit values of special purpose engines:

1. Before placing the engine on the market, the manufacturer shall take reasonable precautions to ensure that the engine will be installed in the special purpose machine that it is intended for;
  - 1.1. A written statement from the OEM or economic operator that receives the engine confirming that it will be installed in equipment that is to be [supplied][placed on the market] for the special purpose for which the engine is intended, would be considered reasonable precautions.
  - 1.2. The statement referred to in 1.1 should be kept for [10 years]
2. the engine shall bear the markings identified in [annex III of implementing regulation 2016/XXX]
3. the engine is supplied together with a statement of conformity of the manufacturer meeting the requirements of annex II of implementing regulation 2016/XX. indicating that it is a special purpose engine supplied under the conditions of Regulation (EU) 2016/XXX article 32 paragraph 4 or 4a and that it shall not be used for any other purposes;

## ANNEX XIII

### Acceptance of equivalent engine type-approvals granted under UNECE Regulations

#### Recognition of Alternative Type-Approvals

1. For engines of sub-categories NRE-v-5 and NRE-v-6 the following type-approvals and, where applicable, the pertaining approval marks are recognised as being equivalent to an approval to this Regulation:
  - 1.1. Type-approvals to Regulation (EC) No 595/2009 and its implementing measures, if it is confirmed by a technical service that the engine meets the requirements of [NOx control inducement requirements]:
  - 1.2. Type-approvals to UNECE Regulation No 49.06 series of amendments, if it is confirmed by a technical service that the engine meets the requirements of [NOx control inducement requirements].
2. For engines of sub-categories RLL-v-1 the following type-approvals and, where applicable, the pertaining approval marks are recognised as being equivalent to an approval to this Regulation:
  - 2.1. Type-approvals to [repealed] Directive 97/68/EC category RB.

UNECE regulation No	Subject	Series of amendments	OJ Reference	Applicability

### Acceptance of equivalent engine type-approvals granted under Union acts

Union Act	Subject	As amended by	Applicability


## ANNEX XIV

### Details of the relevant information and instructions for the OEMs

1. The manufacturer shall provide to the OEM all instructions that are necessary to ensure that the engine conforms to the approved engine type when installed in non-road mobile machinery. Instructions for this purpose shall be clearly identified to the OEM.
  - Deleted:** for the correct installation of
  - Deleted:** into the machinery to maintain the
2. The instructions may be provided on paper or a commonly used electronic format.
3. Where a number of engines requiring the same instructions are supplied to the same OEM it is only necessary to provide one set of instructions.
  - Deleted:** similar
4. For all engines the instructions shall include:
  - 4.1. a description of any special conditions or restrictions linked to the installation or use of an engine as noted on the type approval certificate as defined in Annex IV of Regulation (EU) XXX/2017;
    - Deleted:** document [specific implementing act reference] and instruction that they must be adhered to
  - 4.1.1. Where applicable, this shall include that an engine is exclusively for use in snow throwers;
  - 4.2. installation requirements to achieve the emissions performance of the engine type, inclusive of the emission control system that is part of the approved engine type, and that are not noted on the type approval certificate, but must be taken account of to ensure correct operation of the emissions control system;
    - Deleted:** instructions for the engine required
    - Deleted:** for
    - Deleted:**
    - Deleted:** [implementing act reference];
  - 4.3. where applicable, design requirements for OEM supplied components that are not part of the engine but that are necessary to ensure that, when installed, the engine conforms to the approved engine type;
    - Deleted:** <#>where applicable, design requirements for OEM supplied components necessary to maintain conformity with the approved type.¶
  - 4.4. where applicable, requirement for reagent tank design, including freeze protection, monitoring of reagent level, and means to take a sample of the reagent. If a non-heated reagent system may be used this shall be identified;
    - Deleted:** and
    - Deleted:** ;
  - 4.5. where applicable, instructions for provision of an operator warning system as defined in section 4 Appendix 1 of Annex IV to this regulation, and/or section 4 of Appendix 4 of Annex IV to this regulation;
    - Deleted:** [
    - Deleted:** ]
  - 4.6. where applicable, information on OEM interfaces with an inducement system as defined in section 5 of Appendix 1 of Annex IV to this regulation;
    - Deleted:** [Annex IV to this regulation];  
Instructions on the provision of documentation for end users to include the documentation laid down in [
  - 4.7. where applicable, information on OEM interfaces with an inducement override function as defined in point 5.5 of appendix 1 of Annex IV to this regulation;
    - Deleted:** XXI
  - 4.8. where applicable, information on OEM interfaces with a means to disable the operator inducement as defined in point 5.2.1 of Appendix 1 of Annex IV to this regulation
    - Deleted:** ]

5. For dual fuel engines the OEM shall be provided with the following additional instructions:
- 5.1. for provision of dual-fuel operating mode indicator as described in section 4.3.1 of annex VIII to this regulation;
- 5.2. for provision of an empty gaseous fuel tank warning system as described in section 4.3.2 of annex VIII to this regulation.
6. The OEM shall be provided with all information required in order to enable the OEM to provide the instructions to the end-user set out in Annex XV to this regulation.
7. The value of the carbon dioxide (CO<sub>2</sub>) emissions in g/kWh determined during the EU type-approval process and recorded in [type approval certificate reference] shall be provided including an additional note stating 'the CO<sub>2</sub> measurement is from the tested (parent) engine of the engine family and taken over a fixed test cycle under laboratory conditions and does not imply of express any guarantee of the performance of a particular engine'.

Deleted: [

Deleted: and

Deleted: "the

Deleted: engine"

## ANNEX XV

### Details of the relevant information and instructions for the end-users

1. The OEM shall provide to the end user all instructions that are necessary for the correct operation of the engine to maintain the emissions performance of the engine to the approved engine type. Instructions for this purpose shall be clearly identified to the end-user.
2. The instructions to the end user shall be:
  - 2.1. written in a clear and non-technical manner using the same language as is used in the operator's manual of the non-road mobile machinery;
  - 2.2. may be included as part of the operators manual for the non-road machinery or a separate document;
    - 2.2.1. where delivered as a separate document from the non-road machine operators manual they shall be delivered in the same form as the operators manual for the non-road mobile machinery;
3. Any conditions or restrictions linked to the use of an engine given in Annex XIV point 4.1 shall be described.
  - 3.1. Where applicable, this shall include that an engine is exclusively for use in snow throwers;
4. The instructions shall include:
  - 4.1. A clear warning that the type-approval certificate, issued for the type of engine concerned in accordance with Regulation (EU) 2015/XXX, is valid only when all of the following conditions are met:
    - 4.1.1. the engine, inclusive of the emissions control system is operated, used and maintained in accordance with the instructions provided for the purpose of conformity with this Annex;
    - 4.1.2. where applicable, that the use of and refilling of a required reagent of the correct specifications is essential;
    - 4.1.3. Where applicable, the use of a non-heated reagent tank and dosing system shall be indicated.
    - 4.1.4. prompt action must be taken to rectify incorrect operation, use or maintenance of the emissions control system in accordance with the rectification measures indicated by the warnings referred to in point (4.1.5) and (4.1.6);
    - 4.1.5. detailed warnings, explaining possible malfunctions of the emissions control system generated by incorrect operation, use or maintenance of the installed engine, accompanied by respective rectification measures;

Deleted: on

Deleted: format

Deleted: <#>may be included as part of the operators manual or a separate document.\*  
They

Deleted:

Moved (insertion) [49]

4.1.6. detailed warnings on incorrect use of the machine that would result in possible malfunctions of the engine emissions control system, accompanied by respective rectification measures;

**Deleted:** the

**Deleted:** resulting

4.1.7. that no deliberate tampering with or misuse of the engine emissions control system should take place, in particular deactivating or not maintaining an EGR or a reagent dosing system. This shall include a warning that tampering with the engine voids the emission type approval of the specific engine.

5. Where an operator warning, inducement or incident recording system is implemented the following additional information shall be provided:

**Deleted:** <#>Any conditions or restrictions linked to the use of an engine shall be described.¶  
Where

5.1. Where an operator warning system as defined in section 4 Appendix 1 of Annex IV to this regulation (category: NRE, NRG, IWP, IWA or RLR) and/or section 4 of Appendix 4 of Annex IV to this regulation (category: NRE, NRG, IWP, IWA or RLR) or section 3 of Appendix 3 of Annex IV to this regulation (category RLL) are applicable, the instructions shall state that if the emission control system is not functioning correctly, the operator will be informed of a problem by the operator warning system;

**Deleted:** these

**Deleted:** ,

**Deleted:** and

5.2. where an operator inducement system as defined in section 5 of Appendix 1 of Annex IV to this regulation (category NRE, NRG) is applicable, the instructions shall state that activation of the operator inducement system as a consequence of ignoring the operator warnings will result in the machine being unable to conduct its mission;

**Deleted:** this warning

5.2.1. where an inducement override function as defined in point 5.5 of appendix 1 of Annex IV to this regulation for releasing full engine power is available the operation of this function shall be described;

5.3. where applicable, the instructions shall explain how the operator warning and inducement systems referred to in point 5.1 and 5.2 operate, including the consequences, in terms of performance and fault logging, of ignoring the warning system and not replenishing, where used, the reagent or rectifying the problem;

**Deleted:** work. In addition,

**Deleted:** shall be explained.

5.4. where a record of inadequate reagent injection or reagent quality is made in the on-board computer log as defined in point 4.1 of Appendix 2 of Annex IV to this regulation (category: IWP, IWA, RLR) this will be explained in the instructions with the information that it shall be possible for national inspection authorities to read these records with a scan tool;

5.5. where the engine is fitted with a means to disable the operator inducement as defined in point 5.2.1 of Appendix 1 of Annex IV to this regulation, instructions pertaining to the operation of this feature, that it may only be used in emergencies and that a record will be made of any activation in the on-board computer with the information that it shall be possible for national inspection authorities to read these records with a scan tool shall be included.

6. The instructions shall indicate requirements for the proper use and maintenance of engines in order to maintain their emissions performance including:

**Deleted:** ,

6.1. the fuel specification(s) necessary to maintain the performance of the emissions control system following the requirements of Annex I of Commission Delegated Regulation 2016/AAA on technical and general requirements and consistent with the specification set-out in the engine type approval including, where available, reference to the appropriate EU or international standard. Where the engine is to be operated within the Union on diesel or non-road gas-oil the instructions shall state that a fuel with a sulphur content not greater than 10 mg/kg (20 mg/kg at point of final distribution) cetane number not less than 45 and an FAME content not greater than 7 per cent v/v shall be used. If the manufacturer has declared in the type approval a wider range of fuels, fuel mixtures or fuel emulsions and demonstrated compliance of the parent engine when operated on that wider range these may also be indicated;

**Deleted:** specifications

**Deleted:** system

6.2. the lubrication oil specifications necessary to maintain the performance of the emissions control system.

6.3. if the emission control system requires a reagent, the characteristics of that reagent, including the type of reagent, information on concentration when the reagent is in solution, operational temperature conditions and reference to international standards for composition and quality, consistent with the specification set-out in the engine type approval;

6.4. where applicable, the instructions shall specify whether consumable reagents have to be refilled by the operator between normal maintenance intervals. They shall indicate how the operator should refill the reagent tank and the anticipated frequency of refill, depending upon utilisation of the non-road mobile machinery.

**Deleted:** The instructions shall also specify the required reagent quality.

**Deleted:** . The information shall also indicate a likely rate

**Deleted:** reagent consumption for

**Deleted:** engine type and how often it should be replenished.

**Deleted:** <#>[The maintenance schedule for the engine] ¶

7. For dual fuel engines the following additional information shall be provided:

7.1. Where applicable, these instructions shall state the operation of the dual fuel indication system indicators as described in section 4 of annex VIII to this regulation

7.2. Where a dual fuel engine has operability restrictions in a service mode as defined in point 4.2.2.1 off Annex VIII to this regulation (excludes categories: IWP, IWA, RLL and RLR) these instructions shall state that activation of the service mode will result in the machine being unable to conduct its mission.

**Moved up [49]:** <#>Where applicable, the use of a non-heated reagent tank and dosing system shall be indicated.¶

7.2.1. Where an inducement override function for releasing full engine power is available the operation of this function shall be detailed.

7.3. Where a dual fuel engine a service mode as defined in point 4.2.2.2 off Annex VIII to this regulation (categories: IWP, IWA, RLL and RLR) these instructions shall state that activation of the service mode will result in a record in the on-board computer of the activation and that it shall be possible for national inspection authorities to read these records with a scan tool



8. The end user shall be provided with the CO<sub>2</sub> value given in [Annex XX, paragraph (5) of regulation (EU) 2016/XXX] and in addition a note stating “the CO<sub>2</sub> measurement is from the tested (parent) engine of the engine family and taken over a fixed test cycle under laboratory conditions and does not imply or express any guarantee of the performance of a particular engine.”

Deleted:

Deleted: this

Deleted: ”

Deleted: ¶  
¶

## **Annex XVI**

### **Performance standards and assessment of technical services**

#### **1. General Requirements**

Technical services shall demonstrate appropriate skills, specific technical knowledge and proven experience in the specific fields of competence covered by Regulation (EU) No XXX/2015 and its delegated and implementing acts adopted pursuant to that Regulation.

#### **2. Standards with which the technical services have to comply**

2.1. Technical services of the different categories set out in Article 45 of Regulation (EU) No XXX/2015 shall comply with the standards listed in Appendix 1 to Annex V to Directive 2007/46/EC of the European Parliament and of the Council<sup>5</sup> which are relevant for the activities they carry out.

2.2.1. Reference to Article 41 of Directive 2007/46/EC in that Appendix shall be construed as a reference to Article 45 of Regulation (EU) No XXX/2015.

2.2.3. Reference to Annex IV of Directive 2007/46/EC in that Appendix shall be construed as a reference to Regulation (EU) No XXX/2015 and the delegated acts adopted pursuant to that Regulation.

#### **3. Procedure for the assessment of the technical services**

3.1. The compliance of the Technical services with the requirements of Regulation (EU) No XXX/2015 and the delegated acts adopted pursuant to that Regulation shall be assessed in accordance with the procedure set out in Appendix 2 to Annex V to Directive 2007/46/EC.

3.2. References to Article 42 of Directive 2007/46/EC in Appendix 2 to Annex V to Directive 2007/46/EC shall be construed as references to Article 48 of Regulation (EU) No XXX/2015.

---

<sup>5</sup> Directive 2007/46/EC of the European Parliament and of the Council of 5 September 2007 establishing a framework for the approval of motor vehicles and their trailers, and of systems, components and separate technical units intended for such vehicles (OJ L 263, 9.10.2007, p. 1).

## Annex XVII

### Test cycles

#### Appendix 1. Steady-state discrete-mode NRSCs

##### Test cycles type C

**Table of cycle C1 test modes and weighting factors**

Mode number	1	2	3	4	5	6	7	8
Speed (a)	100%				Intermediate			Idle
Torque (b) (%)	100	75	50	10	100	75	50	0
Weighting factor	0.15	0.15	0.15	0.1	0.1	0.1	0.1	0.15

(a) See [sections 5.2.5, 7.6 and 7.7 of Annex VI](#) for determination of required test speeds.

(b) The percent torque is relative to the maximum torque at the commanded engine speed.

Deleted: paragraph

**Table of cycle C2 test modes and weighting factors**

Mode number	1	2	3	4	5	6	7
Speed (a)	100%	Intermediate					Idle
Torque (b) (%)	25	100	75	50	25	10	0
Weighting factor	0.06	0.02	0.05	0.32	0.30	0.10	0.15

(a) See [sections 5.2.5, 7.6 and 7.7 of Annex VI](#) for determination of required test speeds.

(b) The percent torque is relative to the maximum torque at the commanded engine speed.

Deleted: paragraph

## Test cycles type D

Table of cycle D2 test modes and weighting factors

Mode number (cycle D2)	1	2	3	4	5
Speed (a)	100%				
Torque (b) (%)	100	75	50	25	10
Weighting factor	0.05	0.25	0.3	0.3	0.1
<a href="#">(a) See sections 5.2.5, 7.6 and 7.7 of Annex VI for determination of required test speeds.</a>					
<a href="#">(b) Per cent torque is relative to the torque corresponding to the rated net power declared by the manufacturer.</a>					

## Test cycles type E

**Table of cycles type E test modes and weighting factors**

Mode number (cycle E2)	1	2	3	4							
Speed (a)	100%				Intermediate						
Torque (b) (%)	100	75	50	25							
Weighting factor	0.2	0.5	0.15	0.15							
Mode number (cycle E3)	1				2		3		4		
Speed (a) (%)	100				91		80		63		
Power (c) (%)	100				75		50		25		
Weighting factor	0.2				0.5		0.15		0.15		
<p>(a) See <a href="#">sections 5.2.5, 7.6 and 7.7 of Annex VI</a> for determination of required test speeds.</p> <p>(b) Per cent torque is relative to the torque corresponding to the continuous power rating declared by the manufacturer.</p> <p>(c) Per cent power is relative to the maximum rated power at the 100% speed.</p> <p>(d) Per cent torque is relative to the torque corresponding to the rated power.</p>											

Deleted: paragraph

## Test cycle type F

**Table of cycle type F test modes and weighting factors**

Mode number	1	2 (d)	3
Speed (a)	100%	Intermediate	Idle
Power (%)	100 (c)	50 (c)	5 (b)
Weighting factor	0.15	0.25	0.6
<p>(a) See <a href="#">sections 5.2.5, 7.6 and 7.7 of Annex VI</a> for determination of required test speeds.</p> <p>(b) Per cent power at this mode is relative to the power at mode 1.</p> <p>(c) Per cent power at this mode is relative to the maximum power at the commanded engine speed.</p> <p>(d) For engines using a discrete control system (i.e. notch type controls) mode 2 is defined as an operation in the notch closest to mode 2 or 35 % of the rated power.</p>			

Deleted: paragraph

## Test cycle type G

**Table of cycles type G test modes and weighting factors**

Mode number (cycle G1)						1	2	3	4	5	6
Speed (a)	100%					Intermediate					Idle
Torque (b) %						100	75	50	25	10	0
Weighting factor						0.09	0.20	0.29	0.30	0.07	0.05
Mode number (cycle G2)	1	2	3	4	5						6
Speed (a)	100%					Intermediate					Idle
Torque (b) %	100	75	50	25	10						0
Weighting factor	0.09	0.20	0.29	0.30	0.07						0.05
Mode number (cycle G3)	1										2
Speed (a)	100%					Intermediate					Idle
Torque (b) %	100										0
Weighting factor	0.85										0.15
(a) See <a href="#">sections 5.2.5, 7.6 and 7.7 of Annex VI</a> for determination of required test speeds.											
(b) The percent torque is relative to the maximum torque at the commanded engine speed.											

Deleted: paragraph

## Test cycle type H

**Table of cycle type H test modes and weighting factors**

Mode number	1	2	3	4	5
Speed (a) (%)	100	85	75	65	Idle
Torque (b) (%)	100	51	33	19	0
Weighting factor	0.12	0.27	0.25	0.31	0.05
(a) See <a href="#">sections 5.2.5, 7.6 and 7.7 of Annex VI</a> for determination of required test speeds.					
(b) Per cent torque is relative to the maximum torque at the commanded engine speed.					

Deleted: paragraph

Deleted: ¶

## Appendix 2. Steady-state ramped modal NRSCs (RMCs)

### Test cycles type C

Table of RMC-C1 test modes

RMC Mode Number	Time in mode (seconds)	Engine speed (a)(c)	Torque (%) (b)(c)
1a Steady-state	126	Idle	0
1b Transition	20	Linear transition	Linear transition
2a Steady-state	159	Intermediate	100
2b Transition	20	Intermediate	Linear transition
3a Steady-state	160	Intermediate	50
3b Transition	20	Intermediate	Linear transition
4a Steady-state	162	Intermediate	75
4b Transition	20	Linear transition	Linear transition
5a Steady-state	246	100%	100
5b Transition	20	100%	Linear transition
6a Steady-state	164	100%	10
6b Transition	20	100%	Linear transition
7a Steady-state	248	100%	75
7b Transition	20	100%	Linear transition
8a Steady-state	247	100%	50
8b Transition	20	Linear transition	Linear transition
9 Steady-state	128	Idle	0

**a)** See [sections 5.2.5, 7.6 and 7.7 of Annex VI](#) for determination of required test speeds.

**(b)** Per cent torque is relative to the maximum torque at the commanded engine speed.

**(c)** Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the torque setting of the current mode to the torque setting of the next mode, and simultaneously command a similar linear progression for engine speed if there is a change in speed setting.

**Deleted:** paragraph

**Table of RMC-C2 test modes**

RMC Mode number	Time in mode (seconds)	Engine speed (a)(c)	Torque (%) (b)(c)
1a Steady-state	119	Idle	0
1b Transition	20	Linear transition	Linear transition
2a Steady-state	29	Intermediate	100
2b Transition	20	Intermediate	Linear transition
3a Steady-state	150	Intermediate	10
3b Transition	20	Intermediate	Linear transition
4a Steady-state	80	Intermediate	75
4b Transition	20	Intermediate	Linear transition
5a Steady-state	513	Intermediate	25
5b Transition	20	Intermediate	Linear transition
6a Steady-state	549	Intermediate	50
6b Transition	20	Linear transition	Linear transition
7a Steady-state	96	100%	25
7b Transition	20	Linear transition	Linear transition
8 Steady-state	124	Idle	0

(a) See [sections 5.2.5, 7.6 and 7.7 of Annex VI](#) for determination of required test speeds.

(b) Per cent torque is relative to the maximum torque at the commanded engine speed.

(c) Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the torque setting of the current mode to the torque setting of the next mode, and simultaneously command a similar linear progression for engine speed if there is a change in speed setting.

Deleted: paragraph



## Test cycles type D

Table of RMC-D2 test modes

RMC Mode Number	Time in mode (seconds)	Engine speed (%) (a)	Torque (%) (b)(c)
1a Steady State	53	100	100
1b Transition	20	100	Linear transition
2a Steady-state	101	100	10
2b Transition	20	100	Linear transition
3a Steady-state	277	100	75
3b Transition	20	100	Linear transition
4a Steady-state	339	100	25
4b Transition	20	100	Linear transition
5 Steady-state	350	100	50
<p>(a) See <a href="#">sections 5.2.5, 7.6 and 7.7 of Annex VI</a> for determination of required test speeds.</p> <p>(b) Per cent torque is relative to the torque corresponding to the <a href="#">rated net power</a> declared by the manufacturer.</p> <p>(c) Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the torque setting of the current mode to the torque setting of the next mode.</p>			

- Deleted: paragraph
- Deleted: prime
- Deleted: rating
- Deleted: as defined in ISO 8528-1

## Test cycles type E

**Table of RMC-E2 test modes**

RMC Mode Number	Time in mode (seconds)	Engine speed (%) (a)	Torque (%) (b)(c)
1a Steady-state	229	100	100
1b Transition	20	100	Linear transition
2a Steady-state	166	100	25
2b Transition	20	100	Linear transition
3a Steady-state	570	100	75
3b Transition	20	100	Linear transition
4 Steady-state	175	100	50

(a) See [sections 5.2.5, 7.6 and 7.7 of Annex VI](#) for determination of required test speeds.

(b) Per cent torque is relative to the maximum torque at the commanded engine speed.

(c) Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the torque setting of the current mode to the torque setting of the next mode.

Deleted: paragraph

**Table of RMC-E3 test modes**

<b>RMC Mode Number</b>	<b>Time in mode (seconds)</b>	<b>Engine speed (%) (a)(c)</b>	<b>Power (%) (b)(c)</b>
1a Steady-state	229	100	100
1b Transition	20	Linear transition	Linear transition
2a Steady-state	166	63	25
2b Transition	20	Linear transition	Linear transition
3a Steady-state	570	91	75
3b Transition	20	Linear transition	Linear transition
4 Steady-state	175	80	50

(a) See [sections 5.2, 5.7.6 and 7.7 of Annex VI](#) for determination of required test speeds.

(b) Per cent power is relative to the maximum rated power at the 100% speed.

(c) Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the torque setting of the current mode to the torque setting of the next mode, and simultaneously command a similar linear progression for engine speed.

**Deleted:** paragraph

**Test cycle type F**

**Table of RMC-F test modes**

RMC Mode Number	Time in mode (seconds)	Engine speed (a)(e)	Power (%) (e)
1a Steady-state	350	Idle	5 (b)
1b Transition	20	Linear transition	Linear transition
2a Steady-state(d)	280	Intermediate	50 (c)
2b Transition	20	Linear transition	Linear transition
3a Steady-state	160	100%	100 (c)
3b Transition	20	Linear Transition	Linear transition
4 Steady-state	350	Idle	5 (c)

(a) See [sections 5.2, 5.7.6 and 7.7 of Annex VI](#) for determination of required test speeds.

(b) Per cent power at this mode is relative to the power at mode 3a.

(c) Per cent power at this mode is relative to the maximum power at the commanded engine speed.

(d) For engines using a discrete control system (i.e. notch type controls) mode 2a is defined as an operation in the notch closest to mode 2a or 35 % of the rated power.

(e) Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the torque setting of the current mode to the torque setting of the next mode, and simultaneously command a similar linear progression for engine speed if there is a change in speed setting.

**Deleted:** paragraph

**Test cycles type G**

**Table of RMC-G1 test modes**

<u>RMC Mode Number</u>	<u>Time in mode (seconds)</u>	<u>Engine speed (a)(c)</u>	<u>Torque (%) (b)(c)</u>
<u>1a Steady-state</u>	<u>41</u>	<u>Idle</u>	<u>0</u>
<u>1b Transition</u>	<u>20</u>	<u>Linear transition</u>	<u>Linear transition</u>
<u>2a Steady-state</u>	<u>135</u>	<u>Intermediate</u>	<u>100</u>
<u>2b Transition</u>	<u>20</u>	<u>Intermediate</u>	<u>Linear transition</u>
<u>3a Steady-state</u>	<u>112</u>	<u>Intermediate</u>	<u>10</u>
<u>3b Transition</u>	<u>20</u>	<u>Intermediate</u>	<u>Linear transition</u>
<u>4a Steady-state</u>	<u>337</u>	<u>Intermediate</u>	<u>75</u>
<u>4b Transition</u>	<u>20</u>	<u>Intermediate</u>	<u>Linear transition</u>
<u>5a Steady-state</u>	<u>518</u>	<u>Intermediate</u>	<u>25</u>
<u>5b Transition</u>	<u>20</u>	<u>Intermediate</u>	<u>Linear transition</u>
<u>6a Steady-state</u>	<u>494</u>	<u>Intermediate</u>	<u>50</u>
<u>6b Transition</u>	<u>20</u>	<u>Linear transition</u>	<u>Linear transition</u>
<u>7 Steady-state</u>	<u>43</u>	<u>Idle</u>	<u>0</u>

(a) See sections 5.2.5, 7.6 and 7.7 of Annex VI for determination of required test speeds.

(b) The percent torque is relative to the maximum torque at the commanded engine speed.

(c) Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the torque setting of the current mode to the torque setting of the next mode and simultaneously command a similar linear progression for engine speed if there is a change in speed setting.

**Table of RMC-G2 test modes**

<b>RMC Mode Number</b>	<b>Time in mode (seconds)</b>	<b>Engine speed (a)(c)</b>	<b>Torque (%) (b)(c)</b>
1a Steady-state	41	Idle	0
1b Transition	20	Linear transition	Linear transition
2a Steady-state	135	100%	100
2b Transition	20	100%	Linear transition
3a Steady-state	112	100%	10
3b Transition	20	100%	Linear transition
4a Steady-state	337	100%	75
4b Transition	20	100%	Linear transition
5a Steady-state	518	100%	25
5b Transition	20	100%	Linear transition
6a Steady-state	494	100%	50
6b Transition	20	Linear transition	Linear transition
7 Steady-state	43	Idle	0

(a) See [sections 5.2.5, 7.6 and 7.7 of Annex VI](#) for determination of required test speeds.

(b) The percent torque is relative to the maximum torque at the commanded engine speed.

(c) Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the torque setting of the current mode to the torque setting of the next mode and simultaneously command a similar linear progression for engine speed if there is a change in speed setting.

**Deleted:** paragraph

## Test cycle type H

**Table of RMC-H test modes**

RMC Mode Number	Time in mode (seconds)	Engine speed (a)(c)	Torque (%) (b)(c)
1a Steady-state	27	Idle	0
1b Transition	20	Linear transition	Linear transition
2a Steady-state	121	100%	100
2b Transition	20	Linear transition	Linear transition
3a Steady-state	347	65%	19
3b Transition	20	Linear transition	Linear transition
4a Steady-state	305	85%	51
4b Transition	20	Linear transition	Linear transition
5a Steady-state	272	75%	33
5b Transition	20	Linear transition	Linear transition
6 Steady-state	28	Idle	0

(a) See [sections 5.2.5, 7.6 and 7.7 of Annex VI](#) for determination of required test speeds.

(b) Per cent torque is relative to the maximum torque at the commanded engine speed.

(c) Advance from one mode to the next within a 20-second transition phase. During the transition phase, command a linear progression from the torque setting of the current mode to the torque setting of the next mode, and simultaneously command a similar linear progression for engine speed if there is a change in speed setting.

Deleted: paragraph

**Appendix 3. Transient test cycles**  
**NRTC engine dynamometer schedule**

Time (s)	Normalized speed (%)	Normalized torque (%)
1	0	0
2	0	0
3	0	0
4	0	0
5	0	0
6	0	0
7	0	0
8	0	0
9	0	0
10	0	0
11	0	0
12	0	0
13	0	0
14	0	0
15	0	0
16	0	0
17	0	0
18	0	0
19	0	0
20	0	0
21	0	0
22	0	0
23	0	0

Time (s)	Normalized speed (%)	Normalized torque (%)
24	1	3
25	1	3
26	1	3
27	1	3
28	1	3
29	1	3
30	1	6
31	1	6
32	2	1
33	4	13
34	7	18
35	9	21
36	17	20
37	33	42
38	57	46
39	44	33
40	31	0
41	22	27
42	33	43
43	80	49
44	105	47
45	98	70
46	104	36

Time (s)	Normalized speed (%)	Normalized torque (%)
47	104	65
48	96	71
49	101	62
50	102	51
51	102	50
52	102	46
53	102	41
54	102	31
55	89	2
56	82	0
57	47	1
58	23	1
59	1	3
60	1	8
61	1	3
62	1	5
63	1	6
64	1	4
65	1	4
66	0	6
67	1	4
68	9	21
69	25	56



Time (s)	Normalized speed (%)	Normalized torque (%)
70	64	26
71	60	31
72	63	20
73	62	24
74	64	8
75	58	44
76	65	10
77	65	12
78	68	23
79	69	30
80	71	30
81	74	15
82	71	23
83	73	20
84	73	21
85	73	19
86	70	33
87	70	34
88	65	47
89	66	47
90	64	53
91	65	45
92	66	38
93	67	49
94	69	39
95	69	39

Time (s)	Normalized speed (%)	Normalized torque (%)
96	66	42
97	71	29
98	75	29
99	72	23
100	74	22
101	75	24
102	73	30
103	74	24
104	77	6
105	76	12
106	74	39
107	72	30
108	75	22
109	78	64
110	102	34
111	103	28
112	103	28
113	103	19
114	103	32
115	104	25
116	103	38
117	103	39
118	103	34
119	102	44
120	103	38
121	102	43

Time (s)	Normalized speed (%)	Normalized torque (%)
122	103	34
123	102	41
124	103	44
125	103	37
126	103	27
127	104	13
128	104	30
129	104	19
130	103	28
131	104	40
132	104	32
133	101	63
134	102	54
135	102	52
136	102	51
137	103	40
138	104	34
139	102	36
140	104	44
141	103	44
142	104	33
143	102	27
144	103	26
145	79	53
146	51	37
147	24	23

Time (s)	Normalized speed (%)	Normalized torque (%)
148	13	33
149	19	55
150	45	30
151	34	7
152	14	4
153	8	16
154	15	6
155	39	47
156	39	4
157	35	26
158	27	38
159	43	40
160	14	23
161	10	10
162	15	33
163	35	72
164	60	39
165	55	31
166	47	30
167	16	7
168	0	6
169	0	8
170	0	8
171	0	2
172	2	17
173	10	28

Time (s)	Normalized speed (%)	Normalized torque (%)
174	28	31
175	33	30
176	36	0
177	19	10
178	1	18
179	0	16
180	1	3
181	1	4
182	1	5
183	1	6
184	1	5
185	1	3
186	1	4
187	1	4
188	1	6
189	8	18
190	20	51
191	49	19
192	41	13
193	31	16
194	28	21
195	21	17
196	31	21
197	21	8
198	0	14
199	0	12

Time (s)	Normalized speed (%)	Normalized torque (%)
200	3	8
201	3	22
202	12	20
203	14	20
204	16	17
205	20	18
206	27	34
207	32	33
208	41	31
209	43	31
210	37	33
211	26	18
212	18	29
213	14	51
214	13	11
215	12	9
216	15	33
217	20	25
218	25	17
219	31	29
220	36	66
221	66	40
222	50	13
223	16	24
224	26	50
225	64	23

Time (s)	Normalized speed (%)	Normalized torque (%)
226	81	20
227	83	11
228	79	23
229	76	31
230	68	24
231	59	33
232	59	3
233	25	7
234	21	10
235	20	19
236	4	10
237	5	7
238	4	5
239	4	6
240	4	6
241	4	5
242	7	5
243	16	28
244	28	25
245	52	53
246	50	8
247	26	40
248	48	29
249	54	39
250	60	42
251	48	18

Time (s)	Normalized speed (%)	Normalized torque (%)
252	54	51
253	88	90
254	103	84
255	103	85
256	102	84
257	58	66
258	64	97
259	56	80
260	51	67
261	52	96
262	63	62
263	71	6
264	33	16
265	47	45
266	43	56
267	42	27
268	42	64
269	75	74
270	68	96
271	86	61
272	66	0
273	37	0
274	45	37
275	68	96
276	80	97
277	92	96

Time (s)	Normalized speed (%)	Normalized torque (%)
278	90	97
279	82	96
280	94	81
281	90	85
282	96	65
283	70	96
284	55	95
285	70	96
286	79	96
287	81	71
288	71	60
289	92	65
290	82	63
291	61	47
292	52	37
293	24	0
294	20	7
295	39	48
296	39	54
297	63	58
298	53	31
299	51	24
300	48	40
301	39	0
302	35	18
303	36	16

Time (s)	Normalized speed (%)	Normalized torque (%)
304	29	17
305	28	21
306	31	15
307	31	10
308	43	19
309	49	63
310	78	61
311	78	46
312	66	65
313	78	97
314	84	63
315	57	26
316	36	22
317	20	34
318	19	8
319	9	10
320	5	5
321	7	11
322	15	15
323	12	9
324	13	27
325	15	28
326	16	28
327	16	31
328	15	20
329	17	0

Time (s)	Normalized speed (%)	Normalized torque (%)
330	20	34
331	21	25
332	20	0
333	23	25
334	30	58
335	63	96
336	83	60
337	61	0
338	26	0
339	29	44
340	68	97
341	80	97
342	88	97
343	99	88
344	102	86
345	100	82
346	74	79
347	57	79
348	76	97
349	84	97
350	86	97
351	81	98
352	83	83
353	65	96
354	93	72
355	63	60

Time (s)	Normalized speed (%)	Normalized torque (%)
356	72	49
357	56	27
358	29	0
359	18	13
360	25	11
361	28	24
362	34	53
363	65	83
364	80	44
365	77	46
366	76	50
367	45	52
368	61	98
369	61	69
370	63	49
371	32	0
372	10	8
373	17	7
374	16	13
375	11	6
376	9	5
377	9	12
378	12	46
379	15	30
380	26	28
381	13	9

Time (s)	Normalized speed (%)	Normalized torque (%)
382	16	21
383	24	4
384	36	43
385	65	85
386	78	66
387	63	39
388	32	34
389	46	55
390	47	42
391	42	39
392	27	0
393	14	5
394	14	14
395	24	54
396	60	90
397	53	66
398	70	48
399	77	93
400	79	67
401	46	65
402	69	98
403	80	97
404	74	97
405	75	98
406	56	61
407	42	0

Time (s)	Normalized speed (%)	Normalized torque (%)
408	36	32
409	34	43
410	68	83
411	102	48
412	62	0
413	41	39
414	71	86
415	91	52
416	89	55
417	89	56
418	88	58
419	78	69
420	98	39
421	64	61
422	90	34
423	88	38
424	97	62
425	100	53
426	81	58
427	74	51
428	76	57
429	76	72
430	85	72
431	84	60
432	83	72
433	83	72

Time (s)	Normalized speed (%)	Normalized torque (%)
434	86	72
435	89	72
436	86	72
437	87	72
438	88	72
439	88	71
440	87	72
441	85	71
442	88	72
443	88	72
444	84	72
445	83	73
446	77	73
447	74	73
448	76	72
449	46	77
450	78	62
451	79	35
452	82	38
453	81	41
454	79	37
455	78	35
456	78	38
457	78	46
458	75	49
459	73	50

Time (s)	Normalized speed (%)	Normalized torque (%)
460	79	58
461	79	71
462	83	44
463	53	48
464	40	48
465	51	75
466	75	72
467	89	67
468	93	60
469	89	73
470	86	73
471	81	73
472	78	73
473	78	73
474	76	73
475	79	73
476	82	73
477	86	73
478	88	72
479	92	71
480	97	54
481	73	43
482	36	64
483	63	31
484	78	1
485	69	27

Time (s)	Normalized speed (%)	Normalized torque (%)
486	67	28
487	72	9
488	71	9
489	78	36
490	81	56
491	75	53
492	60	45
493	50	37
494	66	41
495	51	61
496	68	47
497	29	42
498	24	73
499	64	71
500	90	71
501	100	61
502	94	73
503	84	73
504	79	73
505	75	72
506	78	73
507	80	73
508	81	73
509	81	73
510	83	73
511	85	73

Time (s)	Normalized speed (%)	Normalized torque (%)
512	84	73
513	85	73
514	86	73
515	85	73
516	85	73
517	85	72
518	85	73
519	83	73
520	79	73
521	78	73
522	81	73
523	82	72
524	94	56
525	66	48
526	35	71
527	51	44
528	60	23
529	64	10
530	63	14
531	70	37
532	76	45
533	78	18
534	76	51
535	75	33
536	81	17
537	76	45

Time (s)	Normalized speed (%)	Normalized torque (%)
538	76	30
539	80	14
540	71	18
541	71	14
542	71	11
543	65	2
544	31	26
545	24	72
546	64	70
547	77	62
548	80	68
549	83	53
550	83	50
551	83	50
552	85	43
553	86	45
554	89	35
555	82	61
556	87	50
557	85	55
558	89	49
559	87	70
560	91	39
561	72	3
562	43	25
563	30	60

Time (s)	Normalized speed (%)	Normalized torque (%)
564	40	45
565	37	32
566	37	32
567	43	70
568	70	54
569	77	47
570	79	66
571	85	53
572	83	57
573	86	52
574	85	51
575	70	39
576	50	5
577	38	36
578	30	71
579	75	53
580	84	40
581	85	42
582	86	49
583	86	57
584	89	68
585	99	61
586	77	29
587	81	72
588	89	69
589	49	56

Time (s)	Normalized speed (%)	Normalized torque (%)
590	79	70
591	104	59
592	103	54
593	102	56
594	102	56
595	103	61
596	102	64
597	103	60
598	93	72
599	86	73
600	76	73
601	59	49
602	46	22
603	40	65
604	72	31
605	72	27
606	67	44
607	68	37
608	67	42
609	68	50
610	77	43
611	58	4
612	22	37
613	57	69
614	68	38
615	73	2

Time (s)	Normalized speed (%)	Normalized torque (%)
616	40	14
617	42	38
618	64	69
619	64	74
620	67	73
621	65	73
622	68	73
623	65	49
624	81	0
625	37	25
626	24	69
627	68	71
628	70	71
629	76	70
630	71	72
631	73	69
632	76	70
633	77	72
634	77	72
635	77	72
636	77	70
637	76	71
638	76	71
639	77	71
640	77	71
641	78	70

Time (s)	Normalized speed (%)	Normalized torque (%)
642	77	70
643	77	71
644	79	72
645	78	70
646	80	70
647	82	71
648	84	71
649	83	71
650	83	73
651	81	70
652	80	71
653	78	71
654	76	70
655	76	70
656	76	71
657	79	71
658	78	71
659	81	70
660	83	72
661	84	71
662	86	71
663	87	71
664	92	72
665	91	72
666	90	71
667	90	71

Time (s)	Normalized speed (%)	Normalized torque (%)
668	91	71
669	90	70
670	90	72
671	91	71
672	90	71
673	90	71
674	92	72
675	93	69
676	90	70
677	93	72
678	91	70
679	89	71
680	91	71
681	90	71
682	90	71
683	92	71
684	91	71
685	93	71
686	93	68
687	98	68
688	98	67
689	100	69
690	99	68
691	100	71
692	99	68
693	100	69



Time (s)	Normalized speed (%)	Normalized torque (%)
694	102	72
695	101	69
696	100	69
697	102	71
698	102	71
699	102	69
700	102	71
701	102	68
702	100	69
703	102	70
704	102	68
705	102	70
706	102	72
707	102	68
708	102	69
709	100	68
710	102	71
711	101	64
712	102	69
713	102	69
714	101	69
715	102	64
716	102	69
717	102	68
718	102	70
719	102	69

Time (s)	Normalized speed (%)	Normalized torque (%)
720	102	70
721	102	70
722	102	62
723	104	38
724	104	15
725	102	24
726	102	45
727	102	47
728	104	40
729	101	52
730	103	32
731	102	50
732	103	30
733	103	44
734	102	40
735	103	43
736	103	41
737	102	46
738	103	39
739	102	41
740	103	41
741	102	38
742	103	39
743	102	46
744	104	46
745	103	49

Time (s)	Normalized speed (%)	Normalized torque (%)
746	102	45
747	103	42
748	103	46
749	103	38
750	102	48
751	103	35
752	102	48
753	103	49
754	102	48
755	102	46
756	103	47
757	102	49
758	102	42
759	102	52
760	102	57
761	102	55
762	102	61
763	102	61
764	102	58
765	103	58
766	102	59
767	102	54
768	102	63
769	102	61
770	103	55
771	102	60

Time (s)	Normalized speed (%)	Normalized torque (%)
772	102	72
773	103	56
774	102	55
775	102	67
776	103	56
777	84	42
778	48	7
779	48	6
780	48	6
781	48	7
782	48	6
783	48	7
784	67	21
785	105	59
786	105	96
787	105	74
788	105	66
789	105	62
790	105	66
791	89	41
792	52	5
793	48	5
794	48	7
795	48	5
796	48	6
797	48	4

Time (s)	Normalized speed (%)	Normalized torque (%)
798	52	6
799	51	5
800	51	6
801	51	6
802	52	5
803	52	5
804	57	44
805	98	90
806	105	94
807	105	100
808	105	98
809	105	95
810	105	96
811	105	92
812	104	97
813	100	85
814	94	74
815	87	62
816	81	50
817	81	46
818	80	39
819	80	32
820	81	28
821	80	26
822	80	23
823	80	23

Time (s)	Normalized speed (%)	Normalized torque (%)
824	80	20
825	81	19
826	80	18
827	81	17
828	80	20
829	81	24
830	81	21
831	80	26
832	80	24
833	80	23
834	80	22
835	81	21
836	81	24
837	81	24
838	81	22
839	81	22
840	81	21
841	81	31
842	81	27
843	80	26
844	80	26
845	81	25
846	80	21
847	81	20
848	83	21
849	83	15

Time (s)	Normalized speed (%)	Normalized torque (%)
850	83	12
851	83	9
852	83	8
853	83	7
854	83	6
855	83	6
856	83	6
857	83	6
858	83	6
859	76	5
860	49	8
861	51	7
862	51	20
863	78	52
864	80	38
865	81	33
866	83	29
867	83	22
868	83	16
869	83	12
870	83	9
871	83	8
872	83	7
873	83	6
874	83	6
875	83	6

Time (s)	Normalized speed (%)	Normalized torque (%)
876	83	6
877	83	6
878	59	4
879	50	5
880	51	5
881	51	5
882	51	5
883	50	5
884	50	5
885	50	5
886	50	5
887	50	5
888	51	5
889	51	5
890	51	5
891	63	50
892	81	34
893	81	25
894	81	29
895	81	23
896	80	24
897	81	24
898	81	28
899	81	27
900	81	22
901	81	19

Time (s)	Normalized speed (%)	Normalized torque (%)
902	81	17
903	81	17
904	81	17
905	81	15
906	80	15
907	80	28
908	81	22
909	81	24
910	81	19
911	81	21
912	81	20
913	83	26
914	80	63
915	80	59
916	83	100
917	81	73
918	83	53
919	80	76
920	81	61
921	80	50
922	81	37
923	82	49
924	83	37
925	83	25
926	83	17
927	83	13

Time (s)	Normalized speed (%)	Normalized torque (%)
928	83	10
929	83	8
930	83	7
931	83	7
932	83	6
933	83	6
934	83	6
935	71	5
936	49	24
937	69	64
938	81	50
939	81	43
940	81	42
941	81	31
942	81	30
943	81	35
944	81	28
945	81	27
946	80	27
947	81	31
948	81	41
949	81	41
950	81	37
951	81	43
952	81	34
953	81	31

Time (s)	Normalized speed (%)	Normalized torque (%)
954	81	26
955	81	23
956	81	27
957	81	38
958	81	40
959	81	39
960	81	27
961	81	33
962	80	28
963	81	34
964	83	72
965	81	49
966	81	51
967	80	55
968	81	48
969	81	36
970	81	39
971	81	38
972	80	41
973	81	30
974	81	23
975	81	19
976	81	25
977	81	29
978	83	47
979	81	90

Time (s)	Normalized speed (%)	Normalized torque (%)
980	81	75
981	80	60
982	81	48
983	81	41
984	81	30
985	80	24
986	81	20
987	81	21
988	81	29
989	81	29
990	81	27
991	81	23
992	81	25
993	81	26
994	81	22
995	81	20
996	81	17
997	81	23
998	83	65
999	81	54
1000	81	50
1001	81	41
1002	81	35
1003	81	37
1004	81	29
1005	81	28

Time (s)	Normalized speed (%)	Normalized torque (%)
1006	81	24
1007	81	19
1008	81	16
1009	80	16
1010	83	23
1011	83	17
1012	83	13
1013	83	27
1014	81	58
1015	81	60
1016	81	46
1017	80	41
1018	80	36
1019	81	26
1020	86	18
1021	82	35
1022	79	53
1023	82	30
1024	83	29
1025	83	32
1026	83	28
1027	76	60
1028	79	51
1029	86	26
1030	82	34
1031	84	25

Time (s)	Normalized speed (%)	Normalized torque (%)
1032	86	23
1033	85	22
1034	83	26
1035	83	25
1036	83	37
1037	84	14
1038	83	39
1039	76	70
1040	78	81
1041	75	71
1042	86	47
1043	83	35
1044	81	43
1045	81	41
1046	79	46
1047	80	44
1048	84	20
1049	79	31
1050	87	29
1051	82	49
1052	84	21
1053	82	56
1054	81	30
1055	85	21
1056	86	16
1057	79	52

Time (s)	Normalized speed (%)	Normalized torque (%)
1058	78	60
1059	74	55
1060	78	84
1061	80	54
1062	80	35
1063	82	24
1064	83	43
1065	79	49
1066	83	50
1067	86	12
1068	64	14
1069	24	14
1070	49	21
1071	77	48
1072	103	11
1073	98	48
1074	101	34
1075	99	39
1076	103	11
1077	103	19
1078	103	7
1079	103	13
1080	103	10
1081	102	13
1082	101	29
1083	102	25

Time (s)	Normalized speed (%)	Normalized torque (%)
1084	102	20
1085	96	60
1086	99	38
1087	102	24
1088	100	31
1089	100	28
1090	98	3
1091	102	26
1092	95	64
1093	102	23
1094	102	25
1095	98	42
1096	93	68
1097	101	25
1098	95	64
1099	101	35
1100	94	59
1101	97	37
1102	97	60
1103	93	98
1104	98	53
1105	103	13
1106	103	11
1107	103	11
1108	103	13
1109	103	10

Time (s)	Normalized speed (%)	Normalized torque (%)
1110	103	10
1111	103	11
1112	103	10
1113	103	10
1114	102	18
1115	102	31
1116	101	24
1117	102	19
1118	103	10
1119	102	12
1120	99	56
1121	96	59
1122	74	28
1123	66	62
1124	74	29
1125	64	74
1126	69	40
1127	76	2
1128	72	29
1129	66	65
1130	54	69
1131	69	56
1132	69	40
1133	73	54
1134	63	92
1135	61	67

Time (s)	Normalized speed (%)	Normalized torque (%)
1136	72	42
1137	78	2
1138	76	34
1139	67	80
1140	70	67
1141	53	70
1142	72	65
1143	60	57
1144	74	29
1145	69	31
1146	76	1
1147	74	22
1148	72	52
1149	62	96
1150	54	72
1151	72	28
1152	72	35
1153	64	68
1154	74	27
1155	76	14
1156	69	38
1157	66	59
1158	64	99
1159	51	86
1160	70	53
1161	72	36

Time (s)	Normalized speed (%)	Normalized torque (%)
1162	71	47
1163	70	42
1164	67	34
1165	74	2
1166	75	21
1167	74	15
1168	75	13
1169	76	10
1170	75	13
1171	75	10
1172	75	7
1173	75	13
1174	76	8
1175	76	7
1176	67	45
1177	75	13
1178	75	12
1179	73	21
1180	68	46
1181	74	8
1182	76	11
1183	76	14
1184	74	11
1185	74	18
1186	73	22
1187	74	20

Time (s)	Normalized speed (%)	Normalized torque (%)
1188	74	19
1189	70	22
1190	71	23
1191	73	19
1192	73	19
1193	72	20
1194	64	60
1195	70	39
1196	66	56
1197	68	64
1198	30	68
1199	70	38
1200	66	47
1201	76	14
1202	74	18
1203	69	46
1204	68	62
1205	68	62
1206	68	62
1207	68	62
1208	68	62
1209	68	62
1210	54	50
1211	41	37
1212	27	25
1213	14	12

Time (s)	Normalized speed (%)	Normalized torque (%)
1214	0	0
1215	0	0
1216	0	0
1217	0	0
1218	0	0
1219	0	0
1220	0	0
1221	0	0
1222	0	0
1223	0	0
1224	0	0
1225	0	0
1226	0	0
1227	0	0
1228	0	0
1229	0	0
1230	0	0
1231	0	0
1232	0	0
1233	0	0
1234	0	0
1235	0	0
1236	0	0
1237	0	0
1238	0	0

**LSI-NRTC engine dynamometer schedule**

Time (s)	Normalized speed (%)	Normalized torque (%)
0	0	0
1	0	0
2	0	0
3	0	0
4	0	0
5	0	0
6	0	0
7	0	0
8	0	0
9	1	8
10	6	54
11	8	61
12	34	59
13	22	46
14	5	51
15	18	51
16	31	50
17	30	56
18	31	49
19	25	66
20	58	55
21	43	31
22	16	45
23	24	38

Time (s)	Normalized speed (%)	Normalized torque (%)
24	24	27
25	30	33
26	45	65
27	50	49
28	23	42
29	13	42
30	9	45
31	23	30
32	37	45
33	44	50
34	49	52
35	55	49
36	61	46
37	66	38
38	42	33
39	17	41
40	17	37
41	7	50
42	20	32
43	5	55
44	30	42
45	44	53
46	45	56
47	41	52

Time (s)	Normalized speed (%)	Normalized torque (%)
48	24	41
49	15	40
50	11	44
51	32	31
52	38	54
53	38	47
54	9	55
55	10	50
56	33	55
57	48	56
58	49	47
59	33	44
60	52	43
61	55	43
62	59	38
63	44	28
64	24	37
65	12	44
66	9	47
67	12	52
68	34	21
69	29	44
70	44	54
71	54	62



Time (s)	Normalized speed (%)	Normalized torque (%)
72	62	57
73	72	56
74	88	71
75	100	69
76	100	34
77	100	42
78	100	54
79	100	58
80	100	38
81	83	17
82	61	15
83	43	22
84	24	35
85	16	39
86	15	45
87	32	34
88	14	42
89	8	48
90	5	51
91	10	41
92	12	37
93	4	47
94	3	49
95	3	50
96	4	49
97	4	48

Time (s)	Normalized speed (%)	Normalized torque (%)
98	8	43
99	2	51
100	5	46
101	8	41
102	4	47
103	3	49
104	6	45
105	3	48
106	10	42
107	18	27
108	3	50
109	11	41
110	34	29
111	51	57
112	67	63
113	61	32
114	44	31
115	48	54
116	69	65
117	85	65
118	81	29
119	74	21
120	62	23
121	76	58
122	96	75
123	100	77

Time (s)	Normalized speed (%)	Normalized torque (%)
124	100	27
125	100	79
126	100	79
127	100	81
128	100	57
129	99	52
130	81	35
131	69	29
132	47	22
133	34	28
134	27	37
135	83	60
136	100	74
137	100	7
138	100	2
139	70	18
140	23	39
141	5	54
142	11	40
143	11	34
144	11	41
145	19	25
146	16	32
147	20	31
148	21	38
149	21	42

Time (s)	Normalized speed (%)	Normalized torque (%)
150	9	51
151	4	49
152	2	51
153	1	58
154	21	57
155	29	47
156	33	45
157	16	49
158	38	45
159	37	43
160	35	42
161	39	43
162	51	49
163	59	55
164	65	54
165	76	62
166	84	59
167	83	29
168	67	35
169	84	54
170	90	58
171	93	43
172	90	29
173	66	19
174	52	16
175	49	17

Time (s)	Normalized speed (%)	Normalized torque (%)
176	56	38
177	73	71
178	86	80
179	96	75
180	89	27
181	66	17
182	50	18
183	36	25
184	36	24
185	38	40
186	40	50
187	27	48
188	19	48
189	23	50
190	19	45
191	6	51
192	24	48
193	49	67
194	47	49
195	22	44
196	25	40
197	38	54
198	43	55
199	40	52
200	14	49
201	11	45

Time (s)	Normalized speed (%)	Normalized torque (%)
202	7	48
203	26	41
204	41	59
205	53	60
206	44	54
207	22	40
208	24	41
209	32	53
210	44	74
211	57	25
212	22	49
213	29	45
214	19	37
215	14	43
216	36	40
217	43	63
218	42	49
219	15	50
220	19	44
221	47	59
222	67	80
223	76	74
224	87	66
225	98	61
226	100	38
227	97	27

Time (s)	Normalized speed (%)	Normalized torque (%)
228	100	53
229	100	72
230	100	49
231	100	4
232	100	13
233	87	15
234	53	26
235	33	27
236	39	19
237	51	33
238	67	54
239	83	60
240	95	52
241	100	50
242	100	36
243	100	25
244	85	16
245	62	16
246	40	26
247	56	39
248	81	75
249	98	86
250	100	76
251	100	51
252	100	78
253	100	83

Time (s)	Normalized speed (%)	Normalized torque (%)
254	100	100
255	100	66
256	100	85
257	100	72
258	100	45
259	98	58
260	60	30
261	43	32
262	71	36
263	44	32
264	24	38
265	42	17
266	22	51
267	13	53
268	23	45
269	29	50
270	28	42
271	21	55
272	34	57
273	44	47
274	19	46
275	13	44
276	25	36
277	43	51
278	55	73
279	68	72

Time (s)	Normalized speed (%)	Normalized torque (%)
280	76	63
281	80	45
282	83	40
283	78	26
284	60	20
285	47	19
286	52	25
287	36	30
288	40	26
289	45	34
290	47	35
291	42	28
292	46	38
293	48	44
294	68	61
295	70	47
296	48	28
297	42	22
298	31	29
299	22	35
300	28	28
301	46	46
302	62	69
303	76	81
304	88	85
305	98	81

Time (s)	Normalized speed (%)	Normalized torque (%)
306	100	74
307	100	13
308	100	11
309	100	17
310	99	3
311	80	7
312	62	11
313	63	11
314	64	16
315	69	43
316	81	67
317	93	74
318	100	72
319	94	27
320	73	15
321	40	33
322	40	52
323	50	50
324	11	53
325	12	45
326	5	50
327	1	55
328	7	55
329	62	60
330	80	28
331	23	37

Time (s)	Normalized speed (%)	Normalized torque (%)
332	39	58
333	47	24
334	59	51
335	58	68
336	36	52
337	18	42
338	36	52
339	59	73
340	72	85
341	85	92
342	99	90
343	100	72
344	100	18
345	100	76
346	100	64
347	100	87
348	100	97
349	100	84
350	100	100
351	100	91
352	100	83
353	100	93
354	100	100
355	94	43
356	72	10
357	77	3

Time (s)	Normalized speed (%)	Normalized torque (%)
358	48	2
359	29	5
360	59	19
361	63	5
362	35	2
363	24	3
364	28	2
365	36	16
366	54	23
367	60	10
368	33	1
369	23	0
370	16	0
371	11	0
372	20	0
373	25	2
374	40	3
375	33	4
376	34	5
377	46	7
378	57	10
379	66	11
380	75	14
381	79	11
382	80	16
383	92	21

Time (s)	Normalized speed (%)	Normalized torque (%)
384	99	16
385	83	2
386	71	2
387	69	4
388	67	4
389	74	16
390	86	25
391	97	28
392	100	15
393	83	2
394	62	4
395	40	6
396	49	10
397	36	5
398	27	4
399	29	3
400	22	2
401	13	3
402	37	36
403	90	26
404	41	2
405	25	2
406	29	2
407	38	7
408	50	13
409	55	10

Time (s)	Normalized speed (%)	Normalized torque (%)
410	29	3
411	24	7
412	51	16
413	62	15
414	72	35
415	91	74
416	100	73
417	100	8
418	98	11
419	100	59
420	100	98
421	100	99
422	100	75
423	100	95
424	100	100
425	100	97
426	100	90
427	100	86
428	100	82
429	97	43
430	70	16
431	50	20
432	42	33
433	89	64
434	89	77
435	99	95

Time (s)	Normalized speed (%)	Normalized torque (%)
436	100	41
437	77	12
438	29	37
439	16	41
440	16	38
441	15	36
442	18	44
443	4	55
444	24	26
445	26	35
446	15	45
447	21	39
448	29	52
449	26	46
450	27	50
451	13	43
452	25	36
453	37	57
454	29	46
455	17	39
456	13	41
457	19	38
458	28	35
459	8	51
460	14	36
461	17	47

Time (s)	Normalized speed (%)	Normalized torque (%)
462	34	39
463	34	57
464	11	70
465	13	51
466	13	68
467	38	44
468	53	67
469	29	69
470	19	65
471	52	45
472	61	79
473	29	70
474	15	53
475	15	60
476	52	40
477	50	61
478	13	74
479	46	51
480	60	73
481	33	84
482	31	63
483	41	42
484	26	69
485	23	65
486	48	49
487	28	57

Time (s)	Normalized speed (%)	Normalized torque (%)
488	16	67
489	39	48
490	47	73
491	35	87
492	26	73
493	30	61
494	34	49
495	35	66
496	56	47
497	49	64
498	59	64
499	42	69
500	6	77
501	5	59
502	17	59
503	45	53
504	21	62
505	31	60
506	53	68
507	48	79
508	45	61
509	51	47
510	41	48
511	26	58
512	21	62
513	50	52

Time (s)	Normalized speed (%)	Normalized torque (%)
514	39	65
515	23	65
516	42	62
517	57	80
518	66	81
519	64	62
520	45	42
521	33	42
522	27	57
523	31	59
524	41	53
525	45	72
526	48	73
527	46	90
528	56	76
529	64	76
530	69	64
531	72	59
532	73	58
533	71	56
534	66	48
535	61	50
536	55	56
537	52	52
538	54	49
539	61	50

Time (s)	Normalized speed (%)	Normalized torque (%)
540	64	54
541	67	54
542	68	52
543	60	53
544	52	50
545	45	49
546	38	45
547	32	45
548	26	53
549	23	56
550	30	49
551	33	55
552	35	59
553	33	65
554	30	67
555	28	59
556	25	58
557	23	56
558	22	57
559	19	63
560	14	63
561	31	61
562	35	62
563	21	80
564	28	65
565	7	74

Time (s)	Normalized speed (%)	Normalized torque (%)
566	23	54
567	38	54
568	14	78
569	38	58
570	52	75
571	59	81
572	66	69
573	54	44
574	48	34
575	44	33
576	40	40
577	28	58
578	27	63
579	35	45
580	20	66
581	15	60
582	10	52
583	22	56
584	30	62
585	21	67
586	29	53
587	41	56
588	15	67
589	24	56
590	42	69
591	39	83

Time (s)	Normalized speed (%)	Normalized torque (%)
592	40	73
593	35	67
594	32	61
595	30	65
596	30	72
597	48	51
598	66	58
599	62	71
600	36	63
601	17	59
602	16	50
603	16	62
604	34	48
605	51	66
606	35	74
607	15	56
608	19	54
609	43	65
610	52	80
611	52	83
612	49	57
613	48	46
614	37	36
615	25	44
616	14	53
617	13	64

Time (s)	Normalized speed (%)	Normalized torque (%)
618	23	56
619	21	63
620	18	67
621	20	54
622	16	67
623	26	56
624	41	65
625	28	62
626	19	60
627	33	56
628	37	70
629	24	79
630	28	57
631	40	57
632	40	58
633	28	44
634	25	41
635	29	53
636	31	55
637	26	64
638	20	50
639	16	53
640	11	54
641	13	53
642	23	50
643	32	59

Time (s)	Normalized speed (%)	Normalized torque (%)
644	36	63
645	33	59
646	24	52
647	20	52
648	22	55
649	30	53
650	37	59
651	41	58
652	36	54
653	29	49
654	24	53
655	14	57
656	10	54
657	9	55
658	10	57
659	13	55
660	15	64
661	31	57
662	19	69
663	14	59
664	33	57
665	41	65
666	39	64
667	39	59
668	39	51
669	28	41

Time (s)	Normalized speed (%)	Normalized torque (%)
670	19	49
671	27	54
672	37	63
673	32	74
674	16	70
675	12	67
676	13	60
677	17	56
678	15	62
679	25	47
680	27	64
681	14	71
682	5	65
683	6	57
684	6	57
685	15	52
686	22	61
687	14	77
688	12	67
689	12	62
690	14	59
691	15	58
692	18	55
693	22	53
694	19	69
695	14	67



Time (s)	Normalized speed (%)	Normalized torque (%)
696	9	63
697	8	56
698	17	49
699	25	55
700	14	70
701	12	60
702	22	57
703	27	67
704	29	68
705	34	62
706	35	61
707	28	78
708	11	71
709	4	58
710	5	58
711	10	56
712	20	63
713	13	76
714	11	65
715	9	60
716	7	55
717	8	53
718	10	60
719	28	53
720	12	73
721	4	64

Time (s)	Normalized speed (%)	Normalized torque (%)
722	4	61
723	4	61
724	10	56
725	8	61
726	20	56
727	32	62
728	33	66
729	34	73
730	31	61
731	33	55
732	33	60
733	31	59
734	29	58
735	31	53
736	33	51
737	33	48
738	27	44
739	21	52
740	13	57
741	12	56
742	10	64
743	22	47
744	15	74
745	8	66
746	34	47
747	18	71

Time (s)	Normalized speed (%)	Normalized torque (%)
748	9	57
749	11	55
750	12	57
751	10	61
752	16	53
753	12	75
754	6	70
755	12	55
756	24	50
757	28	60
758	28	64
759	23	60
760	20	56
761	26	50
762	28	55
763	18	56
764	15	52
765	11	59
766	16	59
767	34	54
768	16	82
769	15	64
770	36	53
771	45	64
772	41	59
773	34	50

Time (s)	Normalized speed (%)	Normalized torque (%)
774	27	45
775	22	52
776	18	55
777	26	54
778	39	62
779	37	71
780	32	58
781	24	48
782	14	59
783	7	59
784	7	55
785	18	49
786	40	62
787	44	73
788	41	68
789	35	48
790	29	54
791	22	69
792	46	53
793	59	71
794	69	68
795	75	47
796	62	32
797	48	35
798	27	59
799	13	58

Time (s)	Normalized speed (%)	Normalized torque (%)
800	14	54
801	21	53
802	23	56
803	23	57
804	23	65
805	13	65
806	9	64
807	27	56
808	26	78
809	40	61
810	35	76
811	28	66
812	23	57
813	16	50
814	11	53
815	9	57
816	9	62
817	27	57
818	42	69
819	47	75
820	53	67
821	61	62
822	63	53
823	60	54
824	56	44
825	49	39

Time (s)	Normalized speed (%)	Normalized torque (%)
826	39	35
827	30	34
828	33	46
829	44	56
830	50	56
831	44	52
832	38	46
833	33	44
834	29	45
835	24	46
836	18	52
837	9	55
838	10	54
839	20	53
840	27	58
841	29	59
842	30	62
843	30	65
844	27	66
845	32	58
846	40	56
847	41	57
848	18	73
849	15	55
850	18	50
851	17	52

Time (s)	Normalized speed (%)	Normalized torque (%)
852	20	49
853	16	62
854	4	67
855	2	64
856	7	54
857	10	50
858	9	57
859	5	62
860	12	51
861	14	65
862	9	64
863	31	50
864	30	78
865	21	65
866	14	51
867	10	55
868	6	59
869	7	59
870	19	54
871	23	61
872	24	62
873	34	61
874	51	67
875	60	66
876	58	55
877	60	52

Time (s)	Normalized speed (%)	Normalized torque (%)
878	64	55
879	68	51
880	63	54
881	64	50
882	68	58
883	73	47
884	63	40
885	50	38
886	29	61
887	14	61
888	14	53
889	42	6
890	58	6
891	58	6
892	77	39
893	93	56
894	93	44
895	93	37
896	93	31
897	93	25
898	93	26
899	93	27
900	93	25
901	93	21
902	93	22
903	93	24

Time (s)	Normalized speed (%)	Normalized torque (%)
904	93	23
905	93	27
906	93	34
907	93	32
908	93	26
909	93	31
910	93	34
911	93	31
912	93	33
913	93	36
914	93	37
915	93	34
916	93	30
917	93	32
918	93	35
919	93	35
920	93	32
921	93	28
922	93	23
923	94	18
924	95	18
925	96	17
926	95	13
927	96	10
928	95	9
929	95	7

Time (s)	Normalized speed (%)	Normalized torque (%)
930	95	7
931	96	7
932	96	6
933	96	6
934	95	6
935	90	6
936	69	43
937	76	62
938	93	47
939	93	39
940	93	35
941	93	34
942	93	36
943	93	39
944	93	34
945	93	26
946	93	23
947	93	24
948	93	24
949	93	22
950	93	19
951	93	17
952	93	19
953	93	22
954	93	24
955	93	23

Time (s)	Normalized speed (%)	Normalized torque (%)
956	93	20
957	93	20
958	94	19
959	95	19
960	95	17
961	96	13
962	95	10
963	96	9
964	95	7
965	95	7
966	95	7
967	95	6
968	96	6
969	96	6
970	89	6
971	68	6
972	57	6
973	66	32
974	84	52
975	93	46
976	93	42
977	93	36
978	93	28
979	93	23
980	93	19
981	93	16

Time (s)	Normalized speed (%)	Normalized torque (%)
982	93	15
983	93	16
984	93	15
985	93	14
986	93	15
987	93	16
988	94	15
989	93	32
990	93	45
991	93	43
992	93	37
993	93	29
994	93	23
995	93	20
996	93	18
997	93	16
998	93	17
999	93	16
1000	93	15
1001	93	15
1002	93	15
1003	93	14
1004	93	15
1005	93	15
1006	93	14
1007	93	13

Time (s)	Normalized speed (%)	Normalized torque (%)
1008	93	14
1009	93	14
1010	93	15
1011	93	16
1012	93	17
1013	93	20
1014	93	22
1015	93	20
1016	93	19
1017	93	20
1018	93	19
1019	93	19
1020	93	20
1021	93	32
1022	93	37
1023	93	28
1024	93	26
1025	93	24
1026	93	22
1027	93	22
1028	93	21
1029	93	20
1030	93	20
1031	93	20
1032	93	20
1033	93	19

Time (s)	Normalized speed (%)	Normalized torque (%)
1034	93	18
1035	93	20
1036	93	20
1037	93	20
1038	93	20
1039	93	19
1040	93	18
1041	93	18
1042	93	17
1043	93	16
1044	93	16
1045	93	15
1046	93	16
1047	93	18
1048	93	37
1049	93	48
1050	93	38
1051	93	31
1052	93	26
1053	93	21
1054	93	18
1055	93	16
1056	93	17
1057	93	18
1058	93	19
1059	93	21

Time (s)	Normalized speed (%)	Normalized torque (%)
1060	93	20
1061	93	18
1062	93	17
1063	93	17
1064	93	18
1065	93	18
1066	93	18
1067	93	19
1068	93	18
1069	93	18
1070	93	20
1071	93	23
1072	93	25
1073	93	25
1074	93	24
1075	93	24
1076	93	22
1077	93	22
1078	93	22
1079	93	19
1080	93	16
1081	95	17
1082	95	37
1083	93	43
1084	93	32
1085	93	27

Time (s)	Normalized speed (%)	Normalized torque (%)
1086	93	26
1087	93	24
1088	93	22
1089	93	22
1090	93	22
1091	93	23
1092	93	22
1093	93	22
1094	93	23
1095	93	23
1096	93	23
1097	93	22
1098	93	23
1099	93	23
1100	93	23
1101	93	25
1102	93	27
1103	93	26
1104	93	25
1105	93	27
1106	93	27
1107	93	27
1108	93	24
1109	93	20
1110	93	18
1111	93	17

Time (s)	Normalized speed (%)	Normalized torque (%)
1112	93	17
1113	93	18
1114	93	18
1115	93	18
1116	93	19
1117	93	22
1118	93	22
1119	93	19
1120	93	17
1121	93	17
1122	93	18
1123	93	18
1124	93	19
1125	93	19
1126	93	20
1127	93	19
1128	93	20
1129	93	25
1130	93	30
1131	93	31
1132	93	26
1133	93	21
1134	93	18
1135	93	20
1136	93	25
1137	93	24

Time (s)	Normalized speed (%)	Normalized torque (%)
1138	93	21
1139	93	21
1140	93	22
1141	93	22
1142	93	28
1143	93	29
1144	93	23
1145	93	21
1146	93	18
1147	93	16
1148	93	16
1149	93	16
1150	93	17
1151	93	17
1152	93	17
1153	93	17
1154	93	23
1155	93	26
1156	93	22
1157	93	18
1158	93	16
1159	93	16
1160	93	17
1161	93	19
1162	93	18
1163	93	16

Time (s)	Normalized speed (%)	Normalized torque (%)
1164	93	19
1165	93	22
1166	93	25
1167	93	29
1168	93	27
1169	93	22
1170	93	18
1171	93	16
1172	93	19
1173	93	19
1174	93	17
1175	93	17
1176	93	17
1177	93	16
1178	93	16
1179	93	15
1180	93	16
1181	93	15
1182	93	17
1183	93	21
1184	93	30
1185	93	53
1186	93	54
1187	93	38
1188	93	30
1189	93	24

Time (s)	Normalized speed (%)	Normalized torque (%)
1190	93	20
1191	95	20
1192	96	18
1193	96	15
1194	96	11
1195	95	9
1196	95	8
1197	96	7
1198	94	33
1199	93	46
1200	93	37
1201	16	8
1202	0	0
1203	0	0
1204	0	0
1205	0	0
1206	0	0
1207	0	0
1208	0	0
1209	0	0

|

0